

HDA301

Frequency Range:

FM:87.9~107.9 MHz(USA) / 87.5~108 MHz (KOR) / 87.0~108 MHz(CHN)

AM:530~1710 KHz(USA) / 531~1602 KHz(KOR & CHN)

DC 12V $\equiv$ 15A Negative Ground

Speaker Impedance:4-8Ohms

Interference Absorption Circuit

This device complies with Part 15 of the FCC Rules.


Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.




FCC ID: 2BOHJ-HDA301

PIN	FUNCTION	COLOR	PIN	FUNCTION	COLOR
A1	SPEED PULSE	ORANGE	B1	SPKR REAR RIGHT (+)	VIOLET
A2	BACK GEAR	PINK	B2	SPKR REAR RIGHT (-)	VIOLET/BLACK LINE
A3	PKB	ORANGE/BLACK LINE	B3	SPKR FRONT RIGHT (+)	GRAY
A4	ACC(+)	RED	B4	SPKR FRONT RIGHT (-)	GRAY/BLACK LINE
A5	AMP/ANT-B+	BLUE	B5	SPKR FRONT LEFT (+)	WHITE
A6	ILL(+)	BROWN	B6	SPKR FRONT LEFT (-)	WHITE/BLACK LINE
A7	BATT(+)	YELLOW	B7	SPKR REAR LEFT (+)	GREEN
A8	GROUND	BLACK	B8	SPKR REAR LEFT (-)	GREEN/BLACK LINE
C1	CAN-LOW	WHITE	C11	AV-GND	BLACK SHIELD WIRE
C2	CAN-HIGH	GREEN	C12	AV-LEFT	
C3	GND	BROWN	C13	DTV-RX	WHITE
C4	SWRC-A	RED	C14	DTV-TX	GREEN
C5	SWRC-B	PINK	C15	GND	BLACK
C6	SWRC-GND	BLACK	C16	DTV RIGHT	
C7	EXT-MIC-SIG		C17	DTV VIDEO IN	
C8	EXT-MIC-GND	BLACK SHIELD WIRE	C18	GND	BLACK SHIELD WIRE
C9	AV VIDEO IN		C19	DTV LEFT	
C10	AV RIGHT	BLACK SHIELD WIRE	C20	DTV-VCC	RED

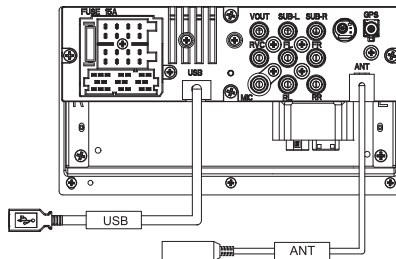

PIN	FUNCTION	COLOR
RR	LINE OUT REAR RIGHT	RED
FR	LINE OUT FRONT RIGHT	RED
SUB-R	SUB WOOFER RIGHT	RED
RL	LINE OUT REAR LEFT	WHITE
FL	LINE OUT FRONT LEFT	WHITE
SUB-L	SUB WOOFER LEFT	WHITE
MIC	INT MIC	YELLOW
RVC	REAR VIEW CAMERA IN	YELLOW
VOUT	VIDEO OUT	YELLOW



MADE IN CHINA

76.3mm

127mm

HDA301主机贴纸 白底黑字印刷

日期2025.4.3

HJA Model - SPEC LABEL 版本

Location

