



Shixin DA F606 WIFI2.4G/BT antenna
Specification acknowledgement
Product Specifications for Approval

物料编号: WF2283B-1131R-80

客户名称: 世鑫达

Customer Name: Shixin Da

天线频段: WIFI2.4G/BT 版本: R-A

Antenna frequency band: WIFI2.4G/BT version: R-A


顺达成科技有限公司研发 Shun reach technology Co., Ltd. R & D			
结构:	陈巍	射频:	符学荣
审核:	陈华明	批准:	陈华明
客户确认			
客户审核:		客户批准:	

公司地址: 深圳市宝安区福永镇重庆路新福工业区 B5 栋 4 楼

Address: 4th Floor, Building B5, Xinfu Industrial Zone,
Zhongqing Road, Fuyong Town, Bao 'an District, Shenzhen

TEL: 0755-27211658

Fax: 0755-29485750

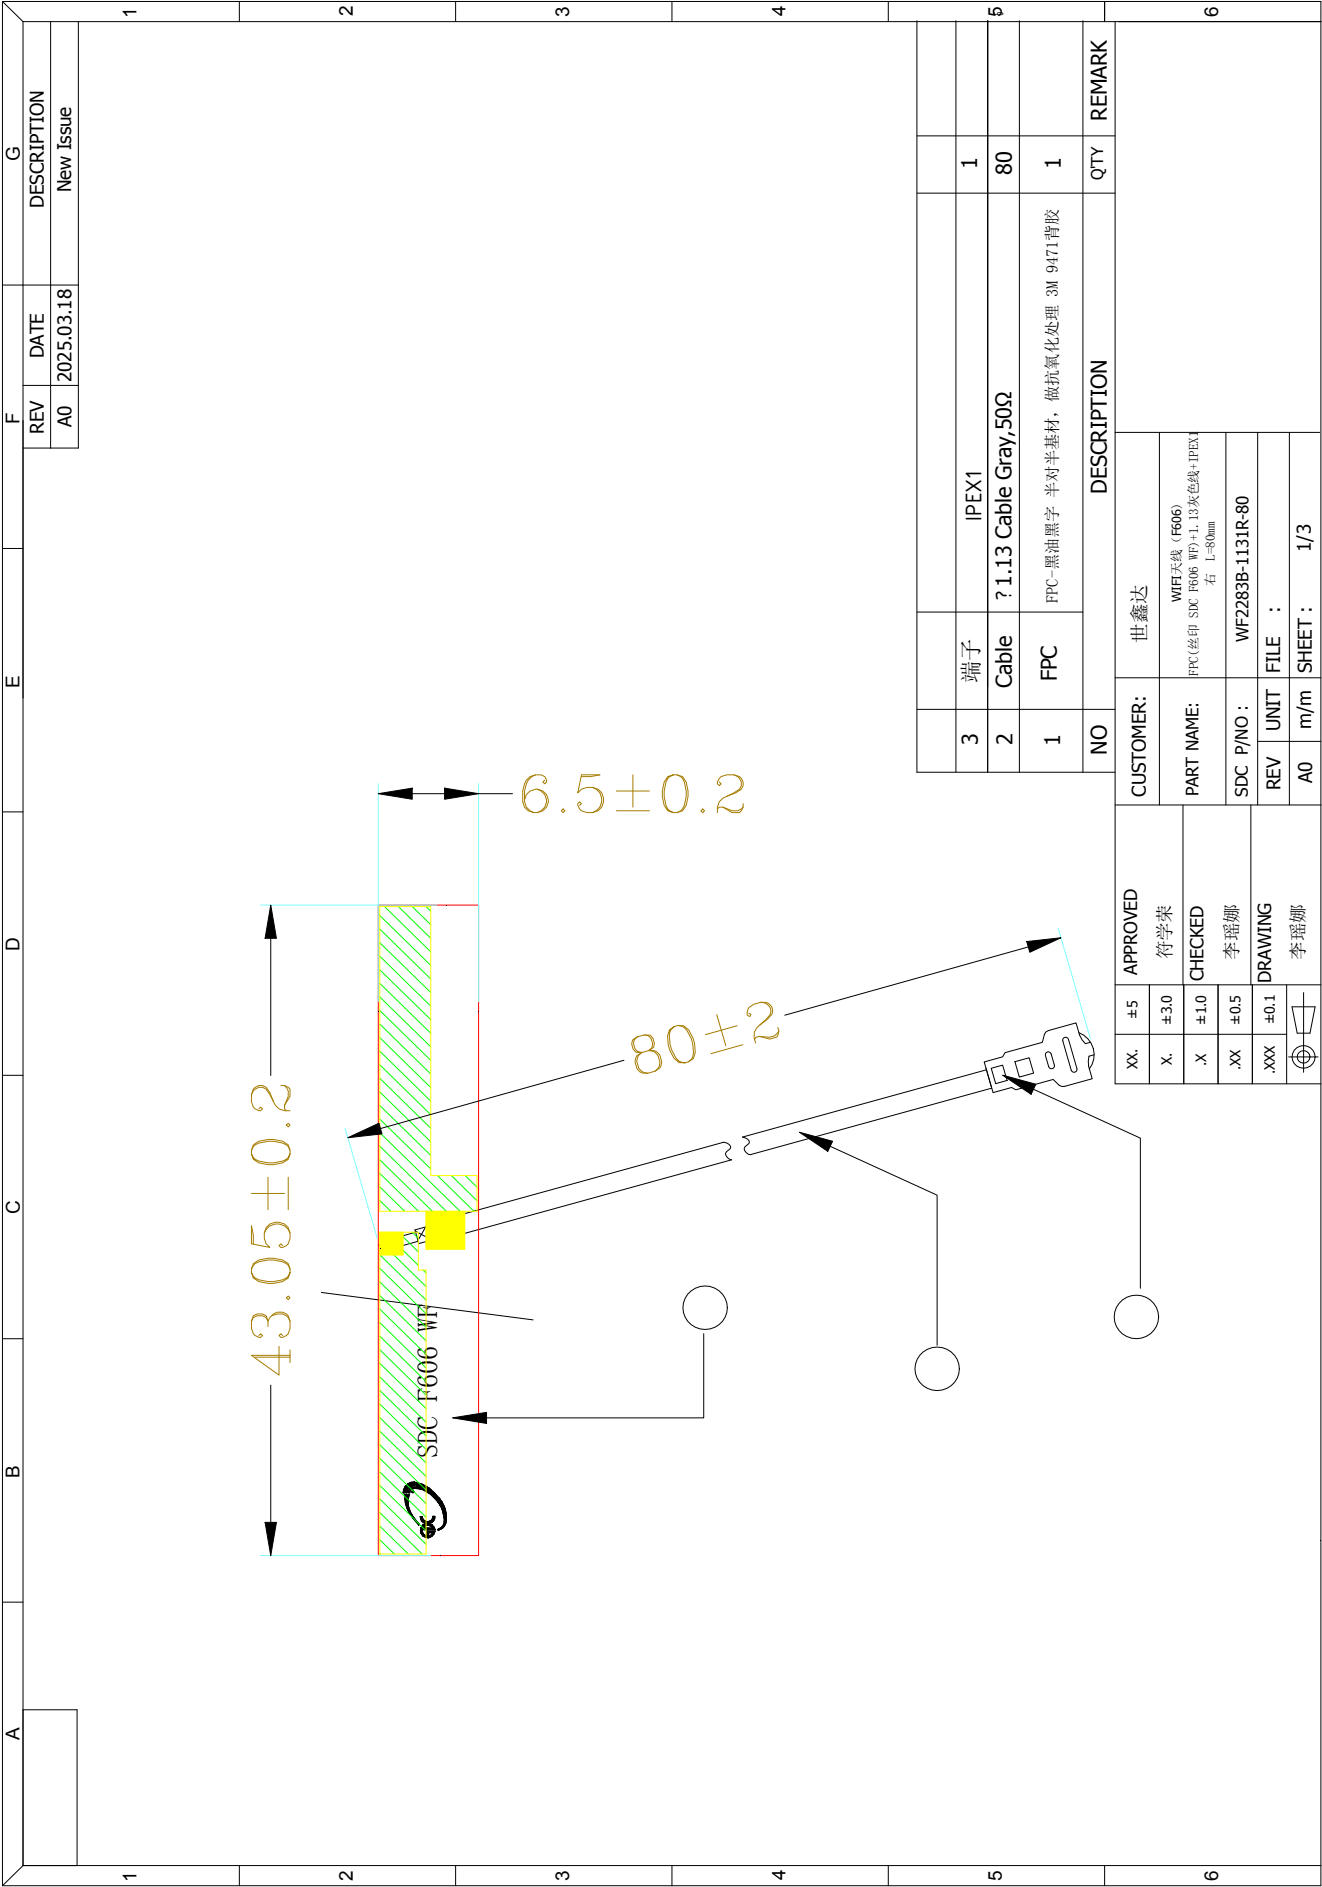

1. Project information and Electrical Specification

*Those specifications were specially defined for **F606**, **WIFI2.4G/BT**, and all characteristics were measured under the model's handset testing jig .*


1-1 Antenna picture



1-2 Frequency Band:

Frequency Band	MHz
WIFI2.4G/BT	2400-2500 (MHz)

1-3 Impedance matching

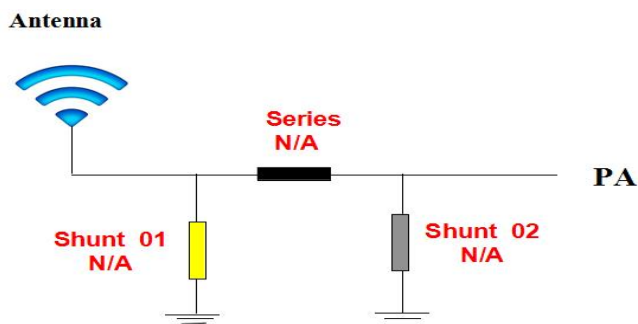


天线原匹配无更改

2.VSWR

Measuring Method:

1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR,
2. Keeping this jig away from metal at least 20cm.

VSWR parameter values

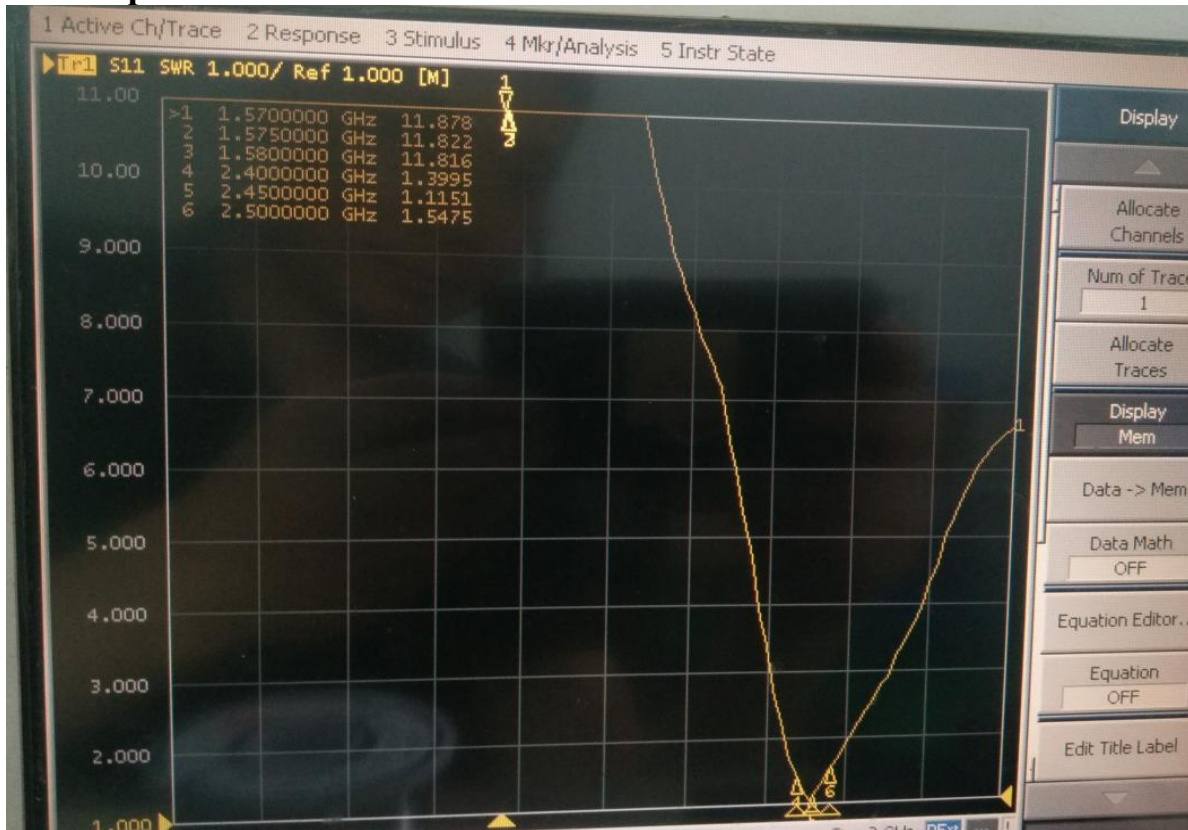

频率 (MHZ)	2400	2450	2500
驻波比	1.39	1.11	1.54

3.Efficiency and Gain*measuring and test instruments:

微波暗室, Agilent 网络分析仪, Agilent 频谱分析仪, 8960 综合测试仪, R&S CMW500 标准天线*test method:

equipment 以 H 面放于转台中心位置固定, 与喇叭天线中心位置在同一个水平线上。

Efficiency/Gain-WIFI2.4G/BT

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	43.86	1.45
2425	44.92	1.67
2450	44.37	1.61
2475	43.13	1.53
2500	43.08	1.52

4.WIFI OTA Data

	802.11b, (2.4G) 11M		
Channel	CH1	CH6	CH12
TRP	12.37	12.44	12.62
TIS	-75.75	-75.76	-75.42