

Appendix Test Data for SRD (Conducted Measurement)

Product Name: Drone

Trade Mark: le-idea

Test Model: K600GPS

FCC ID: 2BOLYLEE39

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A


Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2420	0.892	2419.608	2420.500	0.5	PASS
SRD	Ant1	2445	0.916	2444.572	2445.488	0.5	PASS
SRD	Ant1	2470	0.972	2469.512	2470.484	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

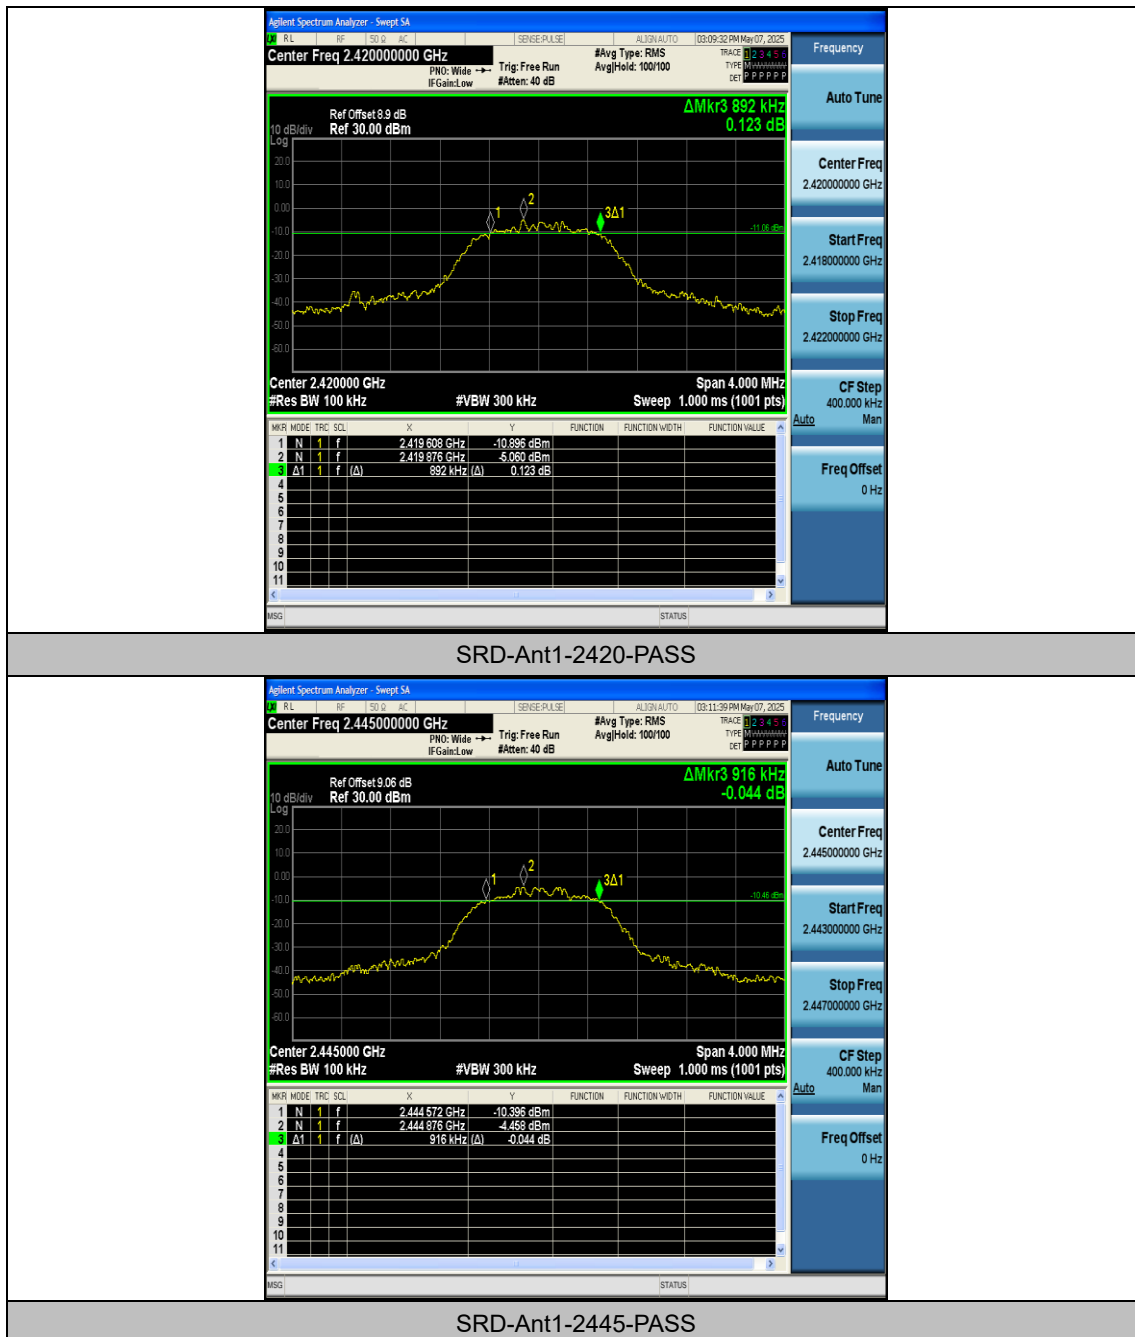




Appendix B: Occupied Channel Bandwidth


Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2420	1.2566	2419.3876	2420.6442	---	---
SRD	Ant1	2445	1.2426	2444.3906	2445.6332	---	---
SRD	Ant1	2470	1.2618	2469.3884	2470.6502	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

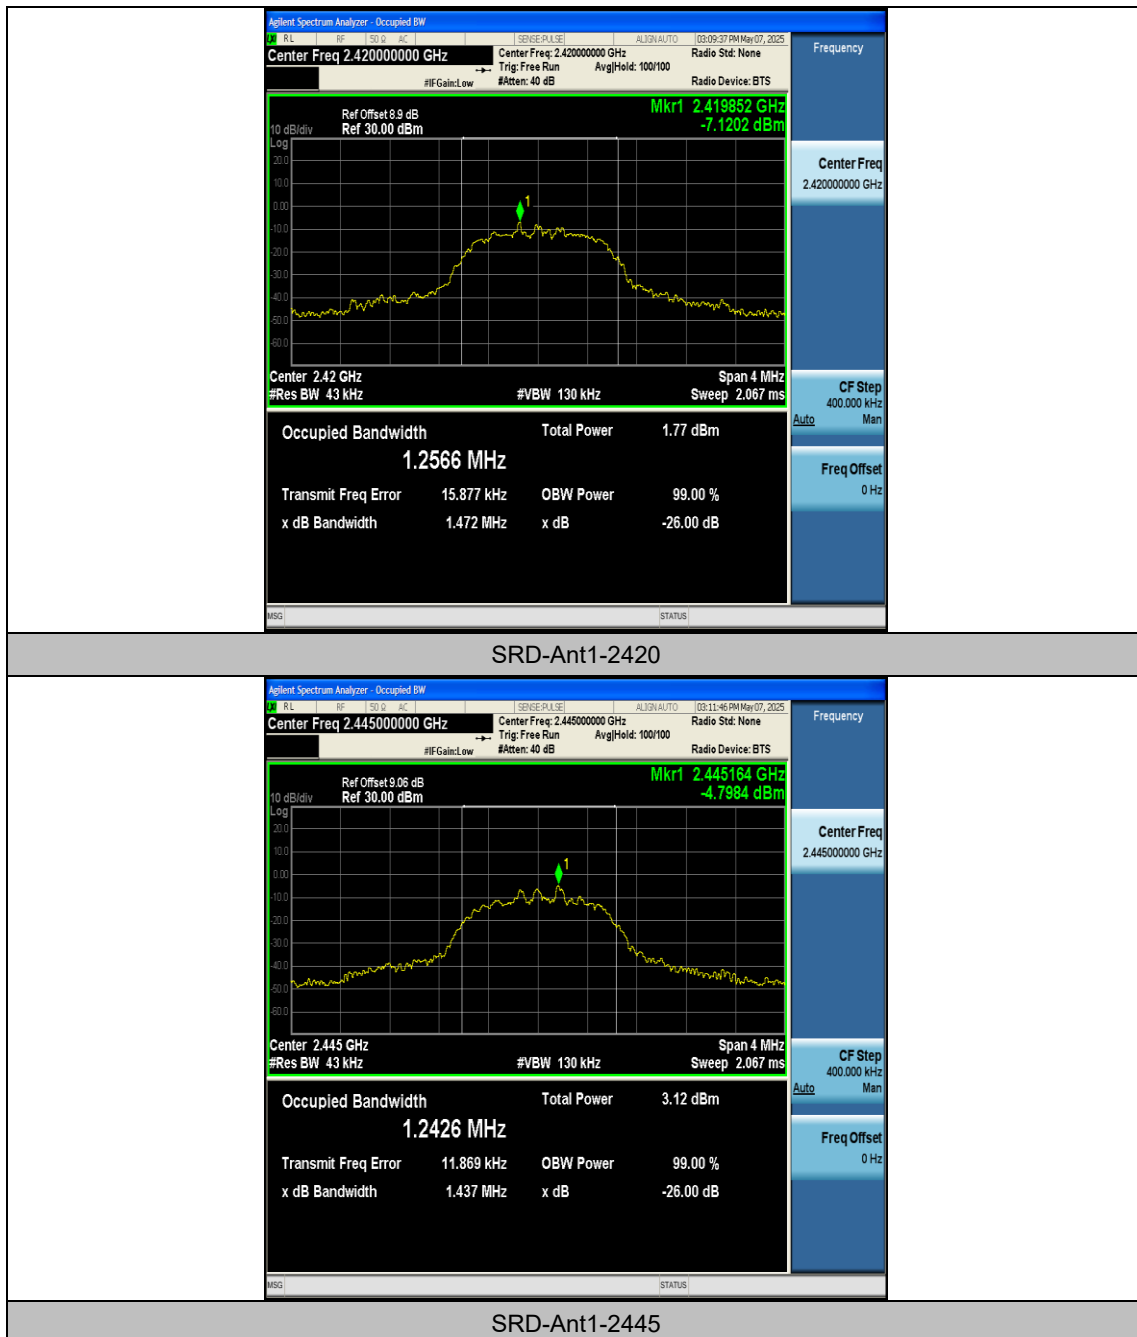

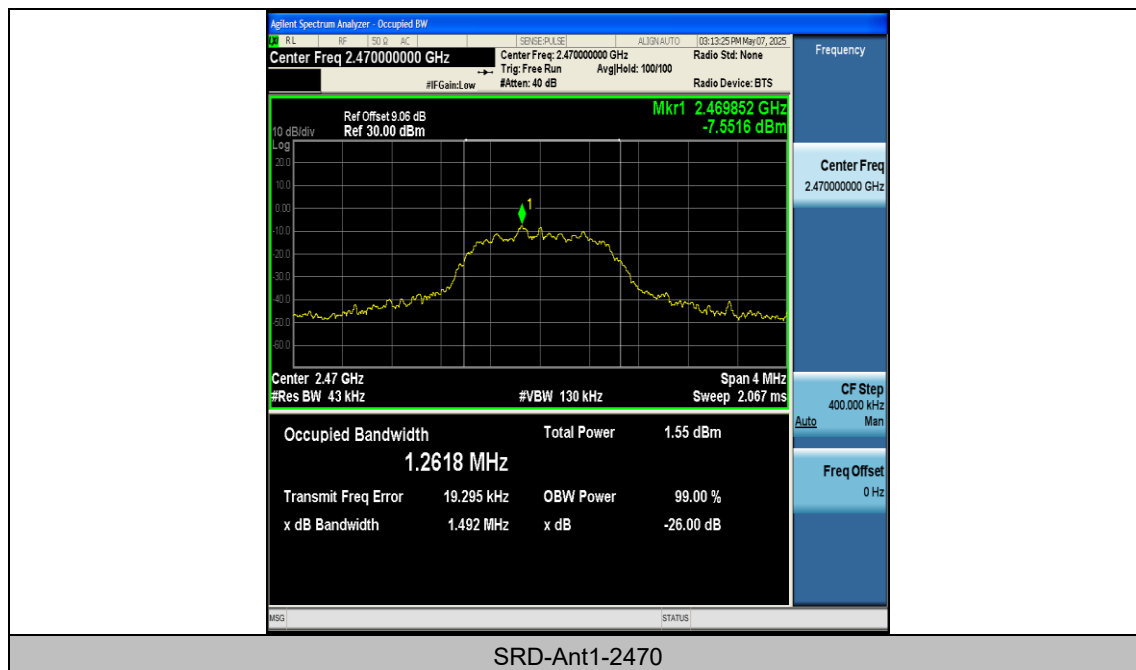


Appendix C: Maximum peak conducted output power


Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
SRD	Ant1	2420	-3.38	≤30	PASS
SRD	Ant1	2445	-2.67	≤30	PASS
SRD	Ant1	2470	-3.43	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs Peak

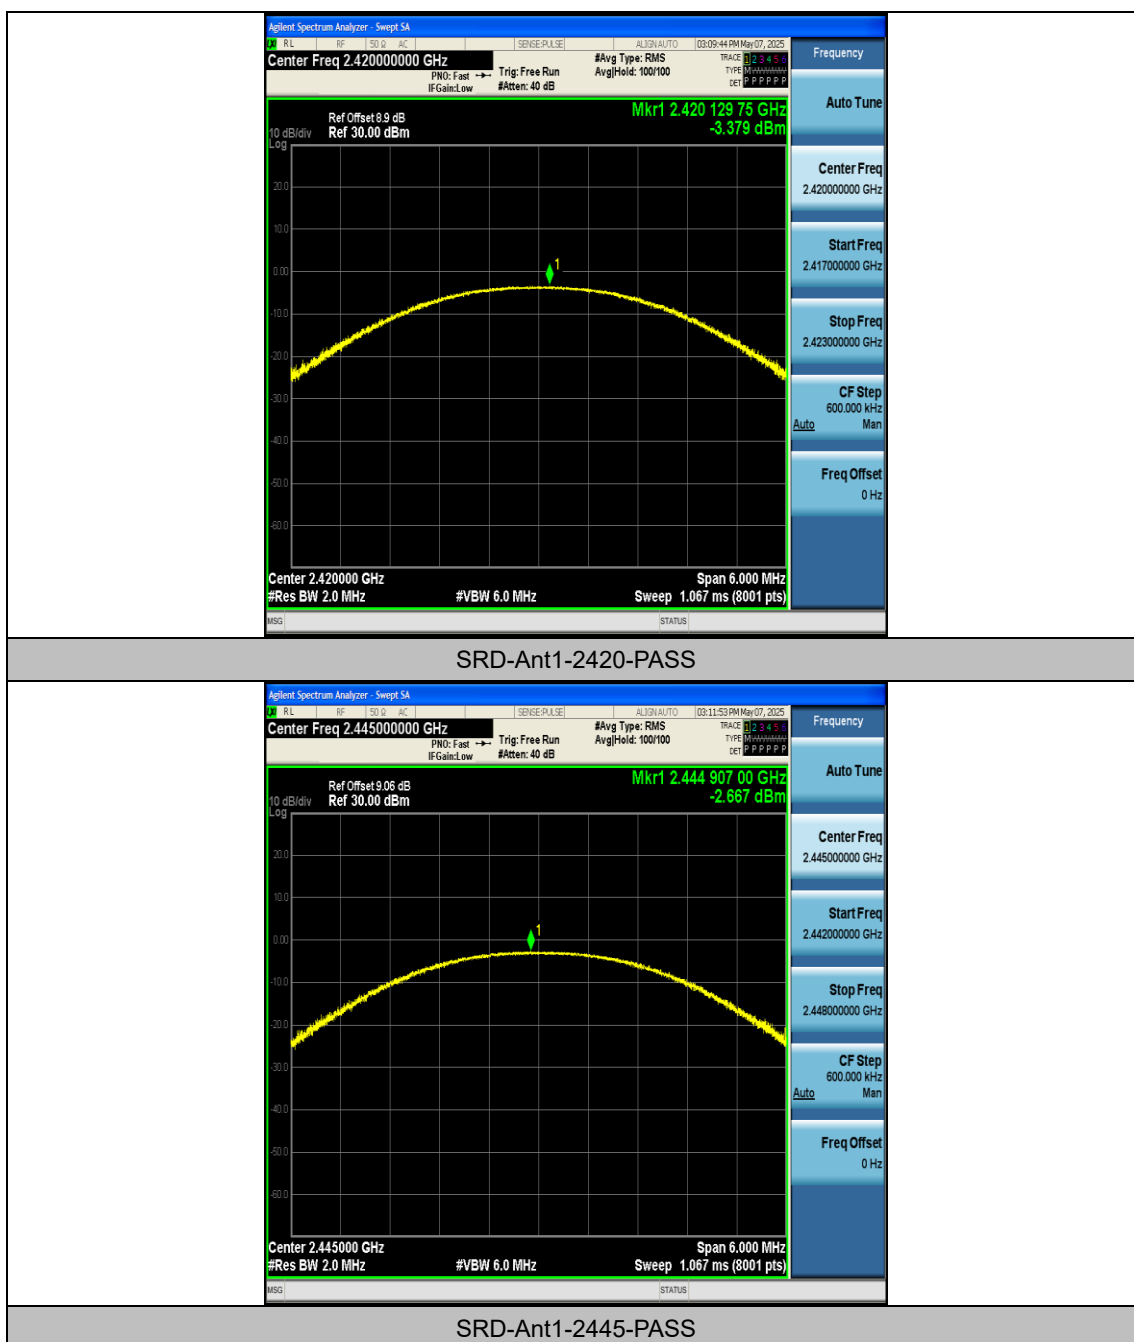

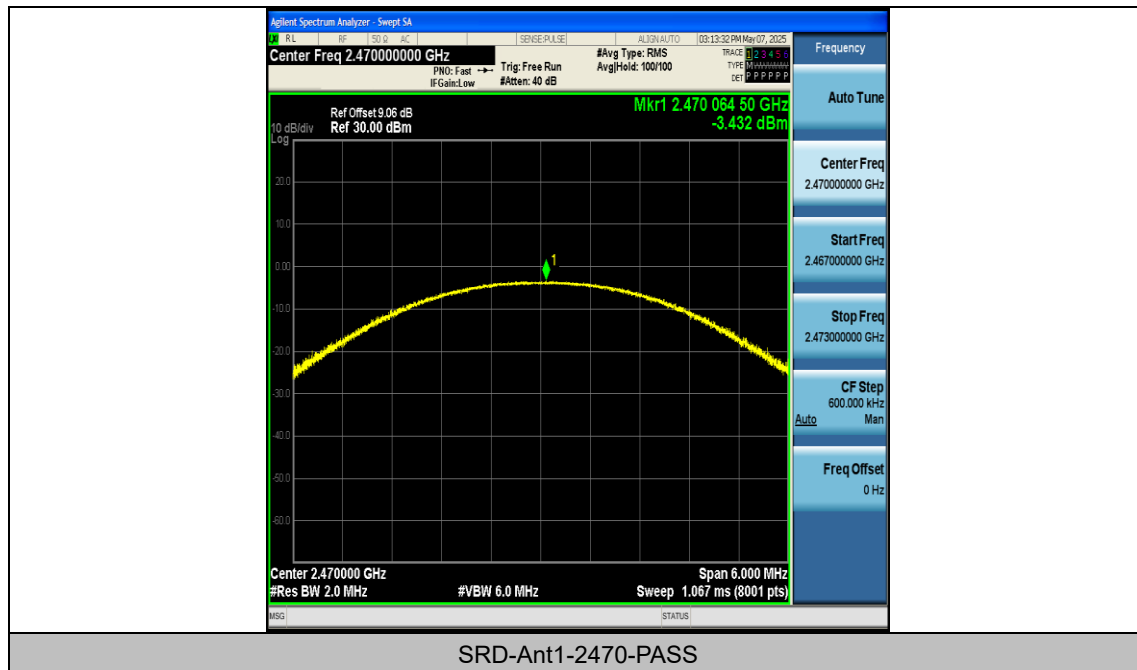


Appendix D: Maximum peak power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
SRD	Ant1	2420	-19.36	≤8.00	PASS
SRD	Ant1	2445	-18.76	≤8.00	PASS
SRD	Ant1	2470	-19.80	≤8.00	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

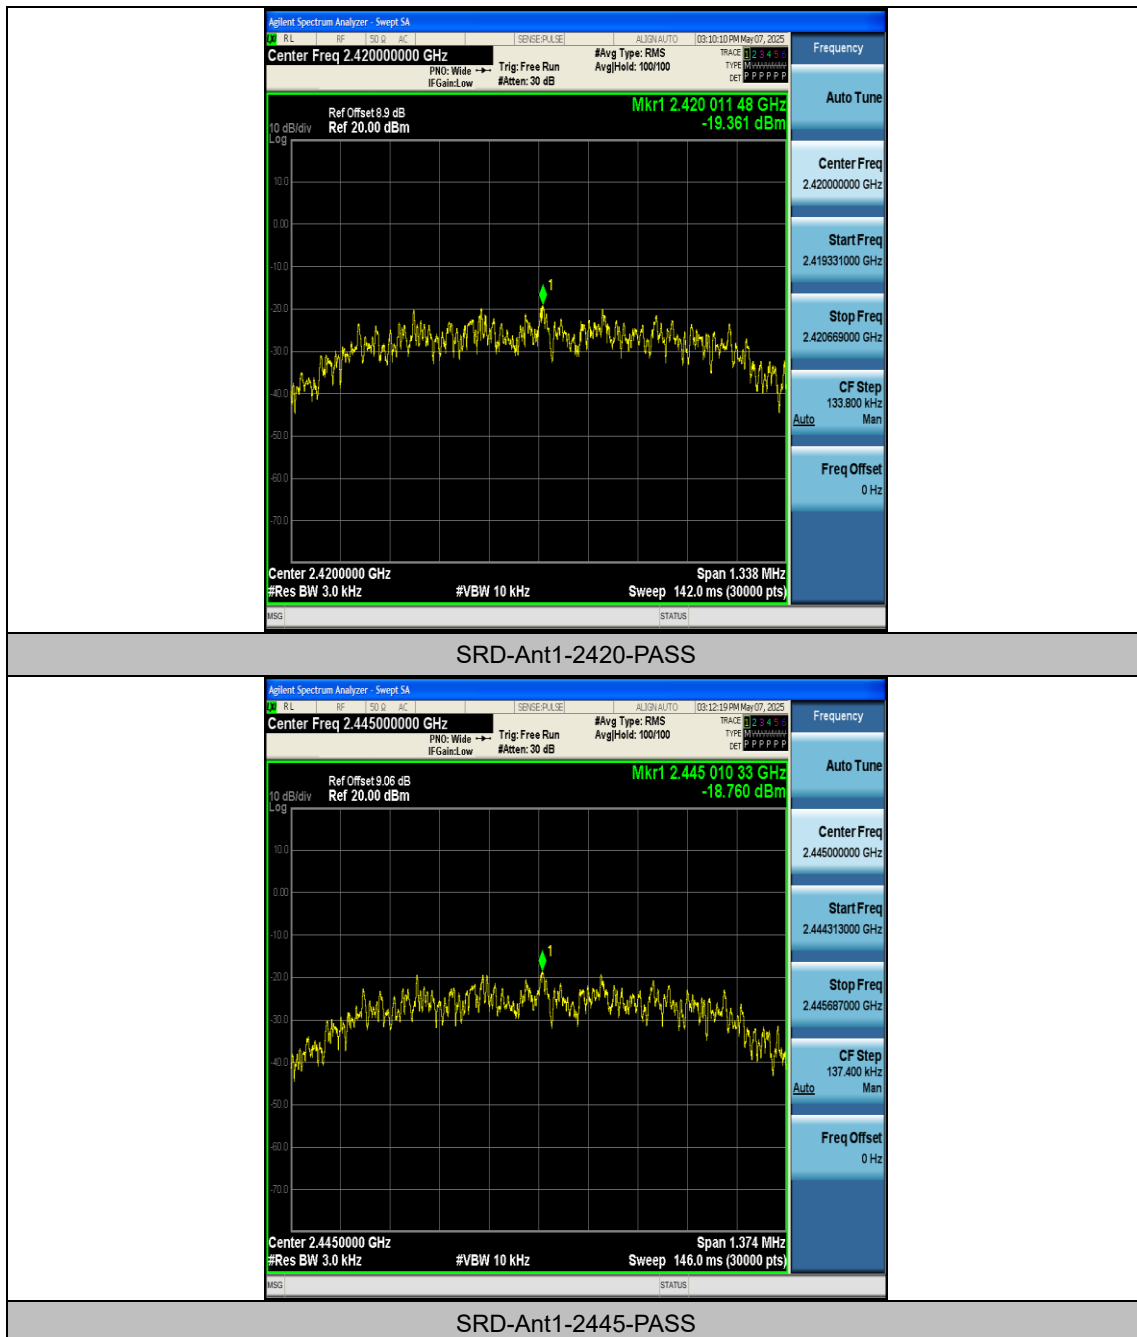

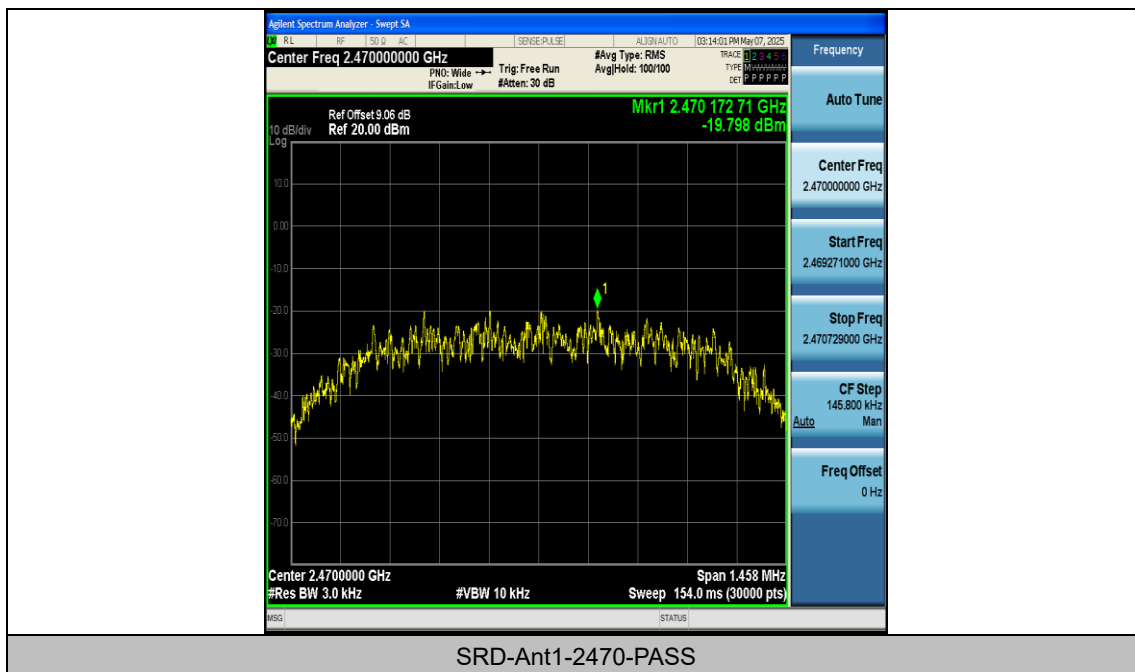


Appendix E: Band edge measurements

Test Result

Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	Low	2420	-4.87	-49.13	≤ -24.87	PASS
SRD	Ant1	High	2470	-7.38	-48.65	≤ -27.38	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

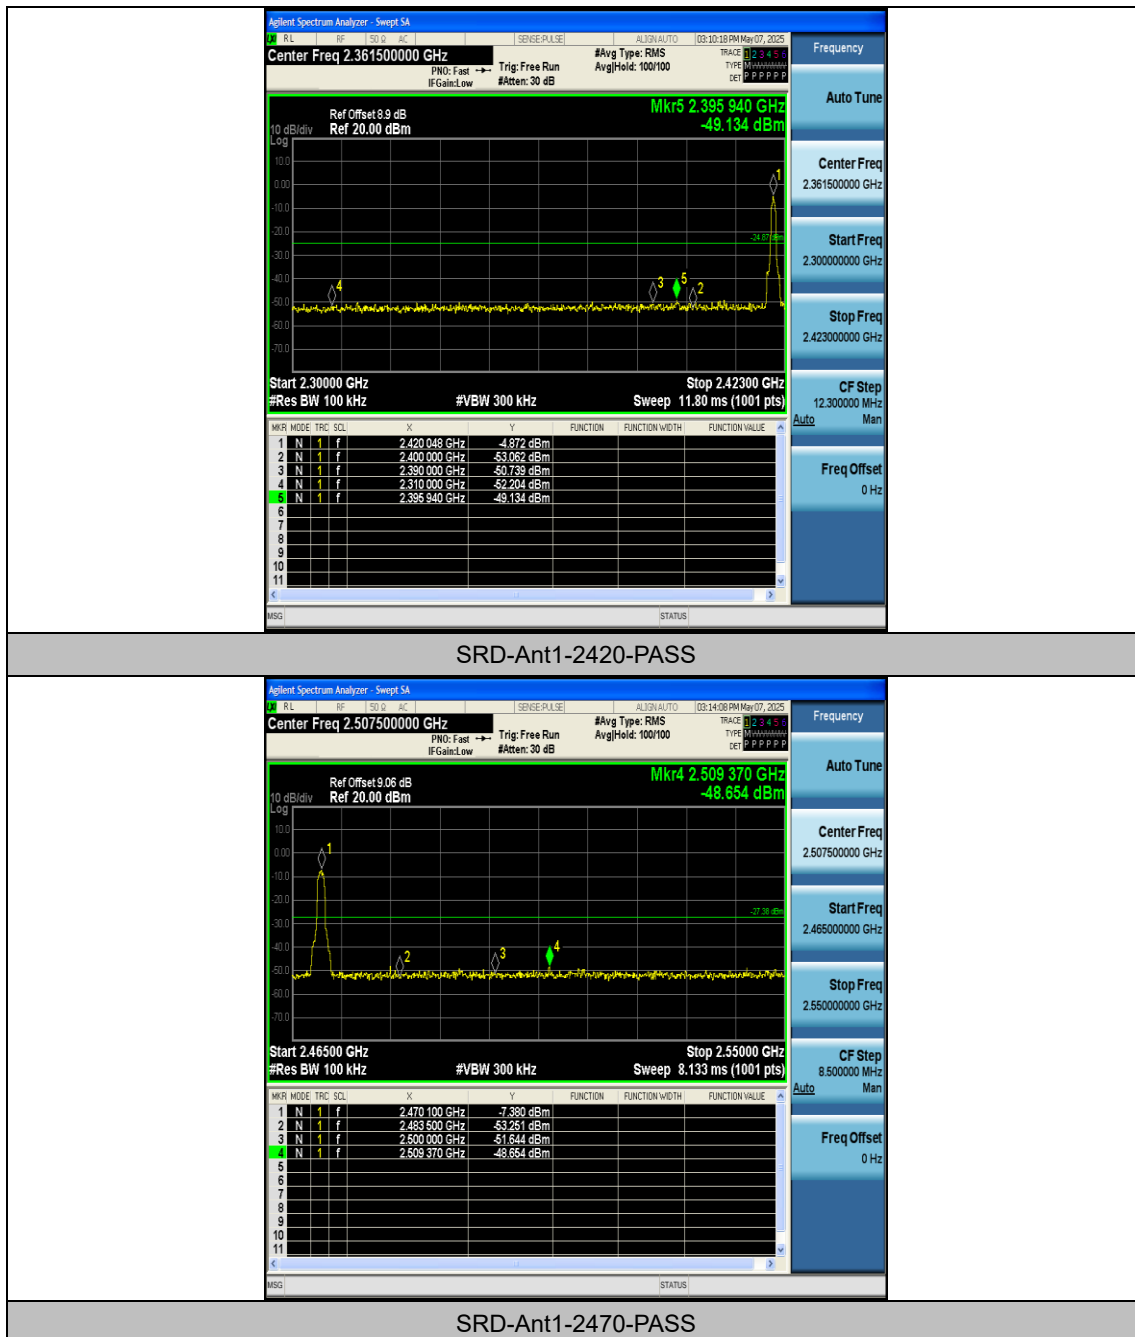


Appendix F: Conducted Spurious Emission


Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	2420	0~Reference	-6.69	-6.69	---	PASS
SRD	Ant1	2420	30~1000	-6.69	-52.35	≤-26.69	PASS
SRD	Ant1	2420	1000~26500	-6.69	-34.35	≤-26.69	PASS
SRD	Ant1	2445	0~Reference	-4.93	-4.93	---	PASS
SRD	Ant1	2445	30~1000	-4.93	-52.70	≤-24.93	PASS
SRD	Ant1	2445	1000~26500	-4.93	-35.61	≤-24.93	PASS
SRD	Ant1	2470	0~Reference	-5.13	-5.13	---	PASS
SRD	Ant1	2470	30~1000	-5.13	-52.59	≤-25.13	PASS
SRD	Ant1	2470	1000~26500	-5.13	-34.55	≤-25.13	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.

Test Graphs

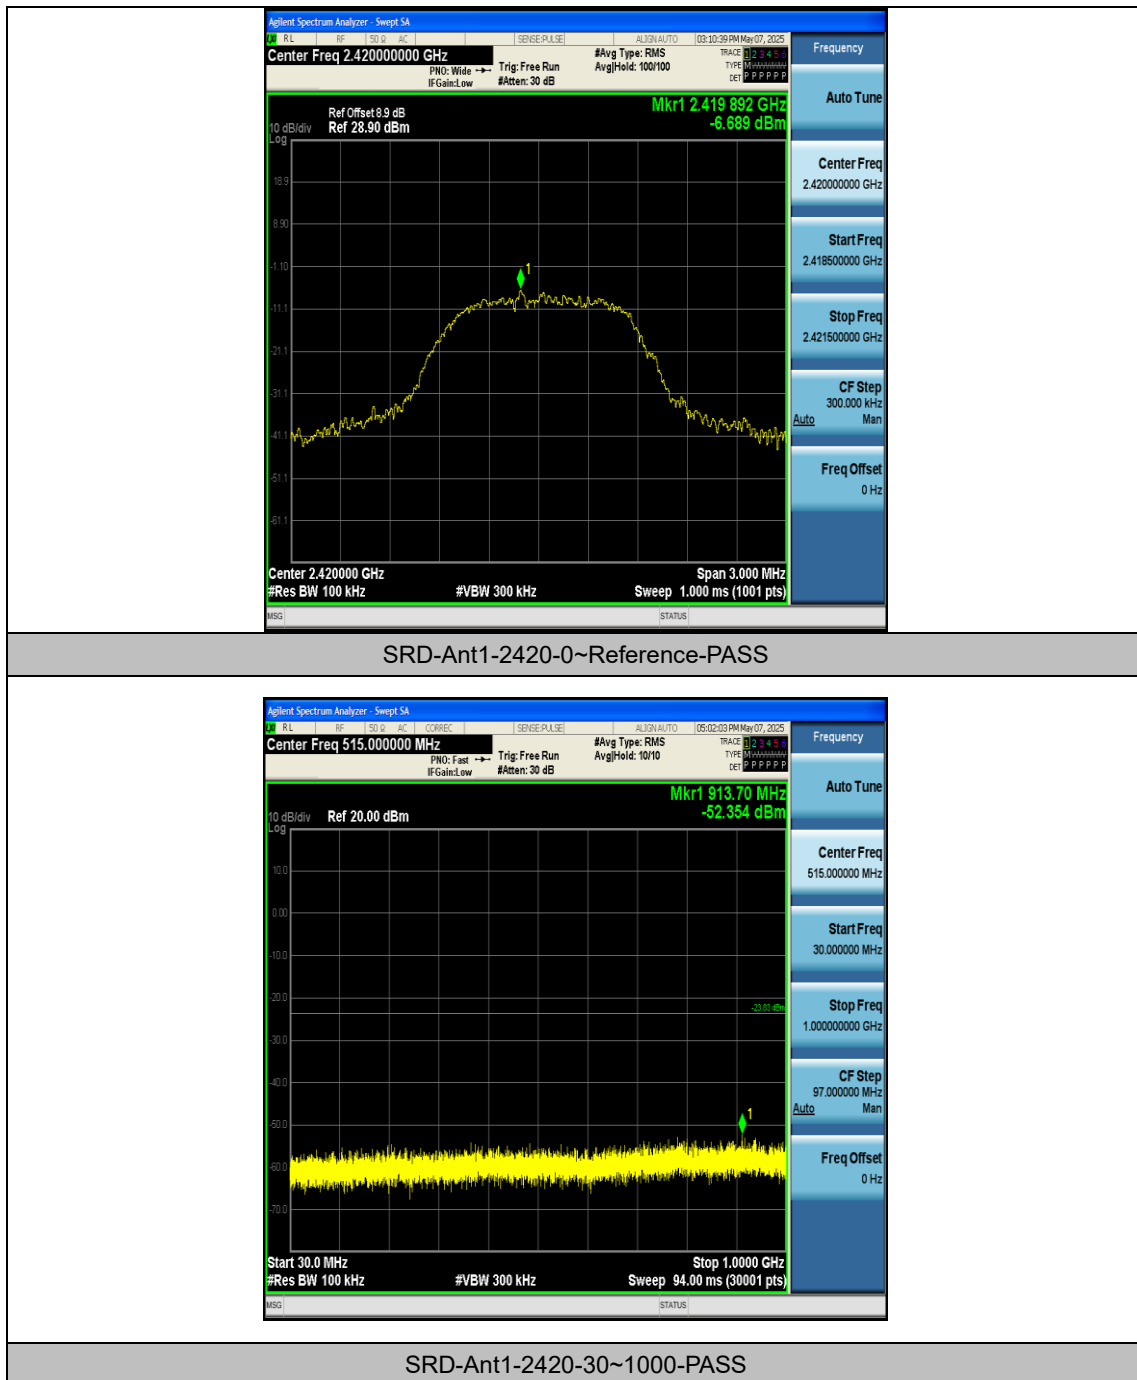


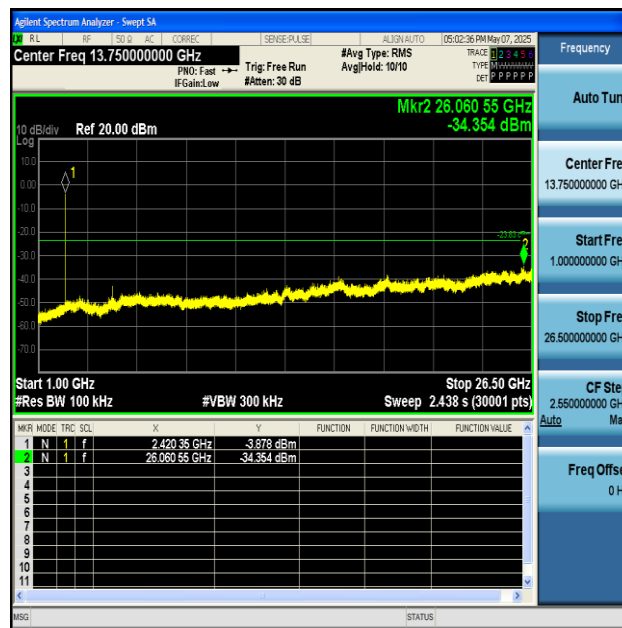


SRD-Ant1-2420-1000~26500-PASS




SRD-Ant1-2445-0~Reference-PASS

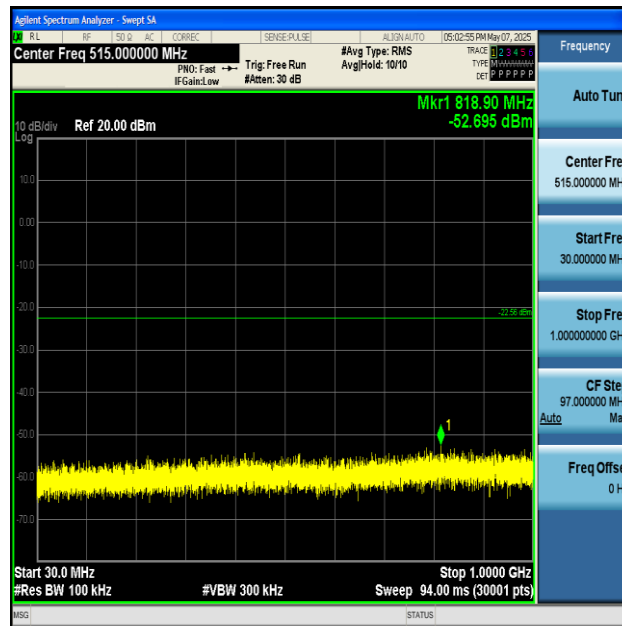


SRD-Ant1-2445-30~1000-PASS

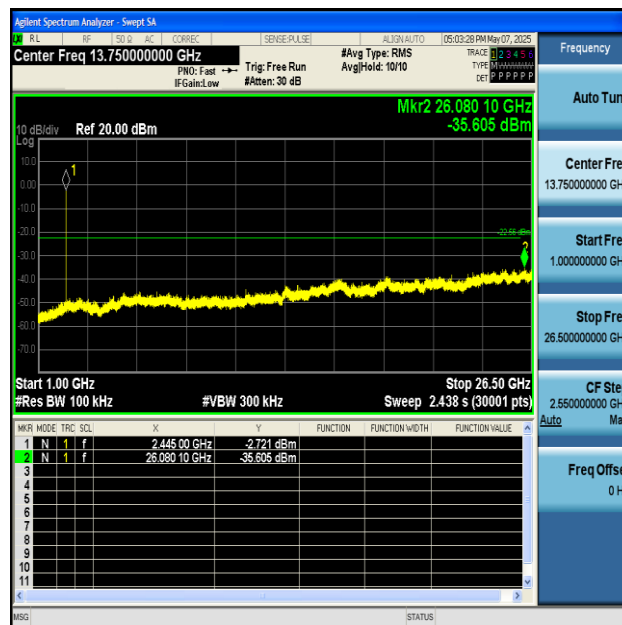


SRD-Ant1-2445-1000~26500-PASS

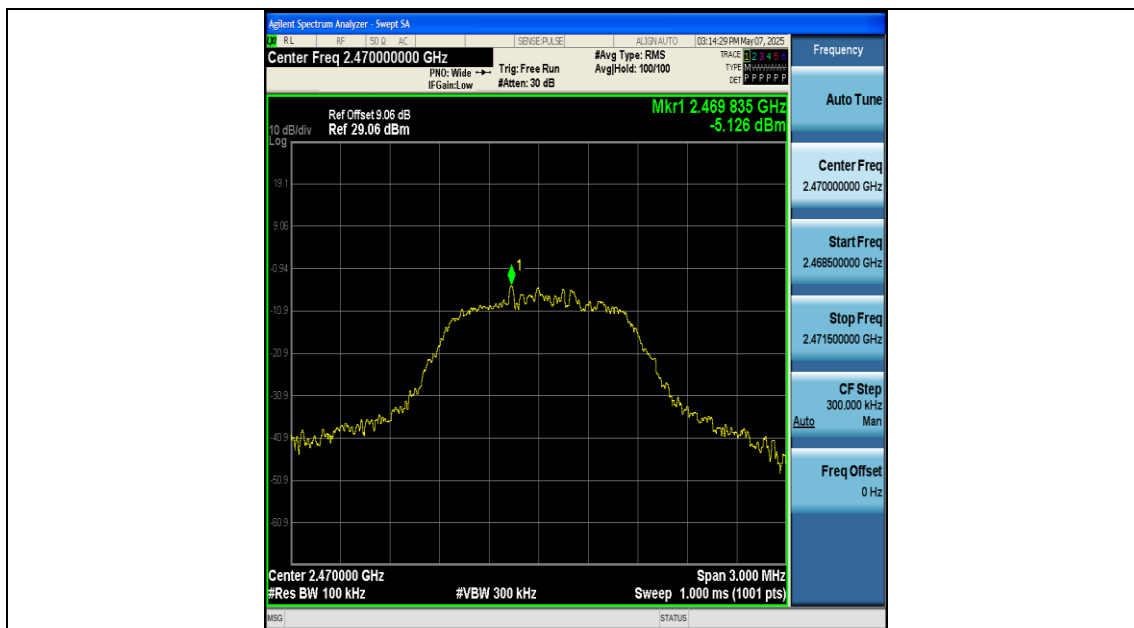

SRD-Ant1-2470-0~Reference-PASS

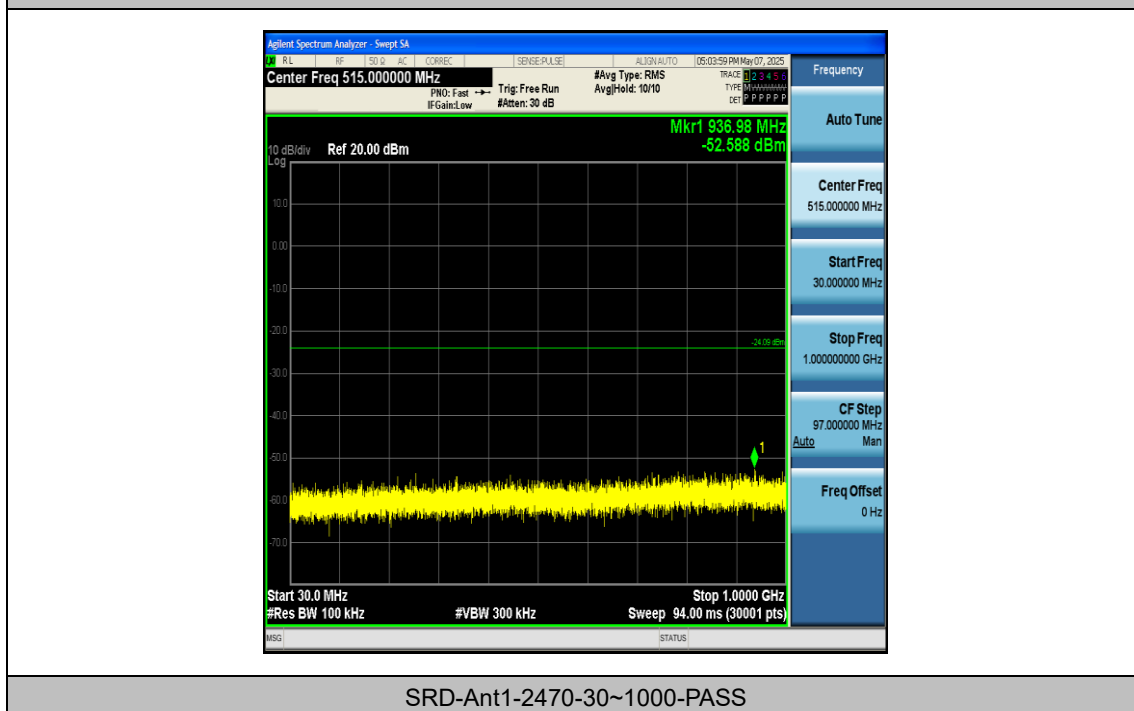

SRD-Ant1-2470-30~1000-PASS

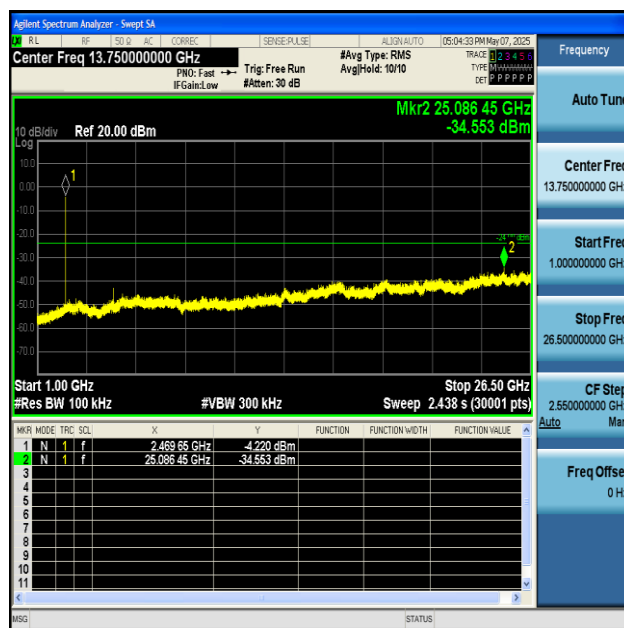

SRD-Ant1-2470-1000~26500-PASS


Appendix G: Duty Cycle


Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
SRD	Ant1	2420	2.88	3.74	77.01	1.13
SRD	Ant1	2445	2.89	3.76	76.86	1.14
SRD	Ant1	2470	2.88	3.75	76.80	1.15

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

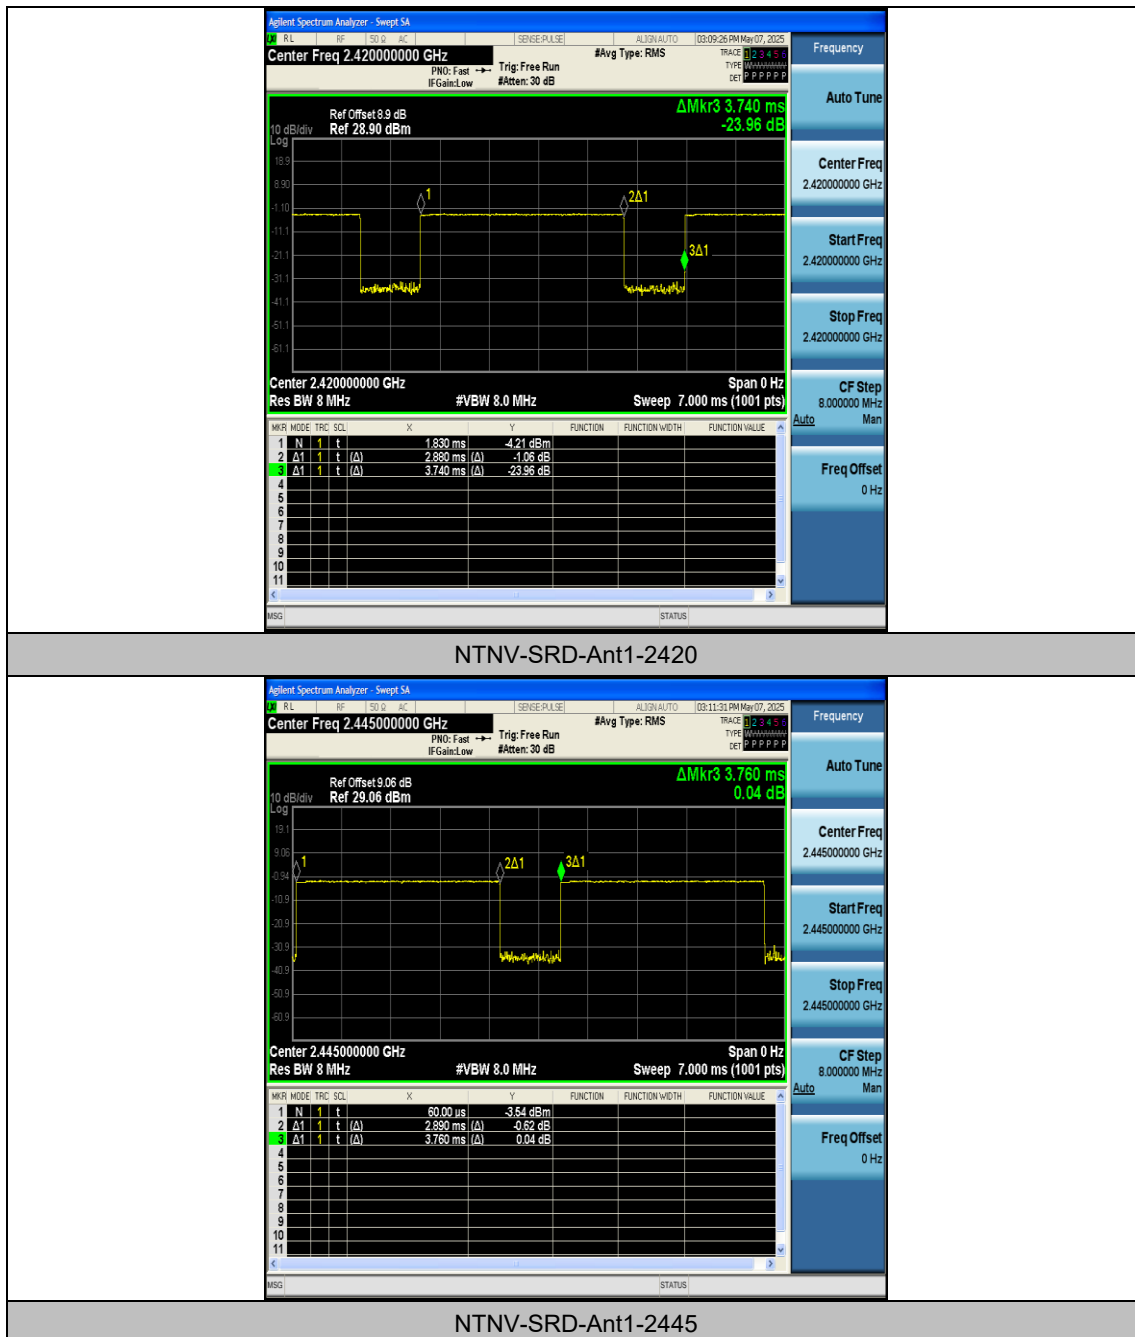

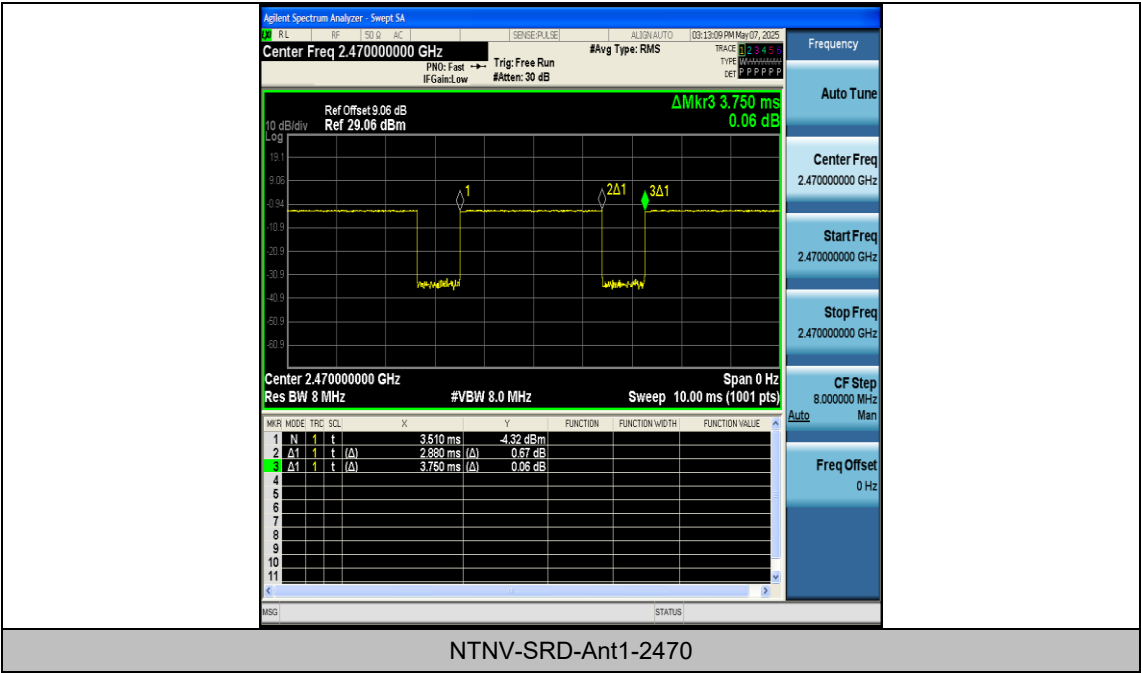

NTNV-SRD-Ant1-2470