



Fusennike (Shenzhen) Technology Co., Ltd.
Zhonghao Industrial City, Xiangjiaotang Community,
Bantian Street, Longgang District, Shenzhen

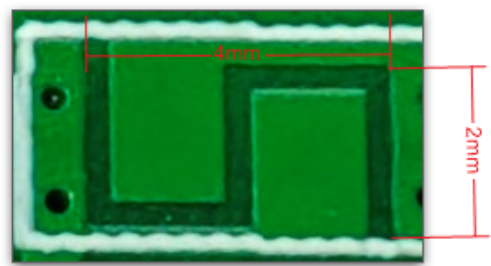


Passive Test For BT2.4									
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivit (dBi)
2400	32.27	-4.91	0.75	-1.4	0	0	0.75	-19.08	4.91
2410	34.52	-4.62	1.01	-1.14	0	0	1.01	-19.29	4.62
2420	31.32	-5.04	0.53	-1.62	0	0	0.53	-20	5.04
2430	29.94	-5.24	0.3	-1.85	0	0	0.3	-22	5.24
2440	33.08	-4.8	0.66	-1.49	0	0	0.66	-21.42	4.8
2450	35.3	-4.52	0.9	-1.25	0	0	0.9	-19.23	4.52
2460	34.55	-4.61	0.77	-1.38	0	0	0.77	-19.74	4.61
2470	32	-4.95	0.44	-1.71	0	0	0.44	-22.45	4.95
2480	38.59	-4.14	1.25	-0.9	0	0	1.25	-22.02	4.14
2490	33.31	-4.77	0.55	-1.6	0	0	0.55	-23.25	4.77
2500	31.09	-5.07	0.26	-1.89	0	0	0.26	-25.91	5.07

2400.00MHz - 2500.00MHz Gain

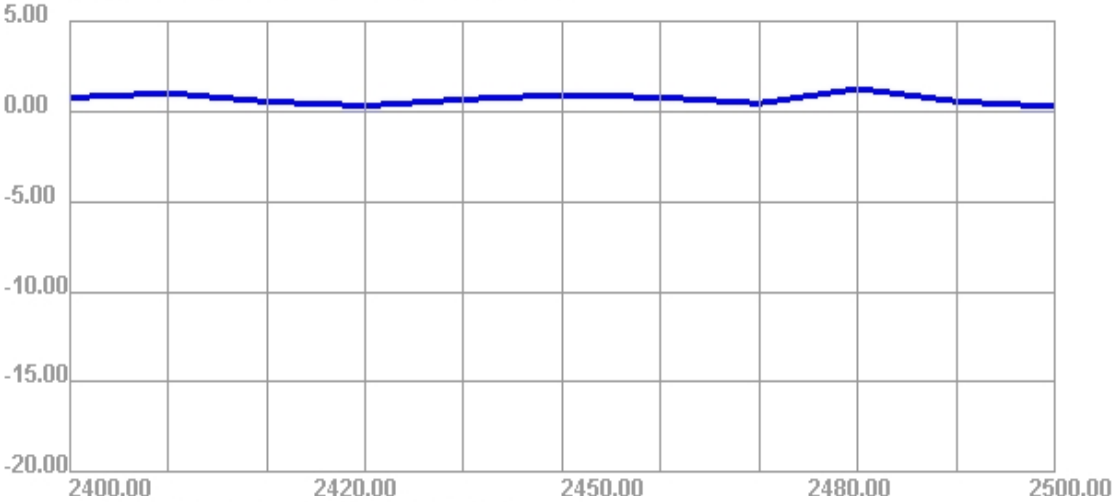

2400.00MHz - 2500.00MHz Efficiency


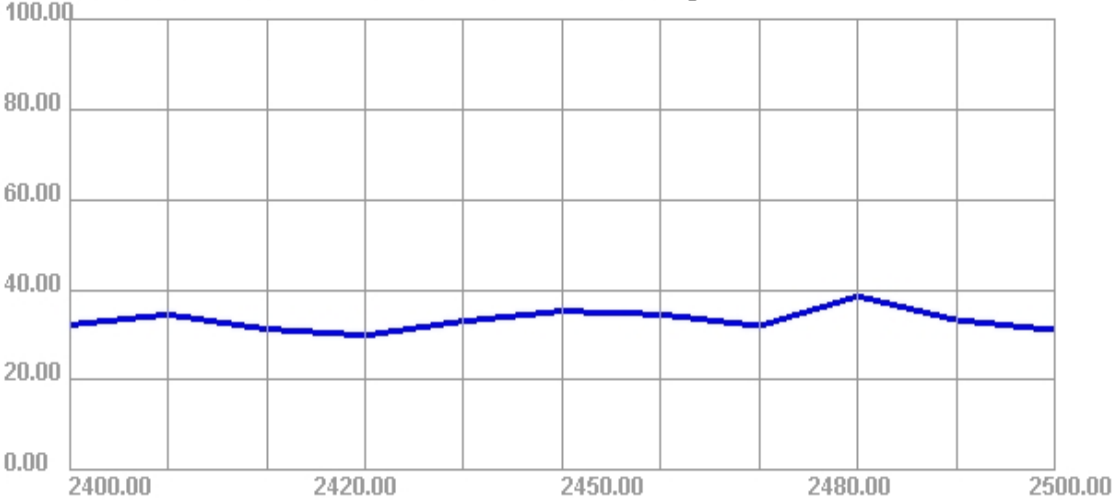


2400.000MHz


2400.000MHz H

0.8




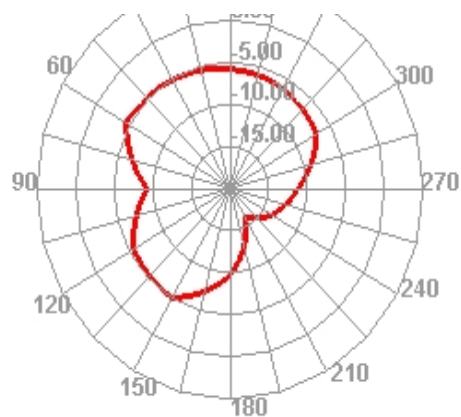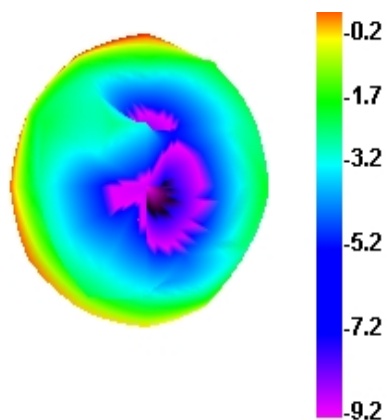


2400.000MHz E1

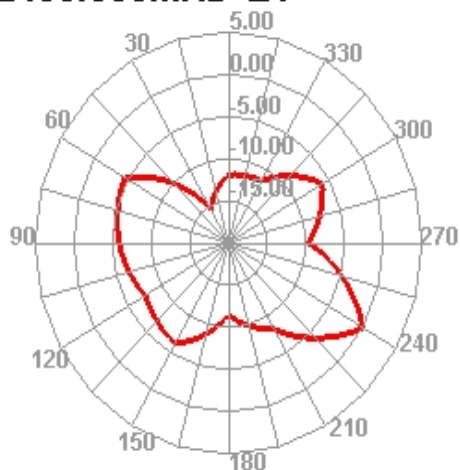


2400.000MHz E2

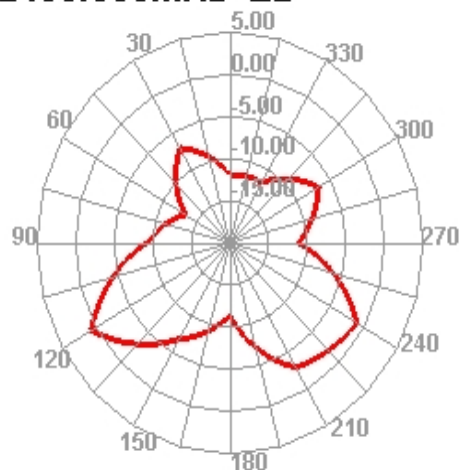

2450.000MHz

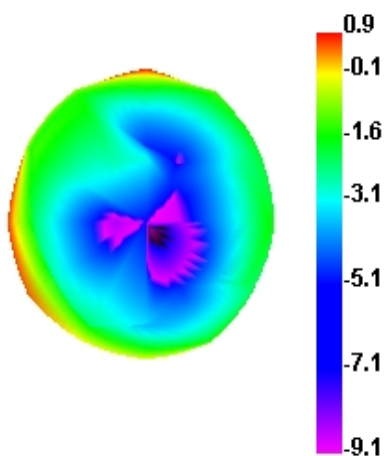

2450.000MHz H


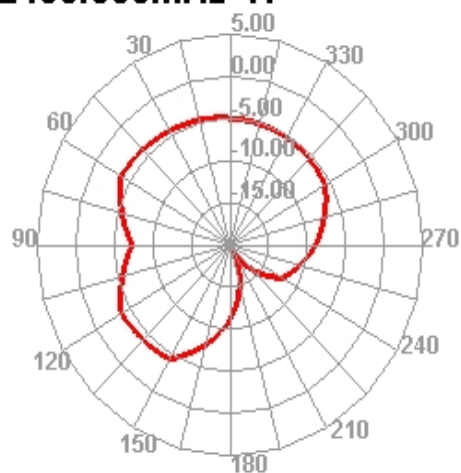


2450.000MHz E1




2450.000MHz E2




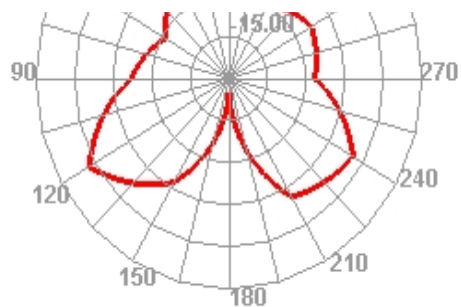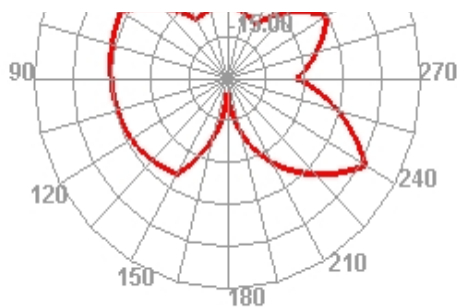


2500.000MHz

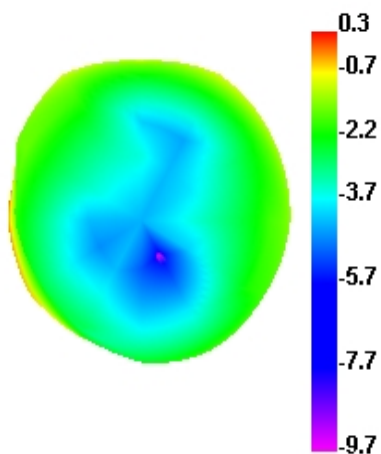


2500.000MHz H

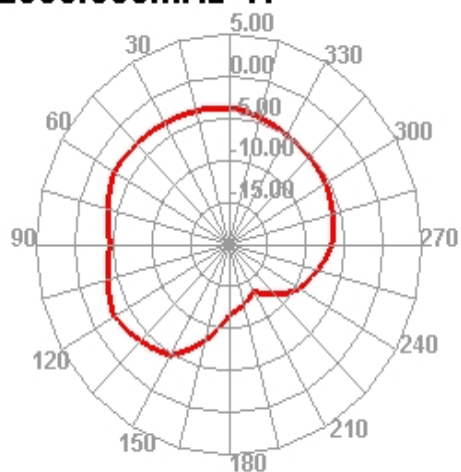

2500.000MHz E1

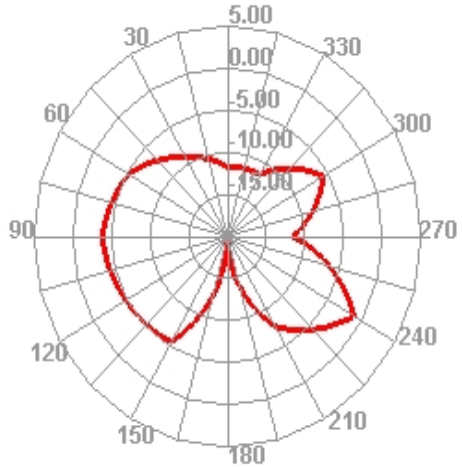

2500.000MHz E2

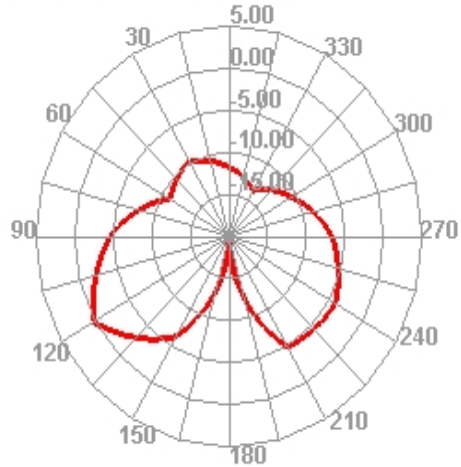

Beamwidth (3dB)	AttH (dB)	AttV (dB)
0	47.36	46.86
0	47.4	46.9
0	47.28	46.76
0	47.35	46.78
0	47.15	46.65
0	47.33	46.85
0	47.72	47.22
0	47.36	46.93
0	47.56	47.1
0	47.05	46.67
0	47.01	46.63

Application Information	
04Version	5.245.351
TotalTime	5m 9s 437ms
AdditionalInfor	NULL