FCC Test Report

Report No.: AGC01040250315FR03

FCC ID	:	2BOPJXX
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	SMART BIKE TRAINER
BRAND NAME	:	ThinkRider
MODEL NAME	:	XX, XX Pro, XX Max, XX Fold, XX Ultra
APPLICANT	:	Wuxi Thinkrider Technology Co., Ltd.
DATE OF ISSUE	:	Apr. 19, 2025
STANDARD(S)	:	FCC Part 15 Subpart E §15.407
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 19, 2025	Valid	Initial Release

Table of Contents

1. General Information

Applicant	Wuxi Thinkrider Technology Co., Ltd.
Address	9th Floor, Building 8, No. 67, Zhujiang Road, Xinwu District, Wuxi City, China.
Manufacturer	Wuxi Thinkrider Technology Co., Ltd.
Address	9th Floor, Building 8, No. 67, Zhujiang Road, Xinwu District, Wuxi City, China.
Factory	Wuxi Thinkrider Technology Co., Ltd.
Address	9th Floor, Building 8, No. 67, Zhujiang Road, Xinwu District, Wuxi City, China.
Product Designation	SMART BIKE TRAINER
Brand Name	ThinkRider
Test Model	XX
Series Model(s)	XX Pro, XX Max, XX Fold, XX Ultra
Difference Description	All the same except the model name and colors.
Date of receipt of test item	Mar. 25, 2025
Date of Test	Mar. 25, 2025~Apr. 19, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-5G WLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jack Gui (Project Engineer)	Apr. 19, 2025
Reviewed By	Calvin Liu (Reviewer)	Apr. 19, 2025
Approved By	Angela Li (Authorized Officer)	Apr. 19, 2025

2. Product Information

2.1 Product Technical Description

Equipment Type	☐ Outdoor access points ☐ Indoor access points ☐ Fixed P2P access points ☒ Client devices
Operation Frequency	☒ U-NII 1:5150MHz~5250MHz ☒ U-NII 2A: 5250MHz~5350MHz ☐ U-NII 2C:5470MHz~5725MHz ☐ U-NII 3: 5725MHz~5850MHz
DFS Design Type	☐ Master ☐ Slave with radar detection ☒ Slave without radar detection
TPC Function	☐ Yes ☒ No
Hardware Version	V2.2
Software Version	V1.0.1
Test Frequency Range	For 802.11a/n-HT20: 5180~5240MHz/5260~5320MHz For 802.11n-HT40: 5190~5230MHz/5270~5310MHz
RF Output Power	802.11a:14.52dBm,802.11n(HT20):13.97dBm; 802.11n(HT40):10.85dBm;
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM
Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps; 802.11n: up to 300Mbps;
Number of channels	6 channels of U-NII-1 Band; 6 channels of U- NII-2A Band
Antenna Designation	PCB Antenna
Antenna Gain	U-NII 1:2.69dBi; U-NII 2A:3.09dBi
Power Supply	DC 48V

2.2 Table of Carrier Frequency

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

For 5260~5320MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	N_{BPSC}	N_{CBPS}		N_{DBPS}		Data rate (Mbps) 800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2BOPJXX** filing to comply with the FCC Part 15 requirements.

2.5 Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

2.6 Special Accessories

Refer to section 4.4.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:
The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna refer to Section 2of the report

2.10 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was “Serial-Secure CRT”.

Software Setting Diagram

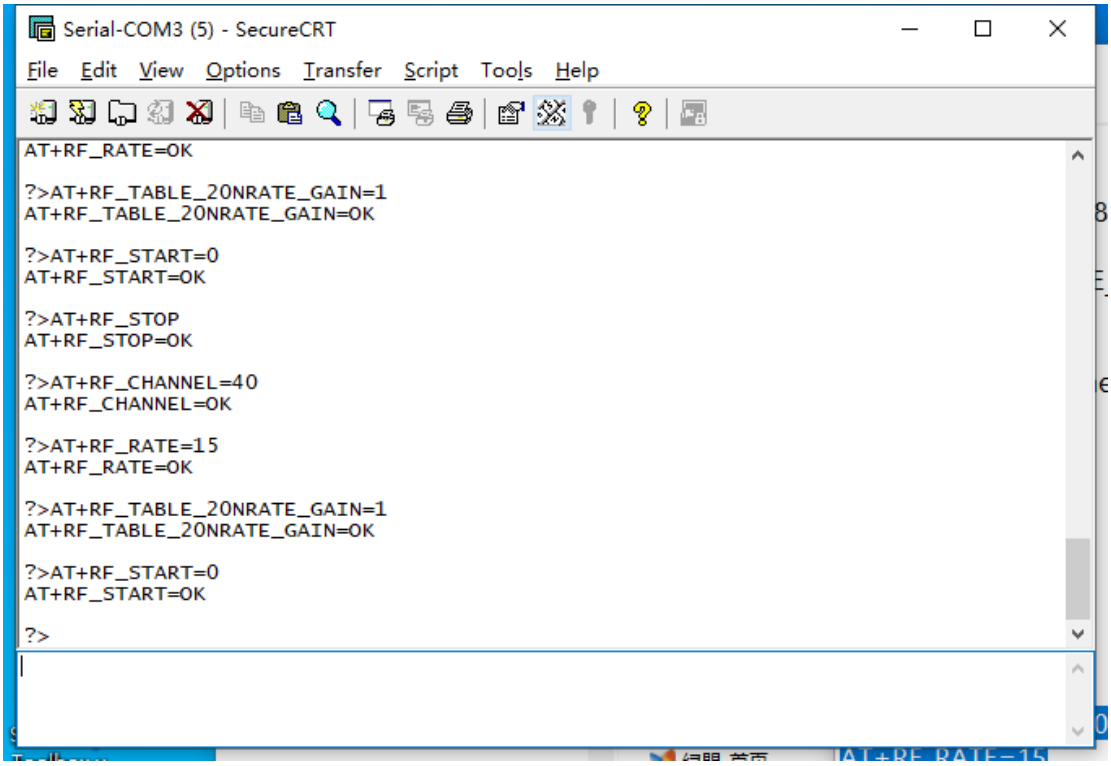

Test Mode	Channel	Power Index
802.11a	L/M/H	13
802.11n(HT20)	L/M/H	12
802.11n(HT40)	L/M/H	4

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	DC 48V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	U_c = ±2.9 dB
Uncertainty of Radiated Emission below 1GHz	U_c = ±3.9 dB
Uncertainty of Radiated Emission above 1GHz	U_c = ±4.9 dB
Uncertainty of total RF power, conducted	U_c = ±0.8 dB
Uncertainty of RF power density, conducted	U_c = ±2.6 dB
Uncertainty of spurious emissions, conducted	U_c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U_c = ±2.7 %

3.5 List of Equipment Used

● RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23
☐	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2025-01-14	2026-01-13
☐	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2025-01-14	2026-01-13
☒	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29
☐	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22
☒	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
☒	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

● Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13
☐	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
☒	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
☒	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
☒	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-05-24	2025-05-23
☒	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
☒	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
☒	AGC-EM-A118	5G Filter	SongYi	BRM50716	N/A	2024-05-23	2025-05-22
☒	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
☐	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

● AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
☒	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2024-02-01	2026-01-31
☒	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☐	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71
☒	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A
☒	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6
☒	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0

4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

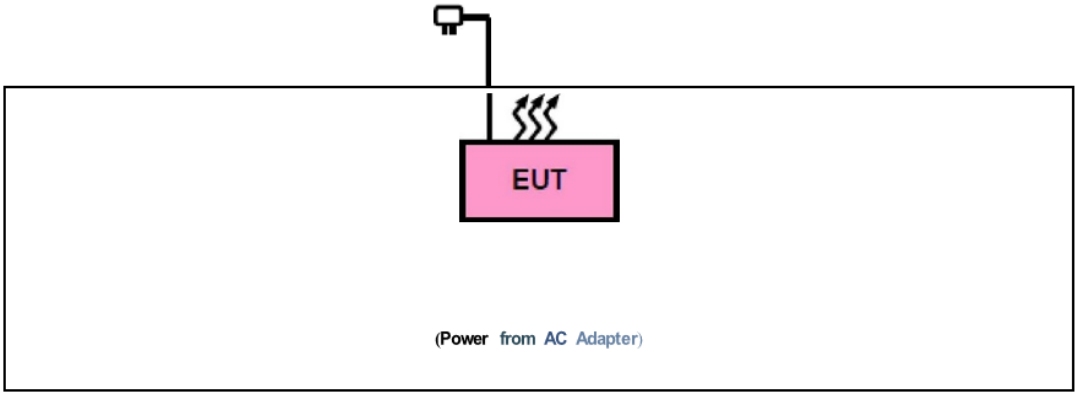

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☒ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	USB-TTL	--	--	--

☒ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	Guangdong Mingxin Power Technologies Co., Ltd	MX65C1-4801250	Input: AC 100-240V 50/60Hz, 2A Output: DC 48V 1.25A 60W	1.0m unshielded

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	N/A
4	§15.403(a)	26dB bandwidth Measurement	Pass
5	§15.407(a/1/2)	Power Spectral Density	Pass
6	§15.407(b)(1/2)	Conducted Spurious Emission	Pass
7	§15.209,§15.407(b)(1/2)	Radiated Emission& Band Edge	Pass
8	§15.207	AC Power Line Conducted Emission	Pass

Note:

1. Refer to the manufacturer's declaration in the user manual.
2. The device operates without the transmission of information.

5. Description of Test Modes

EUT Configure Mode	Applicable To				Description
	RE＞1G	RE＜1G	PLC	APCM	
A	☒	☒	☒	☒	Powered by Adapter with WIFI(5G) Link
B	--	--	--	--	Powered by Battery with WIFI(5G) Link
C	--	--	--	--	Powered by USB with WIFI(5G) Link

Where, **RE＞1G: Radiated Emission above 1GHz** **PLC: Power Line Conducted Emission**

RE＜1G: Radiated Emission below 1GHz **APCM: Antenna Port Conducted Measurement**

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

NOTE 2: "--"means no effect.

NOTE 3: The radiation part tests the dual-antenna MIMO as the worst combination.

- **Radiated Emission Test (Above 1GHz):**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11n (20MHz)	5180-5240	36 to 48	36, 40, 48	OFDM	MCS0
A	802.11n (20MHz)	5260-5320	52 to 64	52, 60, 64	OFDM	MCS0

- **Radiated Emission Test (Below 1GHz):**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	MCS0

- **Power Line Conducted Emission Test:**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11n(20MHz)	5180-5240	36 to 48	36	OFDM	MCS0

- **Band edge Measurement:**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11n (20MHz)	5180-5240	36 to 48	36	OFDM	MCS0
A	802.11n (40MHz)		38 to 46	38	OFDM	MCS0
A	802.11n (20MHz)	5260-5320	52 to 64	52,	OFDM	MCS0
A	802.11n (40MHz)		54 to 62	54	OFDM	MCS0

- **Antenna Port Conducted Measurement:**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	MCS0

6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz, 40MHzchannel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)
Band U-NII1:5150MHz-5250MHz			
802.11a	6	100	/
802.11n_HT20	MCS0	100	/
802.11n_HT40	MCS0	100	/
Band U-NII 2A:5250MHz-5350MHz			
802.11a	6	100	/
802.11n_HT20	MCS0	100	/
802.11n_HT40	MCS0	100	/

Remark:

1. Duty Cycle factor = 10 * log (1/ Duty cycle)
2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.

The test plots as follows:

IEEE 802.11a_U-NII 1	IEEE 802.11n-HT20_U-NII 1
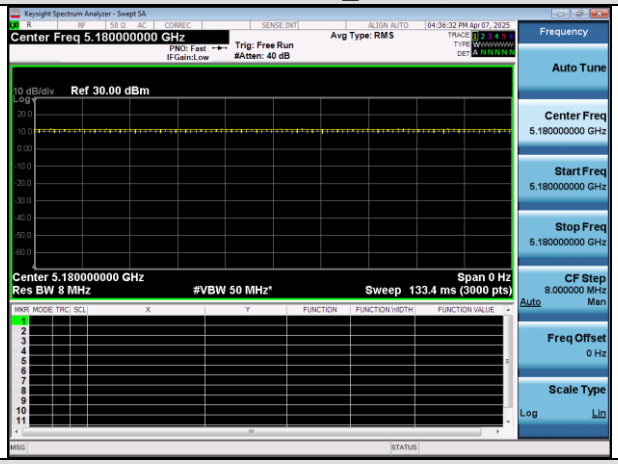	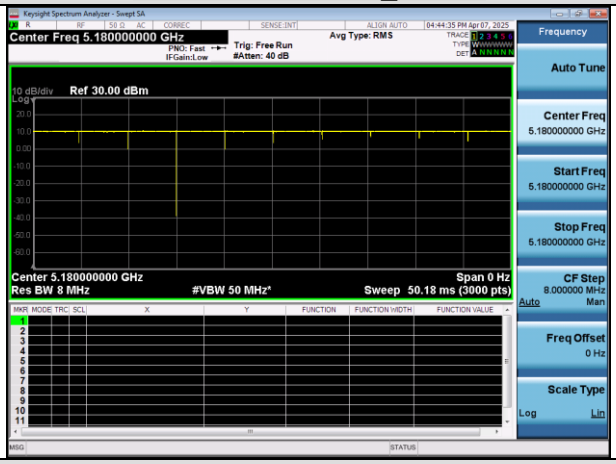
IEEE 802.11n-HT40_U-NII 1	**IEEE 802.11a_U-NII 2A**
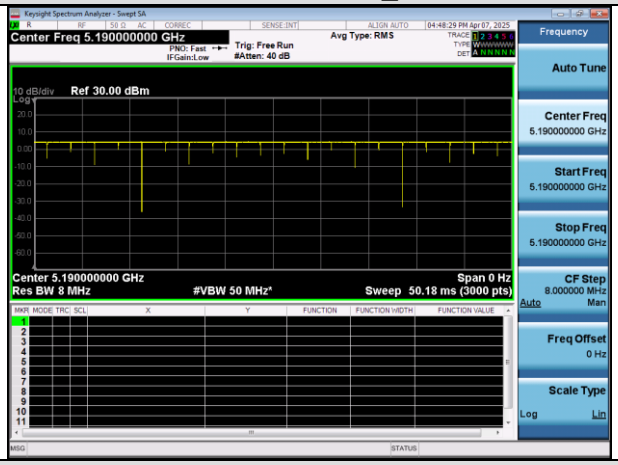	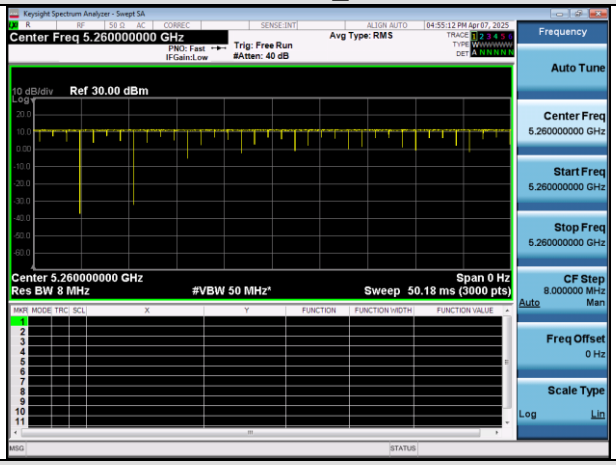
IEEE 802.11n-HT20_U-NII 2A	**IEEE 802.11n-HT40_U-NII 2A**
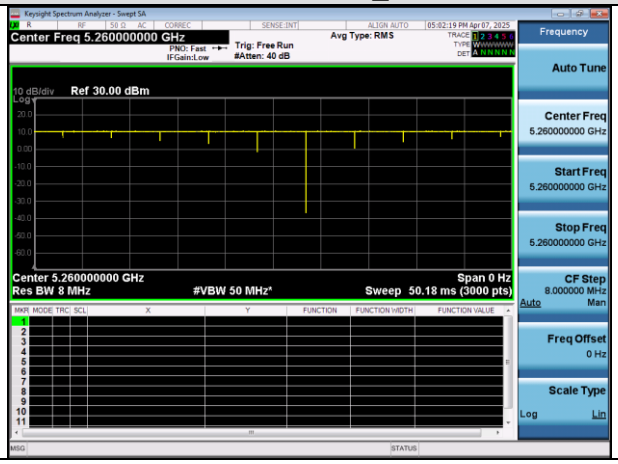	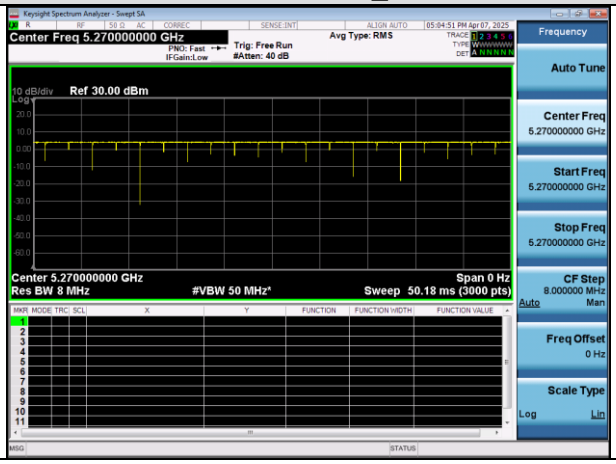

7. RF Output Power Measurement

7.1 Provisions Applicable

Operation Band	EUT Category		LIMIT
U-NII-1	☐	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	☐	Fixed point-to-point Access Point	1 Watt (30 dBm)
	☐	Indoor Access Point	1 Watt (30 dBm)
	☒	Client devices	250mW (23.98 dBm)
U-NII-2A	/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-2C	/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3	/		1 Watt (30 dBm)

Note: Where B is the 26dB emission bandwidth in MHz.

7.2 Measurement Procedure

☒Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

1. The testing follows the ANSI C63.10 Section 12.3.3.1
2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
9. The final test results have been increased by the duty cycle factor and recorded in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

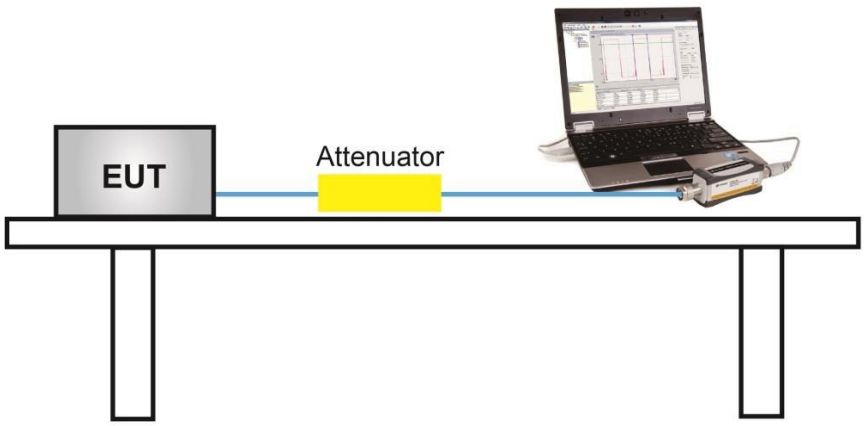

7.4 Measurement Result

Test Data of Conducted Output Power for band 5.15-5.25 GHz				
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail
802.11a	5180	**14.52**	23.98	Pass
	5200	14.20	23.98	Pass
	5240	14.28	23.98	Pass
802.11n20	5180	13.69	23.98	Pass
	5200	13.77	23.98	Pass
	5240	13.83	23.98	Pass
802.11n40	5190	10.73	23.98	Pass
	5230	10.81	23.98	Pass

Test Data of Conducted Output Power for band 5.25-5.35 GHz				
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail
802.11a	5260	14.21	23.98	Pass
	5300	14.31	23.98	Pass
	5320	14.41	23.98	Pass
802.11n20	5260	13.77	23.98	Pass
	5300	13.87	23.98	Pass
	5320	13.97	23.98	Pass
802.11n40	5270	10.66	23.98	Pass
	5310	10.85	23.98	Pass

8. 6dB&26dB Bandwidth Measurement

8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

8.2 Measurement Procedure

◆ **-6dB bandwidth (DTS bandwidth) Test setting:**

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 100kHz.
4. Set the VBW ≥3*RBW. Detector = Peak. Trace mode = max hold.
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

◆ **99% occupied bandwidth test setting:**

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
   The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

◆ **-26dB Bandwidth test setting:**

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.3 Measurement Setup (Block Diagram of Configuration)

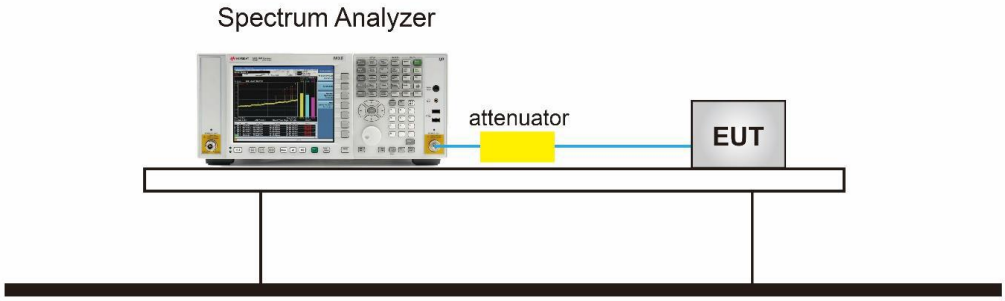

8.4 Measurement Results

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
802.11a	5180	16.666	23.965	N/A	Pass
	5200	16.894	26.474	N/A	Pass
	5240	16.898	26.537	N/A	Pass
802.11n20	5180	17.899	25.277	N/A	Pass
	5200	17.869	20.851	N/A	Pass
	5240	17.868	22.123	N/A	Pass
802.11n40	5190	36.327	40.571	N/A	Pass
	5230	36.257	40.132	N/A	Pass

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
802.11a	5260	16.698	24.501	N/A	Pass
	5300	16.890	25.678	N/A	Pass
	5320	16.878	27.847	N/A	Pass
802.11n20	5260	17.874	21.420	N/A	Pass
	5300	17.879	21.532	N/A	Pass
	5320	17.890	22.011	N/A	Pass
802.11n40	5270	36.318	40.623	N/A	Pass
	5310	36.285	40.223	N/A	Pass

Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

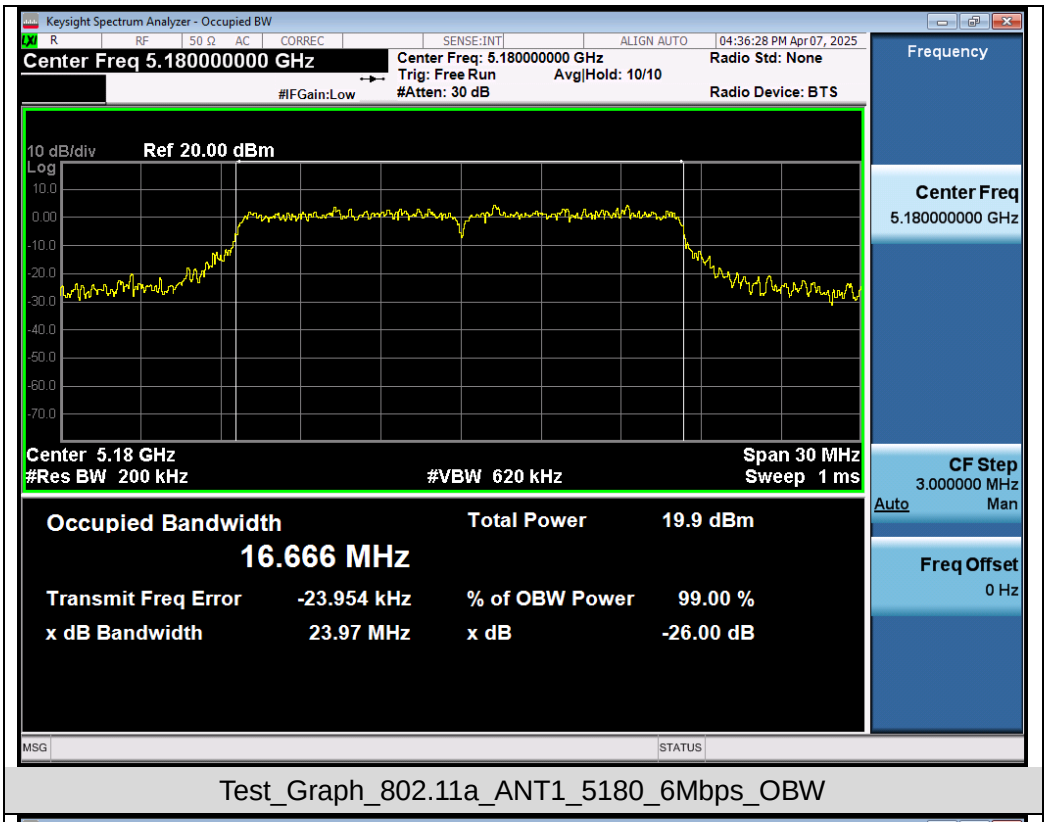

Test_Graph_802.11a_ANT1_5180_6Mbps_OBW

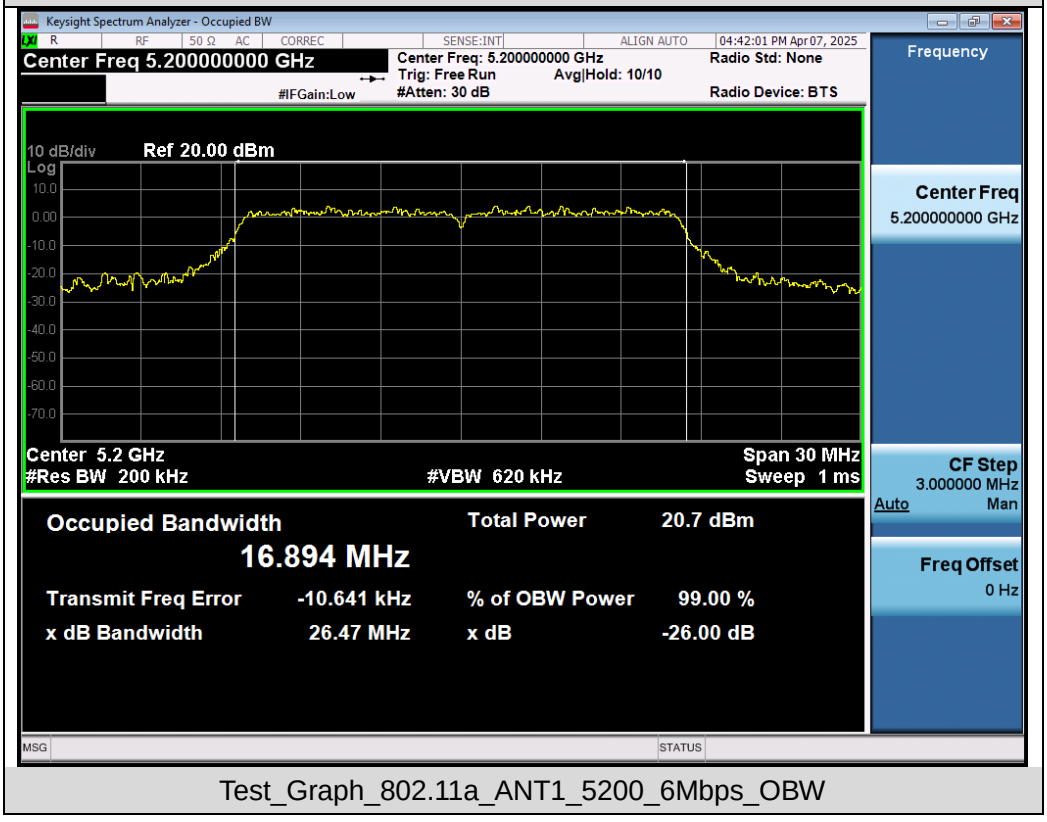

Test_Graph_802.11a_ANT1_5200_6Mbps_OBW

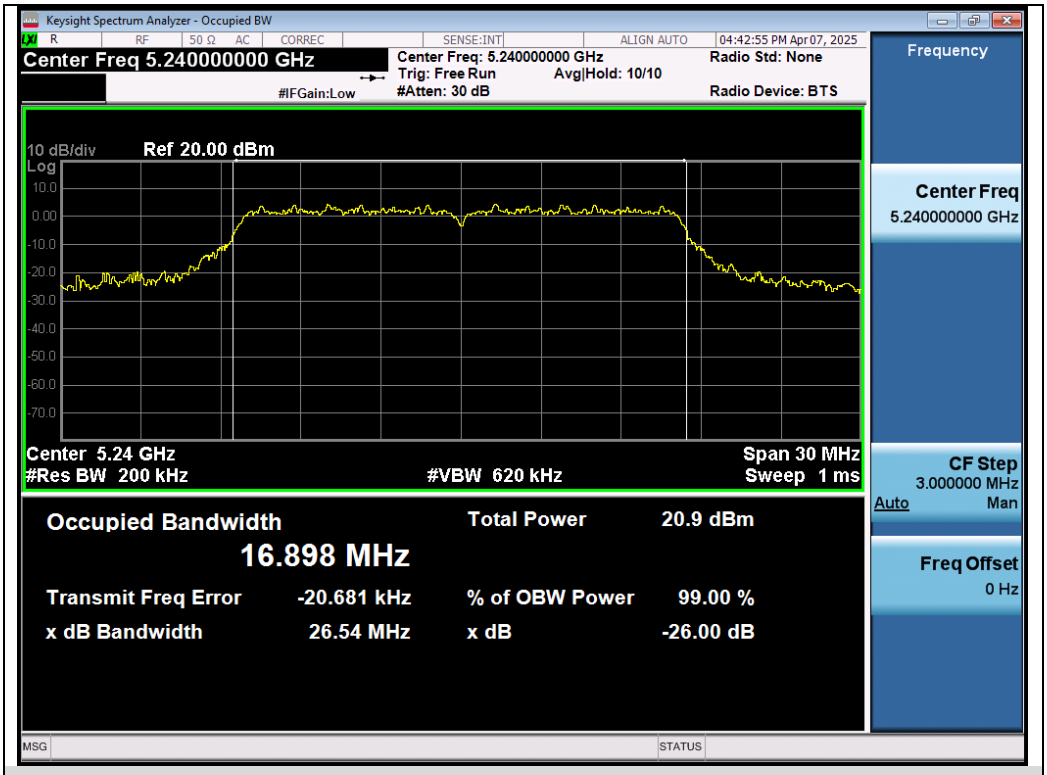

Test_Graph_802.11a_ANT1_5240_6Mbps_OBW

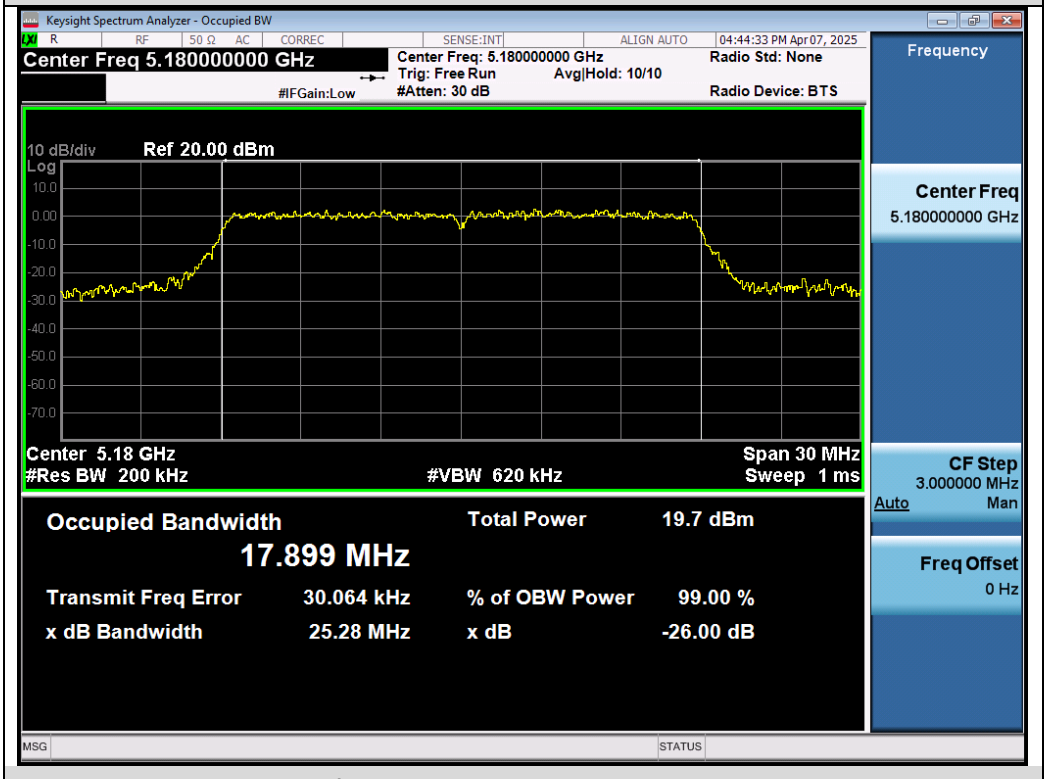

Test_Graph_802.11n20_ANT1_5180_MCS0_OBW

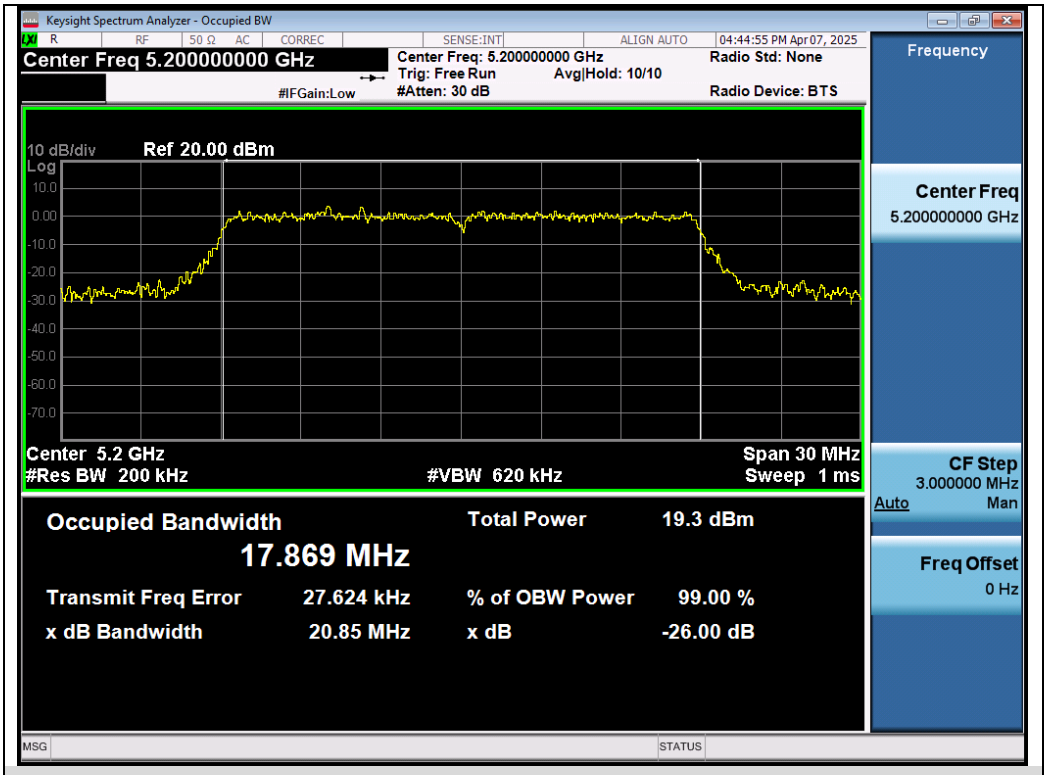

Test_Graph_802.11n20_ANT1_5200_MCS0_OBW

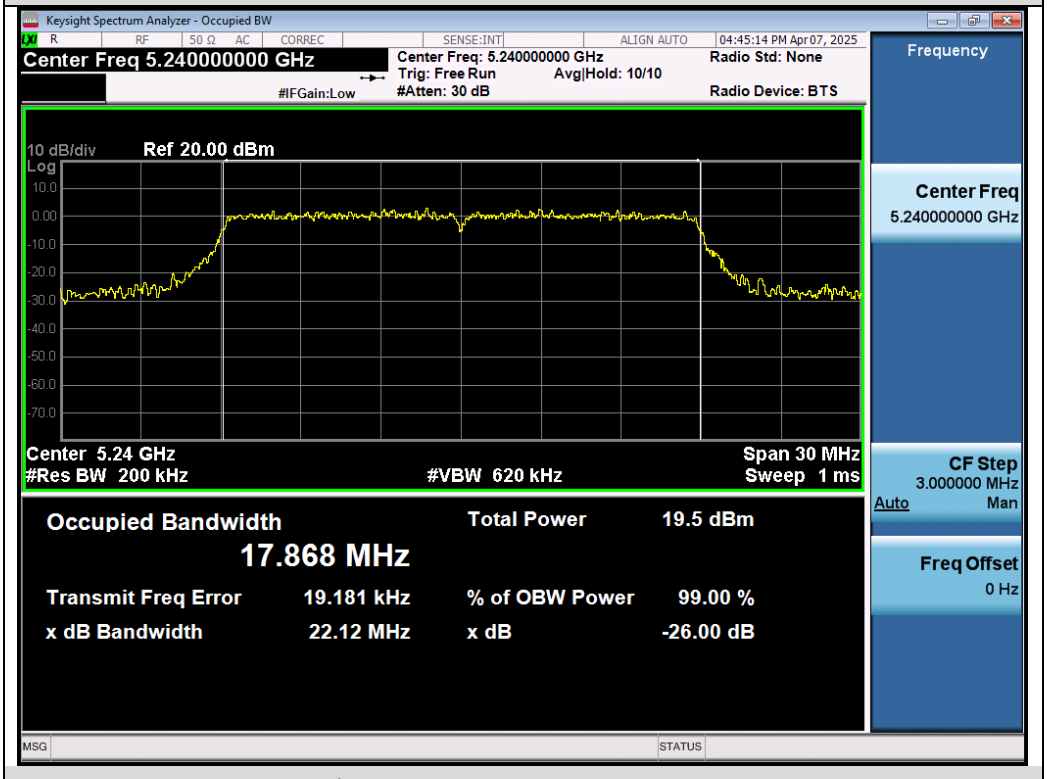

Test_Graph_802.11n20_ANT1_5240_MCS0_OBW

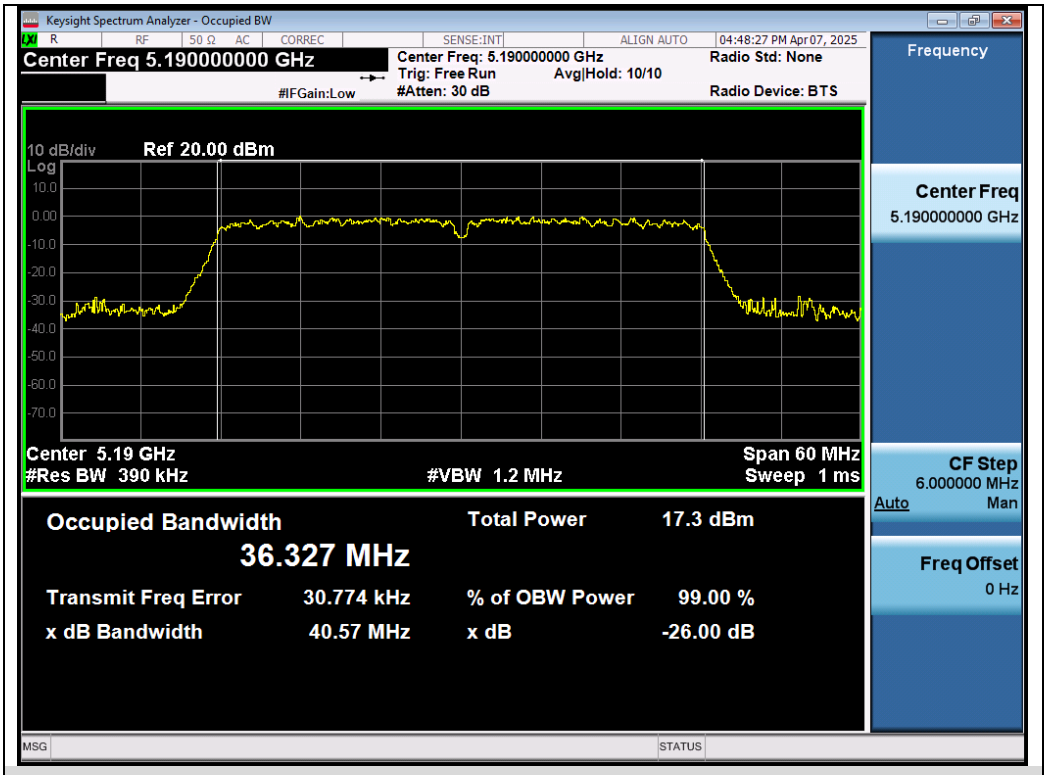

Test_Graph_802.11n40_ANT1_5190_MCS0_OBW

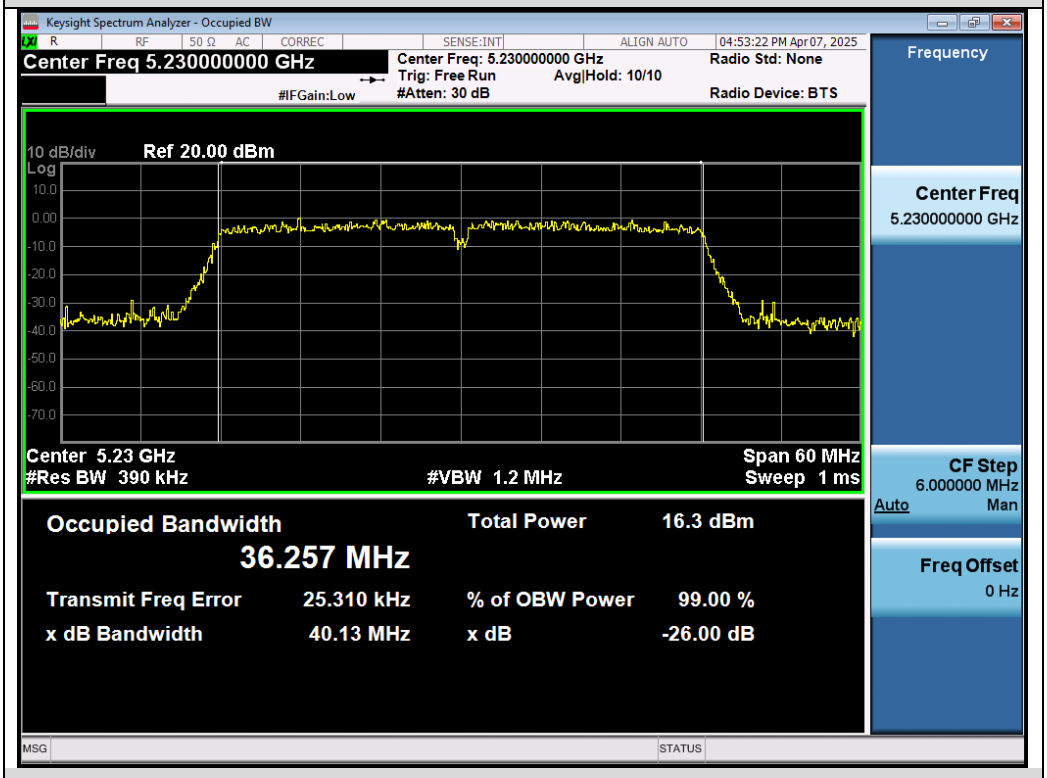

Test_Graph_802.11n40_ANT1_5230_MCS0_OBW

Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz

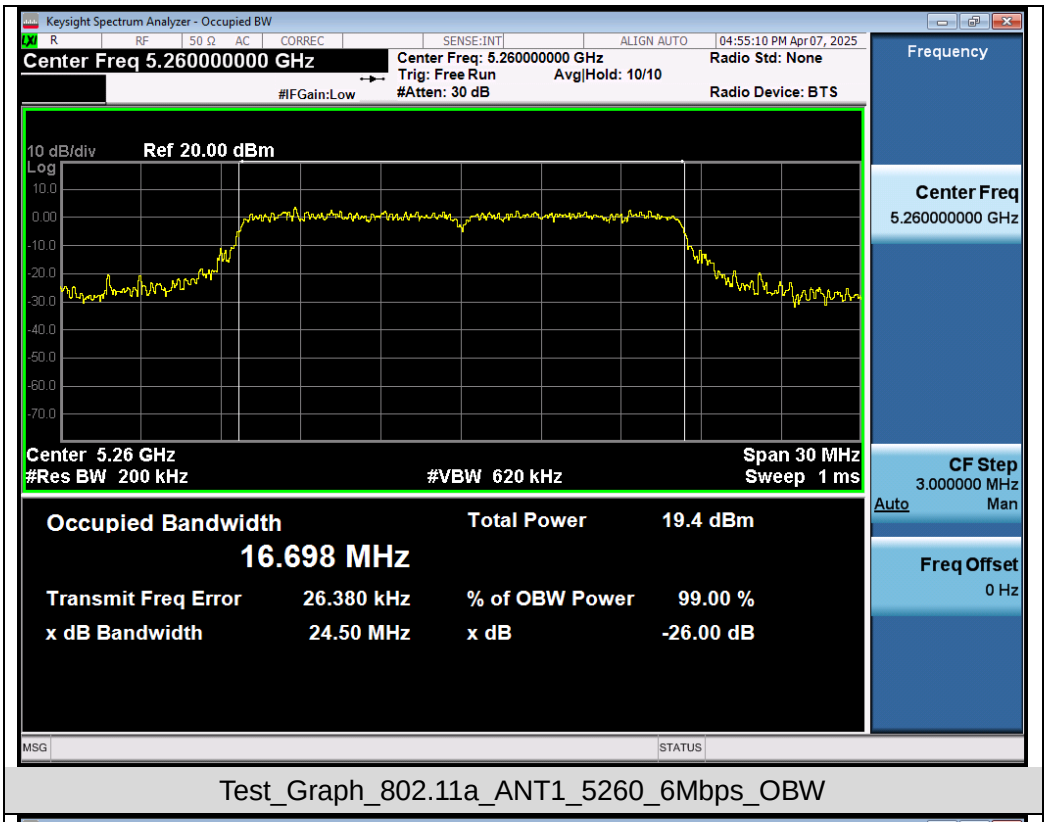

Test_Graph_802.11a_ANT1_5260_6Mbps_OBW

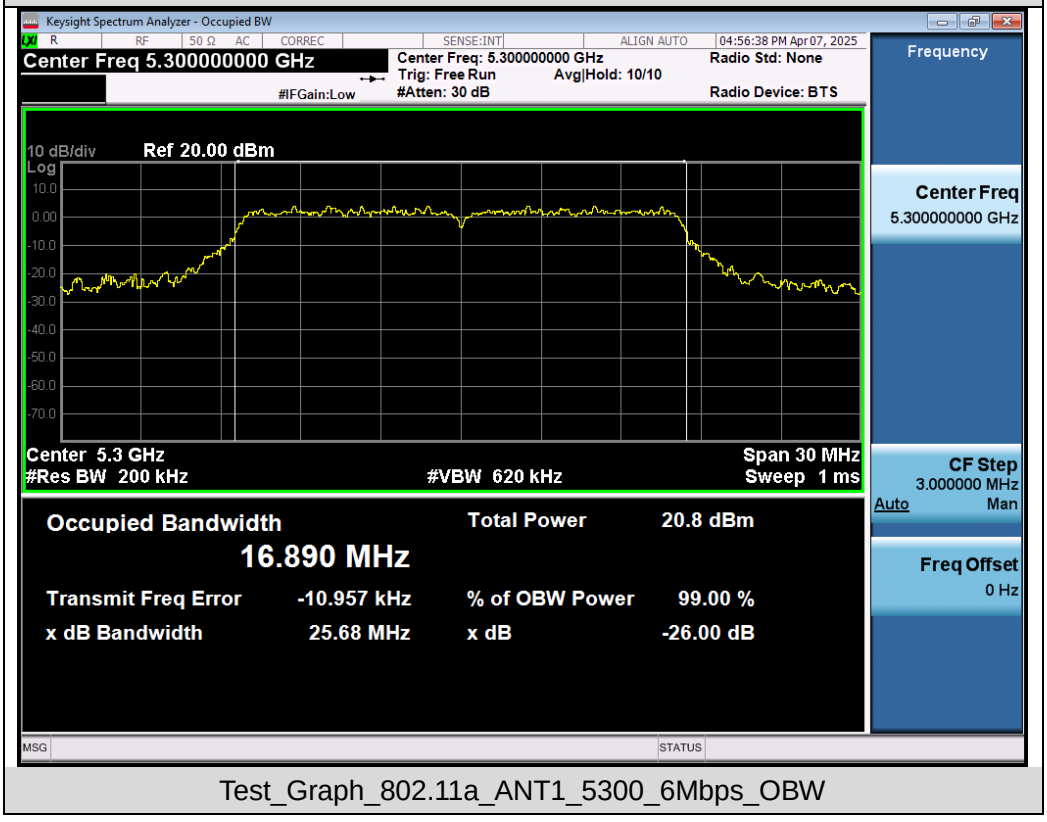

Test_Graph_802.11a_ANT1_5300_6Mbps_OBW

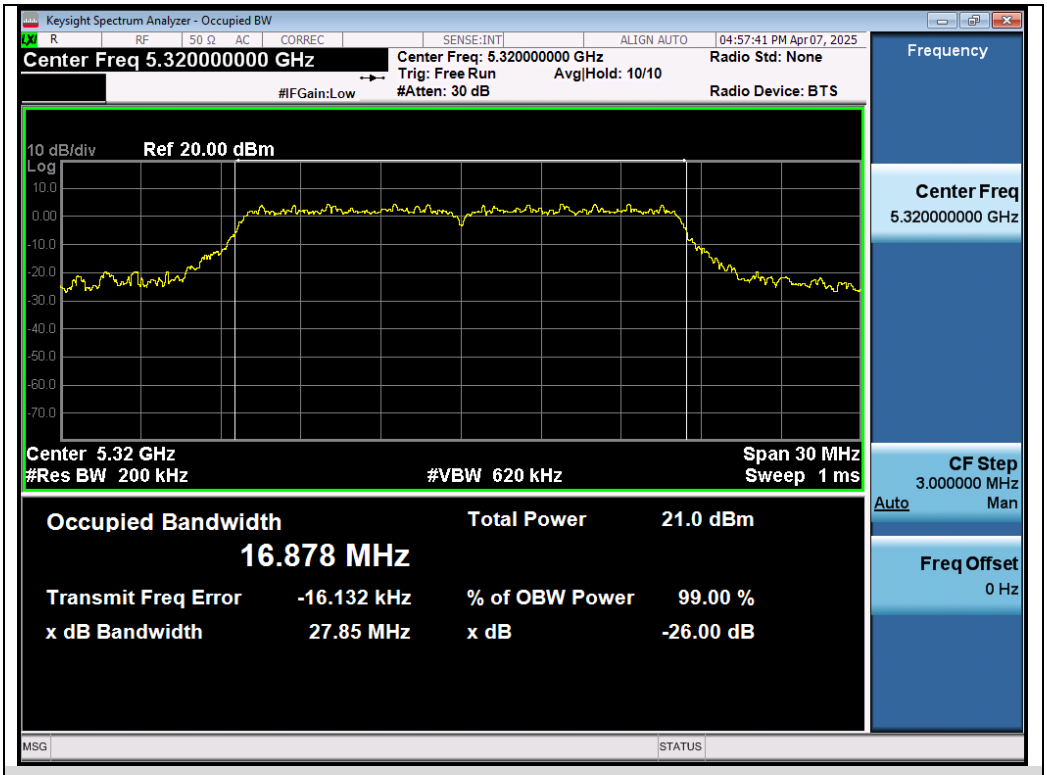

Test_Graph_802.11a_ANT1_5320_6Mbps_OBW

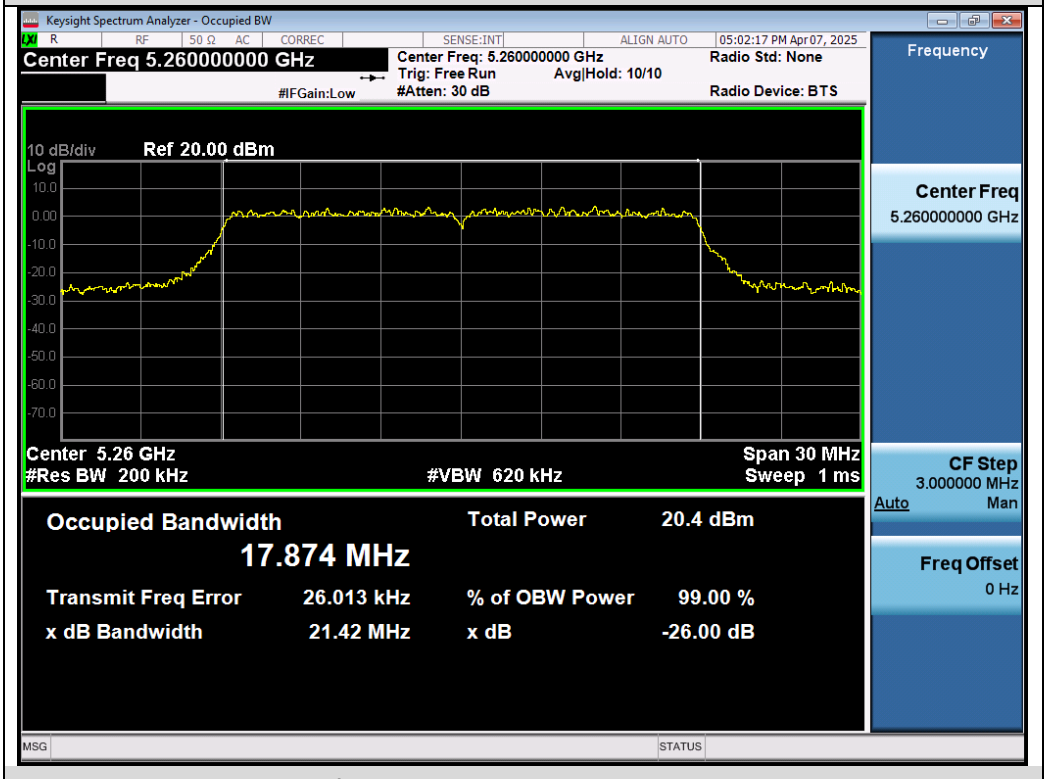

Test_Graph_802.11n20_ANT1_5260_MCS0_OBW

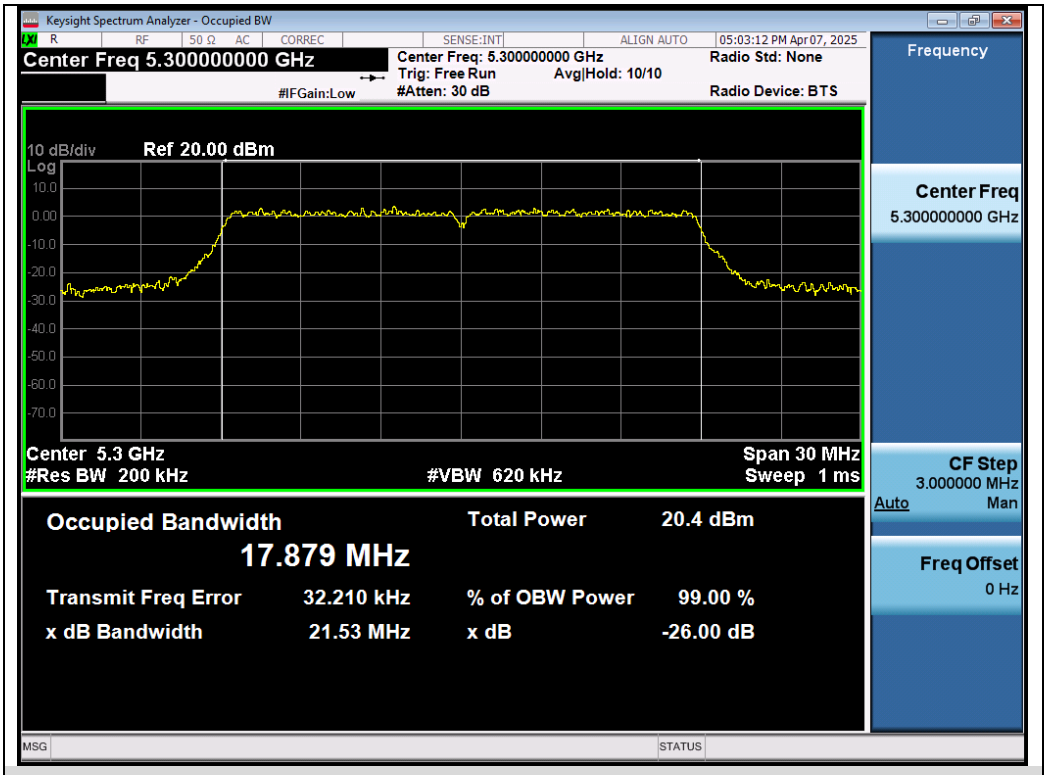

Test_Graph_802.11n20_ANT1_5300_MCS0_OBW

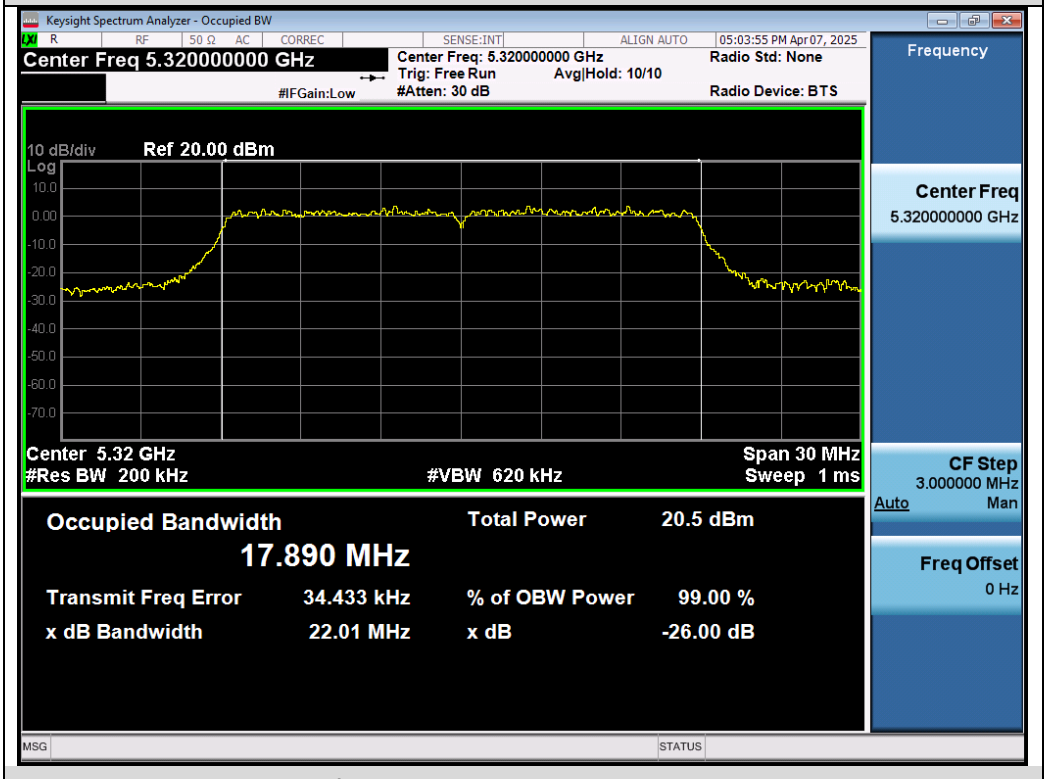

Test_Graph_802.11n20_ANT1_5320_MCS0_OBW

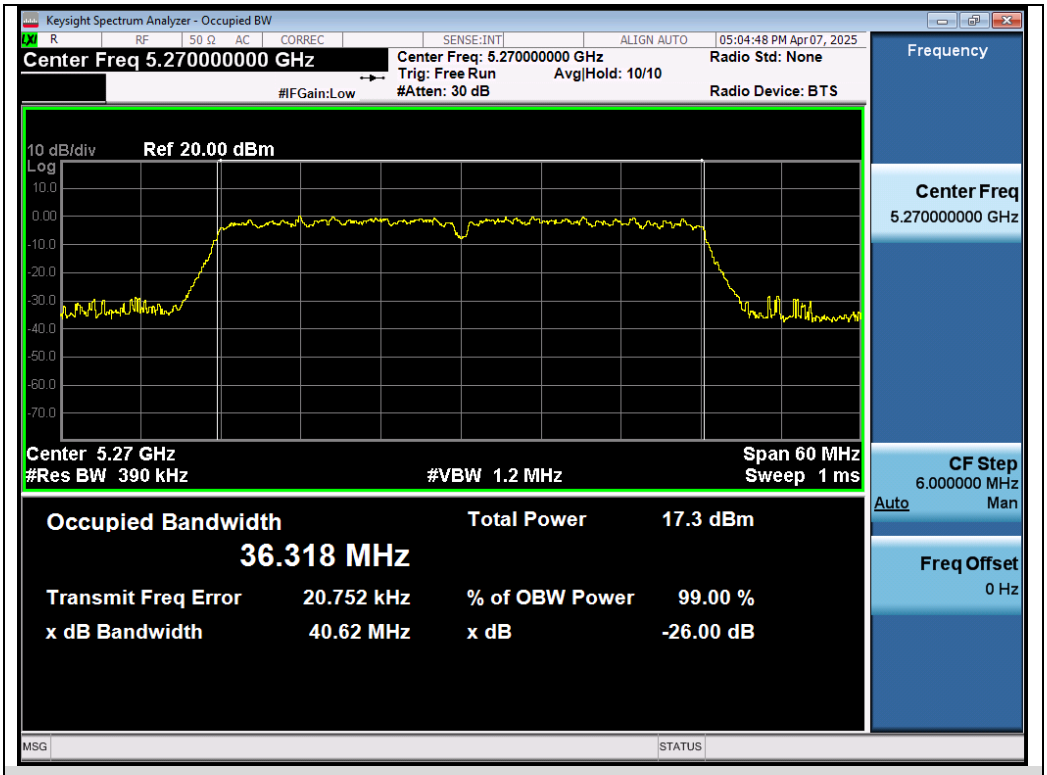

Test_Graph_802.11n40_ANT1_5270_MCS0_OBW

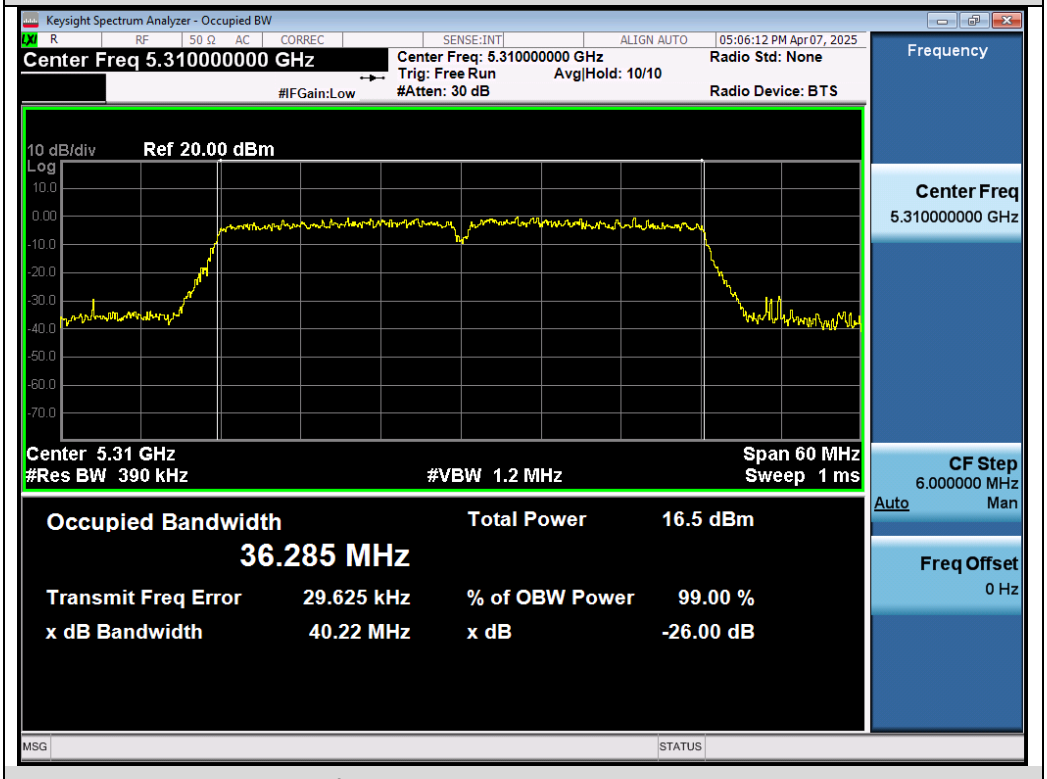

Test_Graph_802.11n40_ANT1_5310_MCS0_OBW

9. Power Spectral Density Measurement

9.1 Provisions Applicable

Operation Band	EUT Category		LIMIT
U-NII-1	☐	Outdoor Access Point	17dBm/ MHz
	☐	Fixed point-to-point Access Point	17dBm/ MHz
	☐	Indoor Access Point	17dBm/ MHz
	☒	Client devices	11dBm/ MHz
U-NII-2A	/		11dBm/ MHz
U-NII-2C	/		11dBm/ MHz
U-NII-3	/		30 dBm/500kHz

9.2 Measurement Procedure

☒For Average power spectral density test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz.
4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
5. Set VBW≥[3×RBW].
6. Sweep Time=Auto couple.
7. Detector function=RMS (i.e., power averaging).
8. Trace average at least 100 traces in power averaging (rms) mode.
9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10*log(500kHz/100kHz) = 6.99 dB to the measured result.
10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
11. Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
12. The final test results have been increased by the duty cycle factor and recorded in the report

9.3 Measurement Setup (Block Diagram of Configuration)

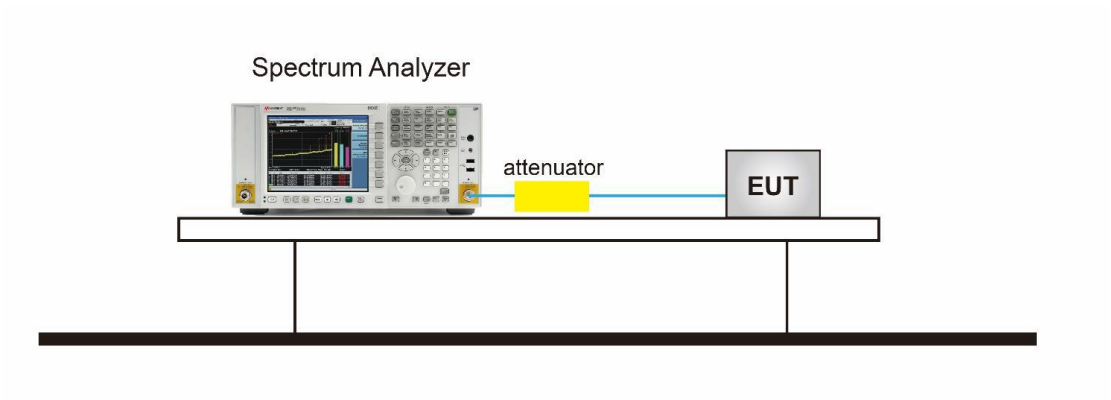

9.4 Measurement Result

Test Data of Conducted Output Power Density for band 5.15-5.25 GHz				
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail
802.11a	5180	3.067	11	Pass
	5200	2.828	11	Pass
	5240	2.896	11	Pass
802.11n20	5180	2.202	11	Pass
	5200	2.219	11	Pass
	5240	2.283	11	Pass
802.11n40	5190	-3.646	11	Pass
	5230	-3.504	11	Pass

Test Data of Conducted Output Power Density for band 5.25-5.35 GHz				
Test Mode	Test Channel (MHz)	Average Power Density (dBm/MHz)	Limits (dBm/MHz)	Pass or Fail
802.11a	5260	2.903	11	Pass
	5300	3.080	11	Pass
	5320	3.126	11	Pass
802.11n20	5260	2.342	11	Pass
	5300	2.310	11	Pass
	5320	2.417	11	Pass
802.11n40	5270	-3.699	11	Pass
	5310	-3.491	11	Pass

Note:1.Power density(dBm/500kHz) = Power density(dBm/100kHz)+10*log(500/100).

Test Graphs of Conducted Output Power Spectral Density for band 5.15-5.25 GHz

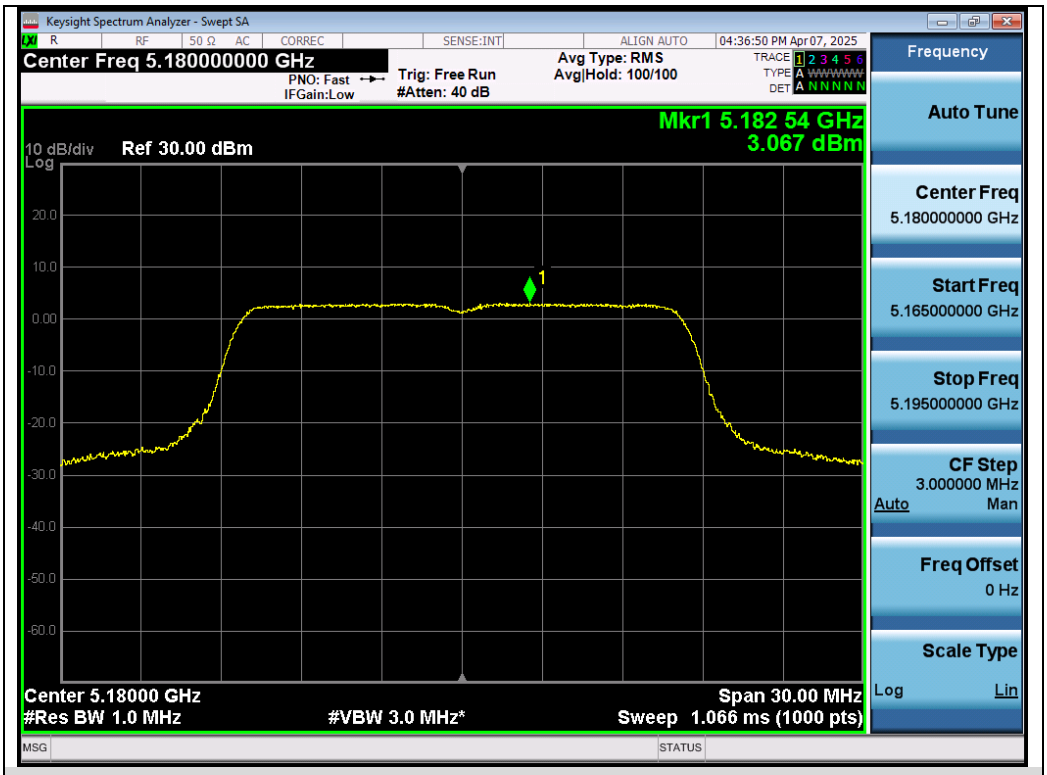

Test_Graph_802.11a_ANT1_5180_6Mbps_PSD

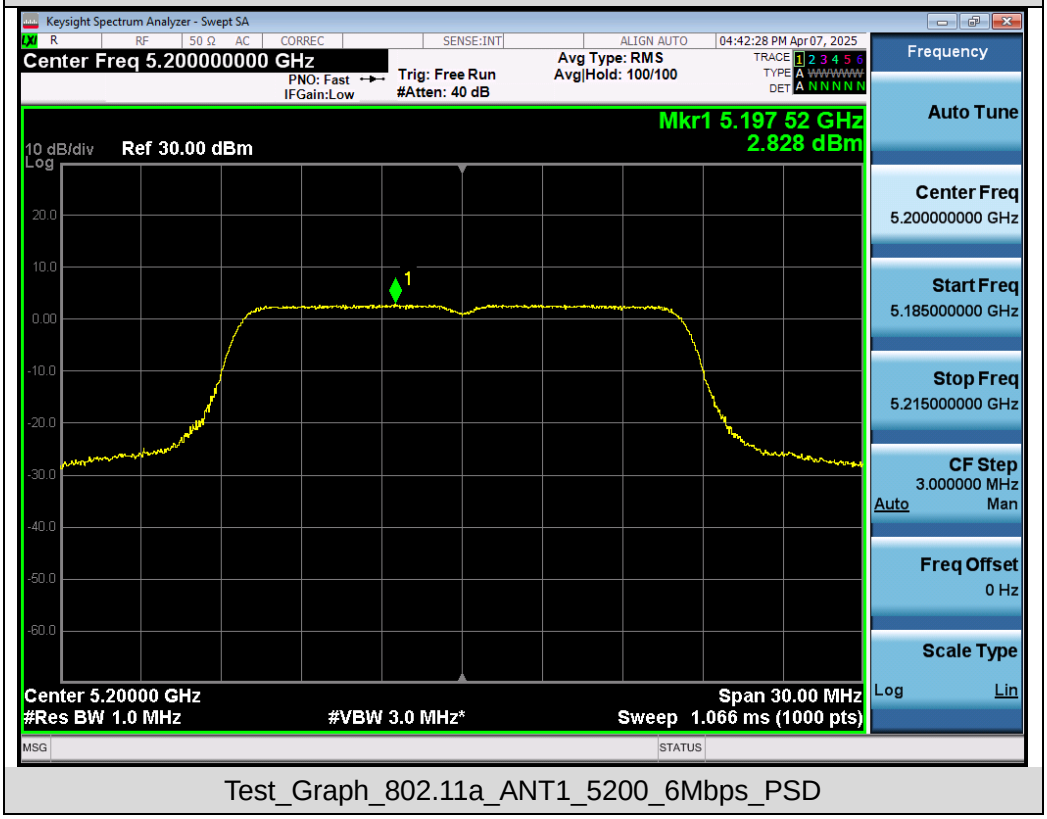

Test_Graph_802.11a_ANT1_5200_6Mbps_PSD

Test_Graph_802.11a_ANT1_5240_6Mbps_PSD

Test_Graph_802.11n20_ANT1_5180_MCS0_PSD

Test_Graph_802.11n20_ANT1_5200_MCS0_PSD

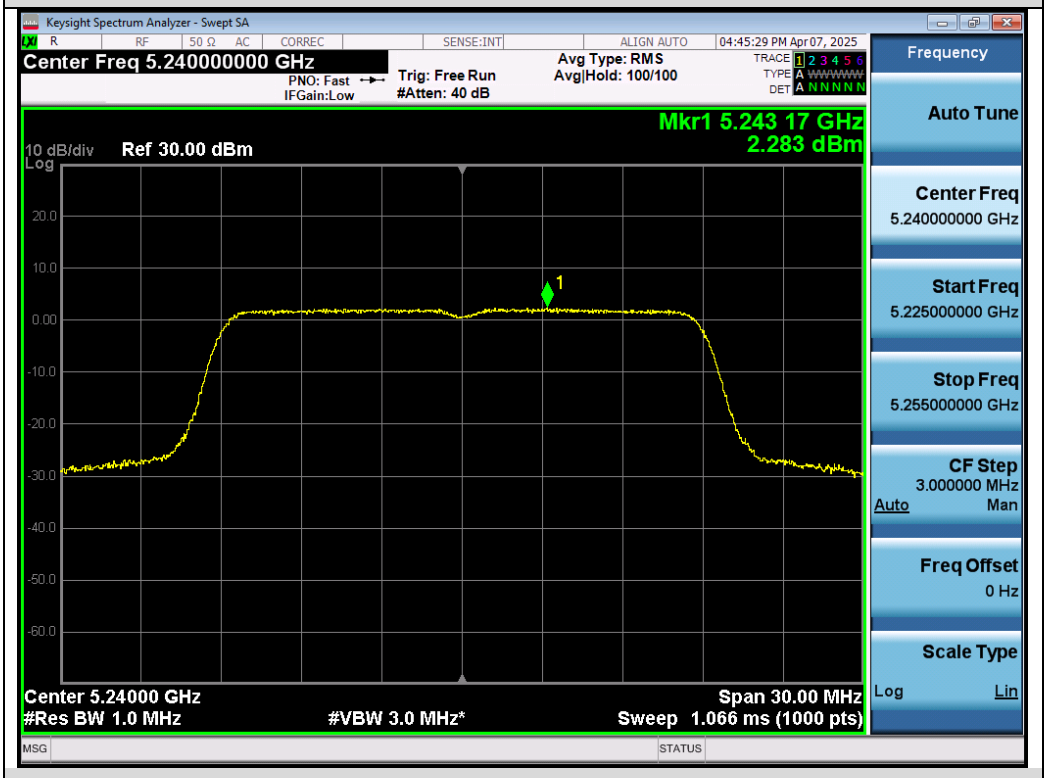

Test_Graph_802.11n20_ANT1_5240_MCS0_PSD

Test_Graph_802.11n40_ANT1_5190_MCS0_PSD

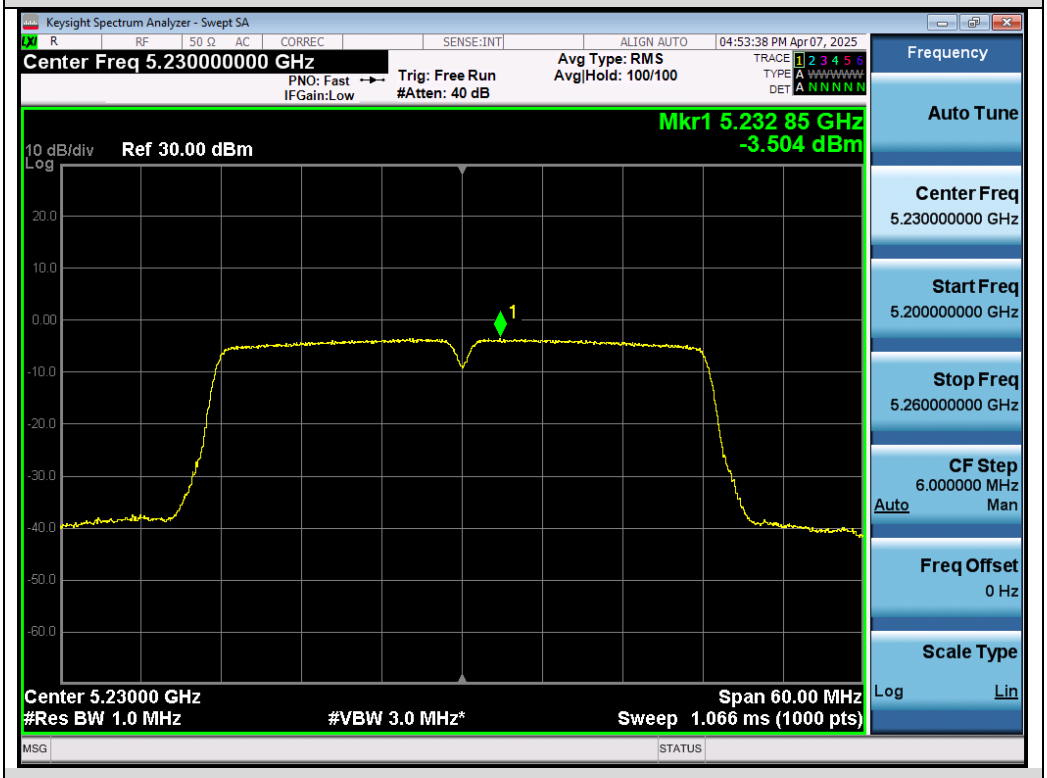

Test_Graph_802.11n40_ANT1_5230_MCS0_PSD

Test Graphs of Conducted Output Power Spectral Density for band 5.25-5.35 GHz

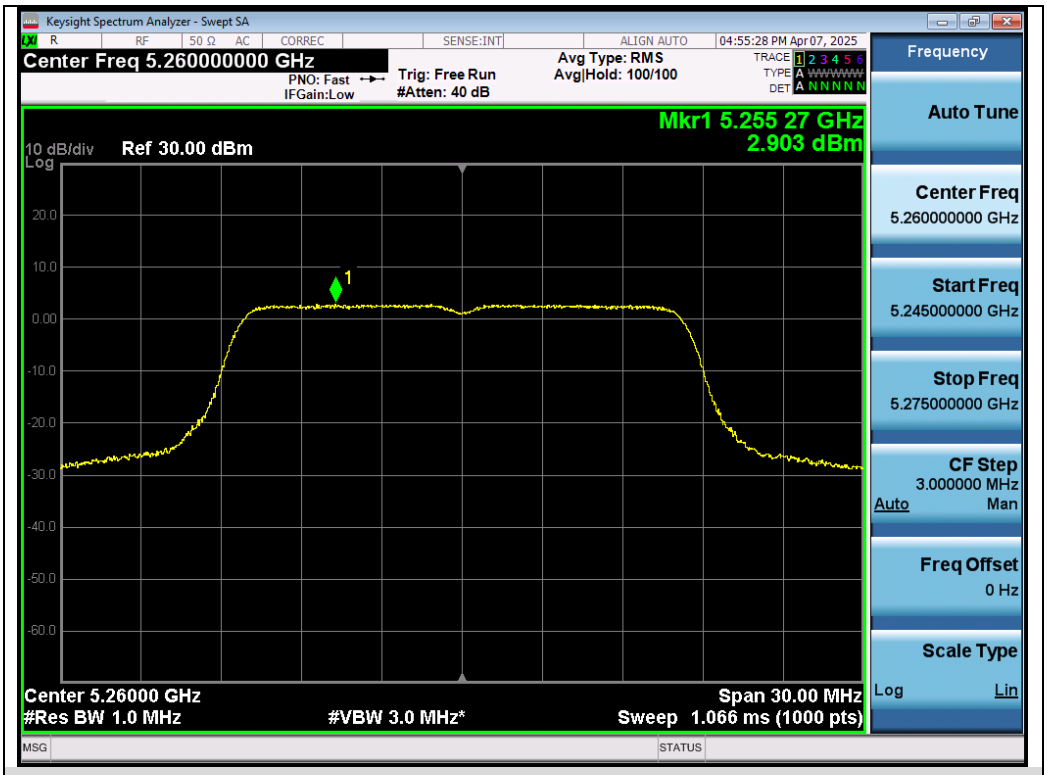

Test_Graph_802.11a_ANT1_5260_6Mbps_PSD

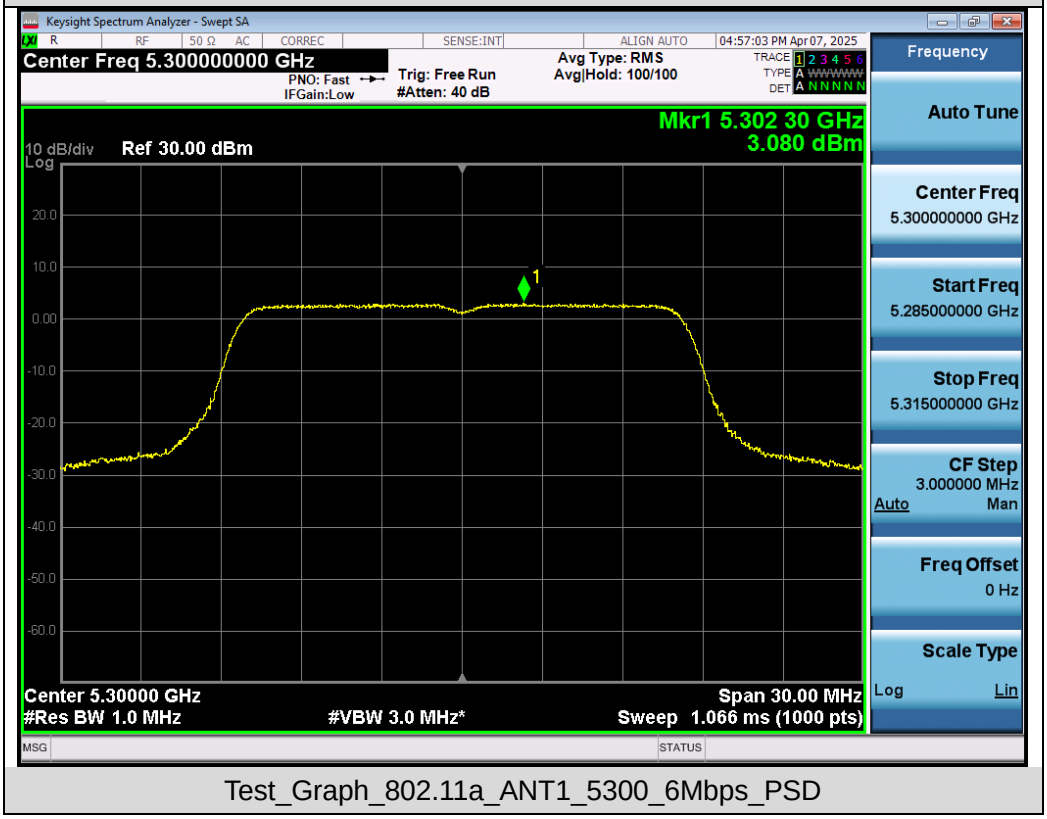

Test_Graph_802.11a_ANT1_5300_6Mbps_PSD

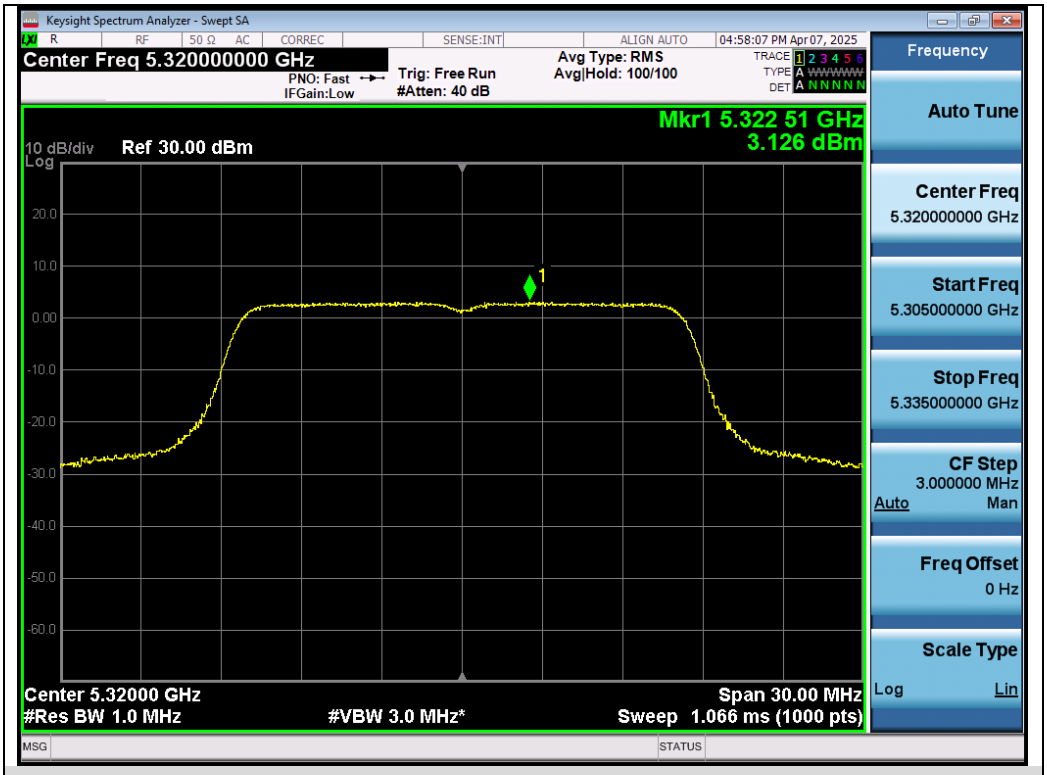

Test_Graph_802.11a_ANT1_5320_6Mbps_PSD

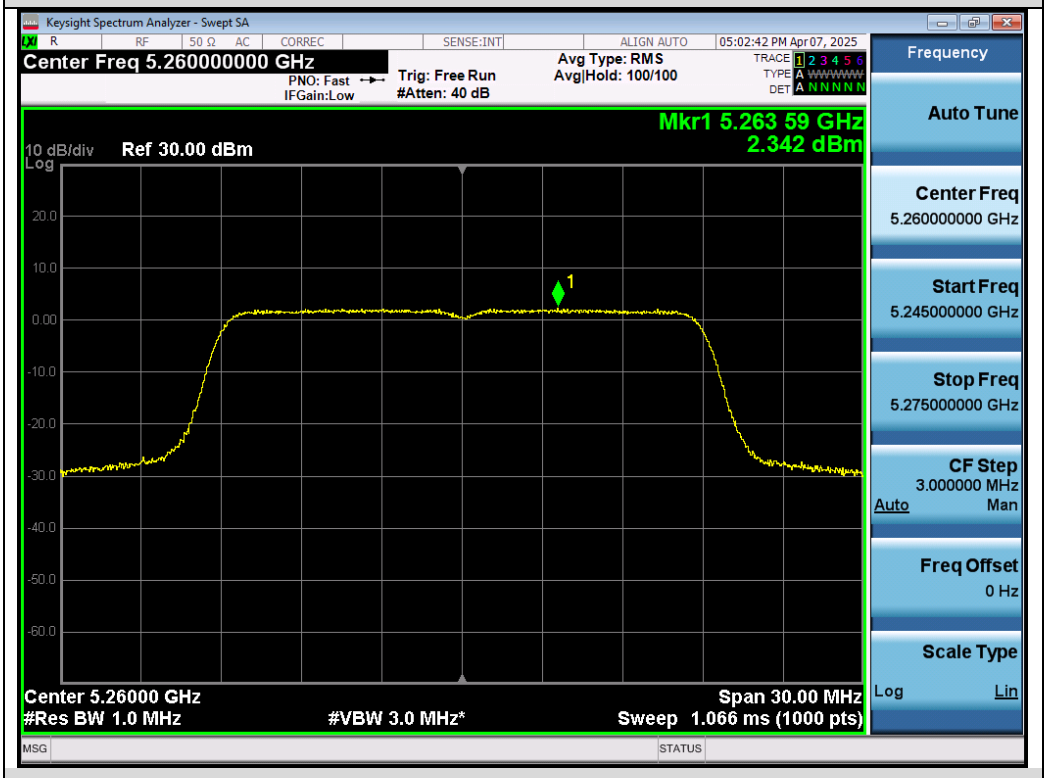

Test_Graph_802.11n20_ANT1_5260_MCS0_PSD

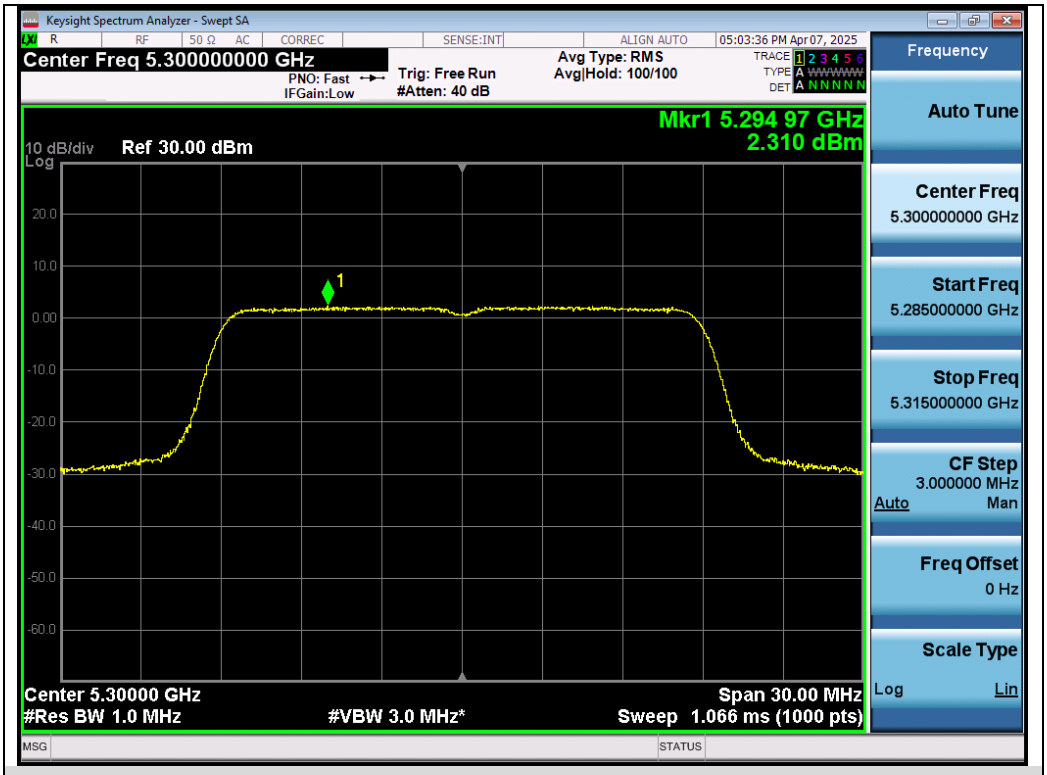

Test_Graph_802.11n20_ANT1_5300_MCS0_PSD

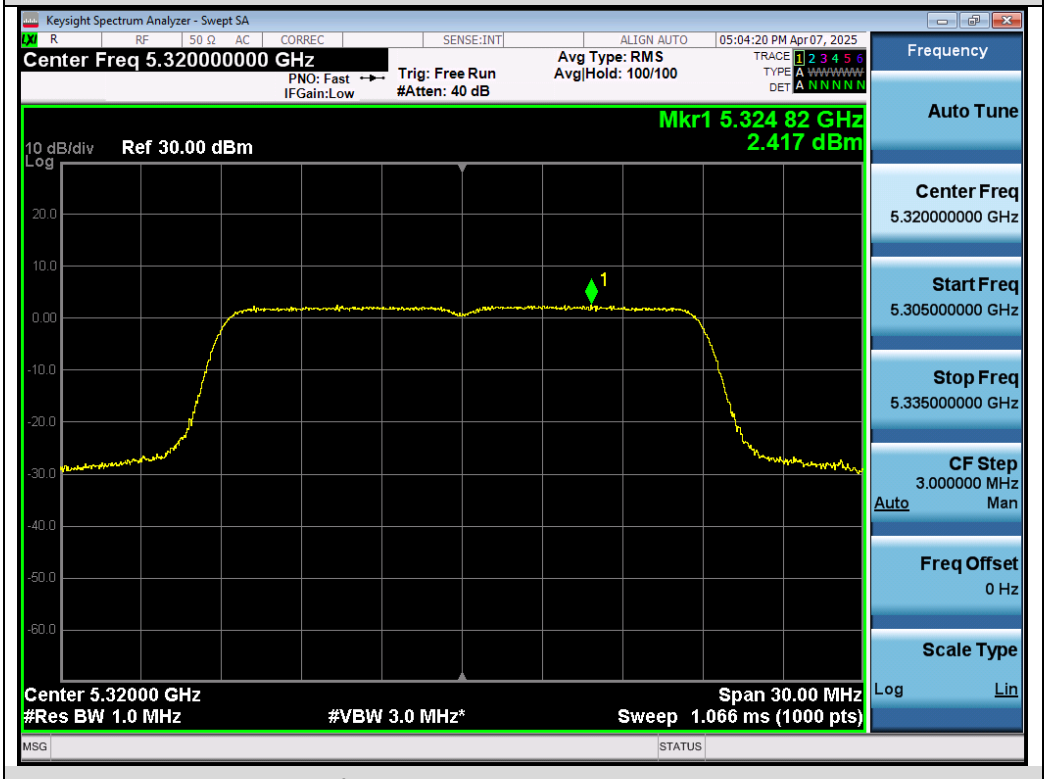

Test_Graph_802.11n20_ANT1_5320_MCS0_PSD

Test_Graph_802.11n40_ANT1_5270_MCS0_PSD

Test_Graph_802.11n40_ANT1_5310_MCS0_PSD

10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

Restricted bands	Applicable to	Limit	
	789033 D02 General UNII Test Procedures New Rules v02r01	Field strength at 3m (dBuV/m)	
		PK: 74	AV: 54
Out of the restricted bands	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)
	FCC 15.407(b)(1)	PK: -27	PK: 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \quad \sqrt{30\ P}}{3}$$ μV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

10.2 Measurement Procedure

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
3. RBW = 1MHz; VBW= 3MHz; Sweep = auto; Detector function = Peak. (Test frequency below 1GHz)
4. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = Peak. (Test frequency Above 1GHz)
5. Set SPA Trace 1 Max hold, then View.
6. Antenna gain and path loss have been compensated to the Correction factor.
7. Mark the maximum useless stray point and compare it with the limit value to record the result.

10.3 Measurement Setup (Block Diagram of Configuration)

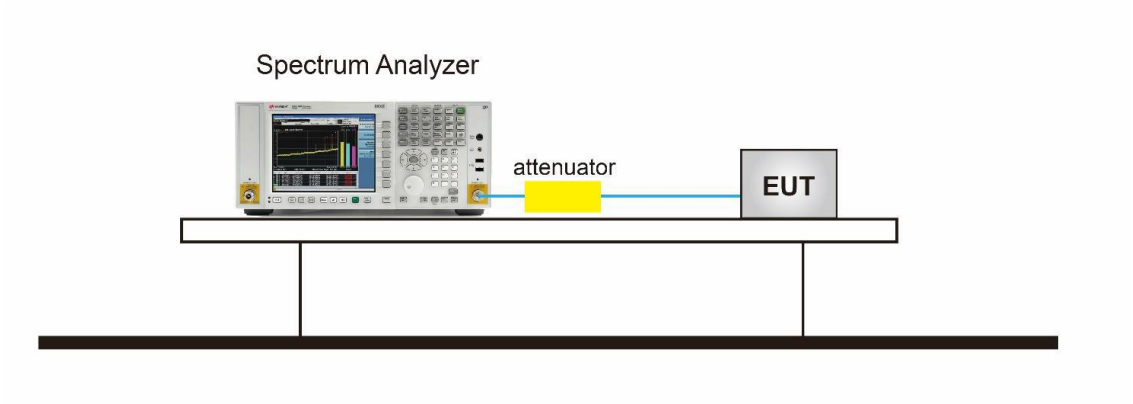

10.4 Measurement Results

Test Graphs of Spurious Emissions outside of the 5.15-5.25 GHz band

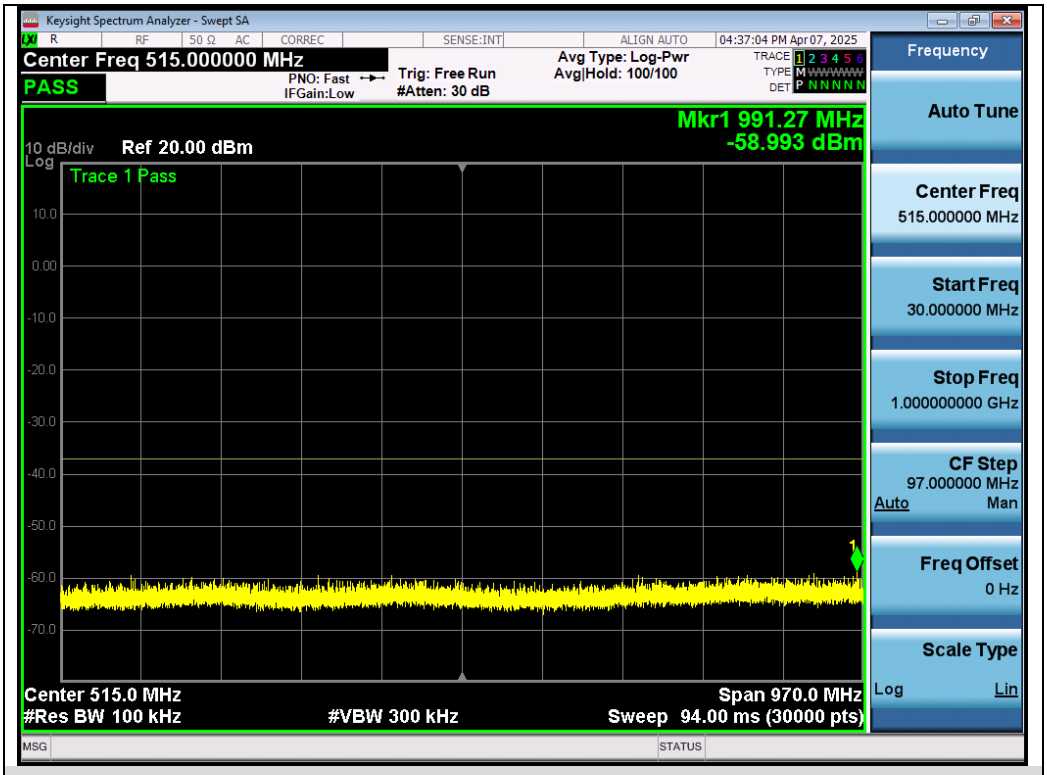

Test_Graph_802.11a_ANT1_5180_6Mbps_Frequency Band 1

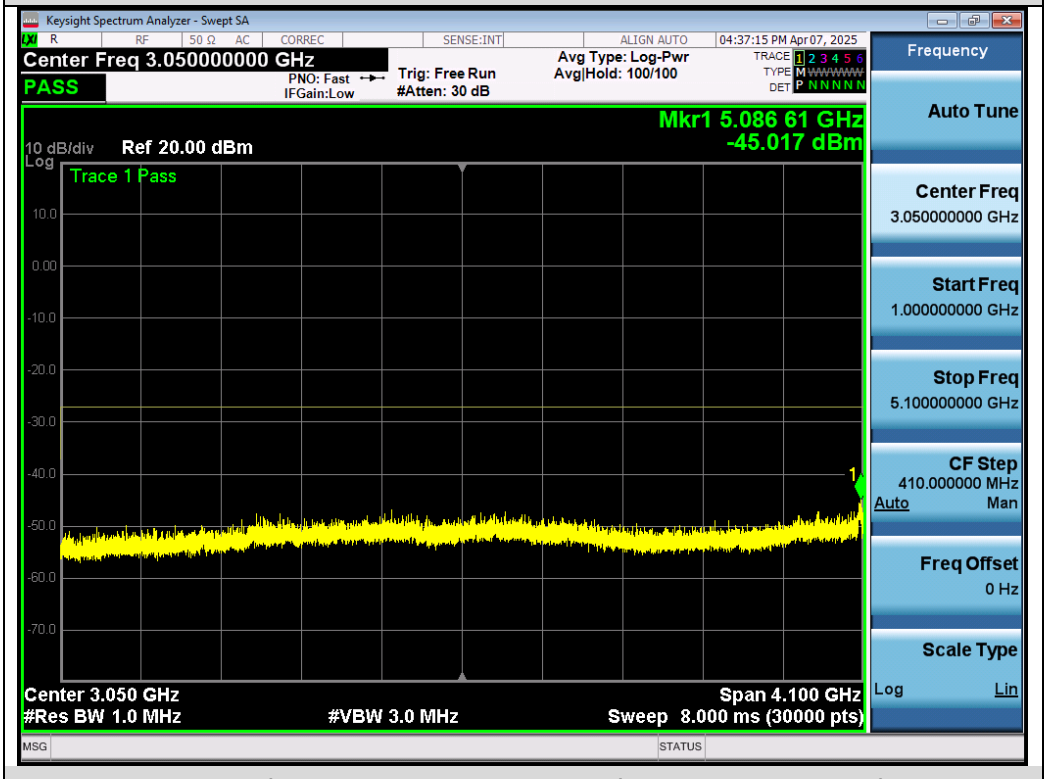

Test_Graph_802.11a_ANT1_5180_6Mbps_Frequency Band 2

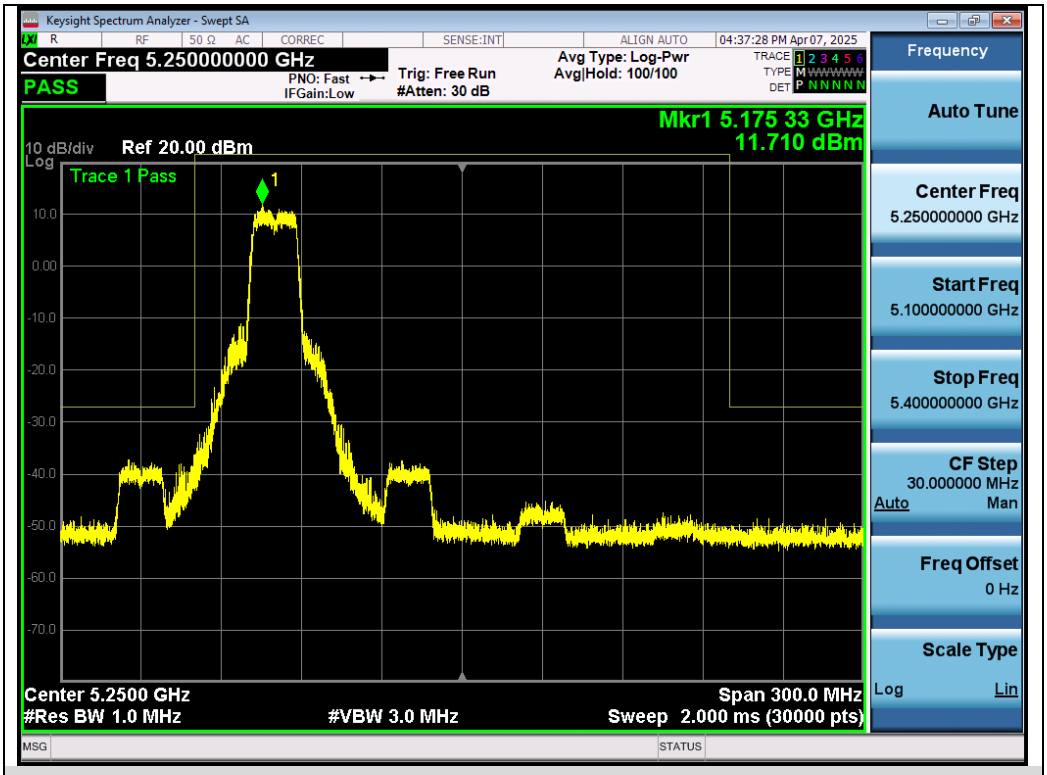

Test_Graph_802.11a_ANT1_5180_6Mbps_Frequency Band 3

Test_Graph_802.11a_ANT1_5180_6Mbps_Frequency Band 4

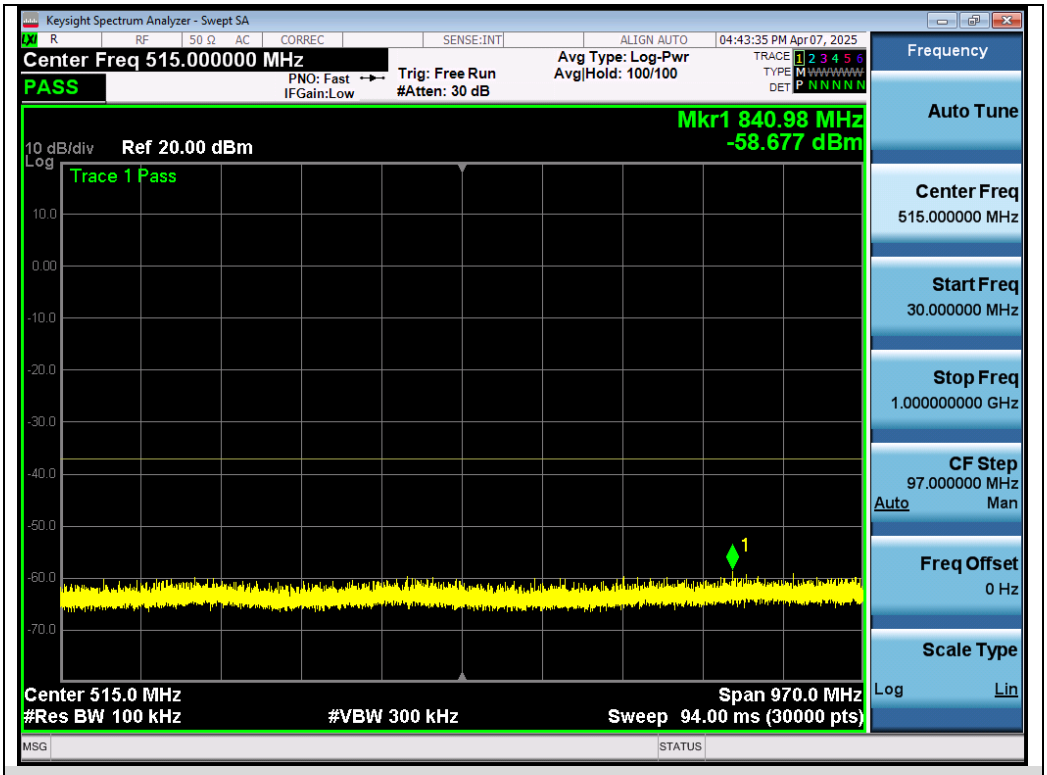

Test_Graph_802.11a_ANT1_5240_6Mbps_Frequency Band 1

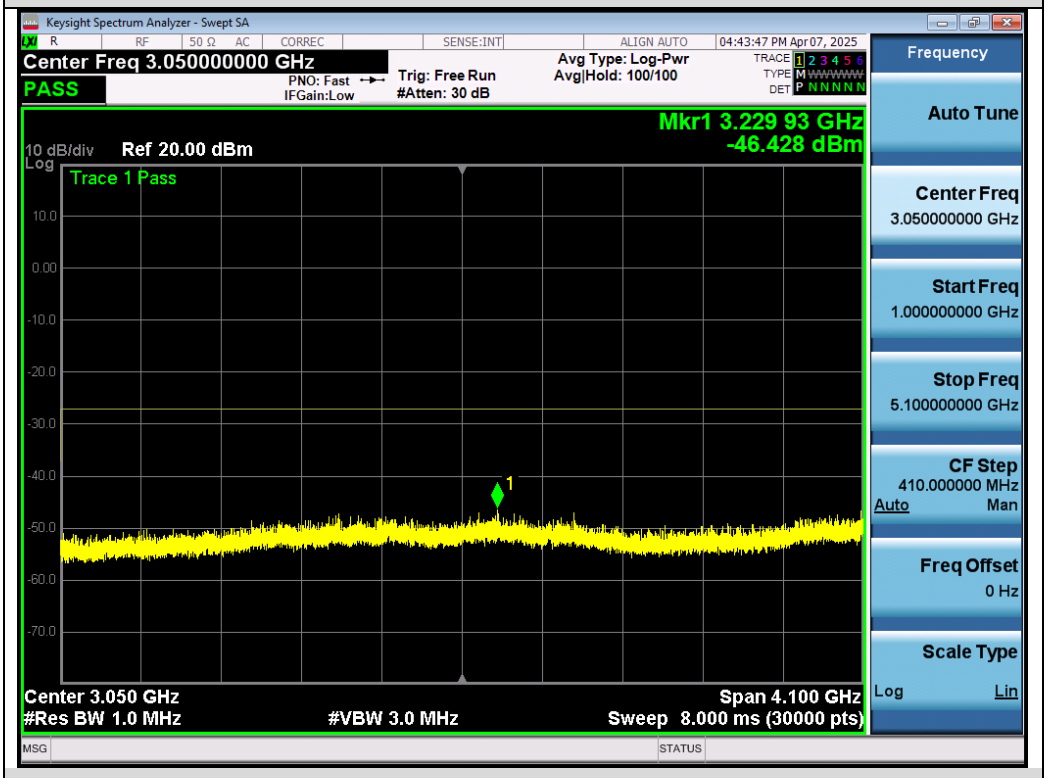

Test_Graph_802.11a_ANT1_5240_6Mbps_Frequency Band 2

Test_Graph_802.11a_ANT1_5240_6Mbps_Frequency Band 3

Test_Graph_802.11a_ANT1_5240_6Mbps_Frequency Band 4

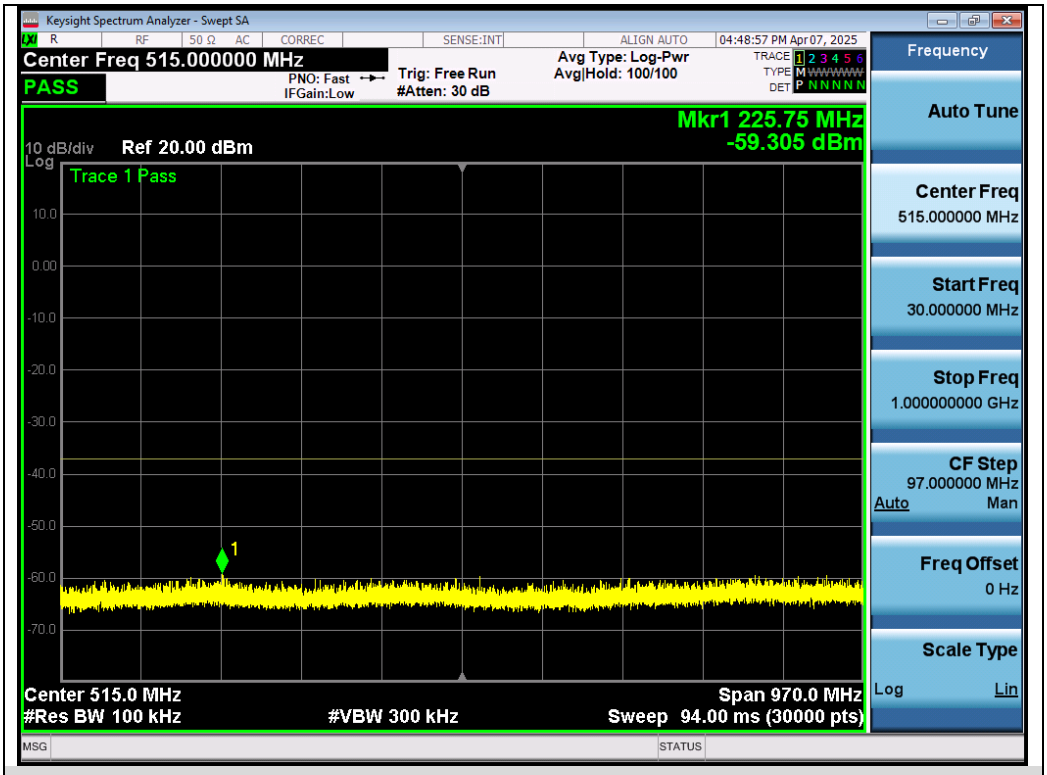

Test_Graph_802.11n40_ANT1_5190_MCS0_Frequency Band 1

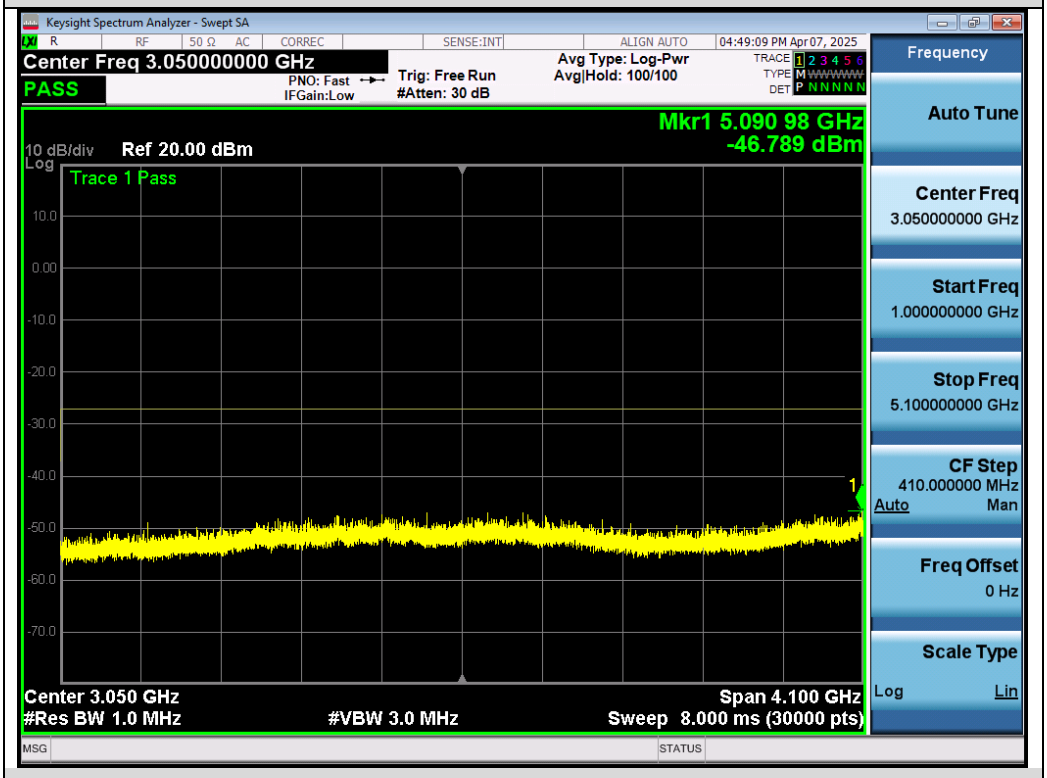

Test_Graph_802.11n40_ANT1_5190_MCS0_Frequency Band 2

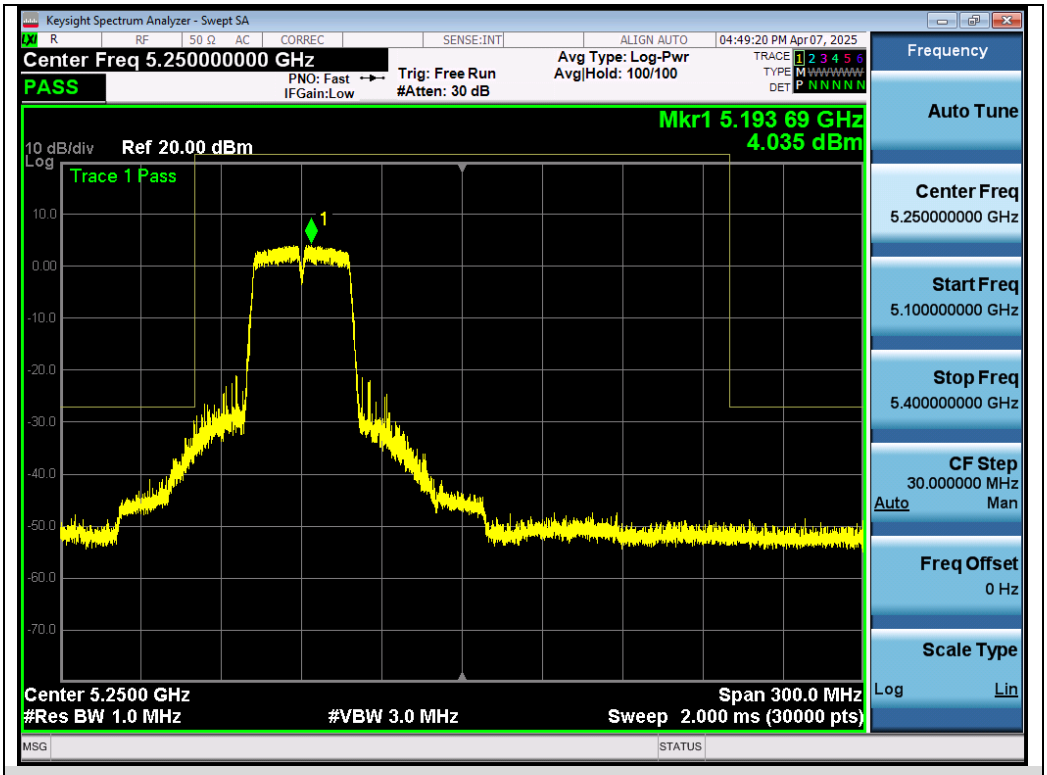

Test_Graph_802.11n40_ANT1_5190_MCS0_Frequency Band 3

Test_Graph_802.11n40_ANT1_5190_MCS0_Frequency Band 4

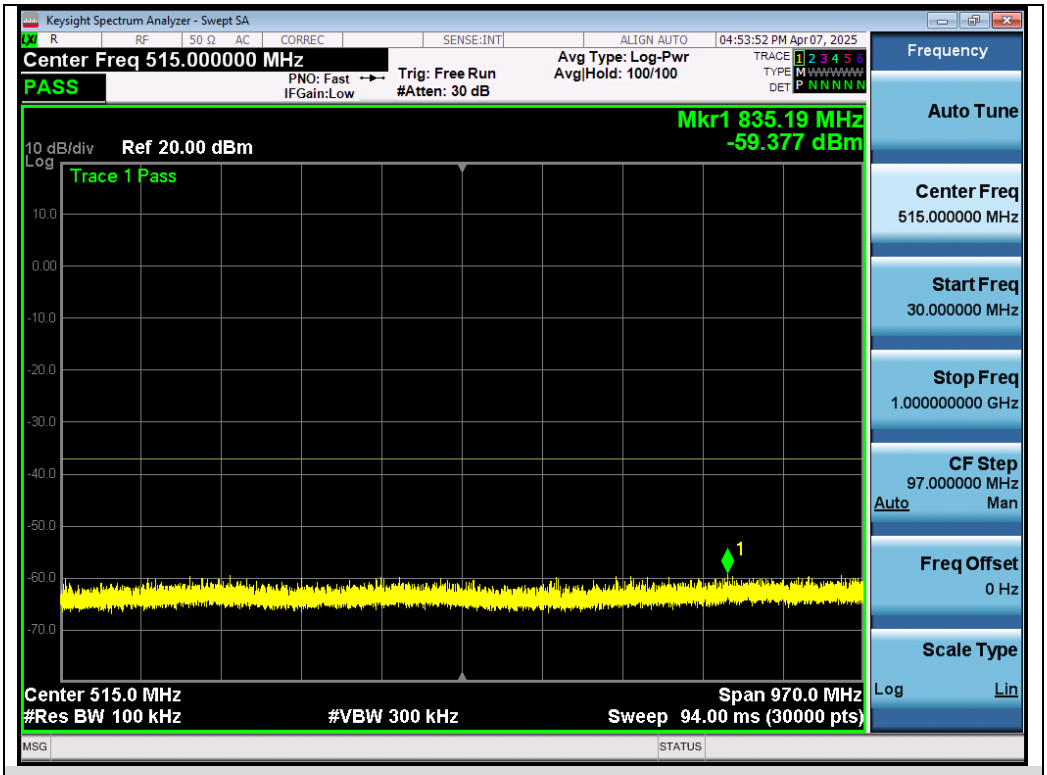

Test_Graph_802.11n40_ANT1_5230_MCS0_Frequency Band 1

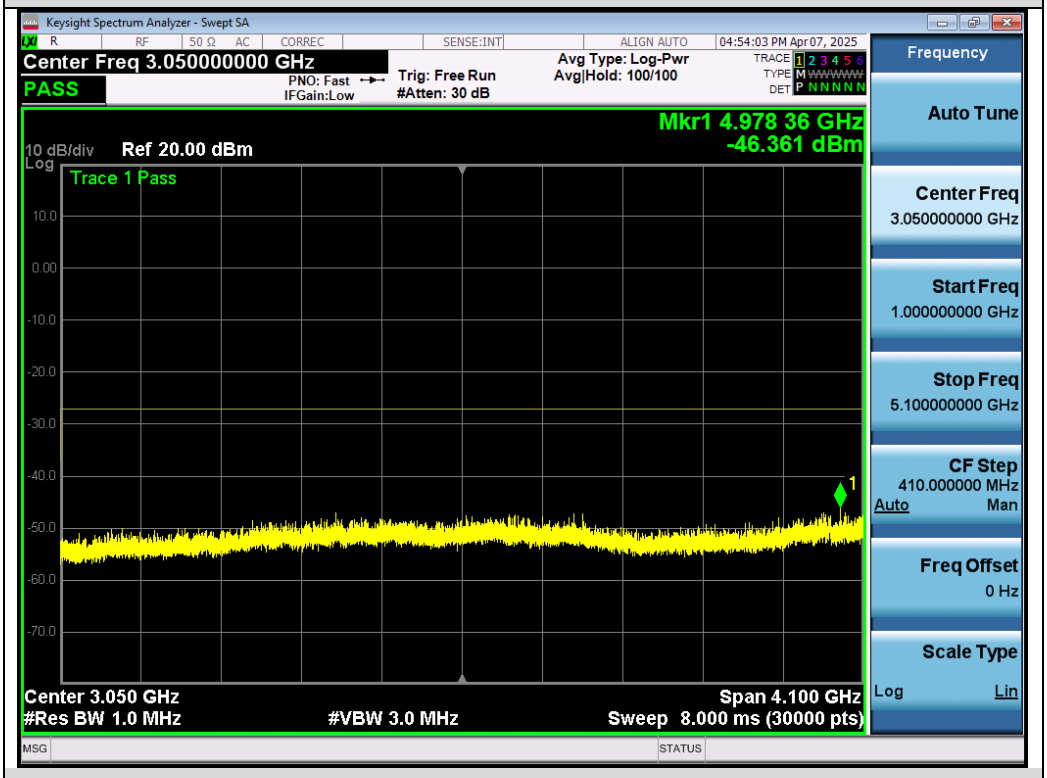

Test_Graph_802.11n40_ANT1_5230_MCS0_Frequency Band 2

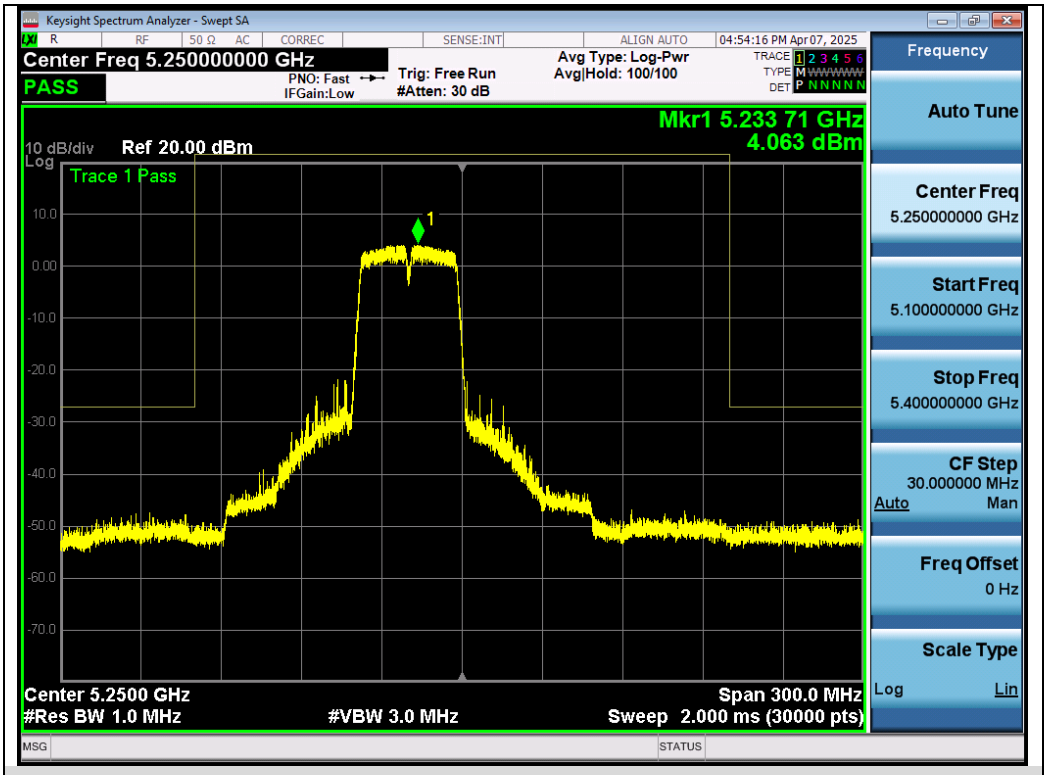

Test_Graph_802.11n40_ANT1_5230_MCS0_Frequency Band 3

Test_Graph_802.11n40_ANT1_5230_MCS0_Frequency Band 4

Test Graphs of Spurious Emissions outside of the 5.25-5.35 GHz band

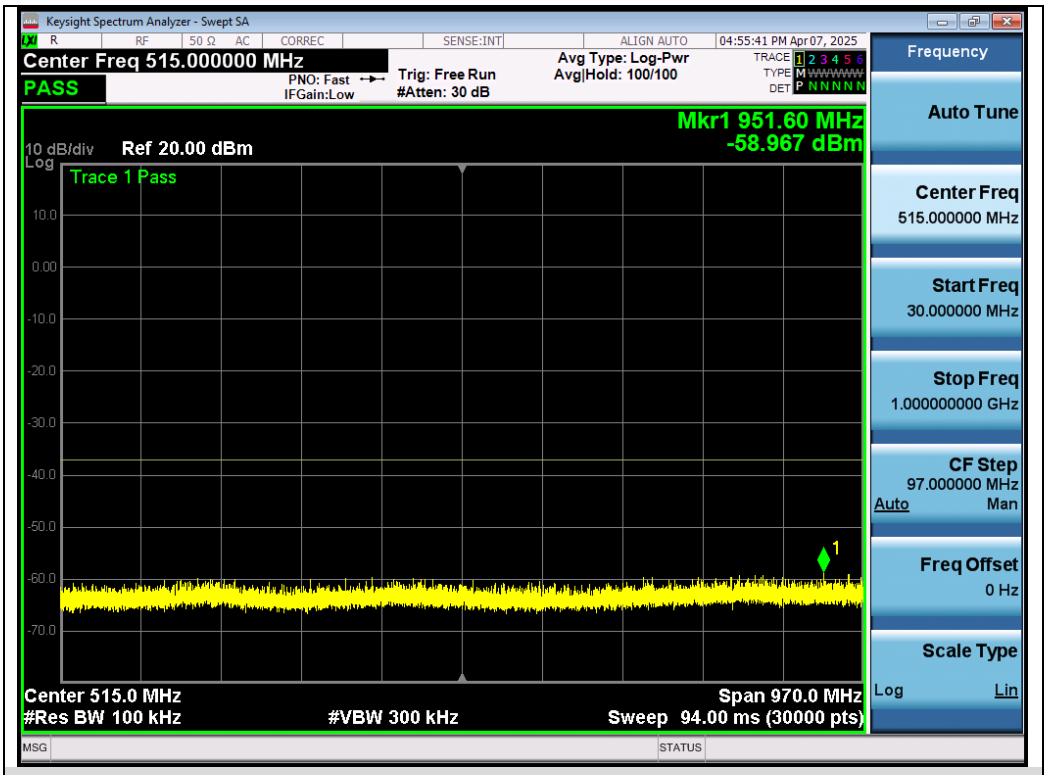

Test_Graph_802.11a_ANT1_5260_6Mbps_Frequency Band 1

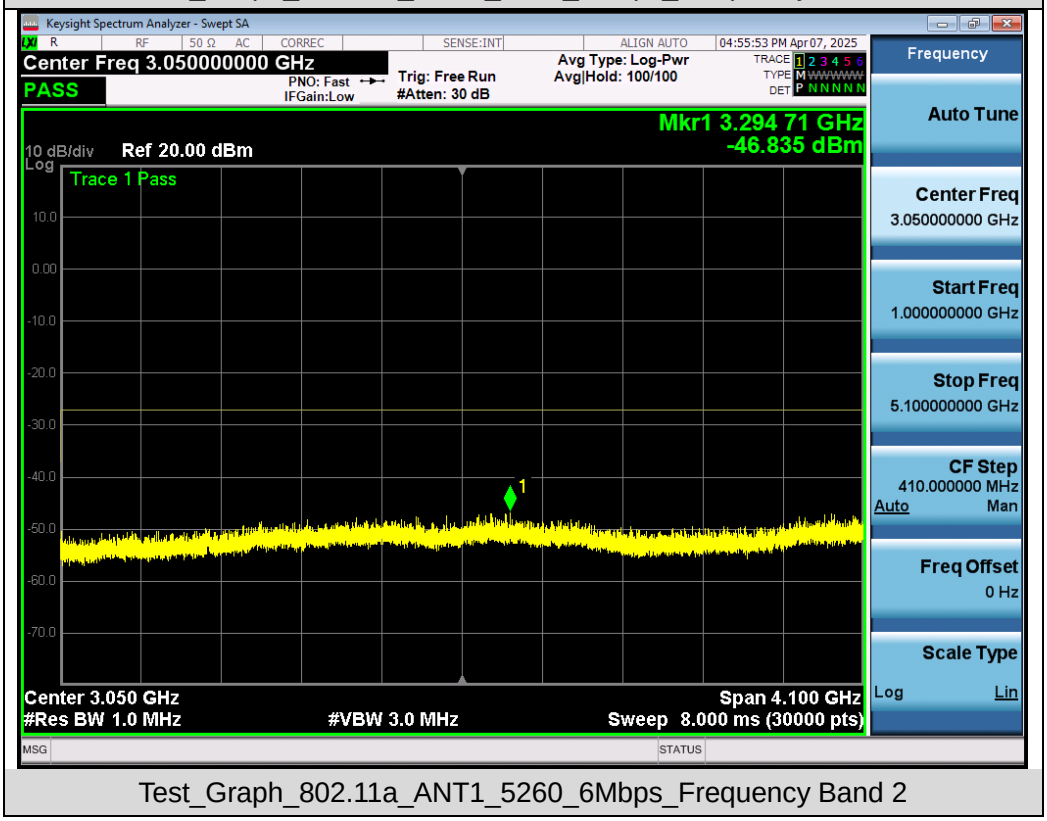

Test_Graph_802.11a_ANT1_5260_6Mbps_Frequency Band 2

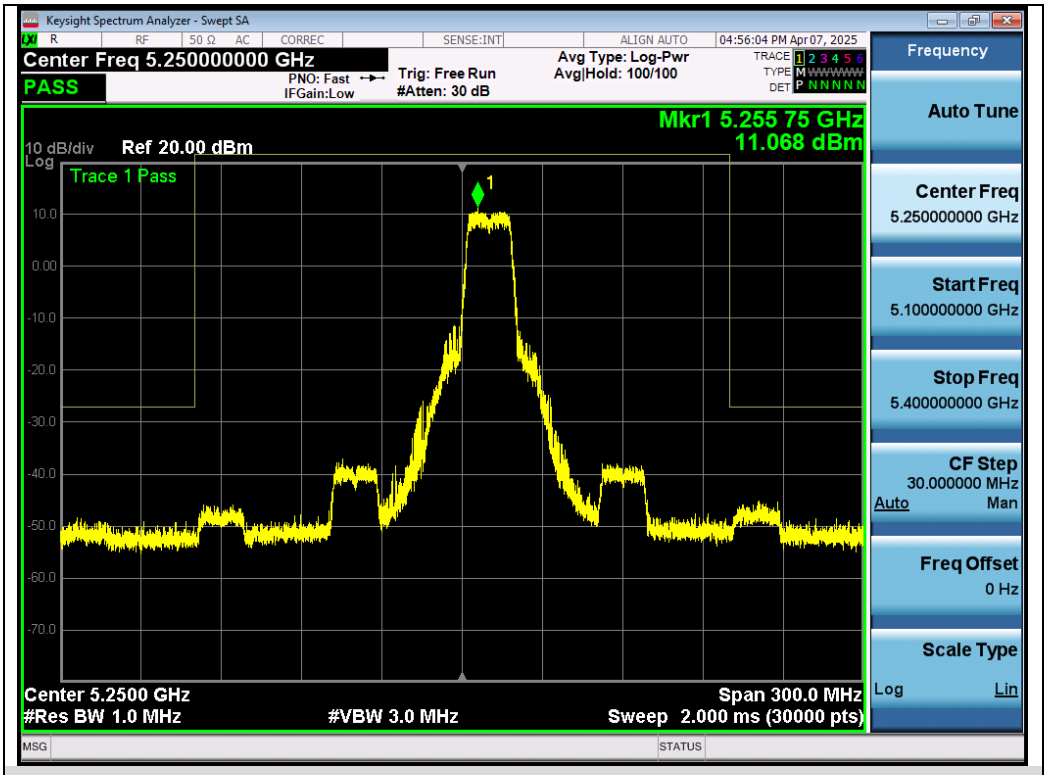

Test_Graph_802.11a_ANT1_5260_6Mbps_Frequency Band 3

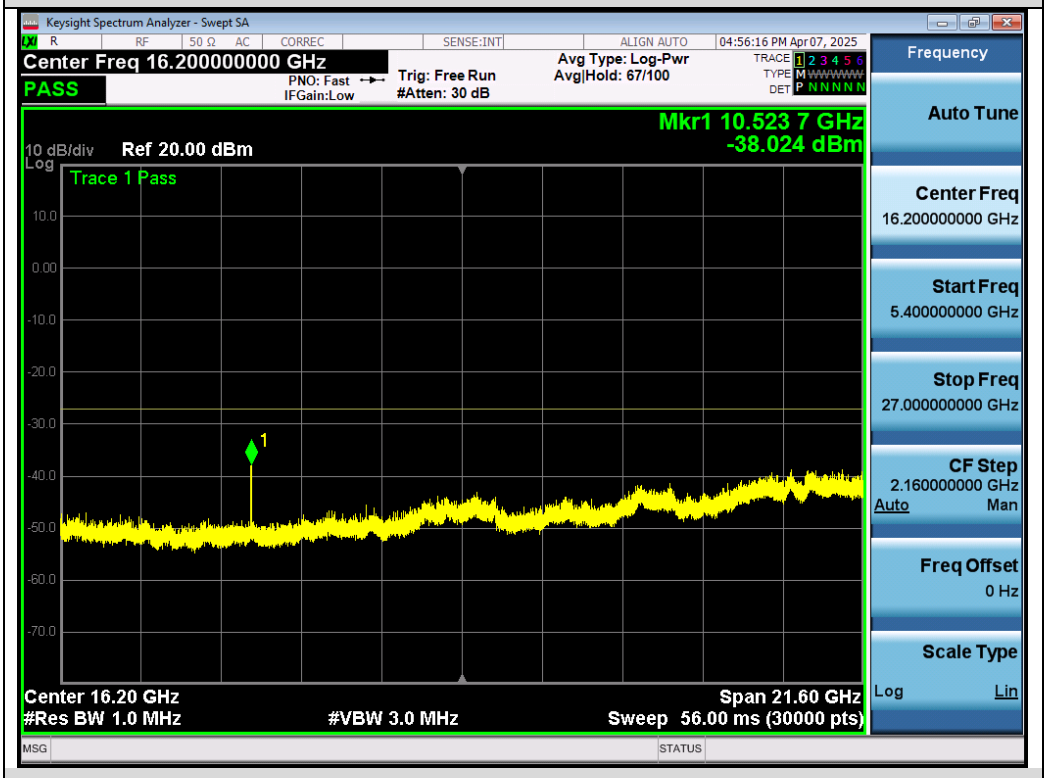

Test_Graph_802.11a_ANT1_5260_6Mbps_Frequency Band 4

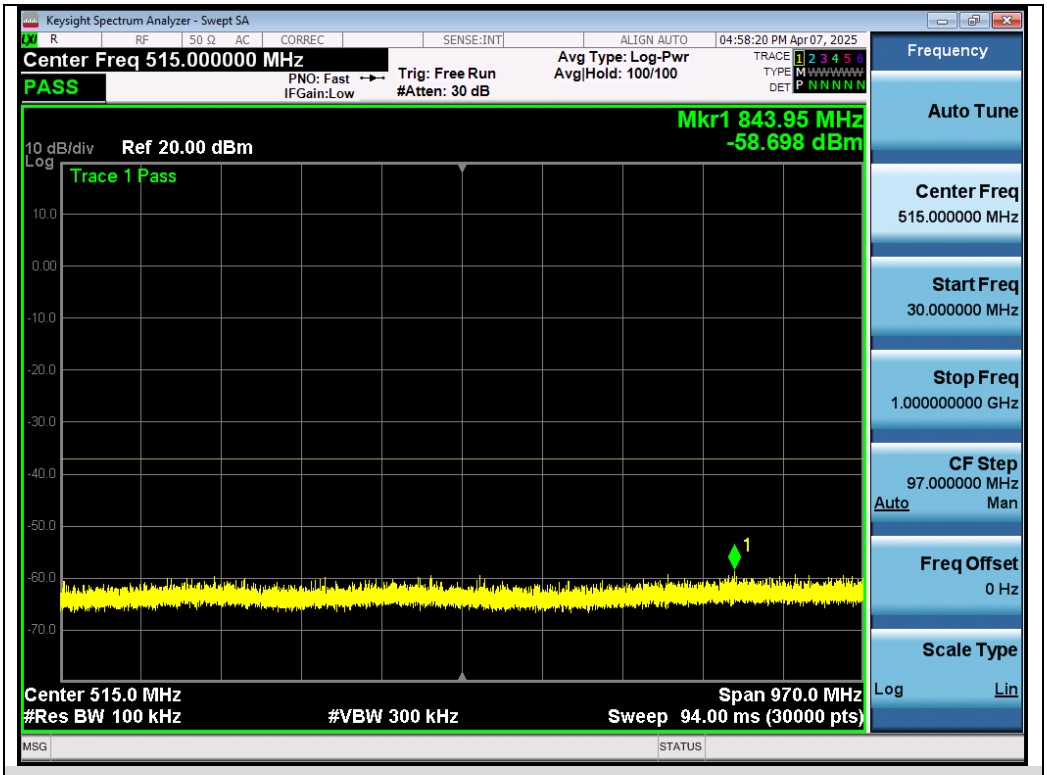

Test_Graph_802.11a_ANT1_5320_6Mbps_Frequency Band 1

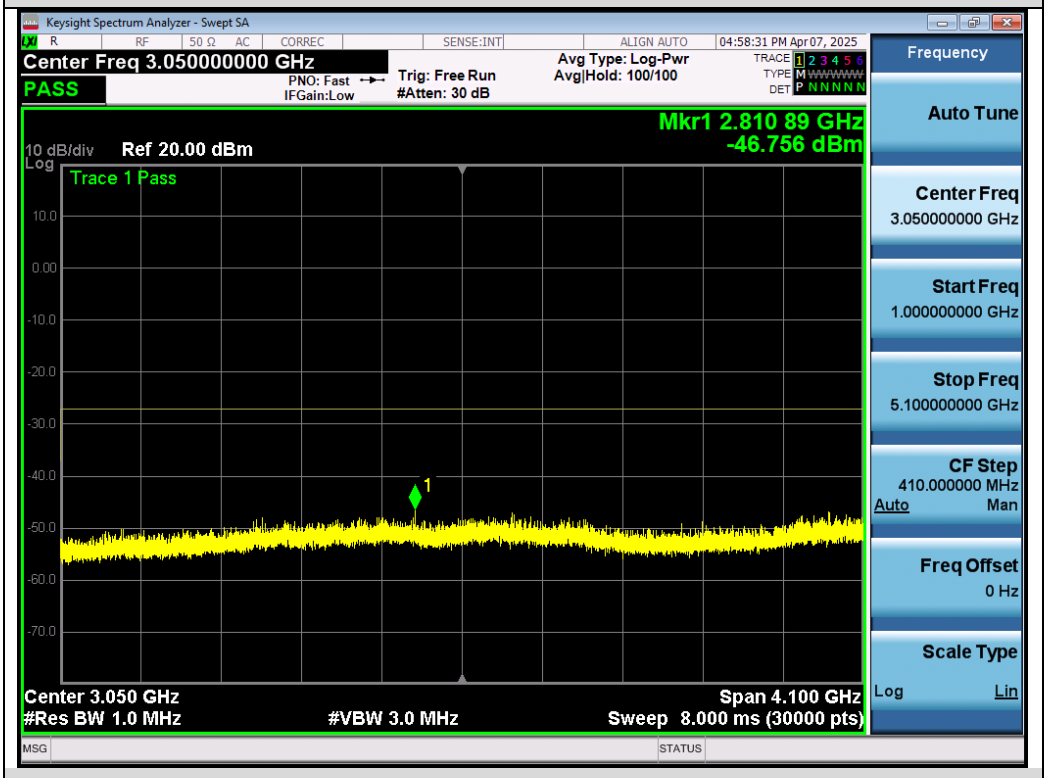

Test_Graph_802.11a_ANT1_5320_6Mbps_Frequency Band 2

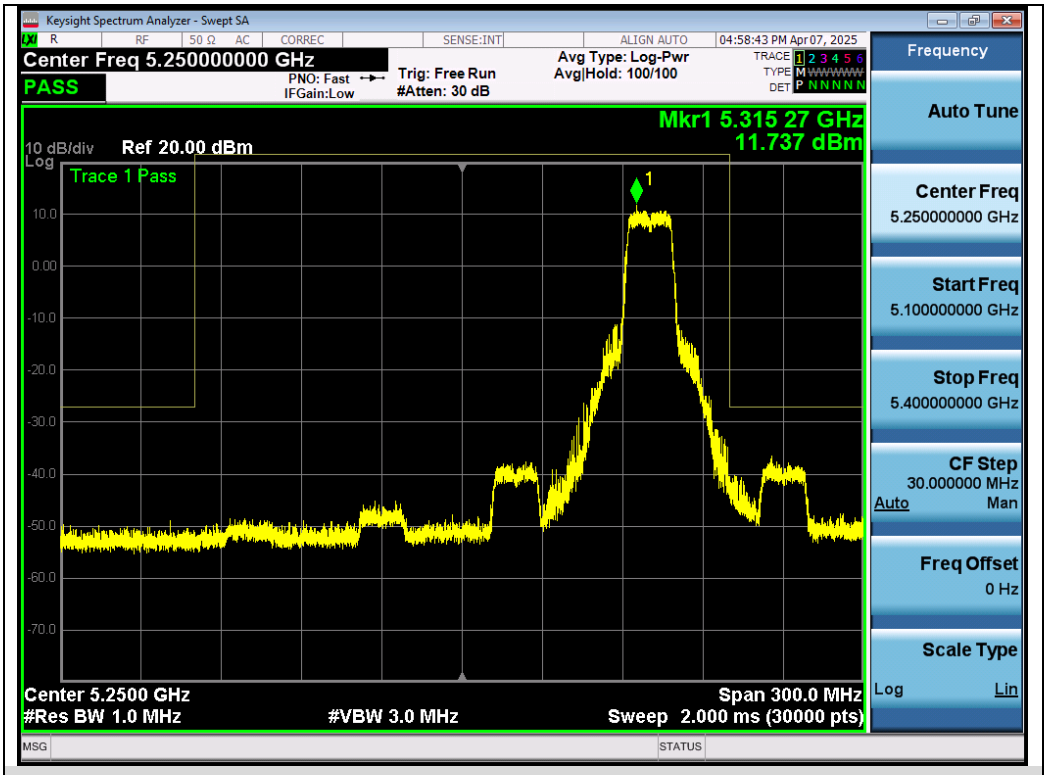

Test_Graph_802.11a_ANT1_5320_6Mbps_Frequency Band 3

Test_Graph_802.11a_ANT1_5320_6Mbps_Frequency Band 4

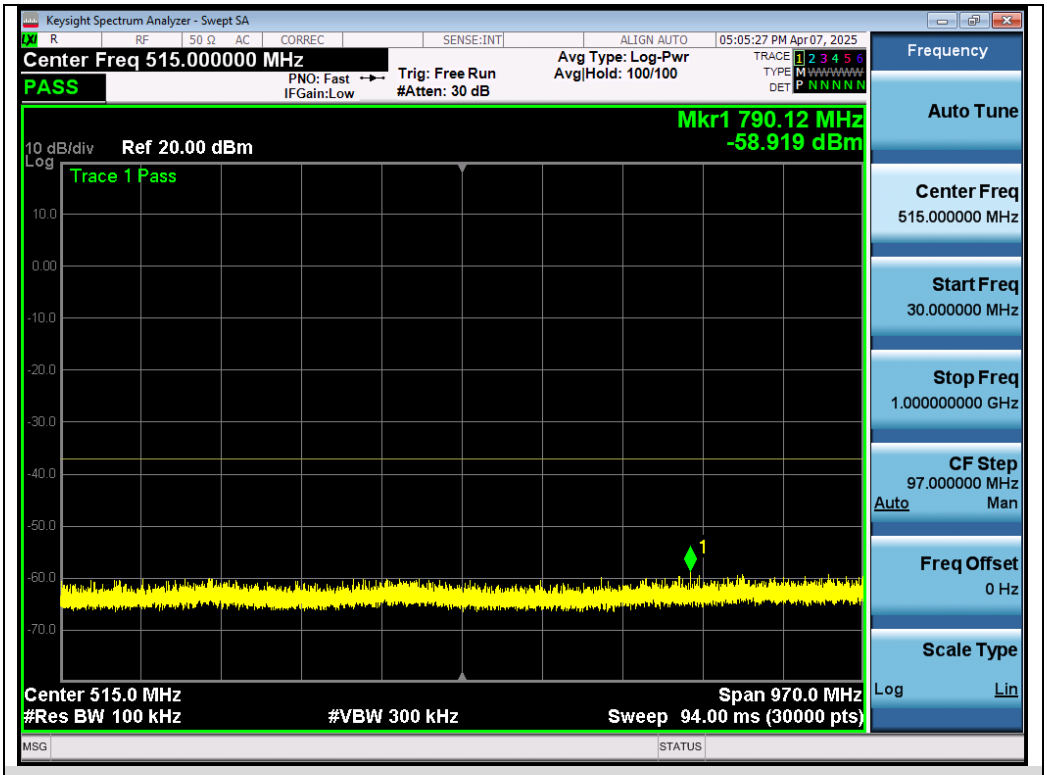

Test_Graph_802.11n40_ANT1_5270_MCS0_Frequency Band 1

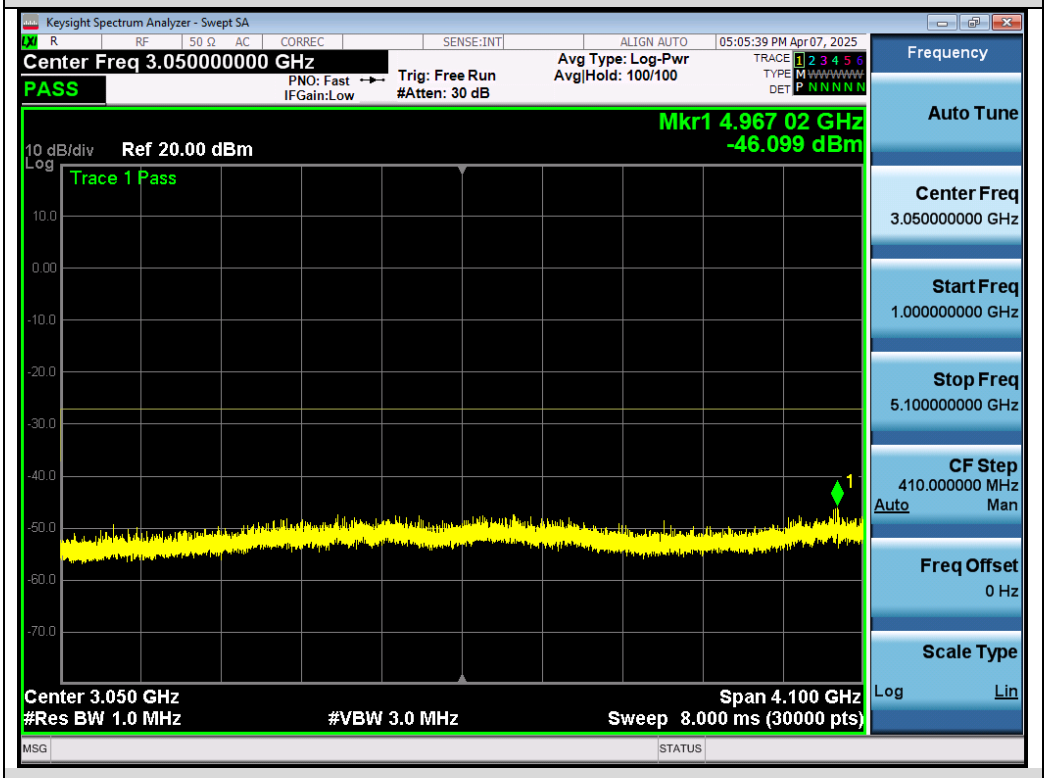

Test_Graph_802.11n40_ANT1_5270_MCS0_Frequency Band 2

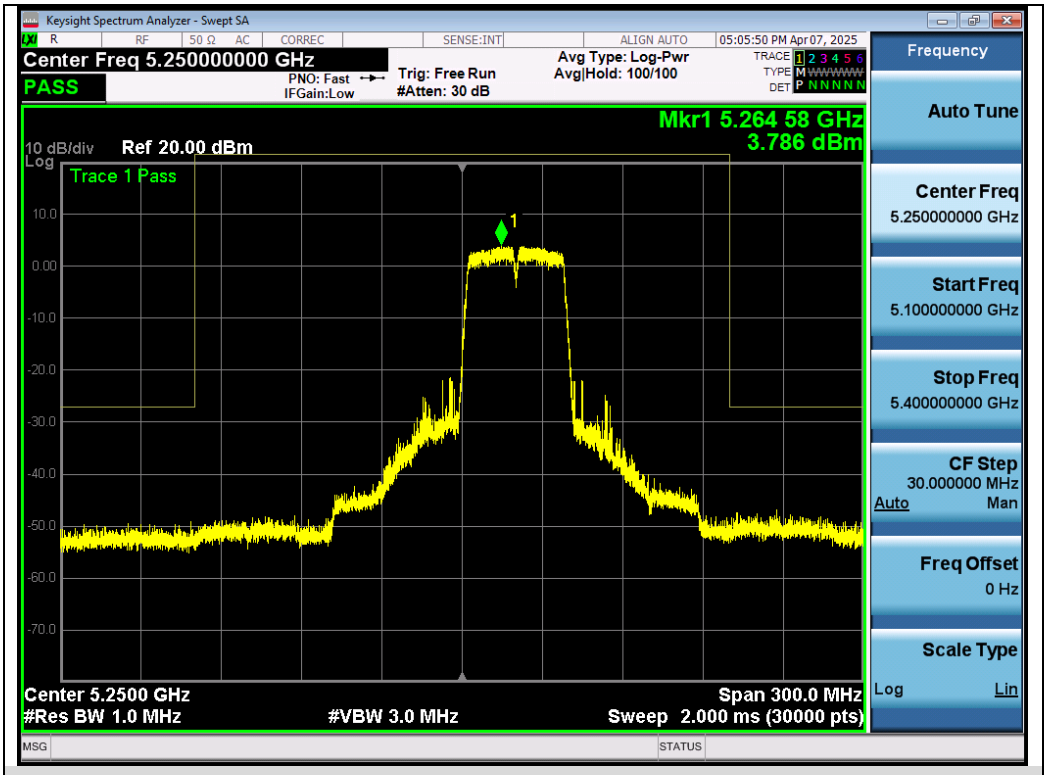

Test_Graph_802.11n40_ANT1_5270_MCS0_Frequency Band 3

Test_Graph_802.11n40_ANT1_5270_MCS0_Frequency Band 4

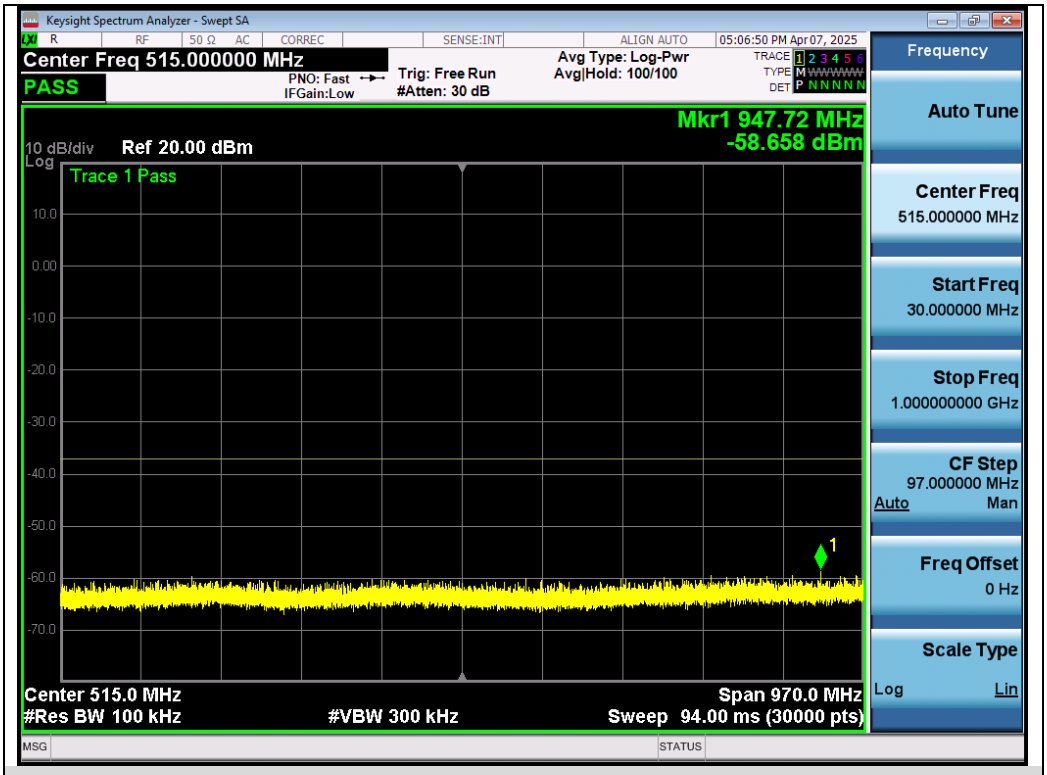

Test_Graph_802.11n40_ANT1_5310_MCS0_Frequency Band 1

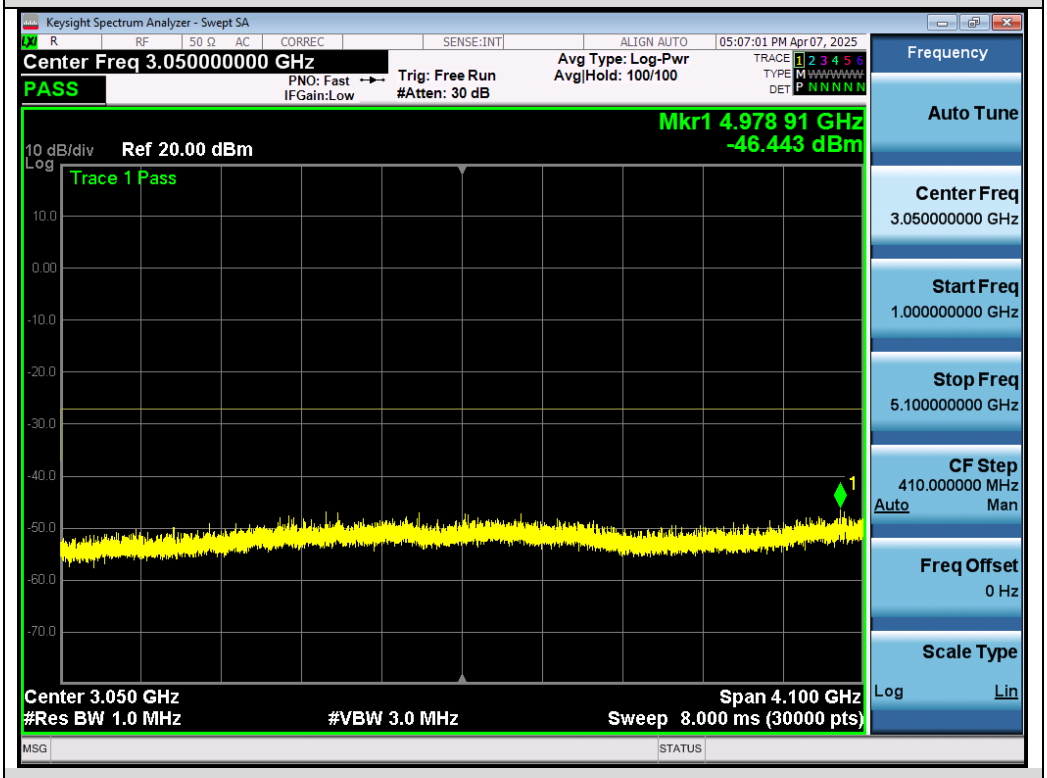

Test_Graph_802.11n40_ANT1_5310_MCS0_Frequency Band 2

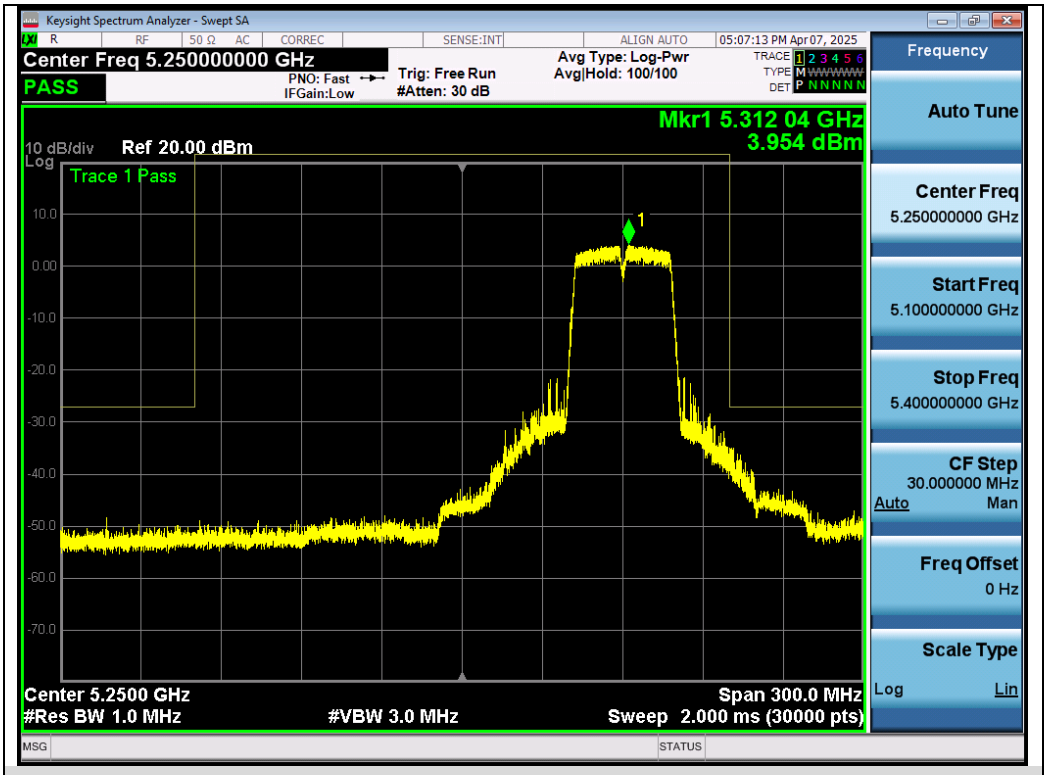

Test_Graph_802.11n40_ANT1_5310_MCS0_Frequency Band 3

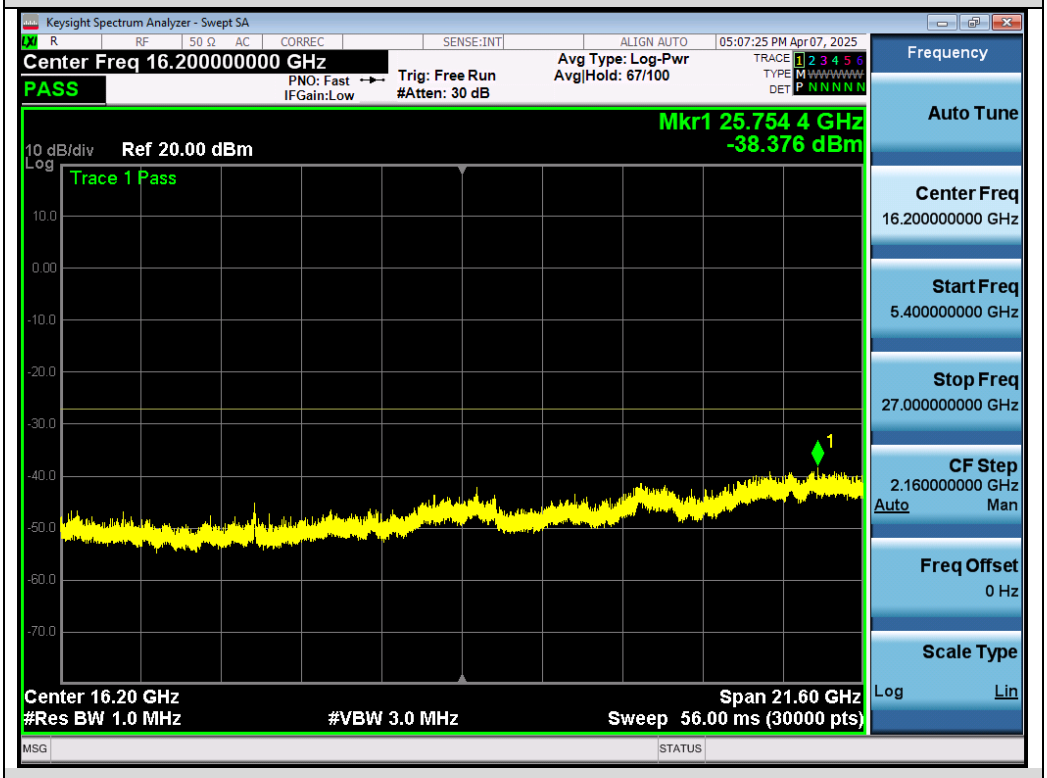

Test_Graph_802.11n40_ANT1_5310_MCS0_Frequency Band 4

11. Radiated Spurious Emission

11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

<table>
<tr><td rowspan="2">Restricted bands</td><td>Applicable to</td><td colspan="2">Limit</td></tr>
<tr><td rowspan="2">789033 D02 General UNII Test Procedures New Rules v02r01</td><td colspan="2">Field strength at 3m (dBuV/m)</td></tr>
<tr><td>PK: 74</td><td>AV: 54</td></tr>
<tr><td rowspan="5">Out of the restricted bands</td><td>Applicable to</td><td>EIRP Limit (dBm/MHz)</td><td>Equivalent field Strength at 3m (dBuV/m)</td></tr>
<tr><td>FCC 15.407(b)(1)</td><td rowspan="3">PK: -27</td><td rowspan="3">PK: 68.2</td></tr>
<tr><td>15.407(b)(2)</td></tr>
<tr><td>15.407(b)(3)</td></tr>
<tr><td>15.407(b)(4)</td><td colspan="2">See Note 2</td></tr>
</table>

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30 P}}{3}$$ μV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.2 Measurement Procedure

1. The EUT was placed on the top of the turntable 0.1 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

◆ **Procedure for Unwanted Emissions Measurements Below 1000MHz:**

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

◆ **Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:**

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

◆ **Procedures for Average Unwanted Emissions Measurements Above 1000MHz:**

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

◆ **Procedures for Average Unwanted Emissions Measurements Above 1000MHz:**

- RBW = 1 MHz
- VBW = 3 MHz • Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.

11.3 Measurement Setup (Block Diagram of Configuration)

Radiated Emission Test Setup 9kHz-30MHz

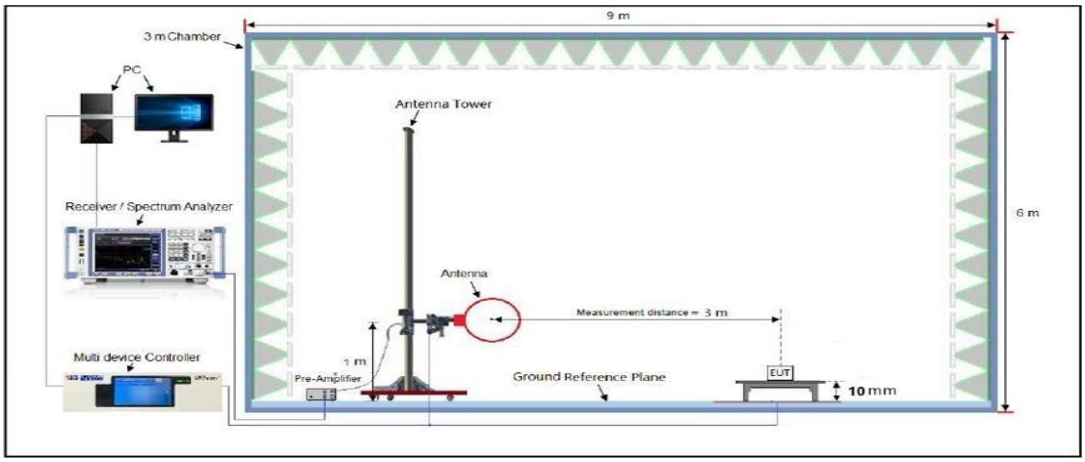

Radiated Emission Test Setup 30MHz-1000MHz

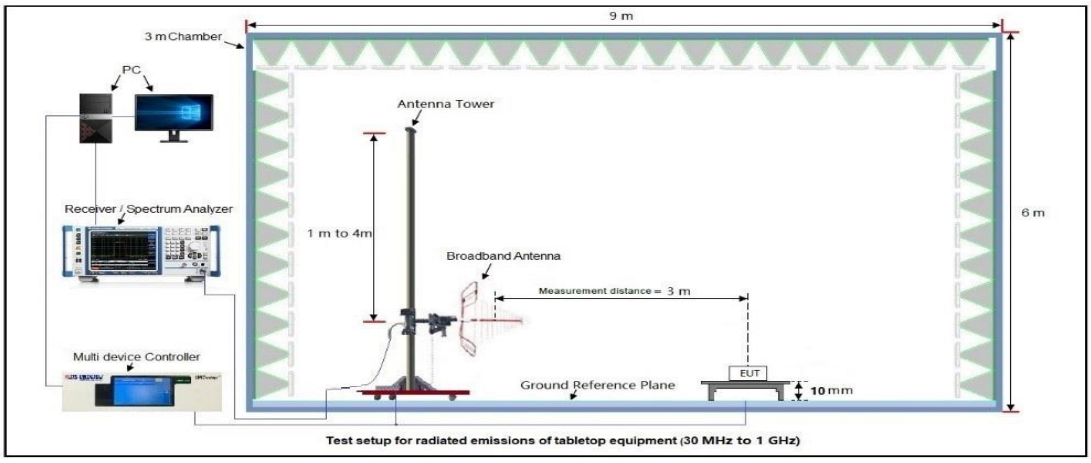

Radiated Emission Test Setup Above 1000MHz

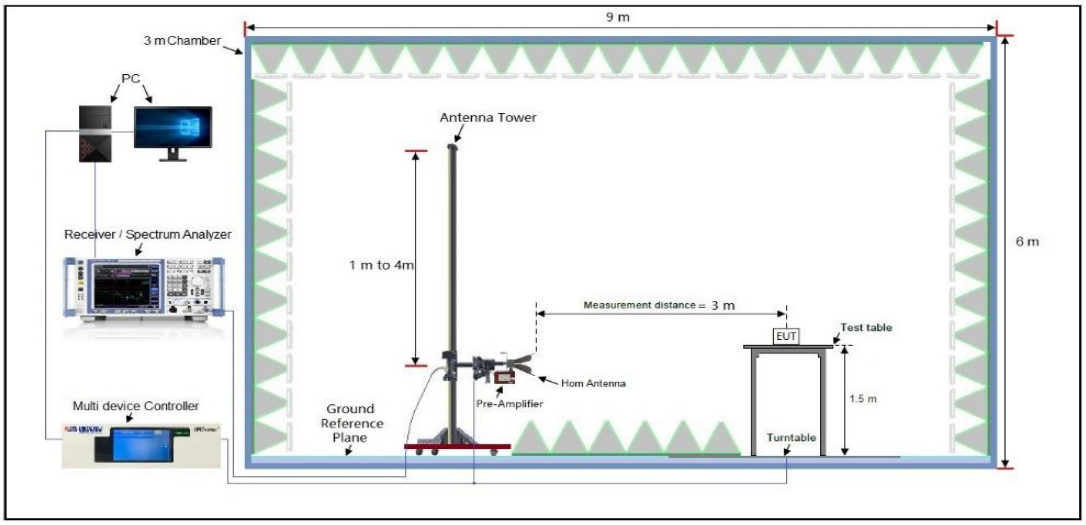

11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz

EUT Name	SMART BIKE TRAINER	**Model Name**	XX
Temperature	23.6°C	**Relative Humidity**	45.1%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	802.11n(20MHz)_5180MHz	**Antenna**	Horizontal

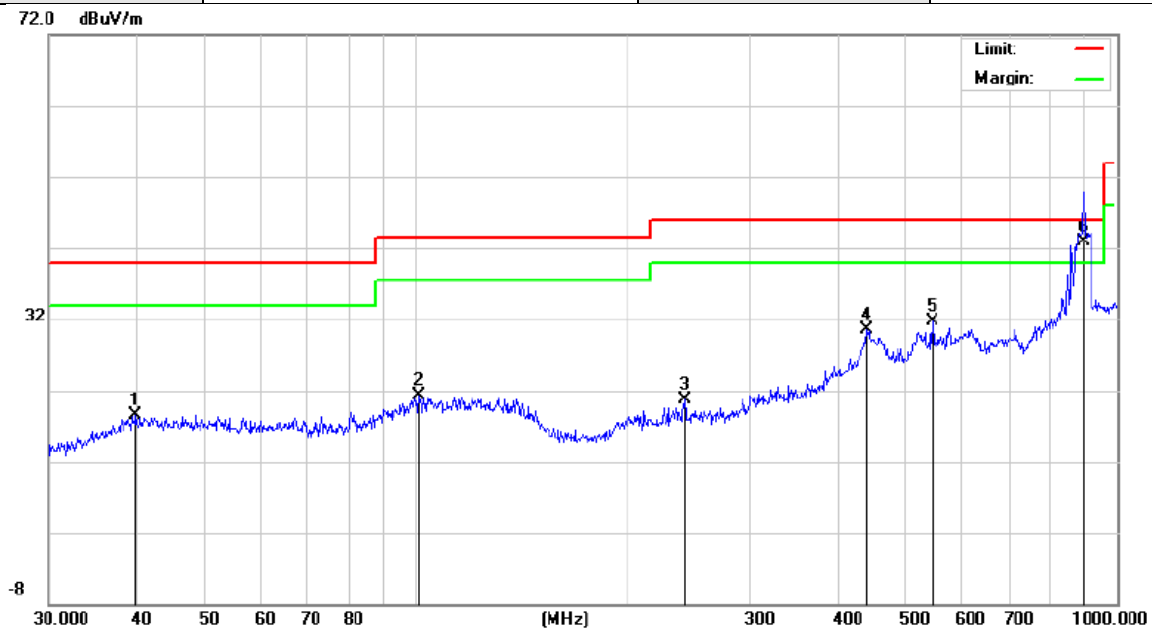

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		39.8542	4.62	13.84	18.46	40.00	-21.54	peak
2		100.9339	5.13	16.21	21.34	43.50	-22.16	peak
3		241.6763	5.37	15.35	20.72	46.00	-25.28	peak
4		440.1963	5.35	25.09	30.44	46.00	-15.56	peak
5		545.1826	7.77	23.98	31.75	46.00	-14.25	peak
6	*	893.8567	11.93	31.03	42.96	46.00	-3.04	QP

Result: Pass

EUT Name	SMART BIKE TRAINER	Model Name	XX
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n(20MHz)_5180MHz	Antenna	Vertical

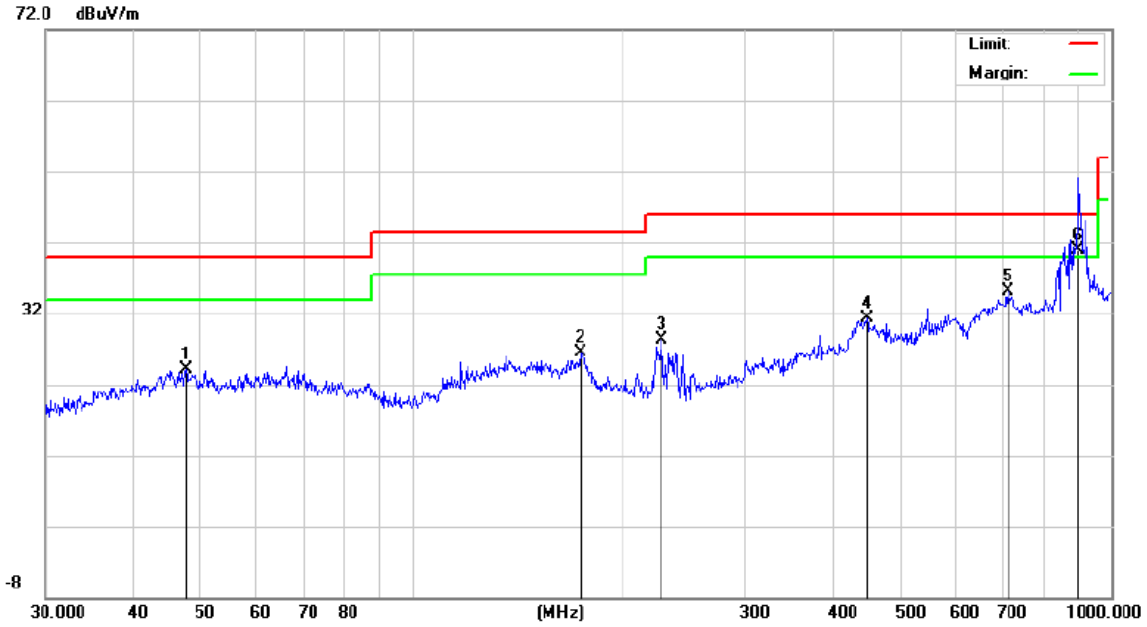

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		47.4918	7.07	16.97	24.04	40.00	-15.96	peak
2		174.4241	8.02	18.42	26.44	43.50	-17.06	peak
3		227.6906	11.88	16.33	28.21	46.00	-17.79	peak
4		447.9822	5.57	25.74	31.31	46.00	-14.69	peak
5		711.6734	6.61	28.51	35.12	46.00	-10.88	peak
6	*	896.9965	12.61	28.23	40.84	46.00	-5.16	QP

Result: Pass

Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
2. All test modes had been pre-tested,Refer to Chapter 5 of the report for details.