



Test Report

FCC ID: 2BOQ9-D36

Applicant: OneAdaptr Limited

Address: Flat 10, 12/F., Wah Yiu Ind. Centre, 30-32 Au Pui Wan Street, Fo Tan, Shatin, NT, Hong Kong

Manufacturer: Shenzhen SuJue Electronic Technology Co., Ltd

Address: No. 301 and 401, No. 39, Caowei Third Lane, Caowei Community, Hangcheng Street, Bao'an District, Shenzhen

EUT: 5in1 Wireless charging stand powerbank

Trade Mark: OneAdaptr

D36

Model Number: OG-B10, OG-B10WH, OG-B10GY, OG-B10XX and OG-Q10XX (XX is the product color code, such as WH representing white, BK representing black, GY representing gray.)

Date of Receipt: Mar. 21, 2025

Test Date: Mar. 21, 2025 - Mar. 31, 2025

Date of Report: Mar. 31, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Prepared (Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



Contents

1	General Description	5
1.1	Description of the EUT.....	5
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty.....	6
3	Test facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.1	Requirement	9
5.2	Test setup.....	10
5.3	Test Procedures	11
5.4	Test results.....	12
Photographs of the Test Setup		20
Photographs of the EUT		20



Test Result Certification	
Applicant:	OneAdaptr Limited
Address:	Flat 10, 12/F., Wah Yiu Ind. Centre, 30-32 Au Pui Wan Street, Fo Tan, Shatin, NT, Hong Kong
Manufacturer:	Shenzhen SuJue Electronic Technology Co., Ltd
Address:	No. 301 and 401, No. 39, Caowei Third Lane, Caowei Community, Hangcheng Street, Bao'an District, Shenzhen
Product description	
Product name:	5in1 Wireless charging stand powerbank
Trademark:	OneAdaptr
Model name:	D36 OG-B10, OG-B10WH, OG-B10GY, OG-B10XX and OG-Q10XX (XX is the product color code, such as WH representing white, BK representing black, GY representing gray.)
Series Model:	N/A
Standards:	FCC CFR 47 PART 1, § 1.1310 FCC CFR 47 PART 2, § 2.1093
Test method:	KDB 680106 D01 Wireless Power Transfer v04
Date of Test	
Date of test:	Mar. 21, 2025 - Mar. 31, 2025
Test result:	Pass



1 General Description

1.1 Description of the EUT

Product Name:	5in1 Wireless charging stand powerbank
Trade Mark:	OneAdaptr
Model No.:	D36 OG-B10, OG-B10WH, OG-B10GY, OG-B10XX and OG-Q10XX (XX is the product color code, such as WH representing white, BK representing black, GY representing gray.)
Series Model:	N/A
Model difference:	All models are same as the samples except model name and appearance color, they have the same structure and circuit.
Electrical rating:	Capacity: 10000mAh, 38.5Wh/3.85V Input: 5V/3A, 9V/2A Type-C Output: 5V/3A, 9V/2A, 12V/1.5A Phone Output: 5W/7.5W/10W/15W Watch Output: 2.5W Max Earphone Output: 5W Max
Accessories:	/
RF specification:	
Operation frequency:	115-205kHz
Modulation type:	MSK
Antenna type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless Output(15W)
Mode2	Charging+Wireless Output(15W)
Mode3	Standby

Note: All of the listed test mode were tested, only the data of the worst mode (Mode1) is recorded in the report



1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
XIAOMI Laptop Portable adapter(65W)	AD65G	/	XIAOMI
Mobile phone (Provide by test lab)	Galaxy S21 5G	/	SAMSUNG
Watch (Provide by test lab)	Series 6		Apple
Headset (Provide by test lab)	AirPods Pro		Apple

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	±7.8%
Electric field measurements (9kHz~30MHz)	±7.8%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen DL Testing Technology Co., Ltd.
Test site location:	101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
FCC Test Firm Registration Number:	854456
Designation Number:	CN1307
IC Registered No.:	27485
CAB ID.:	CN0118



4 List of test equipment

Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	June. 24, 2024	June. 25, 2025



5 Test result

5.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz



* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

For portable exposure conditions:

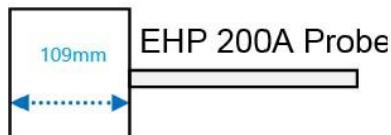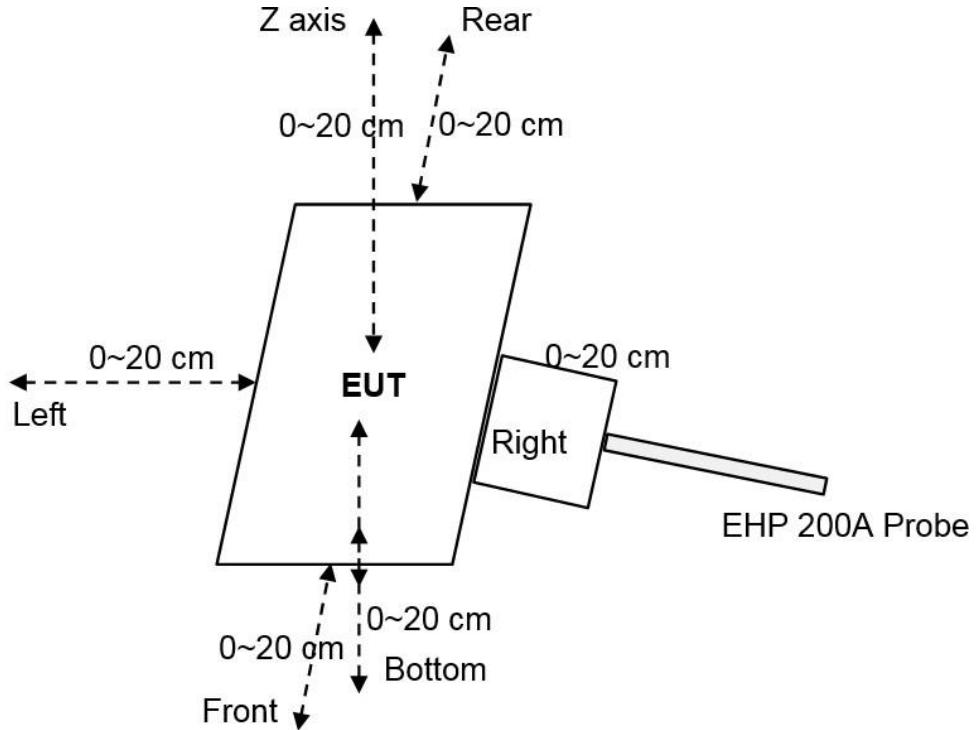

Notes: The EHP 200A Probe has a diameter of 10.9cm and a radius of 5.45cm.



5.3 Test Procedures

For portable exposure conditions:


- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.

Notes: The EUT was setted to transmit continuously with the duty cycle of 100%.

5.4 Test results

For portable exposure condition: Note:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) 20-2cm is the actual test value, and 0 cm is the estimated value.
- (4) Perform H-field/E-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

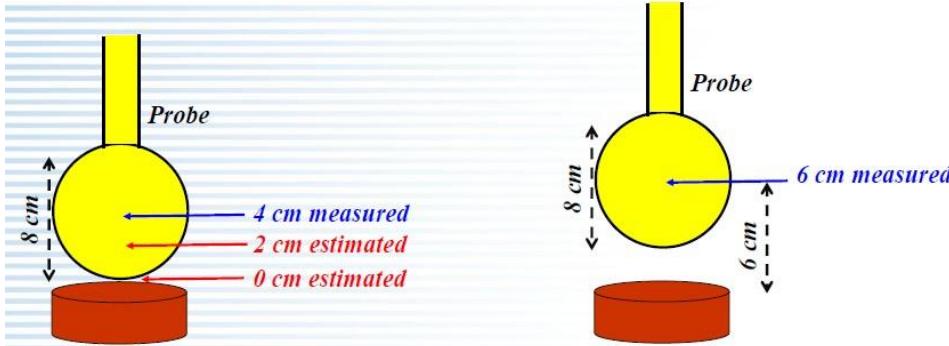


*Example of probe measurements in points close to the device surface:
estimates compared with measurements at 4 and 6 cm provide validation*

According to Calibration information and specification about EHP-200A, The Probe EHP-200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109mm. so the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please below). And the result of test distance 2cm~20cm was measured value.

Probe	Length	Width	Height
	109mm	92mm	92mm



Note: EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value.

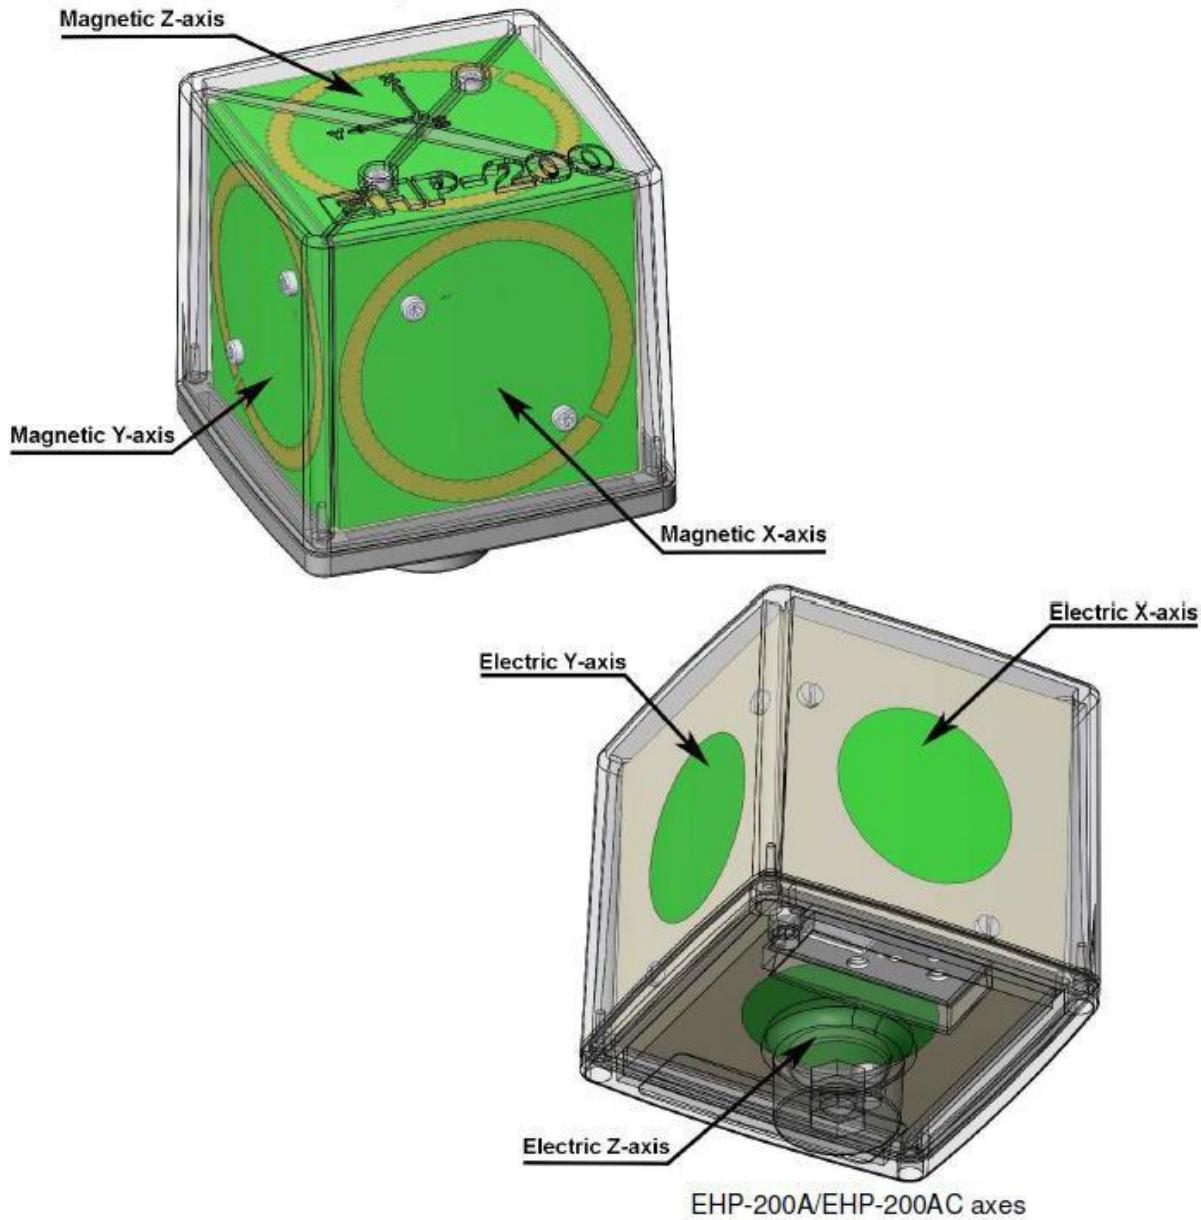


The sensitive elements are located approximately 8 mm below the external surface

(5) Estimated method for portable RF Exposure condition:


We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

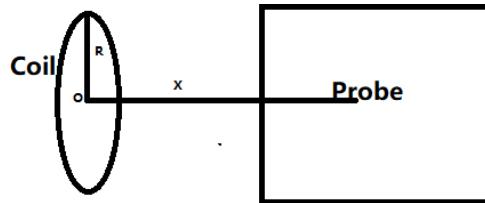

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

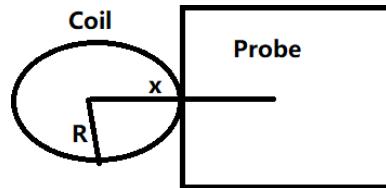

$$B = \frac{\mu_0 * I * N}{2 * x}$$

B: means H-field value;

μ_0 is space permeability; $\mu_0=4\pi*10^{-7}$;

I: A current element passing through a coil;

R: means the Radius of coil(According to provided Antenna specification: We can get the minimum $R=38/2=19\text{mm}=0.019\text{m}$);

Test Distance: The distance from the sensing element of the probe to the edge of the device surface.

x: means the center of the coil to the sensing elements of the probe. (For top & bottom side: $x=\text{test distance}$; For other side: $x=\text{test distance}+R$)

N: Number of turns, according to providing "Antenna specification" files: $N=10$.

(6) For validation purposes: If the value to show a **30% agreement** between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

**Validation:**

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -2cm	13.24	21.56	26.24	22.52	13.22	12.54	
2cm(estimated)	0.3241	0.1552	0.1136	0.1252	0.1423	0.3245	Compliance (Within 30%)
2cm(measured)	0.3221	0.1132	0.1341	0.1224	0.1241	0.2413	

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -2cm	12.32	15.46	22.63	12.83	23.24	22.53	
4cm(estimated)	0.1245	0.0252	0.0252	0.0244	0.0252	0.1252	Compliance (Within 30%)
4cm(measured)	0.1321	0.0314	0.0321	0.0341	0.0221	0.0221	



Test condition 1: Mode1 operating mode with client device (1 % battery status of client device)
-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	1.0221	1.63	73.11%
	Left	1.0336		
	Right	1.1411		
	Front	1.0215		
	Rear	0.9221		
	Bottom	0.5263		

Test condition 2: Mode1 operating mode with client device (1 % battery status of client device)
- Test distance: 2cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.3424	1.63	21.48%
	Left	0.1252		
	Right	0.1333		
	Front	0.1241		
	Rear	0.1363		
	Bottom	0.2421		

**Test condition 3: Mode1 operating mode with client device (1 % battery status of client device)****- Test distance 4cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1336	1.63	6.81%
	Left	0.0141		
	Right	0.0363		
	Front	0.0321		
	Rear	0.0258		
	Bottom	0.0241		

Test condition 4: Mode1 operating mode with client device (1 % battery status of client device)**- Test distance 6cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0223	1.63	6.27%
	Left	0.0321		
	Right	0.0263		
	Front	0.0321		
	Rear	0.0252		
	Bottom	0.0321		

Test condition 5: Mode1 operating mode with client device (1 % battery status of client device)**- Test distance 8cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0224	1.63	5.76%
	Left	0.0336		
	Right	0.0252		
	Front	0.0254		
	Rear	0.0273		
	Bottom	0.0321		

**Test condition 6: Mode1 operating mode with client device (1 % battery status of client device)****- Test distance 10cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0236	1.63	5.17%
	Left	0.0241		
	Right	0.0322		
	Front	0.0336		
	Rear	0.0441		
	Bottom	0.0321		

Test condition 7: Mode1 operating mode with client device (1 % battery status of client device)**- Test distance 12cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0263	1.63	4.74%
	Left	0.0226		
	Right	0.0141		
	Front	0.0216		
	Rear	0.0262		
	Bottom	0.0144		

Test condition 8: Mode1 operating mode with client device (1 % battery status of client device)**- Test distance 14cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0141	1.63	4.50%
	Left	0.0266		
	Right	0.0125		
	Front	0.0414		
	Rear	0.0232		
	Bottom	0.0441		

**Test condition 9: Mode1 operating mode with client device (1 % battery status of client device)**
- Test distance 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0223	1.63	4.11%
	Left	0.0415		
	Right	0.0241		
	Front	0.0366		
	Rear	0.0145		
	Bottom	0.0526		

Test condition 10: Mode1 operating mode with client device (1 % battery status of client device)
- Test distance 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0215	1.63	4.07%
	Left	0.0366		
	Right	0.0528		
	Front	0.0254		
	Rear	0.0411		
	Bottom	0.0463		




Test condition 11: Mode1 operating mode with client device (1 % battery status of client device)
- Test distance 20cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0321	1.63	3.83%
	Left	0.0252		
	Right	0.0233		
	Front	0.0414		
	Rear	0.0251		
	Bottom	0.0262		



Photographs of the Test Setup

Portable exposure conditions(0cm)

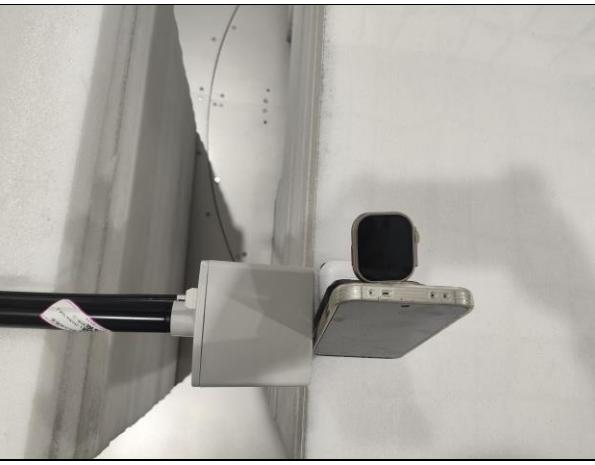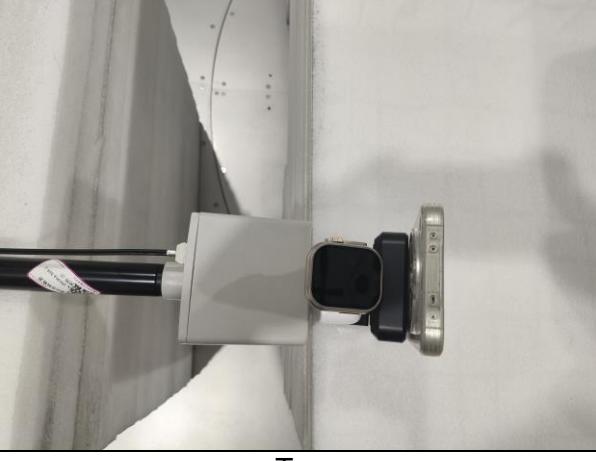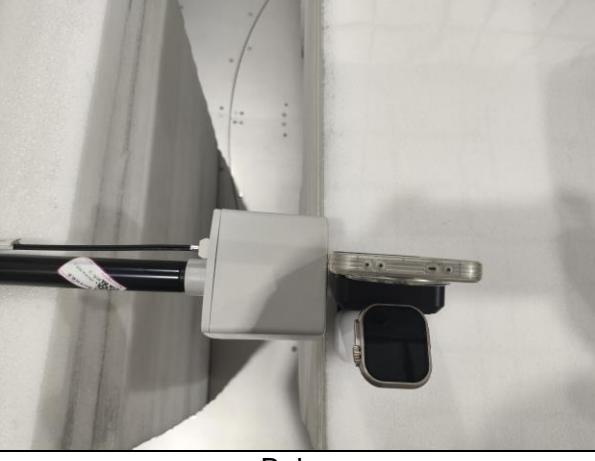Front	Left
	
Right	Rear
	
Top	Below
	



Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----