


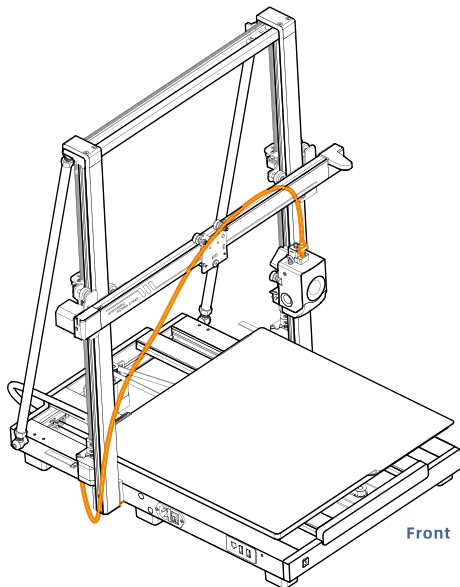


05 Connect Printhead Cable

1. Press down on the printhead cable (the long orange Type-C cable) and insert it into the slot above the printhead.
2. Use the screws from the No. 3 bag to secure the cable.

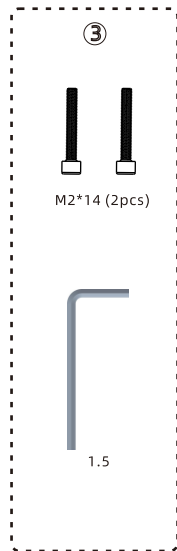

Cover



Note:


If the cover falls off during the installation process, you can wait until the printhead installation (Step 6) is completed before reattaching it.




06 Printhead Installation

Install the printhead from the back of the printer. Use the screws from the No. 4 bag to secure the printhead by turning the screws clockwise.

*We recommend tightening the two screws at the top before tightening the screws at the bottom.

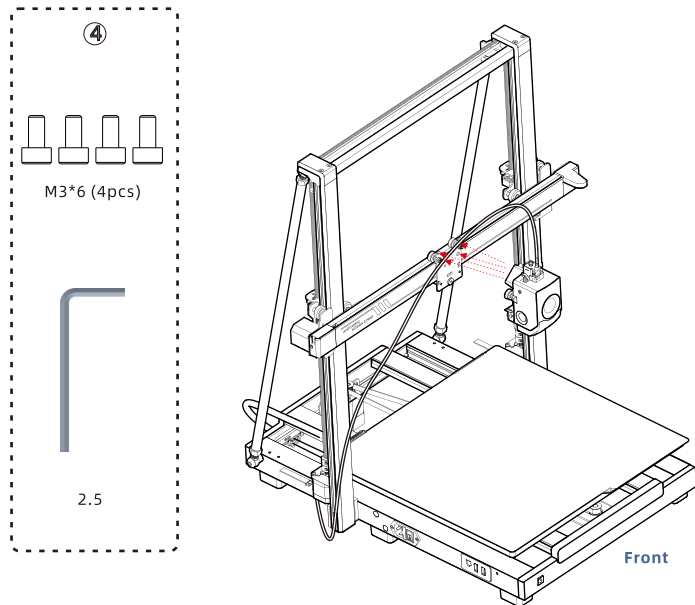

Note: Please install screws in the holes highlighted in white.

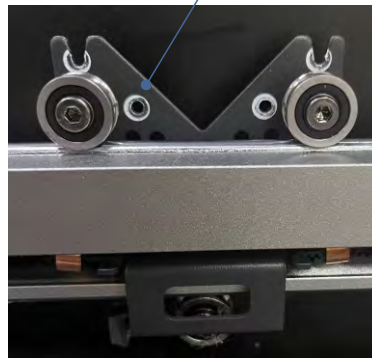

Back

07 Touchscreen Installation

1. Connect the touchscreen with the limit hole.
2. Use the screws from the No. 5 bag to secure the touchscreen onto the printer.

