



FCC TEST REPORT

FCC ID:2BOQG-C702

Report Number..... : DLE-250412001R

Date of Test..... Mar. 31, 2025 to Apr. 07, 2025

Date of issue..... : Apr. 07, 2025

Total number of pages..... 60

Test Result..... : PASS

Testing Laboratory..... : Shenzhen DL Testing Technology Co., Ltd.

Address : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong
Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong,
China

Applicant's name : Dongguan Chuangtong Shiji Technology Co.,Ltd.

Address : Room 801,Buliding 1,No.75 Xiangfeng Street, Dalingshan
Town,Dongguan City,Guangdong Province,China

Manufacturer's name : Dongguan Chuangtong Shiji Technology Co.,Ltd.

Address : Room 801,Buliding 1,No.75 Xiangfeng Street, Dalingshan
Town,Dongguan City,Guangdong Province,China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0

Test Report Form(s) Originator..... : DL Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by DL, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of DL, this document may be altered or revised by DL, personal only, and shall be noted in the revision of the document.

Product name..... : Car DVR Dash Cam

Trademark : N/A

Model/Type reference..... : C702

C01, C02, C03 ,C05,C06, C07, C08, C09, C10 ,C11, C12 ,C13, C15,
C16, C17, C18, C19, C20 ,C21, C22, C23, C25, C26, C27, C28,
C29, C30, C31, C32, C33, C35, C36, C37, C38, C39, C705, C309,
C600, C211, C210, H1, H2, H2, H3, H5, H6, H7, H8, H9

Ratings..... : Input: 5V---2.1A



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen DL Testing Technology Co., Ltd.

**Address.....: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa
Baolong Industrial Zone, Baolong Street, Longgang
Shenzhen, Guangdong, China**

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Jade Yang





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	17
5. RADIATED BAND EMISSIONMEASUREMENT	28
5.1 TEST REQUIREMENT	28
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULT	30
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULT	33



7. 6DB OCCUPIED BANDWIDTH	38
7.1 APPLIED PROCEDURES / LIMIT	38
7.2 TEST PROCEDURE	38
7.3 DEVIATION FROM STANDARD	38
7.4 TEST SETUP	38
7.5 EUT OPERATION CONDITIONS	38
7.6 TEST RESULT	39
8. PEAK OUTPUT POWER TEST	44
8.1 APPLIED PROCEDURES/LIMIT	44
8.2 TEST PROCEDURE	44
8.3 DEVIATION FROM STANDARD	44
8.4 TEST SETUP	44
8.5 EUT OPERATION CONDITIONS	44
8.6 TEST RESULT	45
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	46
9.1 APPLICABLE STANDARD	46
9.2 TEST PROCEDURE	46
9.3 DEVIATION FROM STANDARD	46
9.4 TEST SETUP	46
9.5 EUT OPERATION CONDITIONS	46
9.6 TEST RESULTS	46
10. DUTY CYCLE	55
10.1 APPLIED PROCEDURES / LIMIT	55
10.2 DEVIATION FROM STANDARD	55
10.3 TEST SETUP	55
10.4 EUT OPERATION CONDITIONS	55
10.5 TEST RESULTS	56
11. ANTENNA REQUIREMENT	59
12. TEST SETUP PHOTO	60
13. EUT CONSTRUCTIONAL DETAILS	60



1. VERSION

Report No.	Version	Description	Approved
DLE-250412001R	Rev.01	Initial issue of report	Apr. 07, 2025



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	N/A	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	
ANSI C63.10:2013	Duty cycle	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Car DVR Dash Cam
Model No.:	C702
Serial No.:	C01, C02, C03 ,C05,C06, C07, C08, C09, C10 ,C11, C12 ,C13, C15, C16, C17, C18, C19, C20 ,C21, C22, C23, C25, C26, C27, C28, C29, C30, C31, C32, C33, C35, C36, C37, C38, C39, C705, C309, C600, C211, C210, H1, H2, H2, H3, H5, H6, H7, H8, H9
Model Different.:	All the model are the same circuit and RF module,Only the model name different.
Hardware Version:	V1.0
Software Version:	V1.1
Sample(s) Status:	Engineer sample
Frequency Range:	2412-2462MHz for 802.11 b/g/n20 2422-2452MHz for 802.11 n40
Channel numbers:	802.11b/g/n (20M): 11 CH 802.11n (40M): 7 CH
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/n: Orthogonal Frequency Division Multiplexing(OFDM)
Data Rate:	802.11b: 1/2/5.5/11Mbit/s 802.11g: 6/9/12/24/18/36/48/54Mbit/s 802.11n: MCS0-MCS7
Antenna Type:	FPC Antenna
Antenna Gain:	1.73dBi
Power Supply:	Input: 5V---2.1A



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/g/n (20M)	802.11n (40M)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. For battery operated equipment, the equipment tests shall be performed using a new battery.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n20	802.11n40
Data rate	1Mbps	6Mbps	MCS0(HT0)	MCS0(HT0)

Test Software	CMD
Power level setup	Default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Car DVR Dash Cam	N/A	C702	N/A	EUT
E-2	Storage Battery	NANFU	ZKT-00	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.2M	Car charger

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

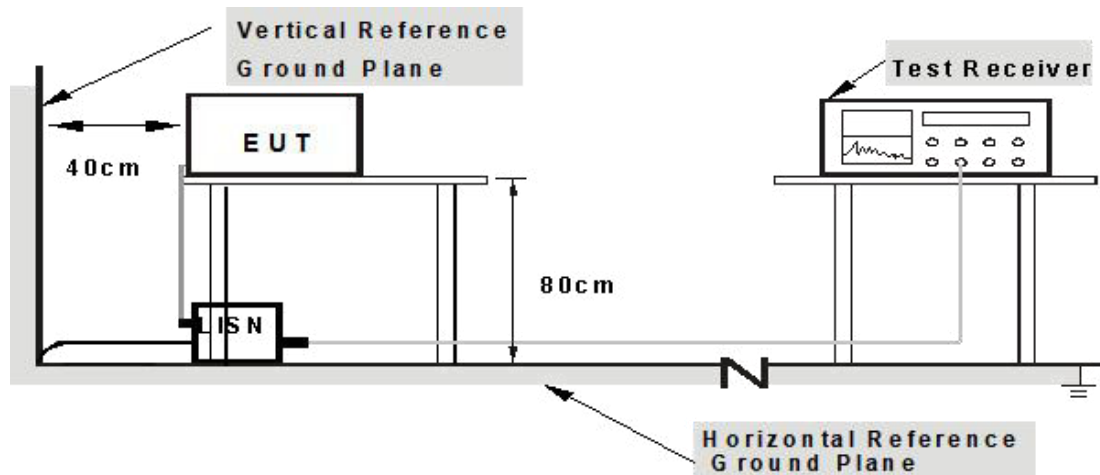

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULT

N/A

Only AC product need to test this item, DC product is not applicable.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	9kHz to 25GHz					
Test site:	Measurement Distance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Value	
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak	
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz	Average	

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

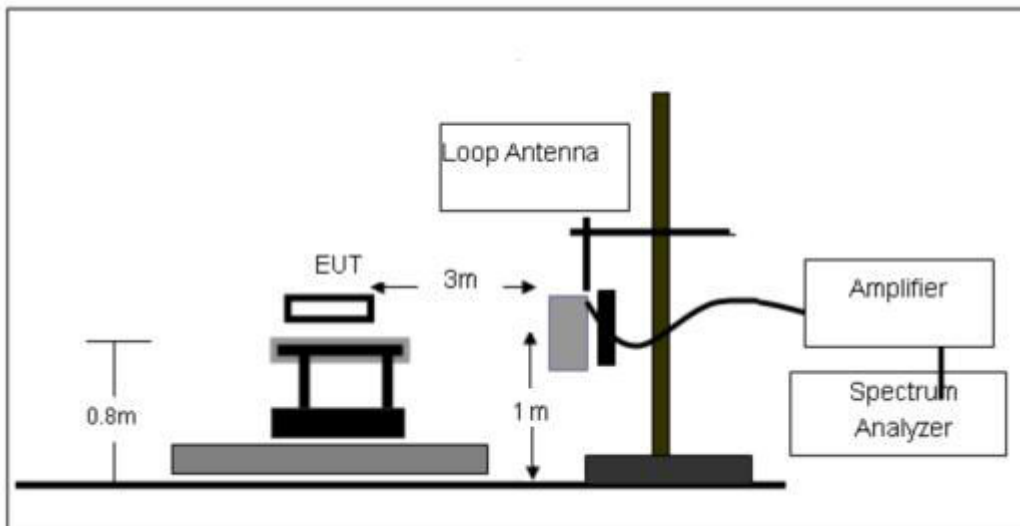

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

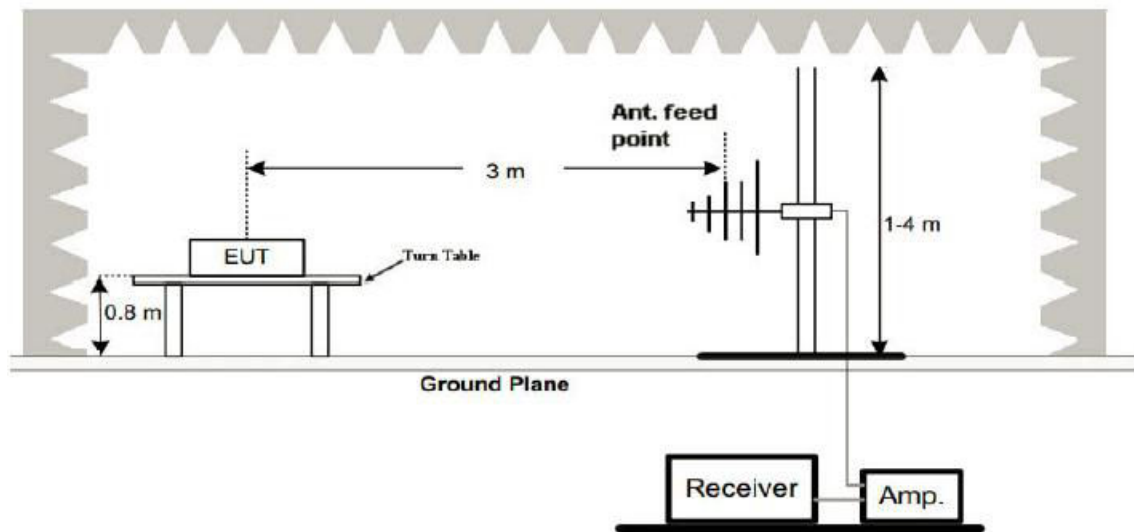

(C) Radiated Emission Test-Up Frequency Above 1GHz

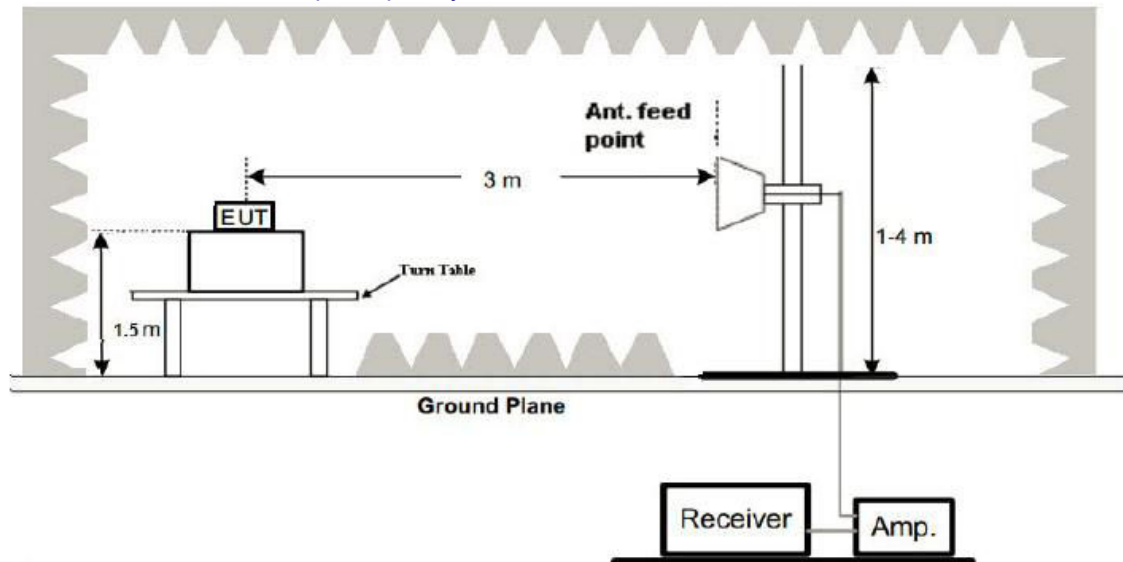

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 2412MHz

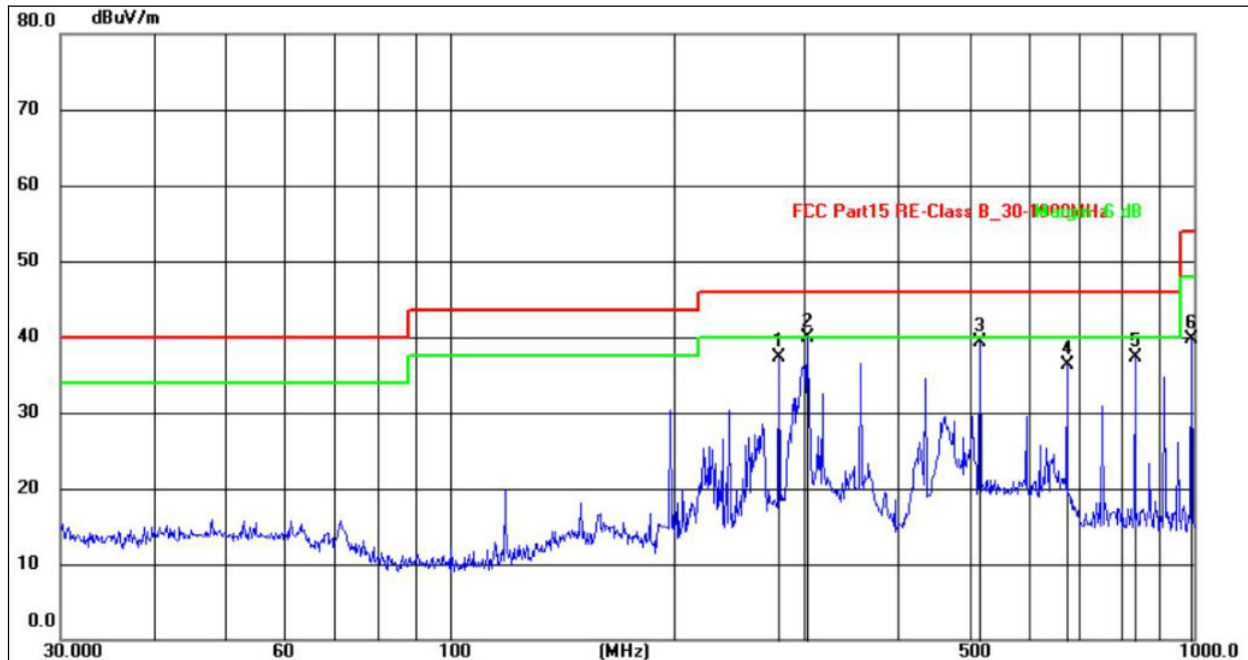


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	277.0935	51.43	-14.12	37.31	46.00	-8.69	QP
2	302.4811	56.51	-16.54	39.97	46.00	-6.03	QP
3	515.4373	49.87	-10.62	39.25	46.00	-6.75	QP
4	675.2078	43.19	-6.92	36.27	46.00	-9.73	QP
5	833.3170	43.95	-6.66	37.29	46.00	-8.71	QP
6	993.0113	44.48	-4.71	39.77	54.00	-14.23	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11n20 - 2412MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 2412MHz

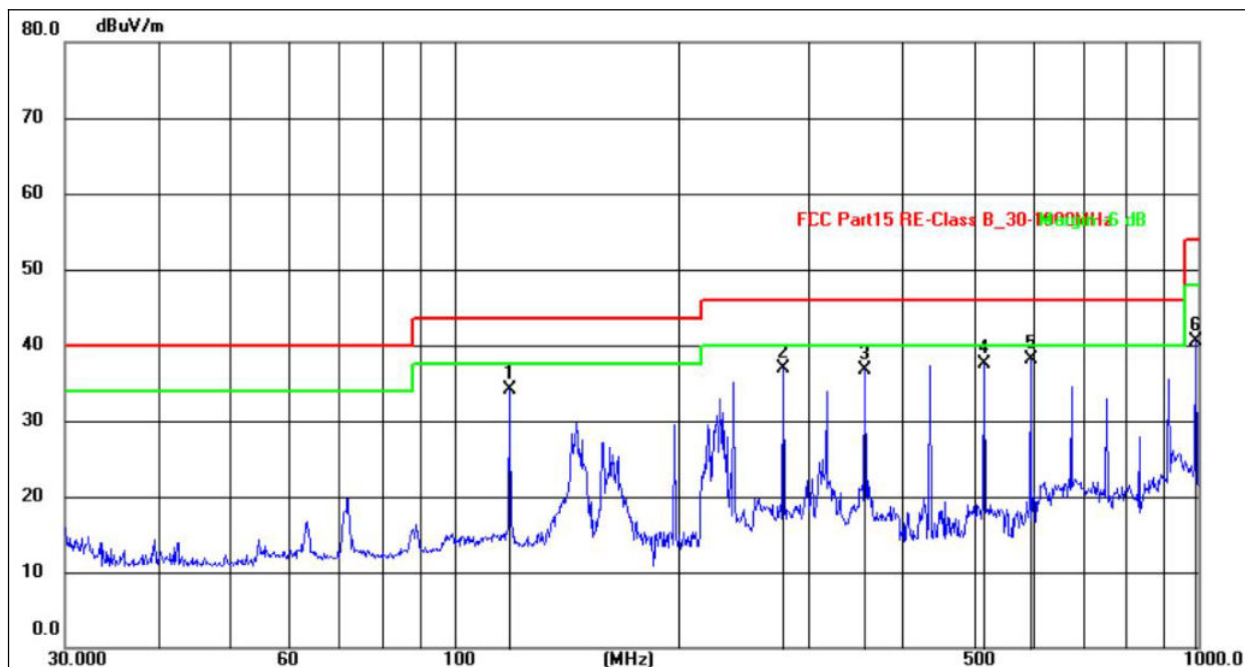

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	118.6012	55.23	-21.21	34.02	43.50	-9.48	QP
2	277.0935	55.48	-18.65	36.83	46.00	-9.17	QP
3	356.6757	52.78	-15.98	36.80	46.00	-9.20	QP
4	515.4373	47.96	-10.42	37.54	46.00	-8.46	QP
5	595.1326	45.53	-7.51	38.02	46.00	-7.98	QP
6	993.0113	40.45	0.05	40.50	54.00	-13.50	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 2412MHz.



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.84	30.55	5.77	24.66	54.72	74.00	-19.28	PK
V	4824.00	43.31	30.55	5.77	24.66	43.19	54.00	-10.81	AV
V	7236.00	54.11	30.33	6.32	24.55	54.65	74.00	-19.35	PK
V	7236.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
V	9648.00	51.06	30.85	7.45	24.69	52.35	74.00	-21.65	PK
V	9648.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
V	12060.00	53.81	31.02	8.99	25.57	57.35	74.00	-16.65	PK
V	12060.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV
H	4824.00	54.82	30.55	5.77	24.66	54.70	74.00	-19.30	PK
H	4824.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
H	7236.00	52.05	30.33	6.32	24.55	52.59	74.00	-21.41	PK
H	7236.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9648.00	53.60	30.85	7.45	24.69	54.89	74.00	-19.11	PK
H	9648.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	12060.00	54.39	31.02	8.99	25.57	57.93	74.00	-16.07	PK
H	12060.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.95	30.55	5.77	24.66	54.83	74.00	-19.17	PK
V	4874.00	43.24	30.55	5.77	24.66	43.12	54.00	-10.88	AV
V	7311.00	54.64	30.33	6.32	24.55	55.18	74.00	-18.82	PK
V	7311.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9748.00	53.19	30.85	7.45	24.69	54.48	74.00	-19.52	PK
V	9748.00	43.13	30.85	7.45	24.69	44.42	54.00	-9.58	AV
V	12185.00	50.27	31.02	8.99	25.57	53.81	74.00	-20.19	PK
V	12185.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV
H	4874.00	54.30	30.55	5.77	24.66	54.18	74.00	-19.82	PK
H	4874.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7311.00	51.33	30.33	6.32	24.55	51.87	74.00	-22.13	PK
H	7311.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9748.00	52.74	30.85	7.45	24.69	54.03	74.00	-19.97	PK
H	9748.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
H	12185.00	55.00	31.02	8.99	25.57	58.54	74.00	-15.46	PK
H	12185.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	54.77	30.55	5.77	24.66	54.65	74.00	-19.35	PK
V	4924.00	43.98	30.55	5.77	24.66	43.86	54.00	-10.14	AV
V	7386.00	51.68	30.33	6.32	24.55	52.22	74.00	-21.78	PK
V	7386.00	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
V	9848.00	52.18	30.85	7.45	24.69	53.47	74.00	-20.53	PK
V	9848.00	43.05	30.85	7.45	24.69	44.34	54.00	-9.66	AV
V	12310.00	52.16	31.02	8.99	25.57	55.70	74.00	-18.30	PK
V	12310.00	43.25	31.02	8.99	25.57	46.79	54.00	-7.21	AV
H	4924.00	52.50	30.55	5.77	24.66	52.38	74.00	-21.62	PK
H	4924.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	7386.00	50.20	30.33	6.32	24.55	50.74	74.00	-23.26	PK
H	7386.00	43.89	30.33	6.32	24.55	44.43	54.00	-9.57	AV
H	9848.00	50.41	30.85	7.45	24.69	51.70	74.00	-22.30	PK
H	9848.00	43.16	30.85	7.45	24.69	44.45	54.00	-9.55	AV
H	12310.00	50.53	31.02	8.99	25.57	54.07	74.00	-19.93	PK
H	12310.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.74	30.55	5.77	24.66	54.62	74.00	-19.38	PK
V	4824.00	43.52	30.55	5.77	24.66	43.40	54.00	-10.60	AV
V	7236.00	50.83	30.33	6.32	24.55	51.37	74.00	-22.63	PK
V	7236.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9648.00	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	PK
V	9648.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
V	12060.00	51.92	31.02	8.99	25.57	55.46	74.00	-18.54	PK
V	12060.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	4824.00	53.97	30.55	5.77	24.66	53.85	74.00	-20.15	PK
H	4824.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
H	7236.00	52.16	30.33	6.32	24.55	52.70	74.00	-21.30	PK
H	7236.00	43.89	30.33	6.32	24.55	44.43	54.00	-9.57	AV
H	9648.00	51.97	30.85	7.45	24.69	53.26	74.00	-20.74	PK
H	9648.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
H	12060.00	54.41	31.02	8.99	25.57	57.95	74.00	-16.05	PK
H	12060.00	43.63	31.02	8.99	25.57	47.17	54.00	-6.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.24	30.55	5.77	24.66	52.12	74.00	-21.88	PK
V	4874.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
V	7311.00	54.46	30.33	6.32	24.55	55.00	74.00	-19.00	PK
V	7311.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
V	9748.00	50.68	30.85	7.45	24.69	51.97	74.00	-22.03	PK
V	9748.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
V	12185.00	54.86	31.02	8.99	25.57	58.40	74.00	-15.60	PK
V	12185.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV
H	4874.00	53.65	30.55	5.77	24.66	53.53	74.00	-20.47	PK
H	4874.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
H	7311.00	51.16	30.33	6.32	24.55	51.70	74.00	-22.30	PK
H	7311.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
H	9748.00	53.74	30.85	7.45	24.69	55.03	74.00	-18.97	PK
H	9748.00	43.23	30.85	7.45	24.69	44.52	54.00	-9.48	AV
H	12185.00	54.90	31.02	8.99	25.57	58.44	74.00	-15.56	PK
H	12185.00	43.56	31.02	8.99	25.57	47.10	54.00	-6.90	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.66	30.55	5.77	24.66	53.54	74.00	-20.46	PK
V	4924.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
V	7386.00	52.11	30.33	6.32	24.55	52.65	74.00	-21.35	PK
V	7386.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	9848.00	53.70	30.85	7.45	24.69	54.99	74.00	-19.01	PK
V	9848.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
V	12310.00	53.12	31.02	8.99	25.57	56.66	74.00	-17.34	PK
V	12310.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV
H	4924.00	51.60	30.55	5.77	24.66	51.48	74.00	-22.52	PK
H	4924.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
H	7386.00	53.64	30.33	6.32	24.55	54.18	74.00	-19.82	PK
H	7386.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
H	9848.00	54.41	30.85	7.45	24.69	55.70	74.00	-18.30	PK
H	9848.00	43.07	30.85	7.45	24.69	44.36	54.00	-9.64	AV
H	12310.00	50.20	31.02	8.99	25.57	53.74	74.00	-20.26	PK
H	12310.00	43.69	31.02	8.99	25.57	47.23	54.00	-6.77	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	52.91	30.55	5.77	24.66	52.79	74.00	-21.21	PK
V	4824.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
V	7236.00	52.01	30.33	6.32	24.55	52.55	74.00	-21.45	PK
V	7236.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
V	9648.00	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
V	9648.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
V	12060.00	54.67	31.02	8.99	25.57	58.21	74.00	-15.79	PK
V	12060.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV
H	4824.00	53.42	30.55	5.77	24.66	53.30	74.00	-20.70	PK
H	4824.00	43.85	30.55	5.77	24.66	43.73	54.00	-10.27	AV
H	7236.00	51.57	30.33	6.32	24.55	52.11	74.00	-21.89	PK
H	7236.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9648.00	50.42	30.85	7.45	24.69	51.71	74.00	-22.29	PK
H	9648.00	43.82	30.85	7.45	24.69	45.11	54.00	-8.89	AV
H	12060.00	51.77	31.02	8.99	25.57	55.31	74.00	-18.69	PK
H	12060.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.37	30.55	5.77	24.66	51.25	74.00	-22.75	PK
V	4874.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
V	7311.00	53.78	30.33	6.32	24.55	54.32	74.00	-19.68	PK
V	7311.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	9748.00	54.83	30.85	7.45	24.69	56.12	74.00	-17.88	PK
V	9748.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
V	12185.00	51.50	31.02	8.99	25.57	55.04	74.00	-18.96	PK
V	12185.00	43.69	31.02	8.99	25.57	47.23	54.00	-6.77	AV
H	4874.00	54.79	30.55	5.77	24.66	54.67	74.00	-19.33	PK
H	4874.00	43.95	30.55	5.77	24.66	43.83	54.00	-10.17	AV
H	7311.00	52.07	30.33	6.32	24.55	52.61	74.00	-21.39	PK
H	7311.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
H	9748.00	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	PK
H	9748.00	43.47	30.85	7.45	24.69	44.76	54.00	-9.24	AV
H	12185.00	53.60	31.02	8.99	25.57	57.14	74.00	-16.86	PK
H	12185.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.55	30.55	5.77	24.66	52.43	74.00	-21.57	PK
V	4924.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
V	7386.00	52.20	30.33	6.32	24.55	52.74	74.00	-21.26	PK
V	7386.00	43.88	30.33	6.32	24.55	44.42	54.00	-9.58	AV
V	9848.00	52.45	30.85	7.45	24.69	53.74	74.00	-20.26	PK
V	9848.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	12310.00	51.89	31.02	8.99	25.57	55.43	74.00	-18.57	PK
V	12310.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV
H	4924.00	54.07	30.55	5.77	24.66	53.95	74.00	-20.05	PK
H	4924.00	43.81	30.55	5.77	24.66	43.69	54.00	-10.31	AV
H	7386.00	52.05	30.33	6.32	24.55	52.59	74.00	-21.41	PK
H	7386.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
H	9848.00	50.38	30.85	7.45	24.69	51.67	74.00	-22.33	PK
H	9848.00	43.16	30.85	7.45	24.69	44.45	54.00	-9.55	AV
H	12310.00	54.62	31.02	8.99	25.57	58.16	74.00	-15.84	PK
H	12310.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844.00	50.82	30.55	5.77	24.66	50.70	74.00	-23.30	PK
V	4844.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
V	7266.00	50.29	30.33	6.32	24.55	50.83	74.00	-23.17	PK
V	7266.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
V	9688.00	53.30	30.85	7.45	24.69	54.59	74.00	-19.41	PK
V	9688.00	43.15	30.85	7.45	24.69	44.44	54.00	-9.56	AV
V	12110.00	54.23	31.02	8.99	25.57	57.77	74.00	-16.23	PK
V	12110.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV
H	4844.00	54.59	30.55	5.77	24.66	54.47	74.00	-19.53	PK
H	4844.00	43.23	30.55	5.77	24.66	43.11	54.00	-10.89	AV
H	7266.00	53.24	30.33	6.32	24.55	53.78	74.00	-20.22	PK
H	7266.00	43.79	30.33	6.32	24.55	44.33	54.00	-9.67	AV
H	9688.00	50.79	30.85	7.45	24.69	52.08	74.00	-21.92	PK
H	9688.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
H	12110.00	50.66	31.02	8.99	25.57	54.20	74.00	-19.80	PK
H	12110.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.42	30.55	5.77	24.66	52.30	74.00	-21.70	PK
V	4874.00	43.25	30.55	5.77	24.66	43.13	54.00	-10.87	AV
V	7311.00	52.96	30.33	6.32	24.55	53.50	74.00	-20.50	PK
V	7311.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
V	9748.00	50.24	30.85	7.45	24.69	51.53	74.00	-22.47	PK
V	9748.00	43.23	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12185.00	50.45	31.02	8.99	25.57	53.99	74.00	-20.01	PK
V	12185.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV
H	4874.00	53.97	30.55	5.77	24.66	53.85	74.00	-20.15	PK
H	4874.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	7311.00	53.27	30.33	6.32	24.55	53.81	74.00	-20.19	PK
H	7311.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
H	9748.00	51.03	30.85	7.45	24.69	52.32	74.00	-21.68	PK
H	9748.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	12185.00	50.33	31.02	8.99	25.57	53.87	74.00	-20.13	PK
H	12185.00	43.81	31.02	8.99	25.57	47.35	54.00	-6.65	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	53.13	30.55	5.77	24.66	53.01	74.00	-20.99	PK
V	4904.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
V	7356.00	52.51	30.33	6.32	24.55	53.05	74.00	-20.95	PK
V	7356.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
V	9808.00	50.93	30.85	7.45	24.69	52.22	74.00	-21.78	PK
V	9808.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12260.00	54.10	31.02	8.99	25.57	57.64	74.00	-16.36	PK
V	12260.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV
H	4904.00	51.77	30.55	5.77	24.66	51.65	74.00	-22.35	PK
H	4904.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
H	7356.00	53.90	30.33	6.32	24.55	54.44	74.00	-19.56	PK
H	7356.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
H	9808.00	52.54	30.85	7.45	24.69	53.83	74.00	-20.17	PK
H	9808.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
H	12260.00	54.83	31.02	8.99	25.57	58.37	74.00	-15.63	PK
H	12260.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

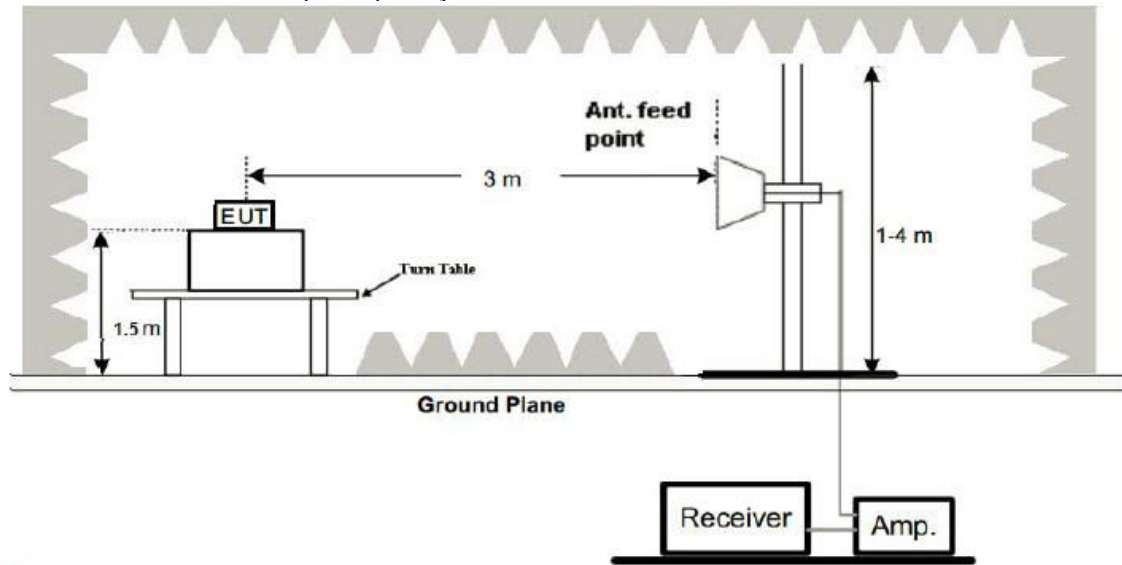

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Dete ctor Type	Result
802.11b	LowChannel 2412MHz										
	H	2390.00	53.25	30.22	4.85	23.98	51.86	74.00	-22.14	PK	PASS
	H	2390.00	44.02	30.22	4.85	23.98	42.63	54.00	-11.37	AV	PASS
	H	2400.00	54.05	30.22	4.85	23.98	52.66	74.00	-21.34	PK	PASS
	H	2400.00	44.05	30.22	4.85	23.98	42.66	54.00	-11.34	AV	PASS
	V	2390.00	53.80	30.22	4.85	23.98	52.41	74.00	-21.59	PK	PASS
	V	2390.00	44.08	30.22	4.85	23.98	42.69	54.00	-11.31	AV	PASS
	V	2400.00	53.35	30.22	4.85	23.98	51.96	74.00	-22.04	PK	PASS
	V	2400.00	44.87	30.22	4.85	23.98	43.48	54.00	-10.52	AV	PASS
	HighChannel 2462MHz										
	H	2483.50	53.82	30.22	4.85	23.98	52.43	74.00	-21.57	PK	PASS
	H	2483.50	44.92	30.22	4.85	23.98	43.53	54.00	-10.47	AV	PASS
	H	2500.00	54.05	30.22	4.85	23.98	52.66	74.00	-21.34	PK	PASS
	H	2500.00	44.45	30.22	4.85	23.98	43.06	54.00	-10.94	AV	PASS
	V	2483.50	54.56	30.22	4.85	23.98	53.17	74.00	-20.83	PK	PASS
	V	2483.50	44.26	30.22	4.85	23.98	42.87	54.00	-11.13	AV	PASS
	V	2500.00	54.09	30.22	4.85	23.98	52.70	74.00	-21.30	PK	PASS
	V	2500.00	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
802.11g	LowChannel 2412MHz										
	H	2390.00	53.59	30.22	4.85	23.98	52.20	74.00	-21.80	PK	PASS
	H	2390.00	44.75	30.22	4.85	23.98	43.36	54.00	-10.64	AV	PASS
	H	2400.00	53.03	30.22	4.85	23.98	51.64	74.00	-22.36	PK	PASS
	H	2400.00	44.51	30.22	4.85	23.98	43.12	54.00	-10.88	AV	PASS
	V	2390.00	53.76	30.22	4.85	23.98	52.37	74.00	-21.63	PK	PASS
	V	2390.00	44.40	30.22	4.85	23.98	43.01	54.00	-10.99	AV	PASS
	V	2400.00	54.35	30.22	4.85	23.98	52.96	74.00	-21.04	PK	PASS
	V	2400.00	44.01	30.22	4.85	23.98	42.62	54.00	-11.38	AV	PASS
	High Channel 2462MHz										
	H	2483.50	53.43	30.22	4.85	23.98	52.04	74.00	-21.96	PK	PASS
	H	2483.50	44.41	30.22	4.85	23.98	43.02	54.00	-10.98	AV	PASS
	H	2500.00	54.38	30.22	4.85	23.98	52.99	74.00	-21.01	PK	PASS
	H	2500.00	44.18	30.22	4.85	23.98	42.79	54.00	-11.21	AV	PASS
	V	2483.50	54.18	30.22	4.85	23.98	52.79	74.00	-21.21	PK	PASS
	V	2483.50	44.84	30.22	4.85	23.98	43.45	54.00	-10.55	AV	PASS
	V	2500.00	53.56	30.22	4.85	23.98	52.17	74.00	-21.83	PK	PASS
	V	2500.00	44.52	30.22	4.85	23.98	43.13	54.00	-10.87	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Dete ctor Type	Result
802.11 n20	LowChannel 2412MHz										
	H	2390.00	53.23	30.22	4.85	23.98	51.84	74.00	-22.16	PK	PASS
	H	2390.00	44.15	30.22	4.85	23.98	42.76	54.00	-11.24	AV	PASS
	H	2400.00	53.21	30.22	4.85	23.98	51.82	74.00	-22.18	PK	PASS
	H	2400.00	44.10	30.22	4.85	23.98	42.71	54.00	-11.29	AV	PASS
	V	2390.00	53.51	30.22	4.85	23.98	52.12	74.00	-21.88	PK	PASS
	V	2390.00	44.45	30.22	4.85	23.98	43.06	54.00	-10.94	AV	PASS
	V	2400.00	54.02	30.22	4.85	23.98	52.63	74.00	-21.37	PK	PASS
	V	2400.00	44.61	30.22	4.85	23.98	43.22	54.00	-10.78	AV	PASS
	HighChannel 2462MHz										
	H	2483.50	54.96	30.22	4.85	23.98	53.57	74.00	-20.43	PK	PASS
	H	2483.50	44.22	30.22	4.85	23.98	42.83	54.00	-11.17	AV	PASS
	H	2500.00	53.62	30.22	4.85	23.98	52.23	74.00	-21.77	PK	PASS
	H	2500.00	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	V	2483.50	53.21	30.22	4.85	23.98	51.82	74.00	-22.18	PK	PASS
	V	2483.50	44.30	30.22	4.85	23.98	42.91	54.00	-11.09	AV	PASS
	V	2500.00	53.63	30.22	4.85	23.98	52.24	74.00	-21.76	PK	PASS
V	2500.00	44.07	30.22	4.85	23.98	42.68	54.00	-11.32	AV	PASS	
802.11 n40	LowChannel 2422MHz										
	H	2390.00	53.37	30.22	4.85	23.98	51.98	74.00	-22.02	PK	PASS
	H	2390.00	44.72	30.22	4.85	23.98	43.33	54.00	-10.67	AV	PASS
	H	2400.00	53.90	30.22	4.85	23.98	52.51	74.00	-21.49	PK	PASS
	H	2400.00	44.27	30.22	4.85	23.98	42.88	54.00	-11.12	AV	PASS
	V	2390.00	54.27	30.22	4.85	23.98	52.88	74.00	-21.12	PK	PASS
	V	2390.00	44.71	30.22	4.85	23.98	43.32	54.00	-10.68	AV	PASS
	V	2400.00	53.68	30.22	4.85	23.98	52.29	74.00	-21.71	PK	PASS
	V	2400.00	44.92	30.22	4.85	23.98	43.53	54.00	-10.47	AV	PASS
	High Channel 2452MHz										
	H	2483.50	54.86	30.22	4.85	23.98	53.47	74.00	-20.53	PK	PASS
	H	2483.50	44.95	30.22	4.85	23.98	43.56	54.00	-10.44	AV	PASS
	H	2500.00	53.44	30.22	4.85	23.98	52.05	74.00	-21.95	PK	PASS
	H	2500.00	44.87	30.22	4.85	23.98	43.48	54.00	-10.52	AV	PASS
	V	2483.50	53.81	30.22	4.85	23.98	52.42	74.00	-21.58	PK	PASS
	V	2483.50	44.80	30.22	4.85	23.98	43.41	54.00	-10.59	AV	PASS
	V	2500.00	53.92	30.22	4.85	23.98	52.53	74.00	-21.47	PK	PASS
V	2500.00	44.15	30.22	4.85	23.98	42.76	54.00	-11.24	AV	PASS	
Remark:											
Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V


Test Mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-17.979	8	PASS
	2437	-18.137	8	PASS
	2462	-18.482	8	PASS
802.11g	2412	-20.557	8	PASS
	2437	-20.452	8	PASS
	2462	-20.822	8	PASS
802.11n20	2412	-20.830	8	PASS
	2437	-19.987	8	PASS
	2462	-21.128	8	PASS
802.11n40	2422	-22.567	8	PASS
	2437	-21.573	8	PASS
	2452	-22.429	8	PASS



802.11b - CH01

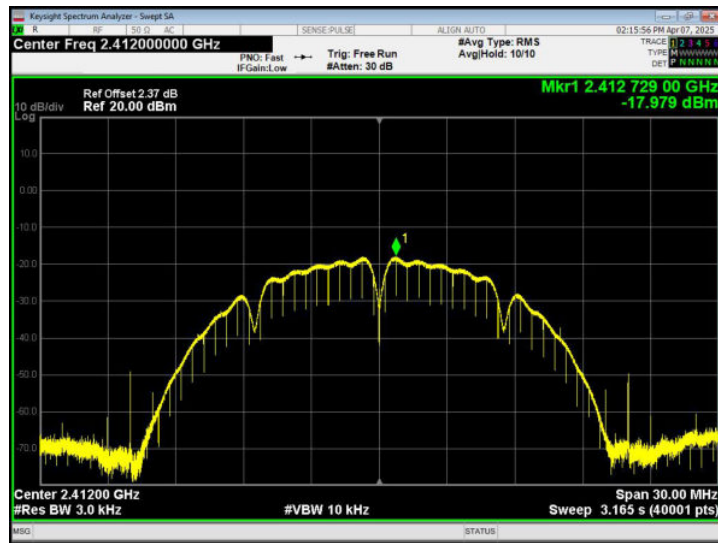

802.11b - CH06

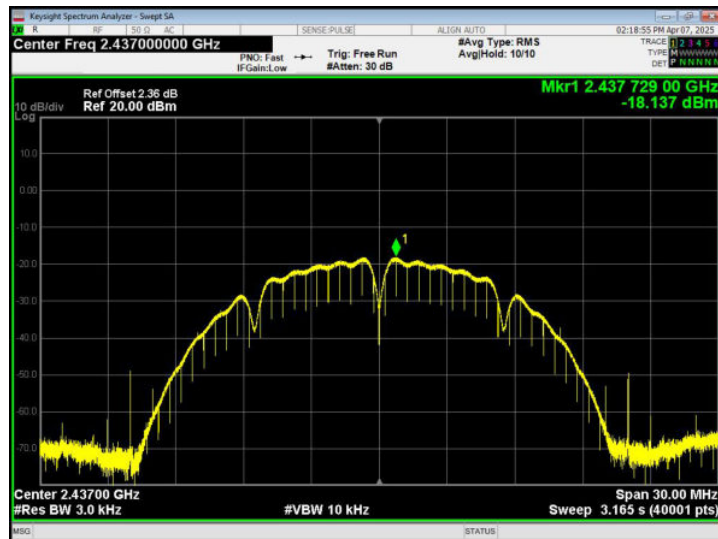


802.11b - CH11







802.11g - CH01

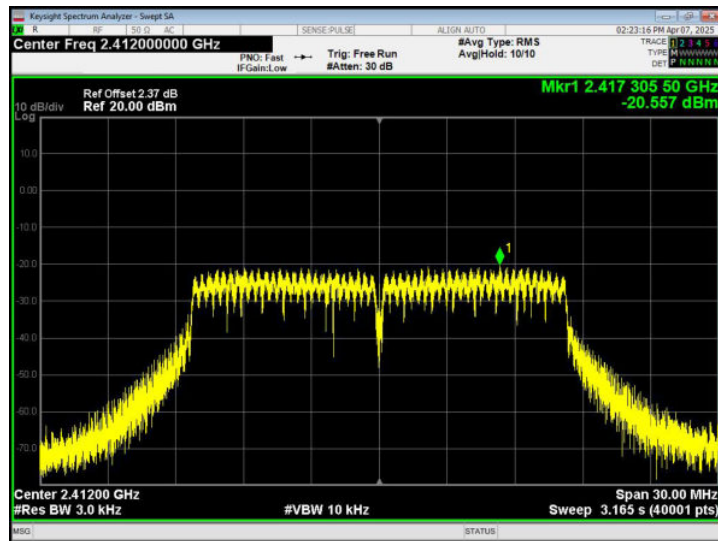

802.11g - CH06

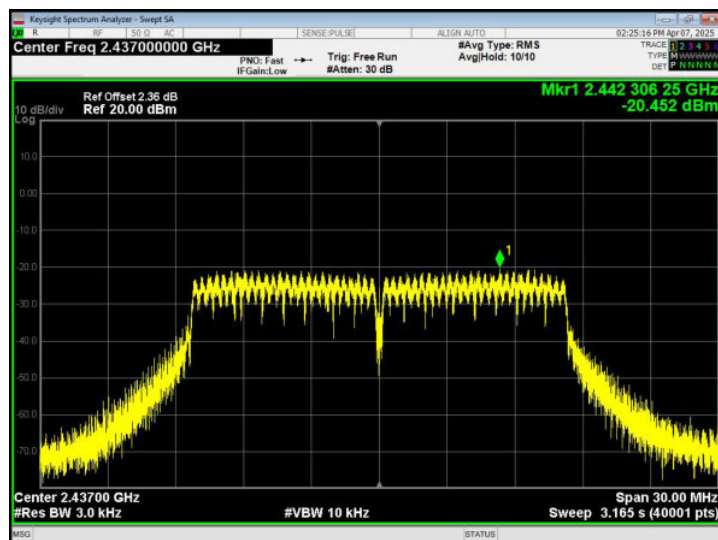


802.11g - CH11

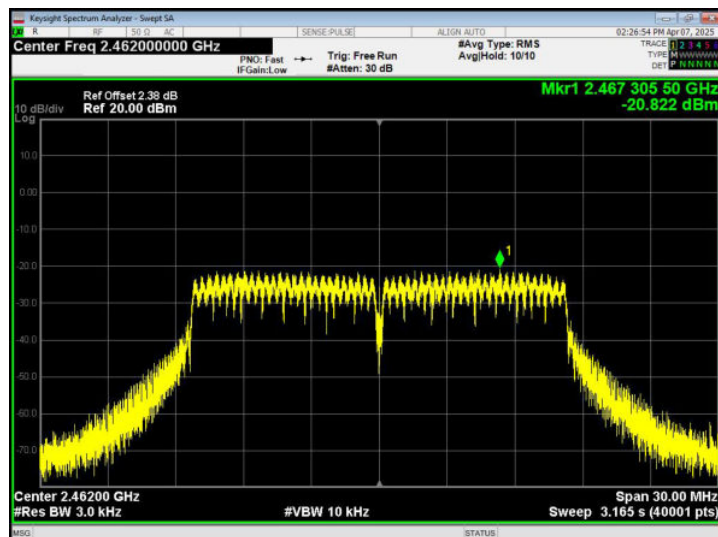





802.11n20 - CH01

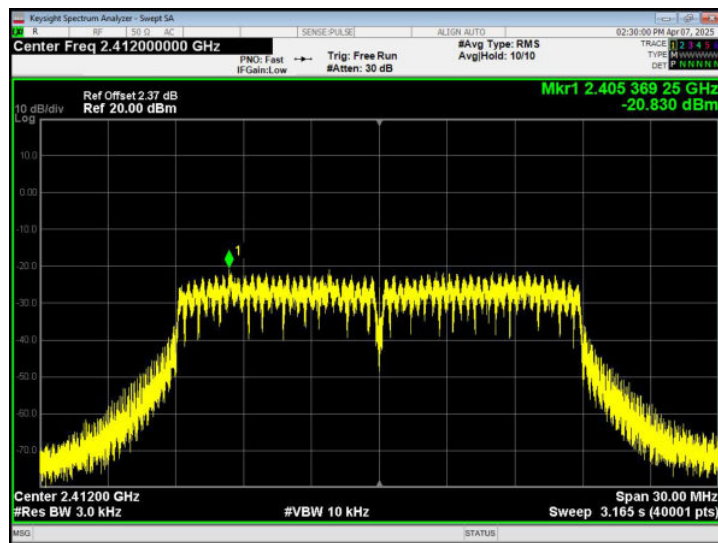

802.11n20 - CH06

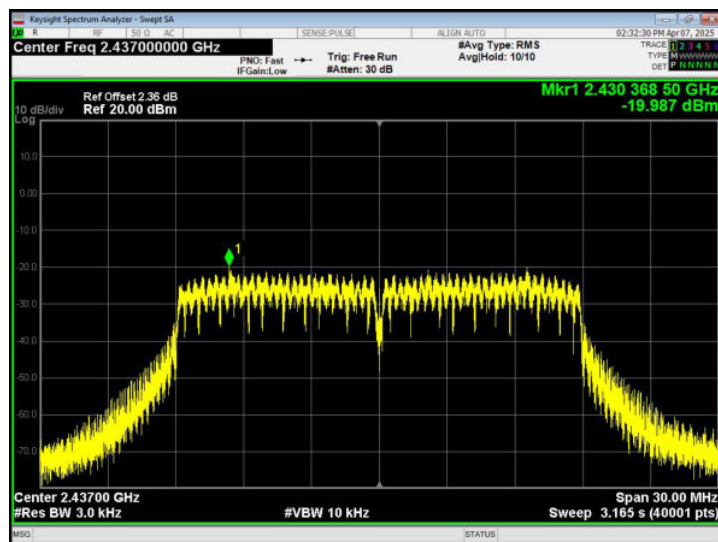


802.11n20 - CH11

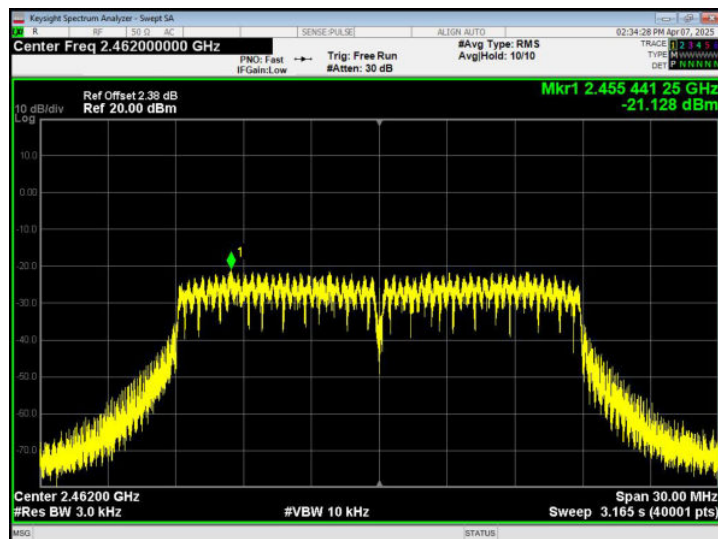





802.11n40 - CH03

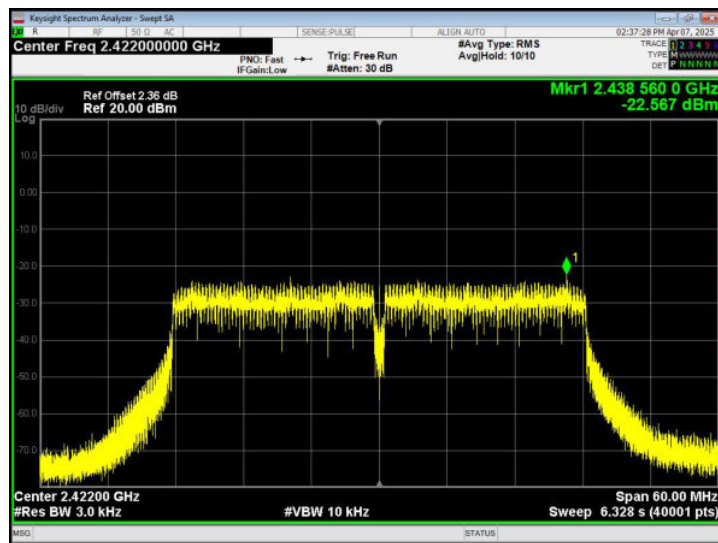

802.11n40 - CH06

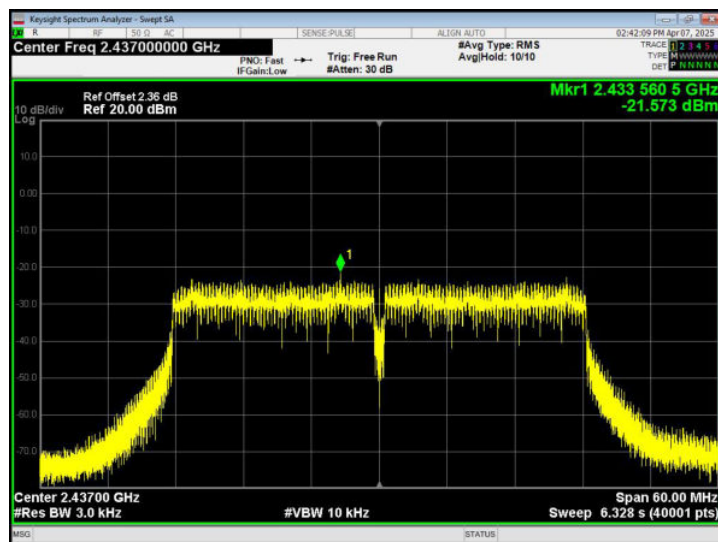

802.11n40 - CH09

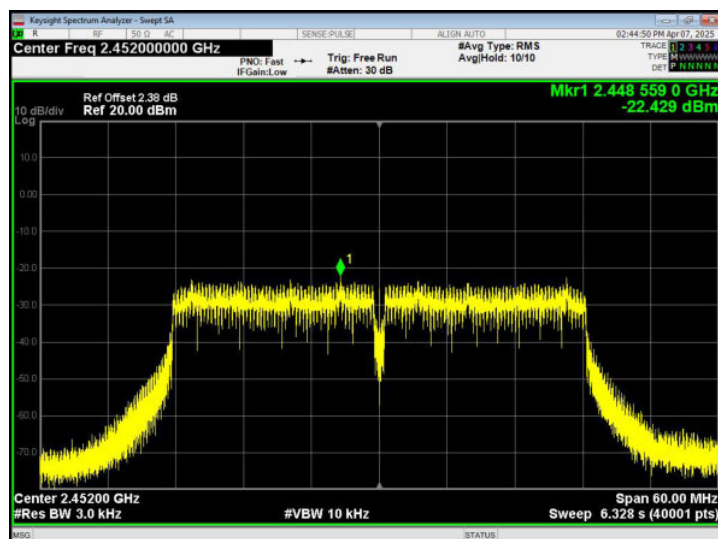



7. 6DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX		

Test Mode	Test Channel (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
802.11b	2412	9.093	>500	Pass
	2437	9.109		
	2462	9.103		
802.11g	2412	16.44	>500	Pass
	2437	16.44		
	2462	16.49		
802.11n20	2412	17.63	>500	Pass
	2437	17.62		
	2462	17.63		
802.11n40	2422	36.45	>500	Pass
	2437	36.46		
	2452	36.43		




802.11b - CH01

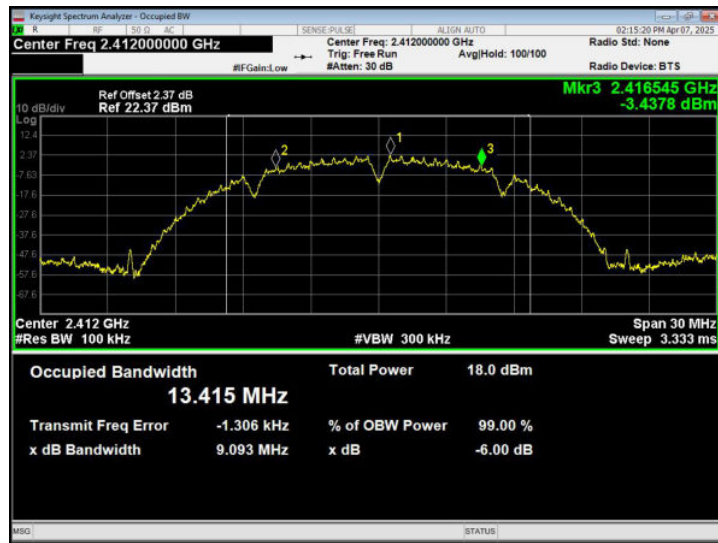

802.11b - CH06




802.11b - CH11

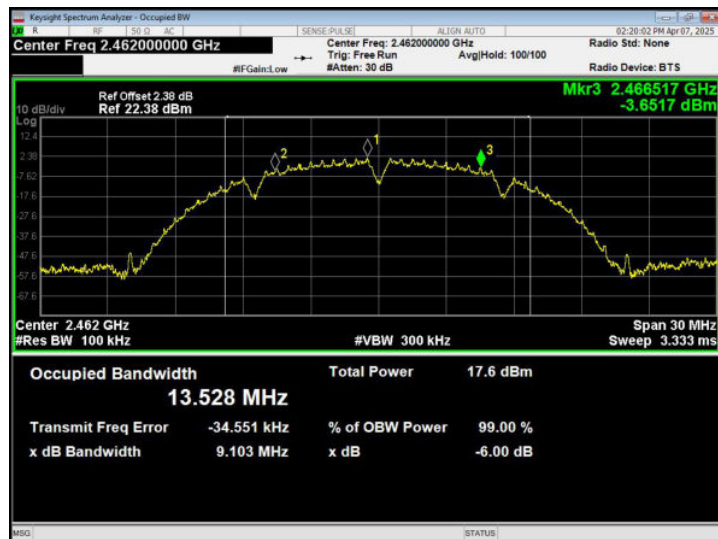





802.11g - CH01

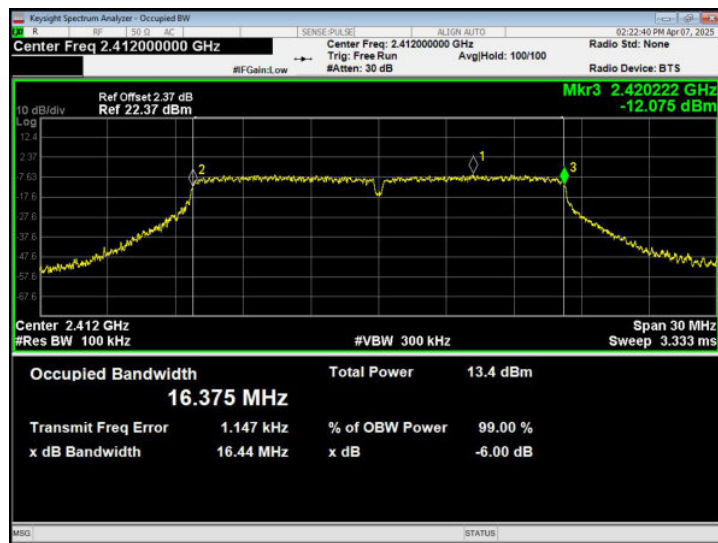

802.11g - CH06

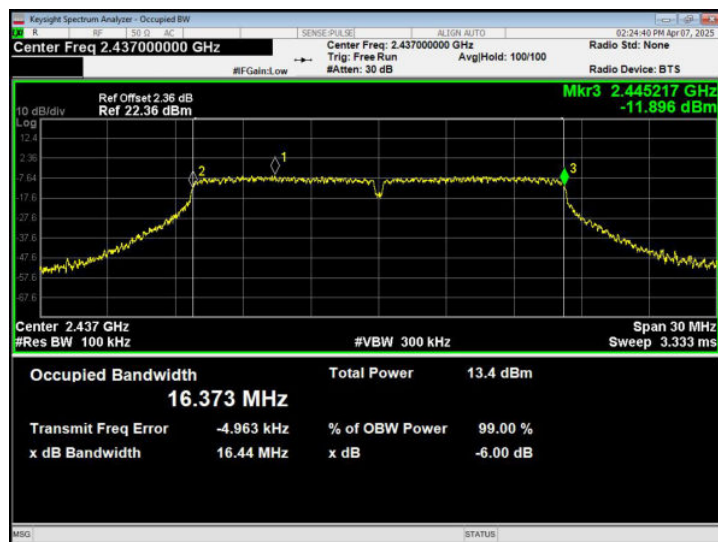


802.11g - CH11

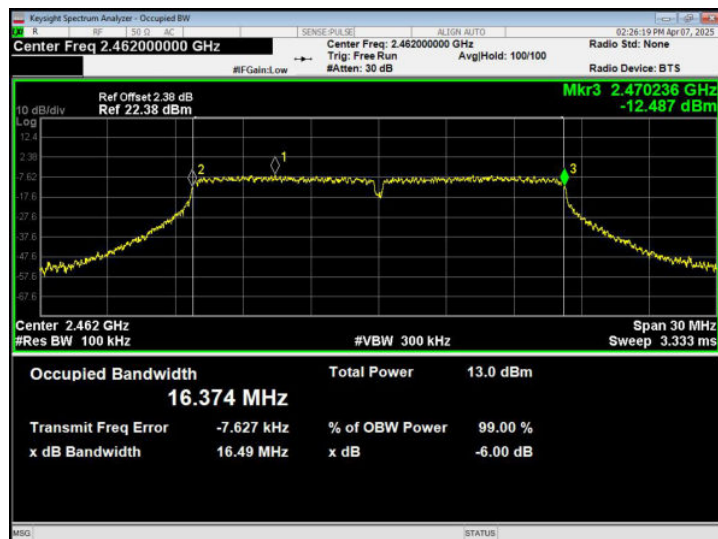




802.11n20 - CH01

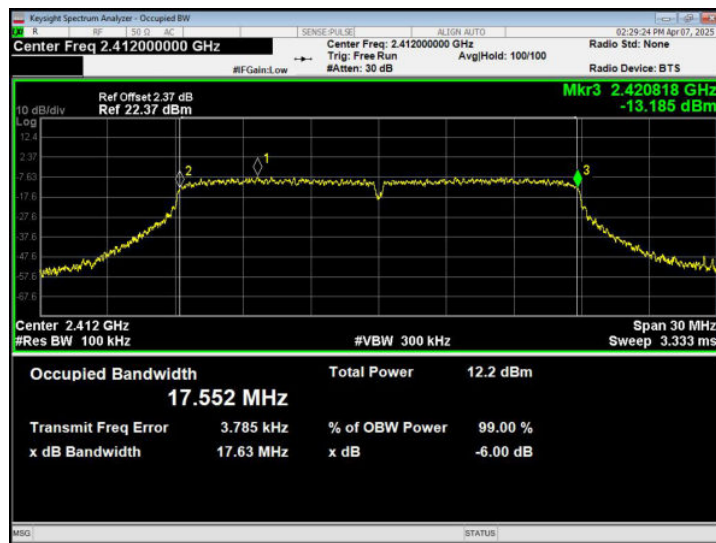

802.11n20 - CH06

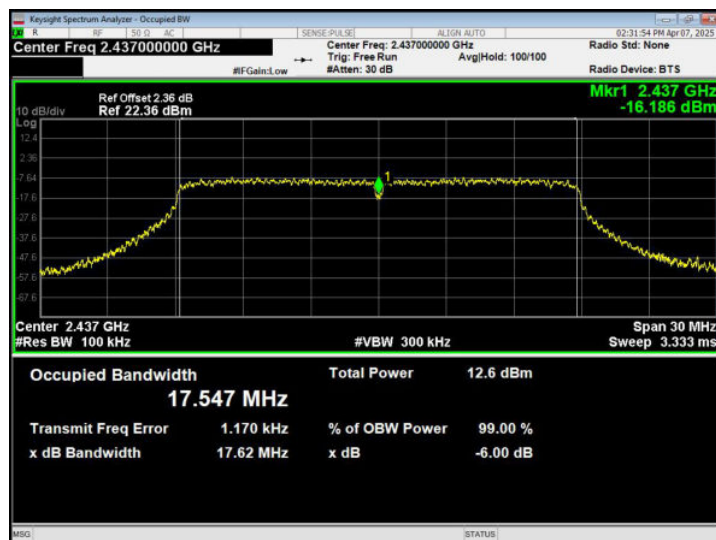


802.11n20 - CH11






802.11n40 - CH03

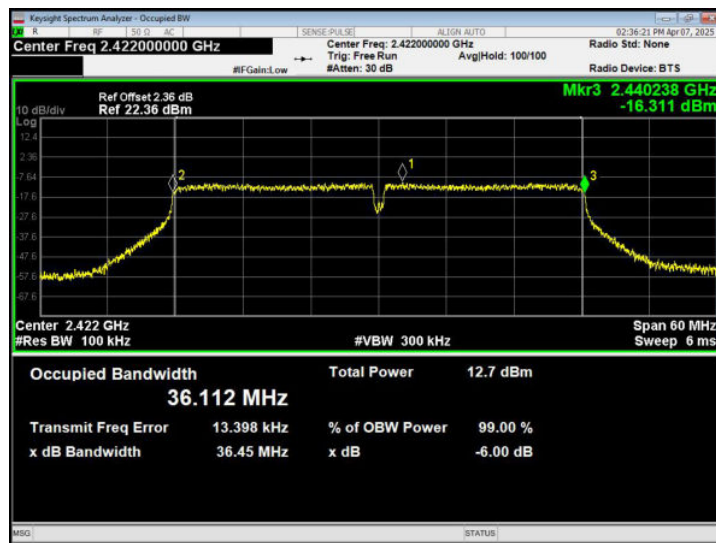

802.11n40 - CH06

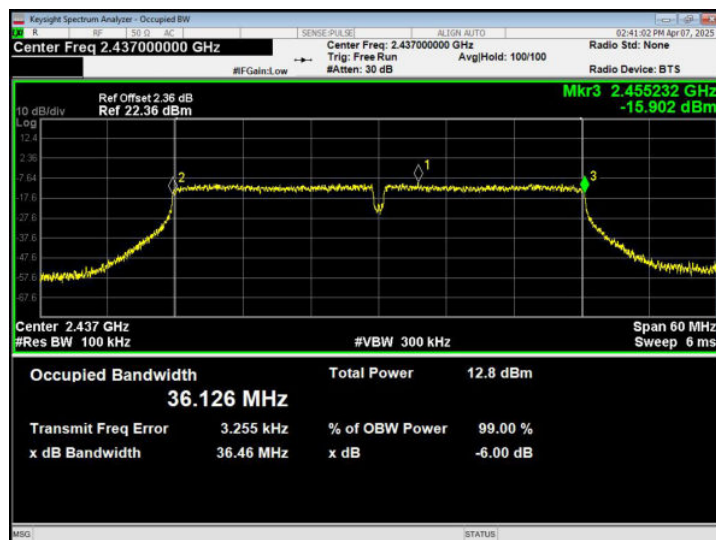

802.11n40 - CH09





8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V

Test Mode	Test Channel (MHz)	Peak Output Power (dBm)	Limit (dBm)	Result
802.11b	2412	13.119	30.00	Pass
	2437	12.971		
	2462	12.701		
802.11g	2412	12.254	30.00	Pass
	2437	12.428		
	2462	11.938		
802.11n20	2412	11.372	30.00	Pass
	2437	11.788		
	2462	11.592		
802.11n40	2422	11.571	30.00	Pass
	2437	11.522		
	2452	11.766		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



9.6 TEST RESULTS




Band edge test plot as follows:

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V

802.11b - Lowest channel

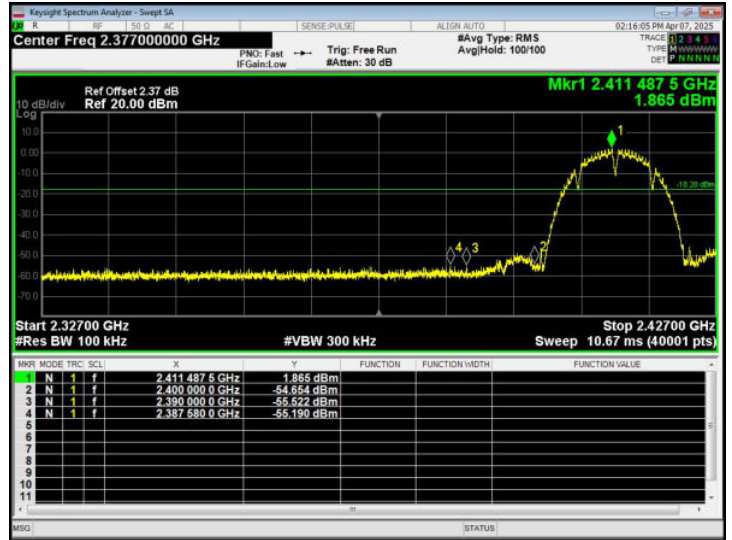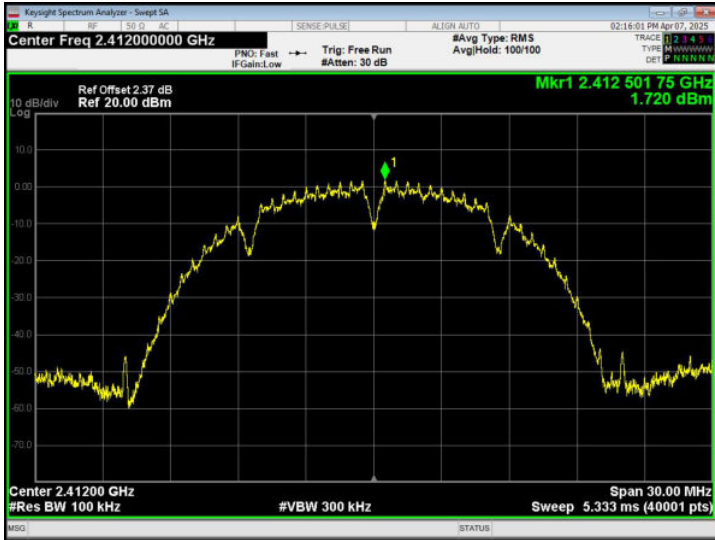

802.11b - Highest channel

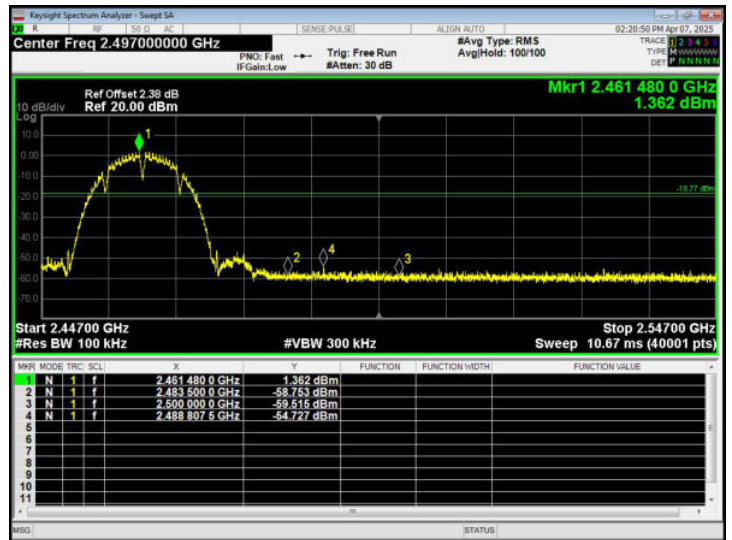



KeySight Spectrum Analyzer - Swept SA

02:23:31 PM Apr 07, 2025

Center Freq 2.412000000 GHz

PRF: Fast
IF Gain: Low

SENSE: PULSE

Trig: Free Run
#Atten: 30 dB

ALGN: AUTO

#Avg Type: RMS
Avg/Hold: 100/100

TRACE 1 2.415
TYPE: MWWWWWW
DET: PPKANAL

10 dB/div
Log

Ref Offset 2.37 dB
Ref 20.00 dBm

Mkr1 2.416 156.50 GHz
-6.375 dBm


Center 2.41200 GHz
#Res BW 100 kHz
#VBW 300 kHz

Span 30.00 MHz
Sweep 5.333 ms (40001 pts)

MSA

(STATUS)

The image shows a Keysight Spectrum Analyzer interface. At the top, the title bar reads 'KeySight Spectrum Analyzer - Swept SA'. The date and time '02:23:31 PM Apr 07, 2025' are in the top right. The main display area shows a spectrum plot with a yellow trace. The plot has a grid. The y-axis is labeled '10 dB/div' and 'Log'. The x-axis is labeled 'Center 2.41200 GHz'. A marker 'Mkr1' is placed on the trace at '2.416 156.50 GHz' with a value of '-6.375 dBm'. The plot shows a signal with a dip at the marker frequency. The top of the screen displays various settings: 'Center Freq 2.412000000 GHz', 'PRF: Fast', 'IF Gain: Low', 'SENSE: PULSE', 'Trig: Free Run', '#Atten: 30 dB', 'ALGN: AUTO', '#Avg Type: RMS', and 'Avg/Hold: 100/100'. The bottom of the screen shows 'Center 2.41200 GHz', '#Res BW 100 kHz', '#VBW 300 kHz', 'Span 30.00 MHz', and 'Sweep 5.333 ms (40001 pts)'. There are also status indicators 'MSA' and '(STATUS)' at the bottom left and right respectively.

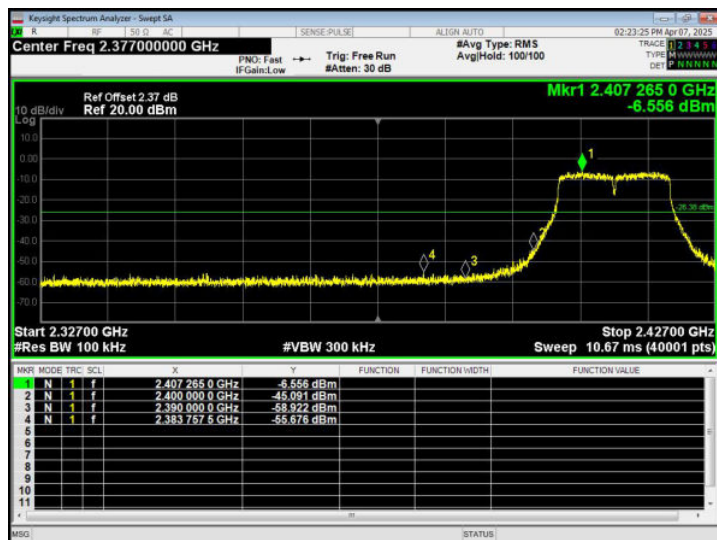

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.462000000 GHz

PMO: Fast IF Gain: Low

Trig: Free Run #Atten: 30 dB

#Avg Type: RMS AvgHold: 100/100

02:26:59 PM Apr 07, 2025

TRACE 1: 13.5 dBm

TYPE: MWWWWWW

DEF: NNNNN

Ref Offset 2.38 dB

Ref 20.00 dBm

Mkr1 2.466 135.50 GHz -6.804 dBm

10 dB/div

Log

Center 2.46200 GHz

#Res BW 100 kHz


#VBW 300 kHz

Span 30.00 MHz

Sweep 5.333 ms (40001 pts)



MSA

[STATUS]


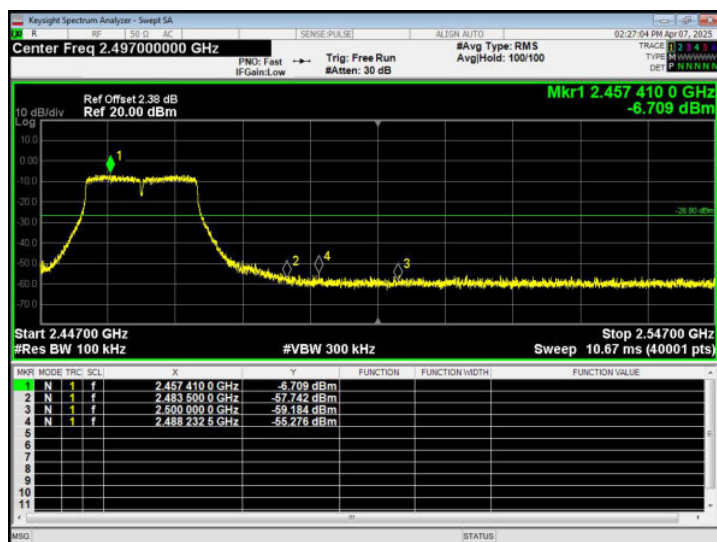




802.11n20 - Lowest channel

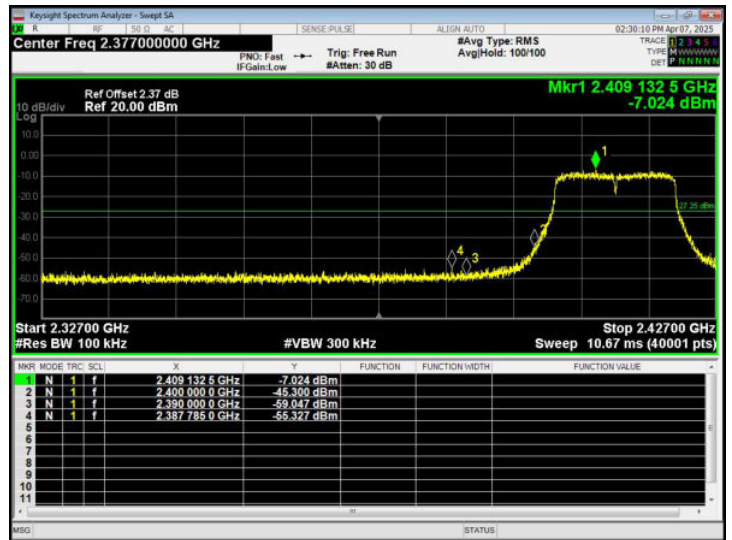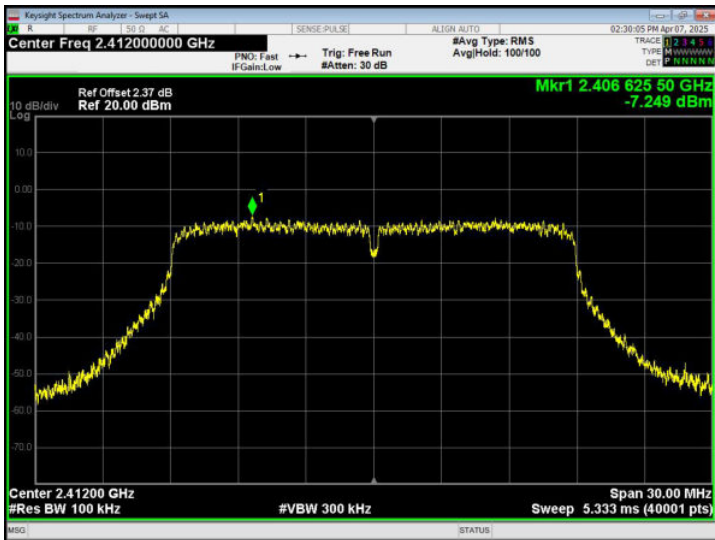

802.11n20 - Highest channel

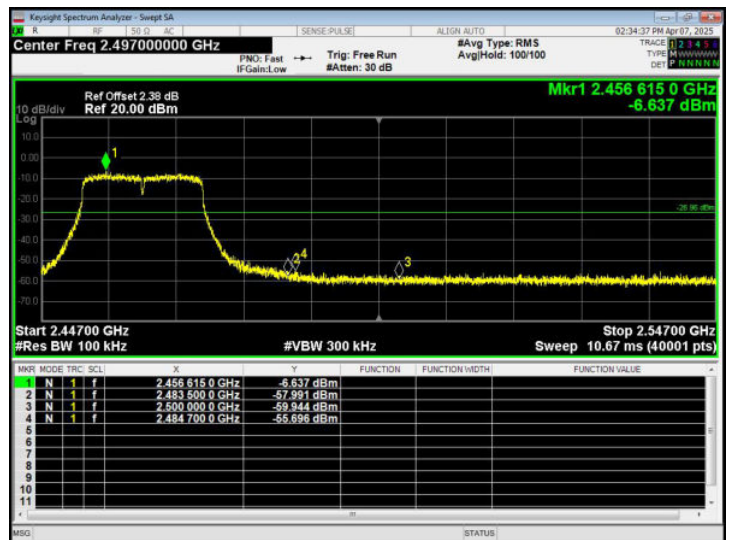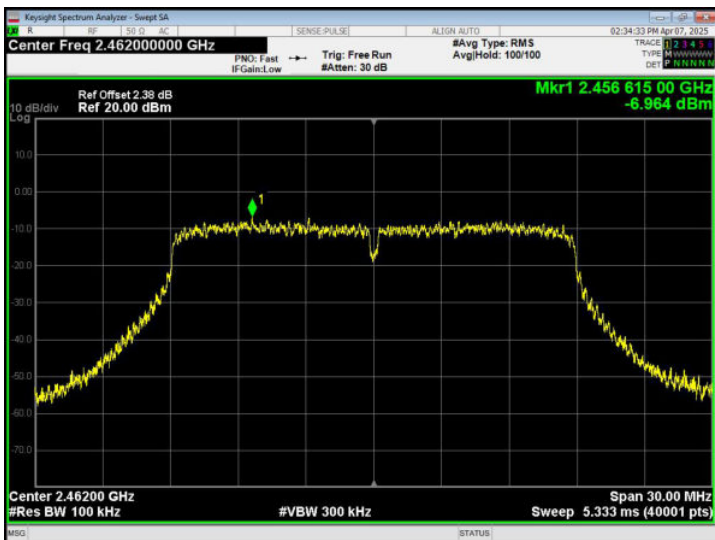



KeySight Spectrum Analyzer - Swept SA

02:37:33 PM Apr 07, 2025

Center Freq 2.422000000 GHz

SENSE: PULSE

ALIGN: AUTO

#Avg Type: RMS

Avg/Hold: 100/100

TRACED 1 1 1 1 1

TYPE: M W W W W W W W

DET: P P P P P P P P

PRF: Fast

IF Gain: Low

Trig: Free Run

#Atten: 30 dB

Ref Offset 2.36 dB

Ref 20.0 dBm

Mkr1 2.425 504 0 GHz

-10.190 dBm

10 dB/div

Log

Center 2.42200 GHz


#Res BW 100 kHz

#VBW 300 kHz

Span 60.00 MHz

Sweep 8.000 ms (40001 pts)

STATUS

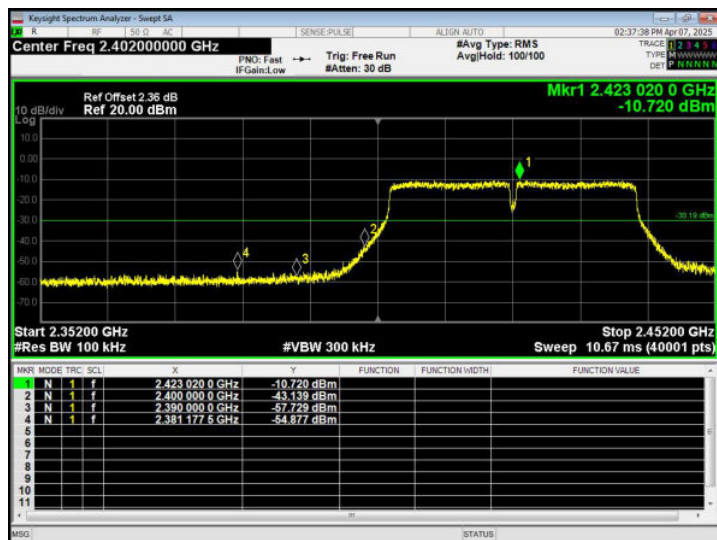

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.45200000 GHz

Span 60.00 MHz

Ref Offset 2.38 dB

Ref 20.00 dBm

#Res BW 100 kHz

#VBW 300 kHz

Sweep 8.000 ms (40001 pts)

10 dB/div

Log

Mkr1 2.455 510 0 GHz


-9.893 dBm

Trace 1

TYPE: M

DEF: N



STATUS

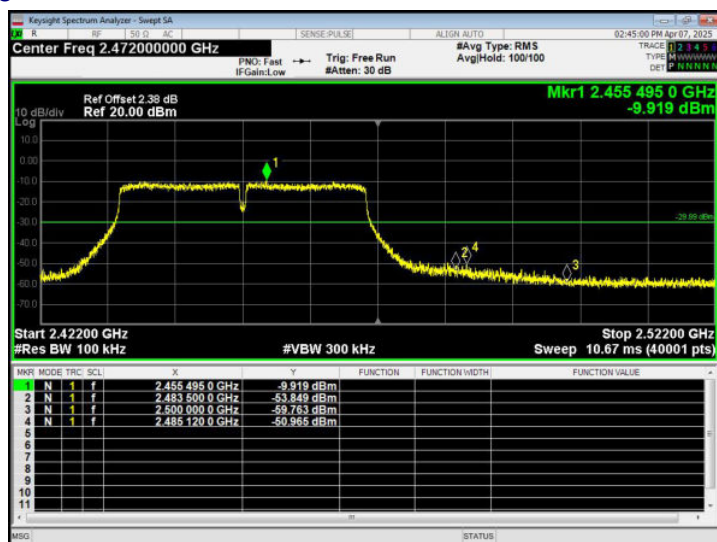





Spurious emission test plot as follows:


802.11b
Lowest channel

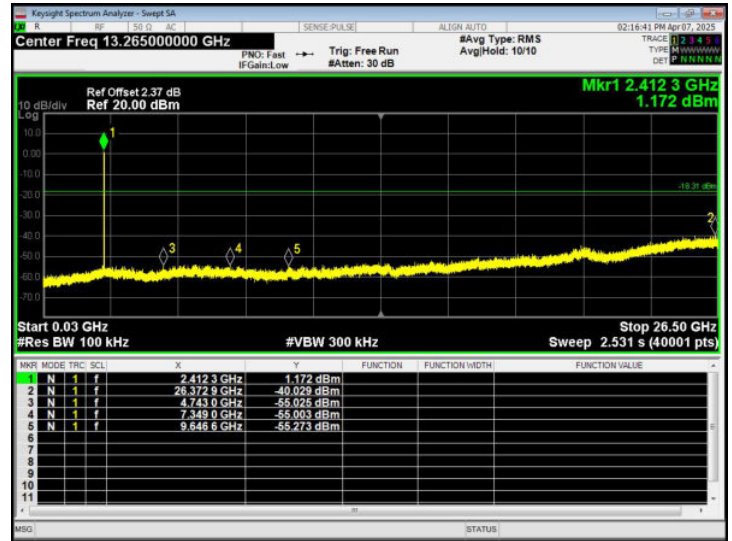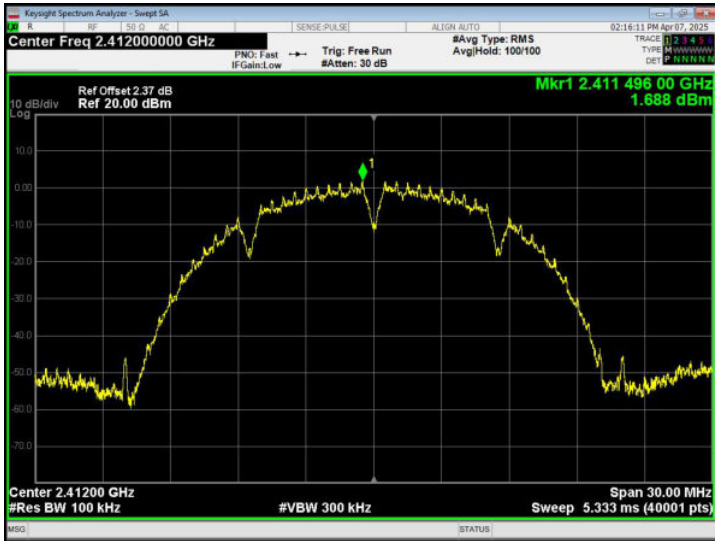

Middle channel

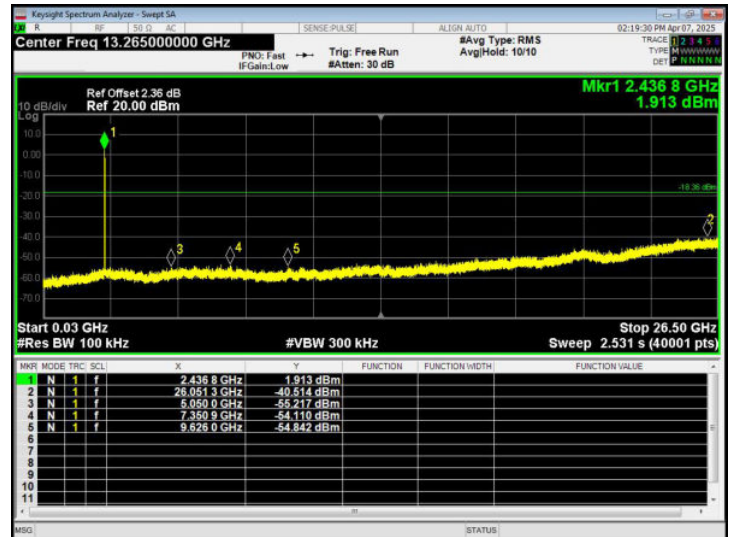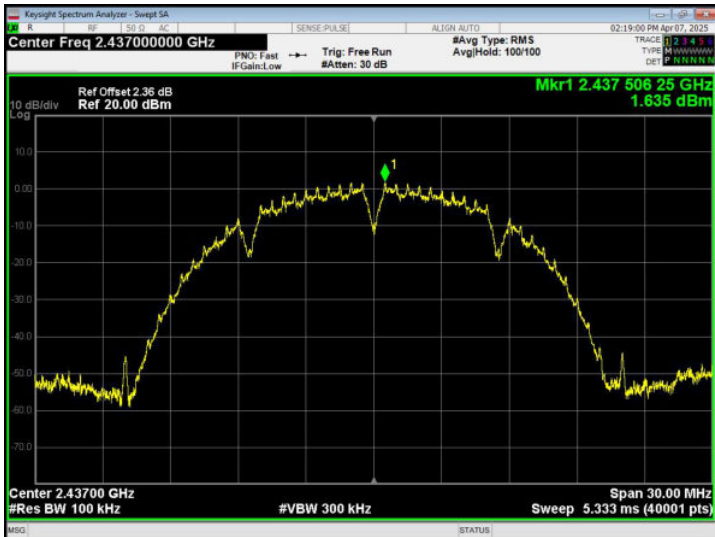



Highest channel

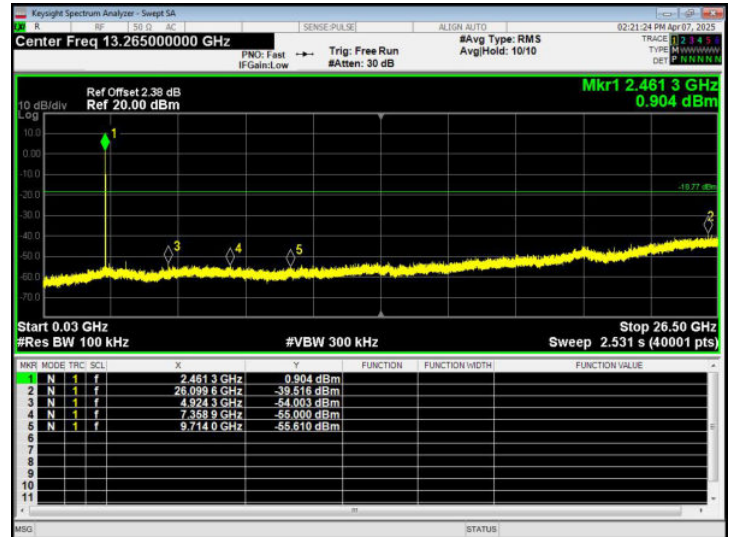



30MHz ~ 26.5GHz





802.11g
Lowest channel

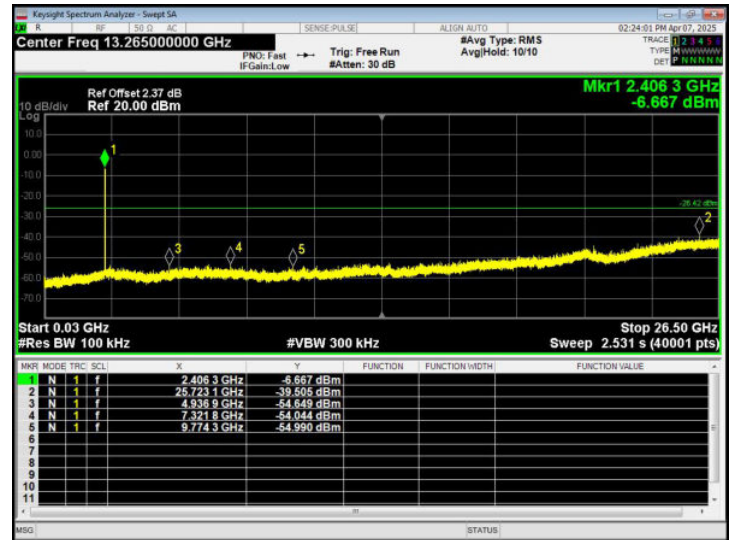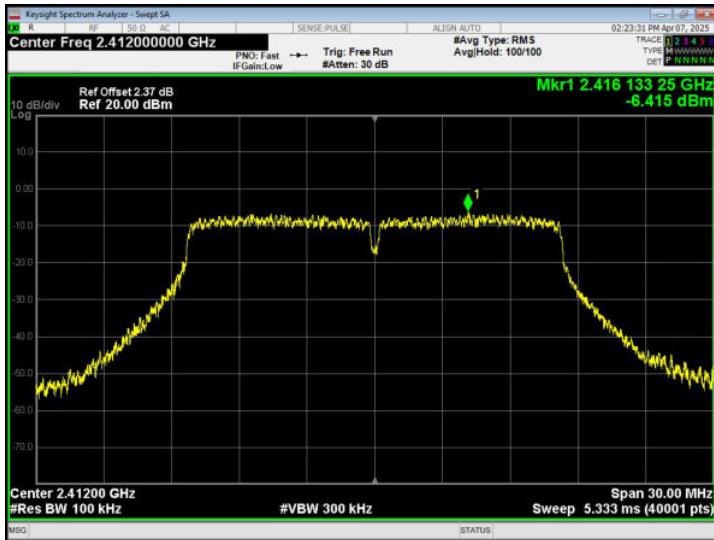

Middle channel

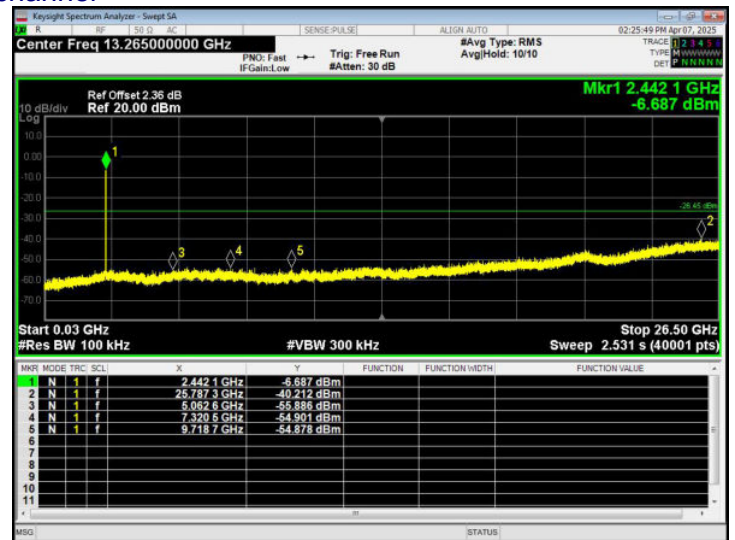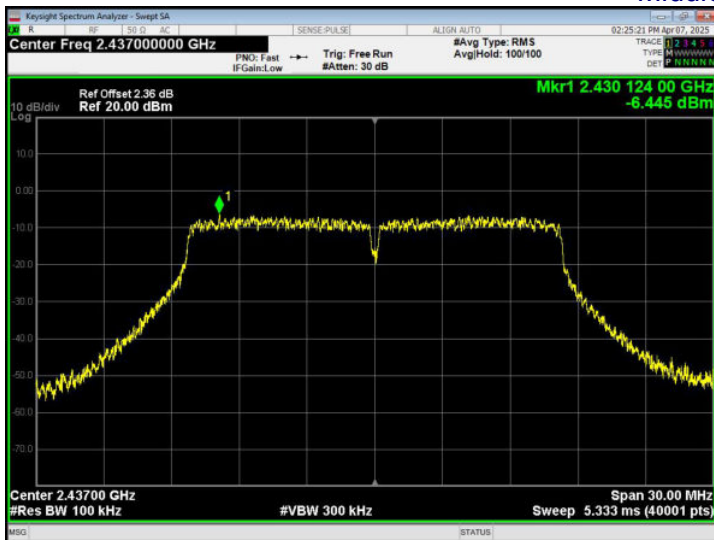



Highest channel

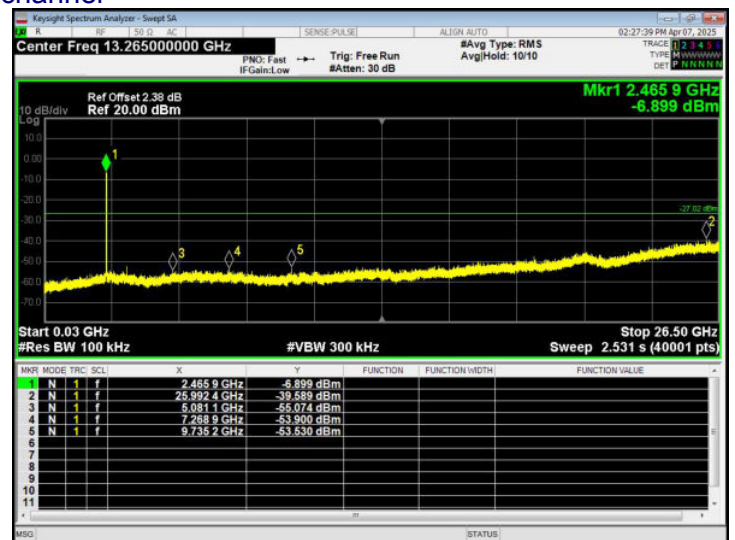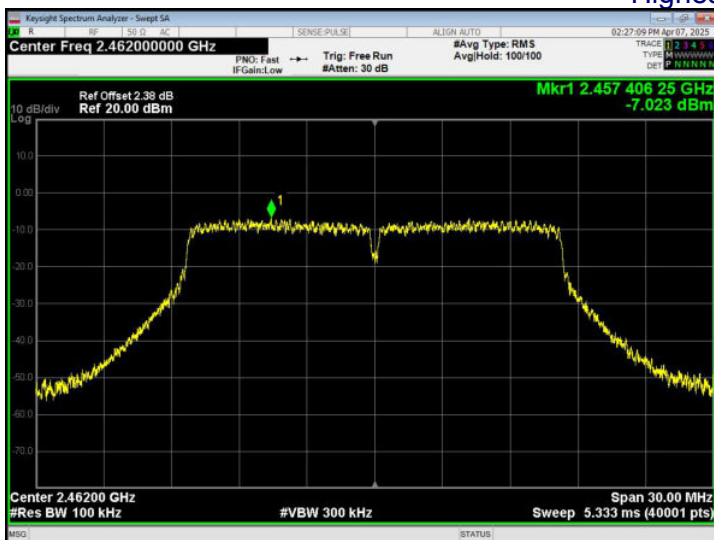



30MHz ~ 26.5GHz





802.11n20
Lowest channel

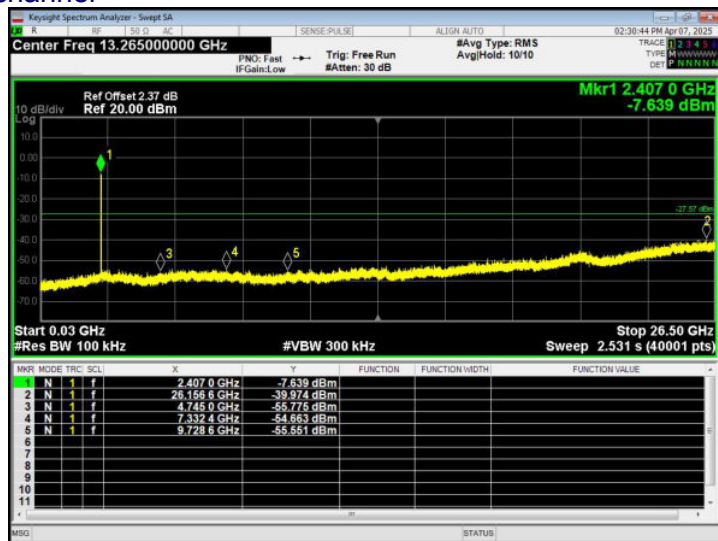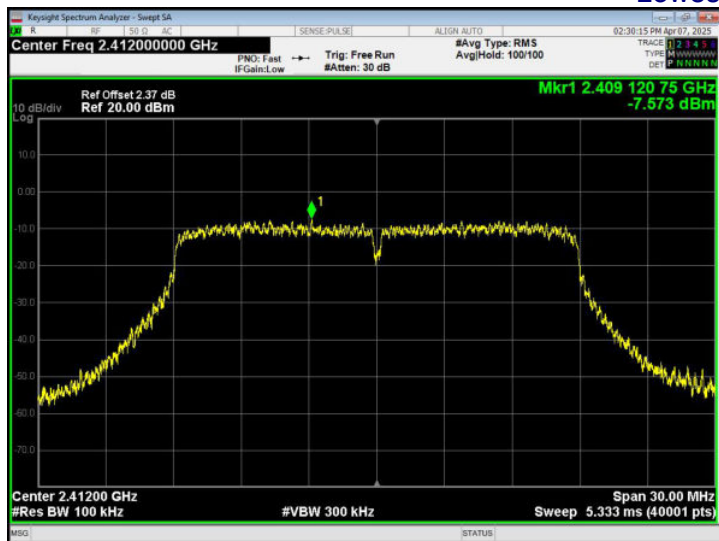

Middle channel

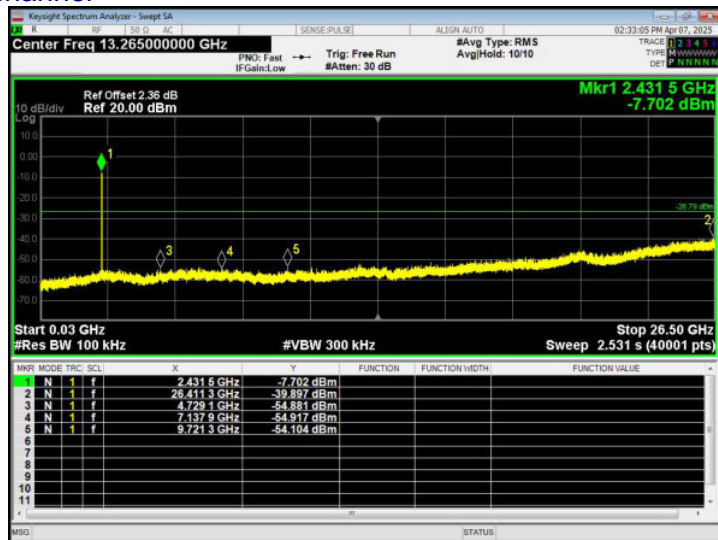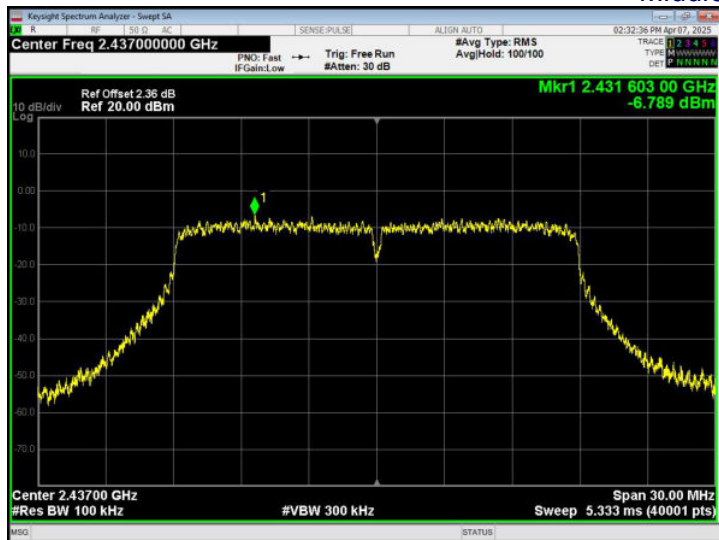



Highest channel

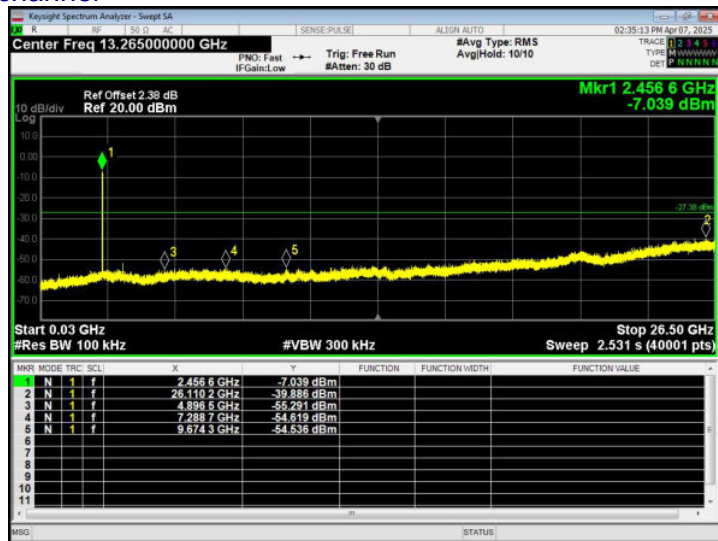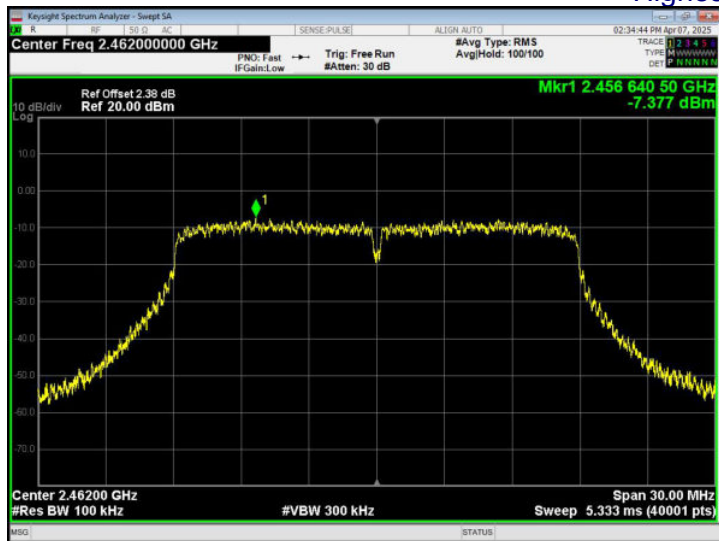



30MHz ~ 26.5GHz




802.11n40 Lowest channel

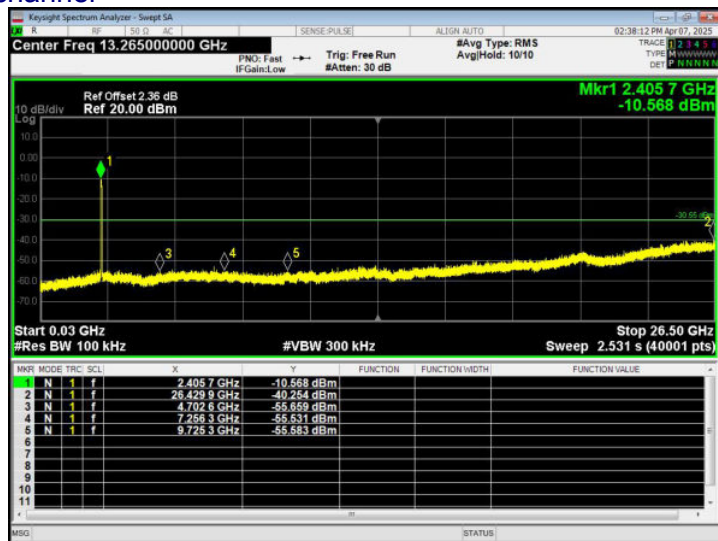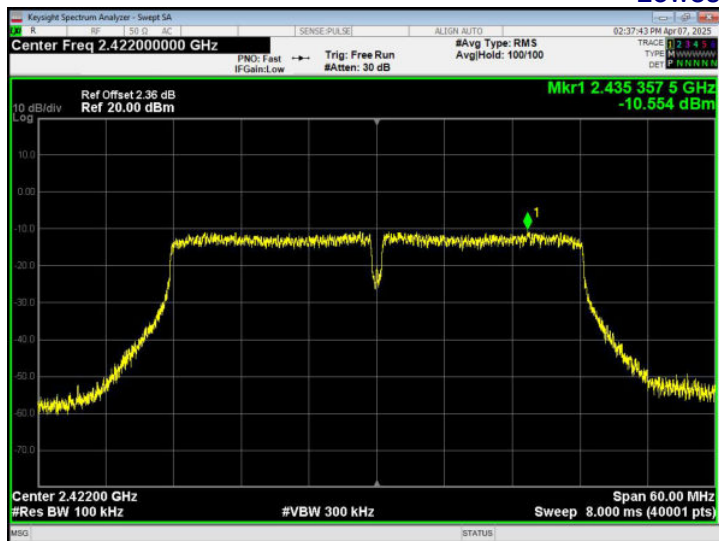

Middle channel

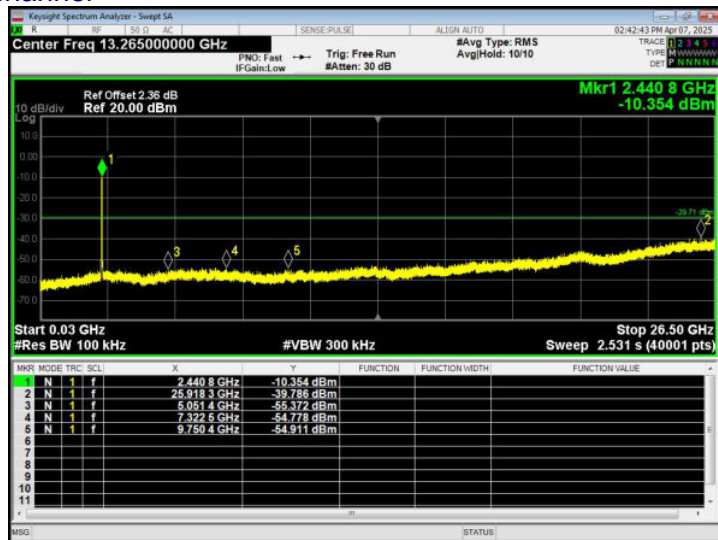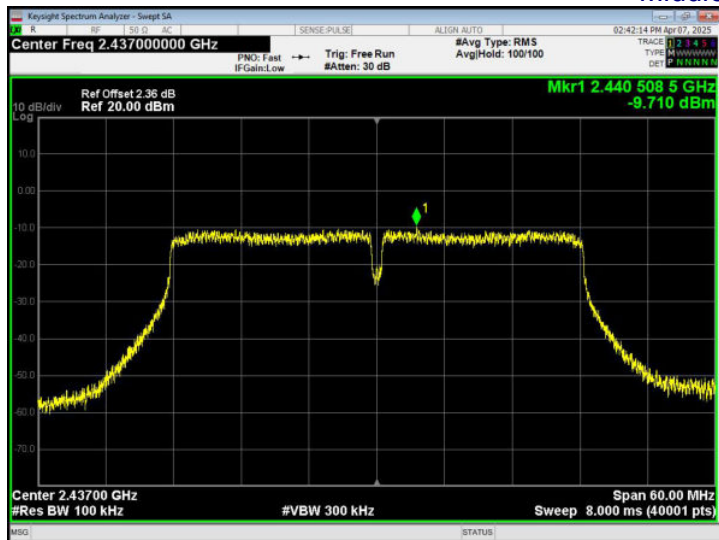

Highest channel

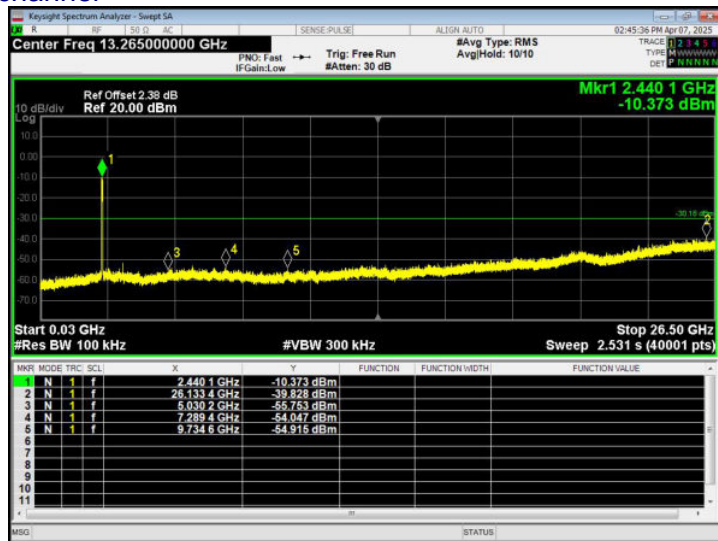

30MHz ~ 26.5GHz



10. DUTY CYCLE

Test Method:	ANSI C63.10:2013
--------------	------------------

10.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD

No deviation.

10.3 TEST SETUP



10.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



10.5 TEST RESULTS


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V

Test Mode	Test Frequency (MHz)	Duty Cycle (%)	Factor (dB)	Result
802.11b	2412	100	0	Pass
802.11g	2412	100	0	Pass
802.11n20	2412	100	0	Pass
802.11n40	2422	100	0	Pass

Note: Duty Cycle = $T_{on} / T_{total} * 100\%$;
Duty Cycle Correction Factor = $10\log (1/Duty\ Cycle)$.




2412MHz

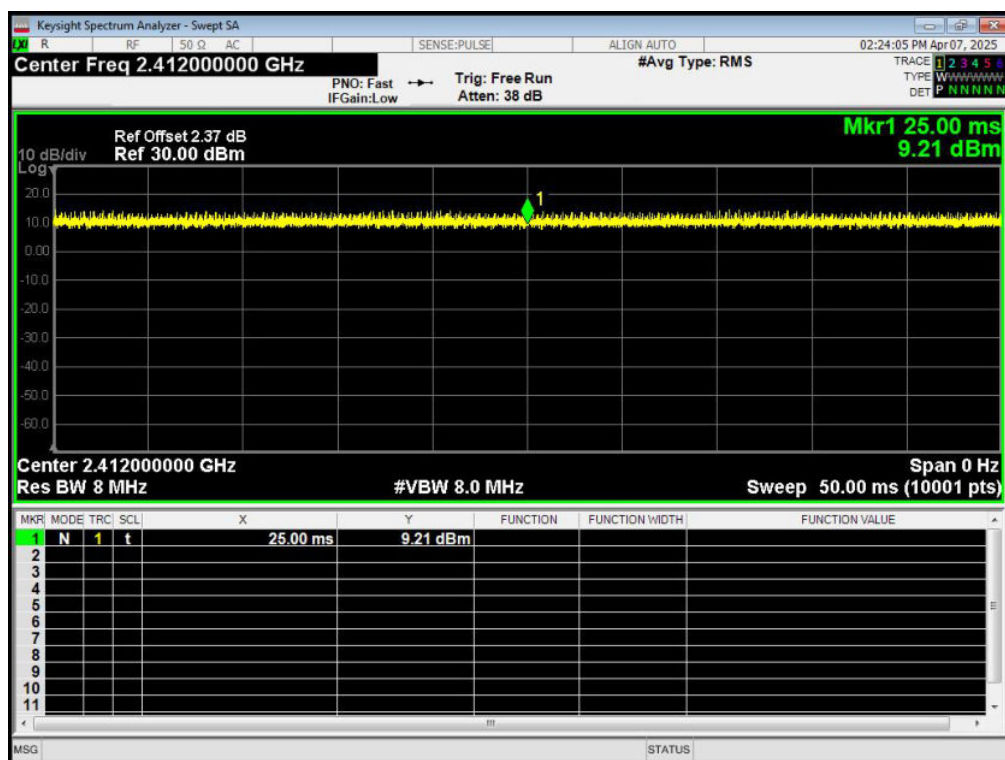




802.11n20

2412MHz

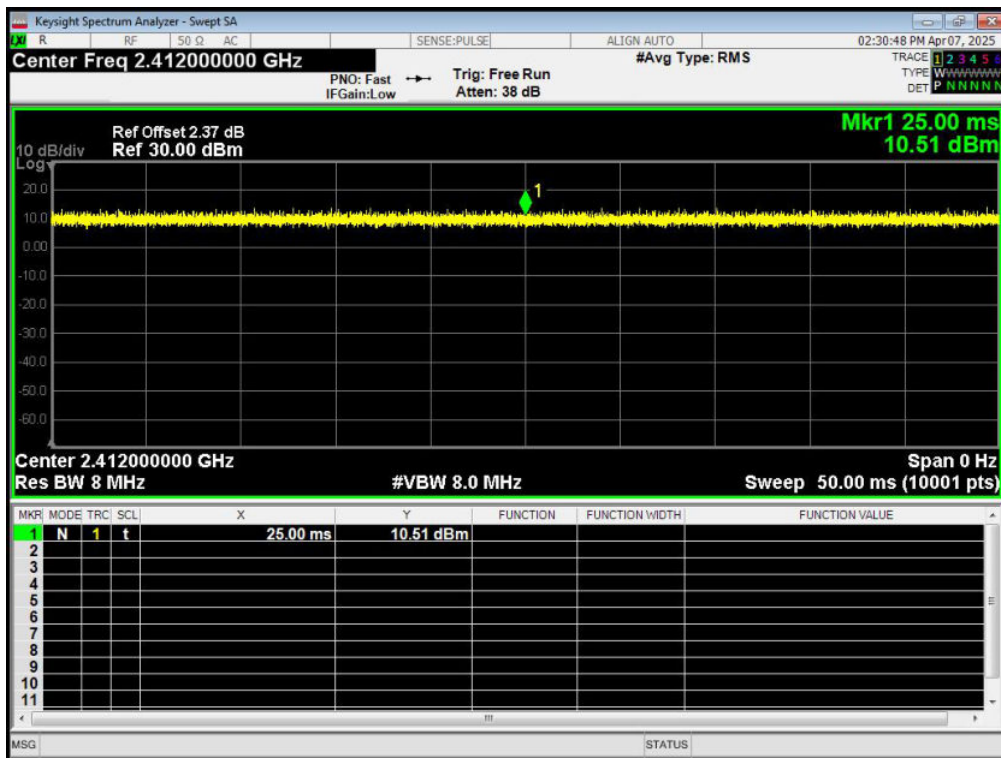

802.11n40

2422MHz

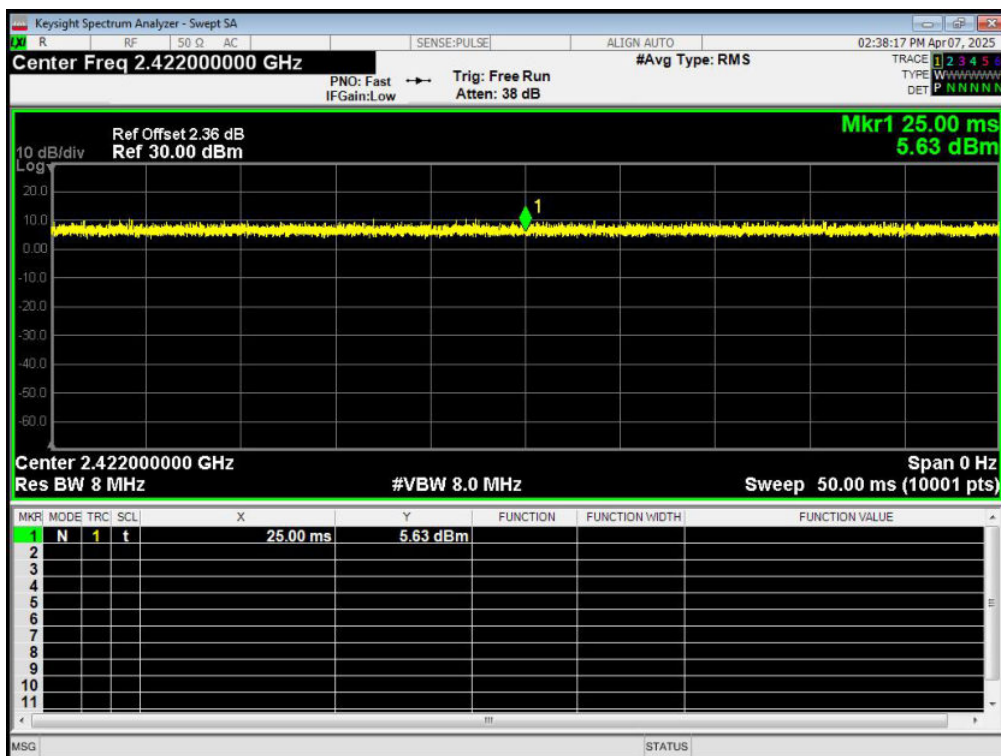

Note: All channel have been tested, and the report only reflects the worst case data.



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is FPC antenna, the best case gain of the antenna is 1.73dBi, reference to the appendix II for details.	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******