



FCC TEST REPORT

FCC ID: 2BOR7-T58

Applicant: Shenzhen Hanbeike Technology Co., Ltd

Address: Changwei Industrial Zone, Dabutou Road, Guanlan, Longhua District, Shenzhen

Manufacturer: Shenzhen Hanbeike Technology Co., Ltd

Address: Changwei Industrial Zone, Dabutou Road, Guanlan, Longhua District, Shenzhen

EUT: Wireless FM Transmitter

Trade Mark: N/A

Model Number: T58
T37

Date of Receipt: Mar. 24, 2025

Test Date: Mar. 24, 2025 - May 13, 2025

Date of Report: May 13, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area,
No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District,
Shenzhen, China

Applicable Standards: FCC CFR47 Part 15 Section 15.239
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250408060R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Contents

	Page
2 TEST SUMMARY	3
2.1 TEST SITE	4
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF E.U.T.	5
3.2 CHANNEL LIST.....	6
3.3 TEST SETUP CONFIGURATION.....	7
3.4 TEST MODE.....	7
4 EQUIPMENT DURING TEST	8
4.1 EQUIPMENTS LIST	8
4.2 MEASUREMENT UNCERTAINTY	10
4.3 DESCRIPTION OF SUPPORT UNITS	10
5 CONDUCTED EMISSION	11
5.1 E.U.T. OPERATION	11
5.2 EUT SETUP.....	11
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
5.4 MEASUREMENT PROCEDURE	12
5.5 CONDUCTED EMISSION LIMIT	12
5.6 MEASUREMENT DESCRIPTION.....	12
5.7 CONDUCTED EMISSION TEST RESULT	12
6 RADIATED SPURIOUS EMISSIONS.....	13
LIMITS OF RADIATED EMISSION MEASUREMENT (ABOVE 1000MHz)	13
6.1 EUT OPERATION	14
6.2 TEST SETUP.....	15
6.3 SPECTRUM ANALYZER SETUP	16
6.4 TEST PROCEDURE	17
6.5 SUMMARY OF TEST RESULTS.....	18
7 BANDWIDTH MEASUREMENT	24
7.1 TEST PROCEDURE	24
7.2 TEST RESULT	24
8 ANTENNA APPLICATION.....	26
8.1 ANTENNA REQUIREMENT.....	26
8.2 RESULT	26
9 EUT PHOTO AND TEST SETUP PHOTO	27



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC Part 15.207	N/A
Fundamental & Radiated / Conducted Spurious Emission Measurement	FCC Part 15.209 & 15.239 c	PASS
Band edge	FCC Part 15.239 c	PASS
Bandwidth	FCC Part 15.239 a	PASS
Antenna Requirement	FCC Part 15.203	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.



2.1 Test Site

Site Description

EMC Lab. : FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

Name of Firm : Shenzhen DL Testing Technology Co., Ltd.

Site Location : 101-201, Comprehensive Building, Tongzhou Electronics Longgang
Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong
Street, Longgang District, Shenzhen, China



3 General Information

3.1 General Description of E.U.T.

Product Name:	:	Wireless FM Transmittre
Trademark	:	N/A
Model No.:	:	T58 T37
Model Different.:	:	All models are same as the samples except model name, they have the same structure and circuit.
Operating frequency	:	88.1-107.9MHz
Number of Channels	:	199 channels
Type of Modulation	:	FM
Antenna installation	:	Internal Antenna
Antenna Gain	:	1.81dBi
Power supply	:	Input: DC 12-24V Output: PD 30W+QC3.0 18W PD Output: 5V---3A, 9V---3A, 12V---2.5A OC3.0 Output: 5V---3A, 9V---2A, 12V---1.5A
Hardware Version	:	V1.0
Software Version	:	V1.0
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		



3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)
01	88.1
02	88.2
~	~
100	98.0
~	~
198	107.8
199	107.9


Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.




3.3 Test Setup Configuration

Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Channel	Frequency(MHz)
01	88.1
100	98.0
199	107.9



4 Equipment During Test

4.1 Equipments List

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025



15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Temperature & humidity chamber	Changfeng	CF-150-40-P	CF170802-01	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless FM Transmittre	N/A	T58	N/A	EUT

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa


5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

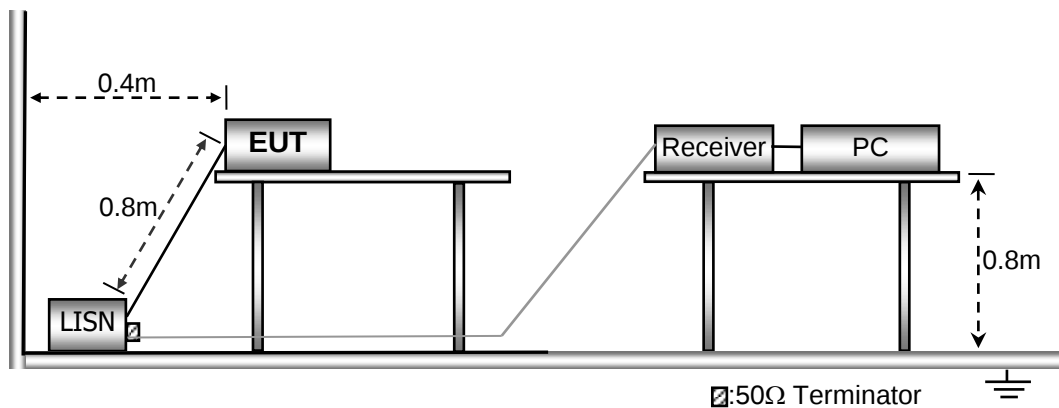



5.3 Test SET-UP (Block Diagram of Configuration)

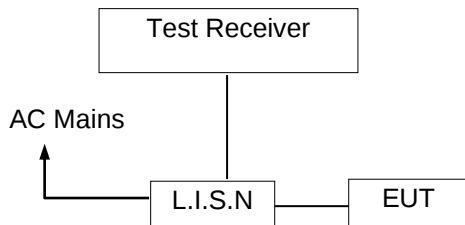

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

N/A



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.239
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.209&15.239 limit in the table below has to be followed.

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FUNDAMENTAL AND HARMONICS EMISSION LIMITS

The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in § 15.35 for limiting peak emissions apply.



6.1 EUT Operation


Operating Environment :

Temperature	:	23.5 °C
Humidity	:	51.1 % RH
Atmospheric Pressure	:	101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

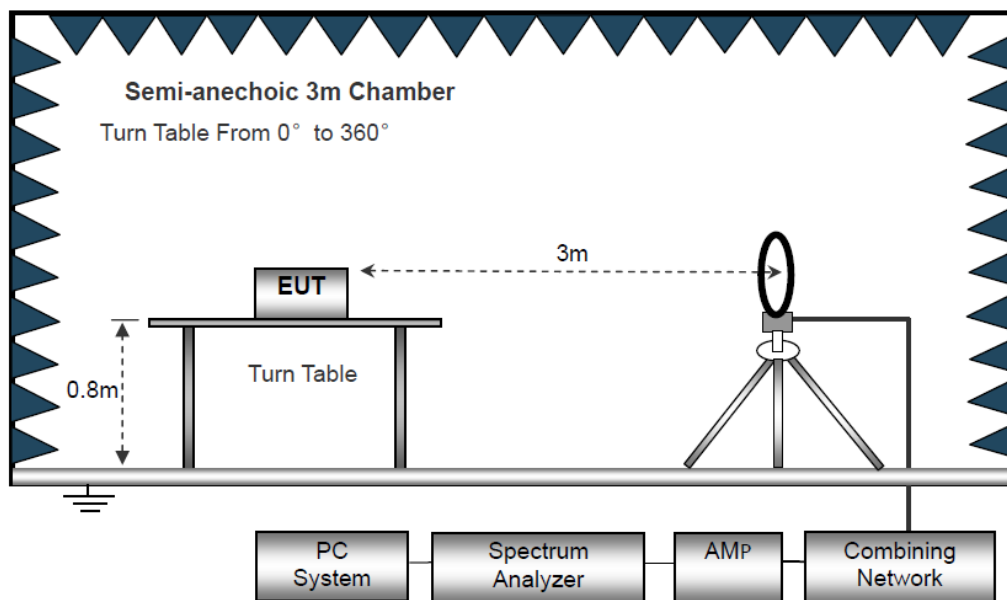

The test setup for emission measurement from 30 MHz to 1 GHz.

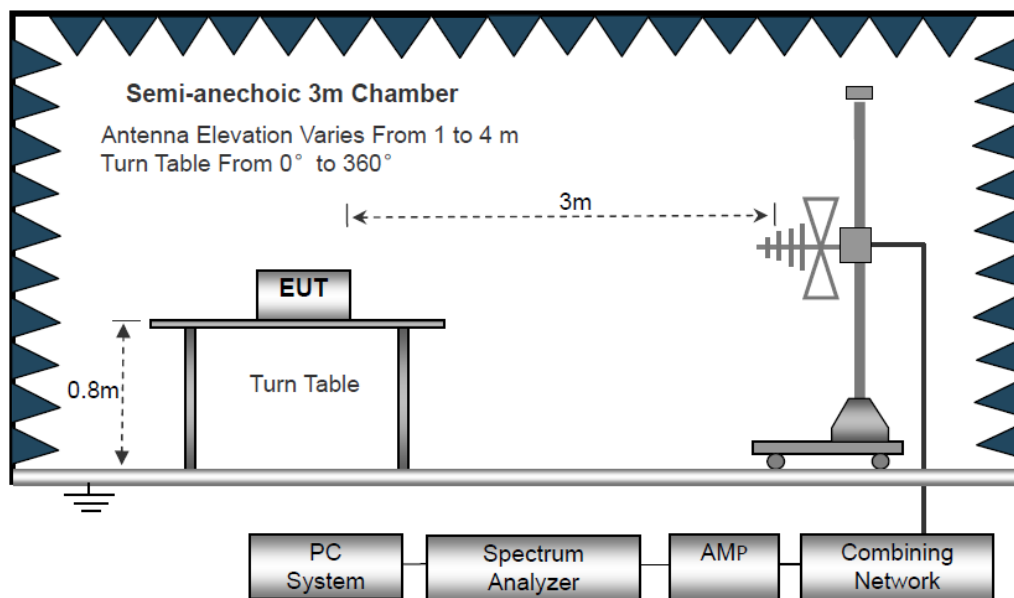

The test setup for emission measurement above 1 GHz

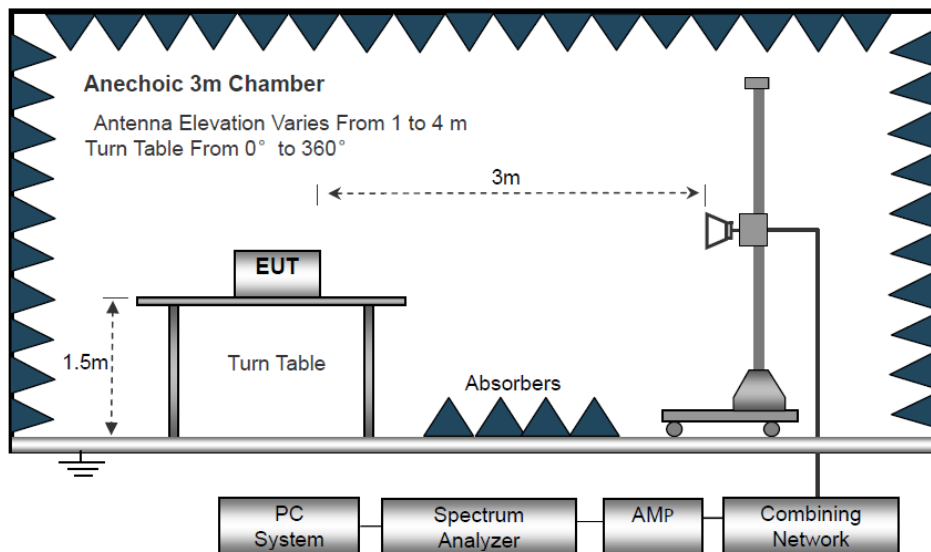

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (CH01: 88.1MHz).



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC 24V		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		88.3421	75.94	-17.58	58.36	68.00	-9.64	peak
2	*	88.3421	57.58	-17.58	40.00	48.00	-8.00	AVG
3		43.2014	36.91	-13.38	23.53	40.00	-16.47	QP
4		178.7582	33.87	-16.39	17.48	43.50	-26.02	QP
5		354.1831	39.03	-10.65	28.38	46.00	-17.62	QP
6		441.7425	38.47	-8.59	29.88	46.00	-16.12	QP
7		618.5366	35.74	-5.06	30.68	46.00	-15.32	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 24V		

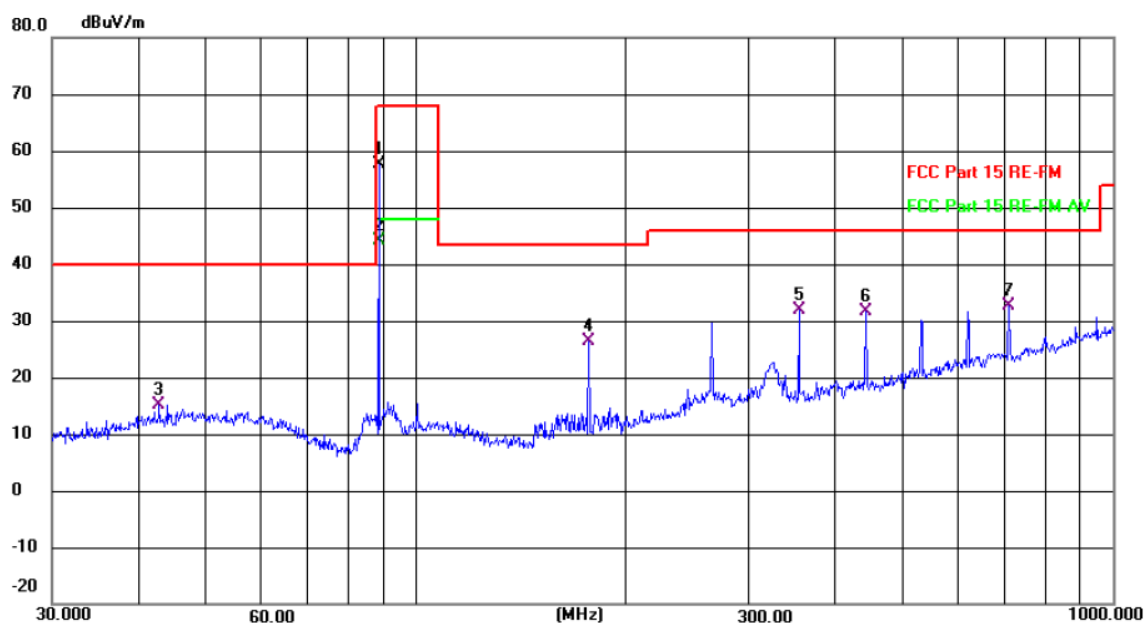

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		88.3421	75.25	-17.57	57.68	68.00	-10.32	peak
2	*	88.3421	61.82	-17.57	44.25	48.00	-3.75	AVG
3		42.7495	28.63	-13.47	15.16	40.00	-24.84	QP
4		176.8878	43.27	-16.96	26.31	43.50	-17.19	QP
5		354.1831	42.62	-10.65	31.97	46.00	-14.03	QP
6		441.7425	40.11	-8.59	31.52	46.00	-14.48	QP
7		709.1821	36.64	-4.10	32.54	46.00	-13.46	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**FIELD STRENGTH CALCULATION**

Frequency	Emission Level	Limits	Margin	Horizontal / Vertical	Detector Type
MHz	dBμV/m	dBμV/m	dBμV/m		
88.10	57.68	68	-10.32	H	PK
88.10	44.25	48	-3.75	H	AV
88.10	58.36	68	-8.00	V	PK
88.10	40.00	48	-8.72	V	AV
98.00	48.59	68	-19.41	H	PK
98.00	34.32	48	-13.68	H	AV
98.00	47.47	68	-20.53	V	PK
98.00	38.26	48	-9.74	V	AV
107.90	46.32	68	-21.68	H	PK
107.90	32.89	48	-15.11	H	AV
107.90	46.31	68	-21.69	V	PK
107.90	33.28	48	-14.72	V	AV

**Test Frequency 1GHz-10GHz:**

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1057.20	44.67	39.55	7.77	25.66	38.55	74	-35.45	Pk
V	1057.20	36.76	39.55	7.77	25.66	30.64	54	-23.36	AV
V	1176.00	45.63	38.33	7.3	24.55	39.15	74	-34.85	Pk
V	1176.00	36.76	38.33	7.3	24.55	30.28	54	-23.72	AV
V	1294.80	43.50	35.23	7.6	26.38	42.25	74	-31.75	Pk
V	1294.80	35.43	35.23	7.6	26.38	34.18	54	-19.82	AV
H	1145.30	47.68	38.34	7.32	24.46	41.12	74	-32.88	Pk
H	1145.30	35.03	38.34	7.32	24.46	28.47	54	-25.53	AV
H	1274.00	44.61	35.12	7.51	26.31	43.31	74	-30.69	Pk
H	1274.00	35.70	35.12	7.51	26.31	34.4	54	-19.6	AV
H	1402.70	44.50	35.45	7.68	23.81	40.54	74	-33.46	Pk
H	1402.70	33.46	35.45	7.68	23.81	29.5	54	-24.5	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Spurious Emission in Restricted Band**

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
88.1MHz							
V	75.05	38.51	-19.55	18.96	40	-21.04	Pk
V	88.00	39.13	-19.58	19.55	40	-20.45	AV
V	75.05	35.05	-19.55	15.5	40	-24.5	Pk
V	88.00	36.17	-19.58	16.59	40	-23.41	AV
107.90MHz							
H	108.00	25.53	-16.67	25.53	43.5	-17.97	Pk
H	109.24	26.59	-16.69	26.59	43.5	-16.91	AV
H	108.00	22.49	-16.67	22.49	43.5	-21.01	Pk
H	109.24	21.8	-16.69	21.8	43.5	-21.7	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Factor= Antenna Factor + Cable Loss – Pre-amplifier

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



7 Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.239
Test Method : ANSI C63.10:2013
Test Limit : Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency.

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 2kHz, VBW $\geq$ 3*RBW

7.2 Test Result

Channel number	Channel frequency (MHz)	Measurement level (KHz)	Required Limit (KHz)
01	88.10	61.60	200
100	98.00	60.39	200
199	107.90	61.09	200




CH01



CH100



CH199

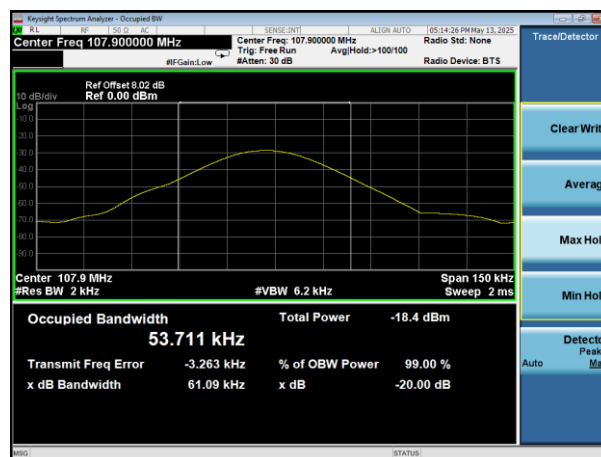



8 Antenna Application

8.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Result

The antenna is Internal Antenna, the best case gain of the antennas is 1.81dBi, reference to the appendix for details.



9 EUT Photo and Test Setup Photo

Please see the attachment for details.

*****THE END REPORT*****