



FCC Part 15C Test Report

FCC ID: 2BORC-V8

Applicant: Jinhua Xincui Electronic Commerce Firm

Address: Room 405, Building 1, Yingbin Garden, No. 133 Yingbin Avenue, Xinshi Street, Wucheng District, Jinhua City, Zhejiang

Manufacturer: Shenzhen Shenma Technology Co., Ltd

Address: Wannian Good Technology Park, Yu'an 2nd Road, Bao'an District, Shenzhen

EUT: Bluetooth ear clip

Trade Mark: N/A

Model Number: V8
V1, V2, V3, V4, V5, V6, V7

Date of Receipt: Mar. 26, 2025

Test Date: Mar. 26, 2025 - Apr. 07, 2025

Date of Report: Apr. 07, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.249
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250327008R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~25GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	27
3.3.1 TEST REQUIREMENT:	27
3.3.2 TEST PROCEDURE	27
3.3.3 DEVIATION FROM TEST STANDARD	27
3.3.4 TEST SETUP	28
3.3.5 EUT OPERATING CONDITIONS	28
4 . BANDWIDTH TEST	35
4.1 APPLIED PROCEDURES / LIMIT	35
4.1.1 TEST PROCEDURE	35
4.1.2 DEVIATION FROM STANDARD	35
4.1.3 TEST SETUP	35



Table of Contents	Page
4.1.4 EUT OPERATION CONDITIONS	35
4.1.5 TEST RESULTS	36
5 . ANTENNA REQUIREMENT	39
5.1 STANDARD REQUIREMENT	39
5.2 EUT ANTENNA	39
6 . TEST SEUUP PHOTO	39
7 . EUT PHOTO	39



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205(a), 15.209(a) 15.249(a), 15.249(c)	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.249(d)	Band Edge Emission	PASS	
15.215(c)	20dB Bandwidth	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen,
China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.42\text{dB}$
3	Spurious emissions, conducted	$\pm 2.76\text{dB}$
4	All emissions, radiated (<1G)	$\pm 3.65\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	20dB Bandwidth	$\pm 0.2\text{MHz}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth ear clip
Trademark	N/A
Model No.:	V8 V1, V2, V3, V4, V5, V6, V7
Model Difference	All models are same as the samples except model name, they have the same structure and circuit.
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1MHz
Modulation technology:	GFSK, PI/4 DQPSK, 8DPSK
Antenna Type:	Internal Antenna
Antenna gain:	2.18dBi
Power Supply:	DC 5V from adapter DC 3.7V from battery

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	GFSK	CH00/CH39/CH78
Mode 2	PI/4 DQPSK	CH00/CH39/CH78
Mode 3	8DPSK	CH00/CH39/CH78
Mode 4	Link Mode	


For Conducted & Radiated Emission		
Final Test Mode	Description	
Mode 1	GFSK	CH00/CH39/CH78
Mode 2	PI/4 DQPSK	CH00/CH39/CH78
Mode 3	8DPSK	CH00/CH39/CH78
Mode 4	Link Mode	

Note: (1) The measurements are performed at the highest, middle, lowest available channels.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Bluetooth ear clip	V8	N/A	EUT
E-2	Adapter	HW-0501000E	N/A	XIAOMI

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: BT_Tool V1.1.0		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Setting of Softwave	10	10	10



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

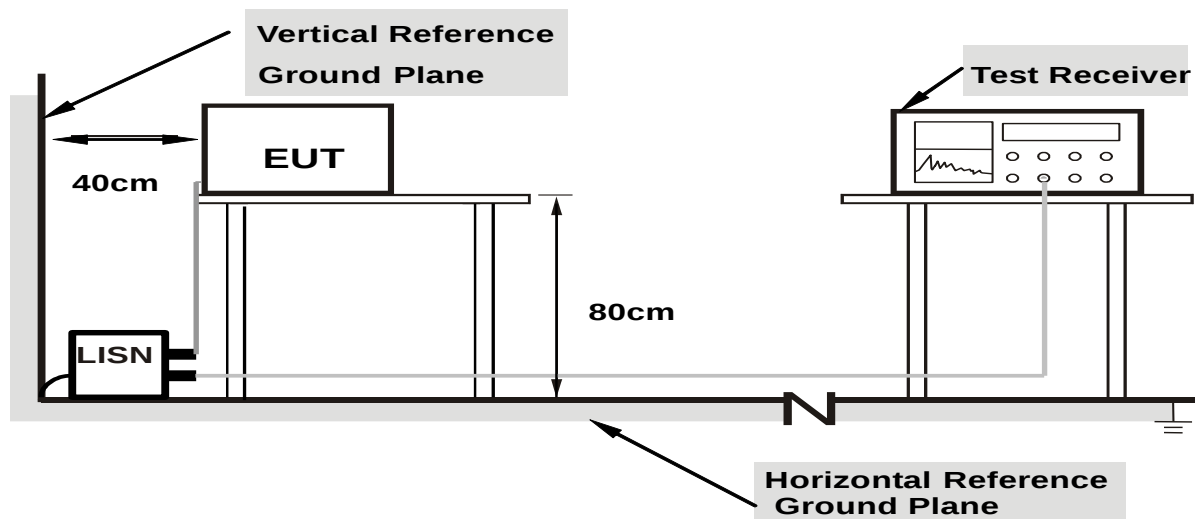

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

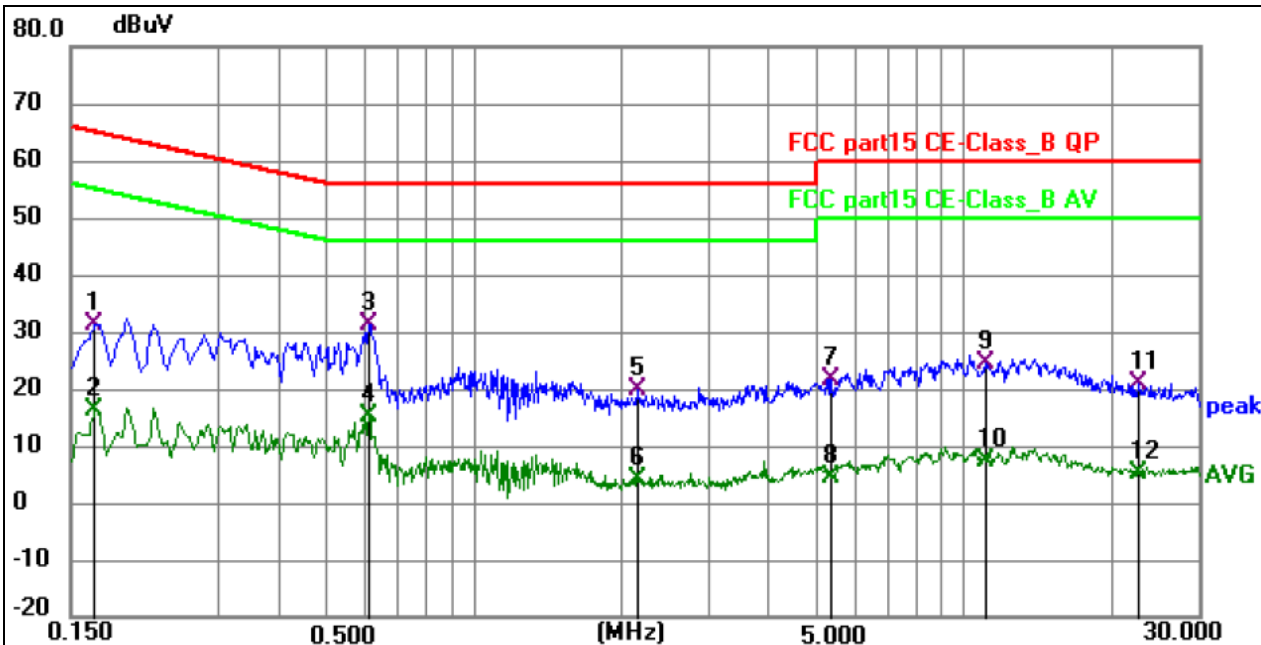


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	21.16	10.03	31.19	65.06	-33.87	QP	P	
2	0.1680	6.31	10.03	16.34	55.06	-38.72	AVG	P	
3 *	0.6134	21.04	10.13	31.17	56.00	-24.83	QP	P	
4	0.6134	5.08	10.13	15.21	46.00	-30.79	AVG	P	
5	2.1480	9.59	10.07	19.66	56.00	-36.34	QP	P	
6	2.1480	-6.10	10.07	3.97	46.00	-42.03	AVG	P	
7	5.3340	11.32	10.45	21.77	60.00	-38.23	QP	P	
8	5.3340	-5.88	10.45	4.57	50.00	-45.43	AVG	P	
9	11.0535	13.23	11.34	24.57	60.00	-35.43	QP	P	
10	11.0535	-3.89	11.34	7.45	50.00	-42.55	AVG	P	
11	22.7670	8.32	12.41	20.73	60.00	-39.27	QP	P	
12	22.7670	-7.29	12.41	5.12	50.00	-44.88	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

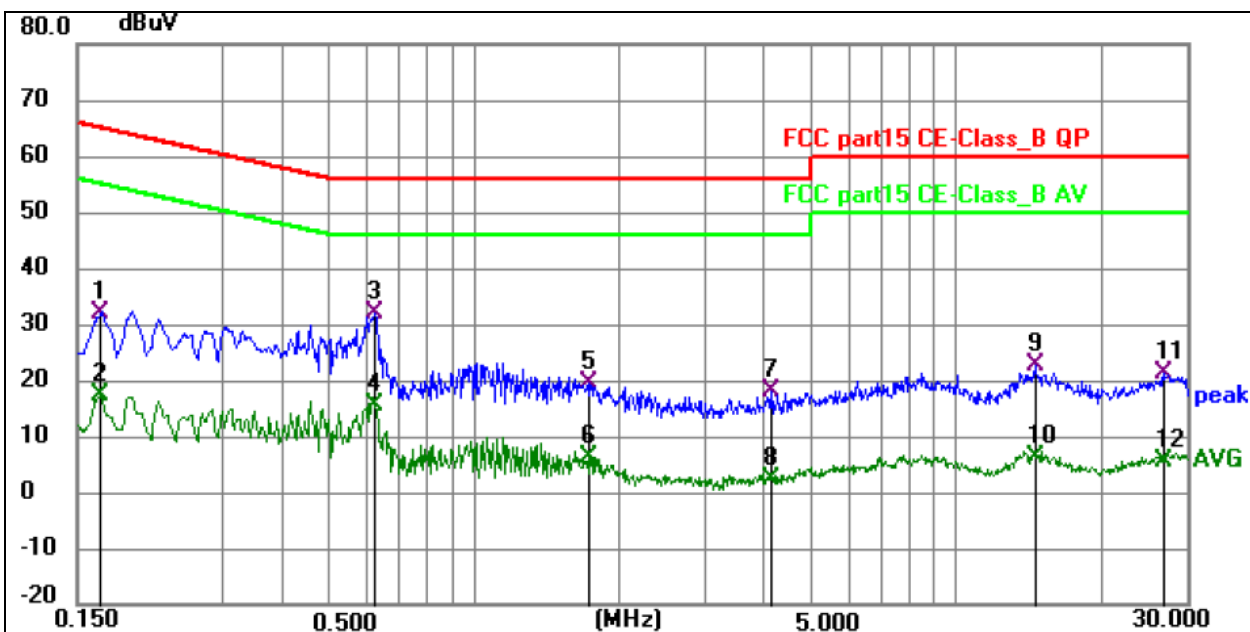

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	21.90	10.15	32.05	65.06	-33.01	QP	P	
2	0.1680	7.19	10.15	17.34	55.06	-37.72	AVG	P	
3 *	0.6225	21.71	10.16	31.87	56.00	-24.13	QP	P	
4	0.6225	5.27	10.16	15.43	46.00	-30.57	AVG	P	
5	1.7430	9.23	10.07	19.30	56.00	-36.70	QP	P	
6	1.7430	-3.93	10.07	6.14	46.00	-39.86	AVG	P	
7	4.1280	7.92	10.15	18.07	56.00	-37.93	QP	P	
8	4.1280	-7.75	10.15	2.40	46.00	-43.60	AVG	P	
9	14.5905	11.15	11.55	22.70	60.00	-37.30	QP	P	
10	14.5905	-5.17	11.55	6.38	50.00	-43.62	AVG	P	
11	26.9610	8.35	12.80	21.15	60.00	-38.85	QP	P	
12	26.9610	-7.30	12.80	5.50	50.00	-44.50	AVG	P	

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak



	Peak	1MHz	10Hz	Average
--	------	------	------	---------

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber.
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

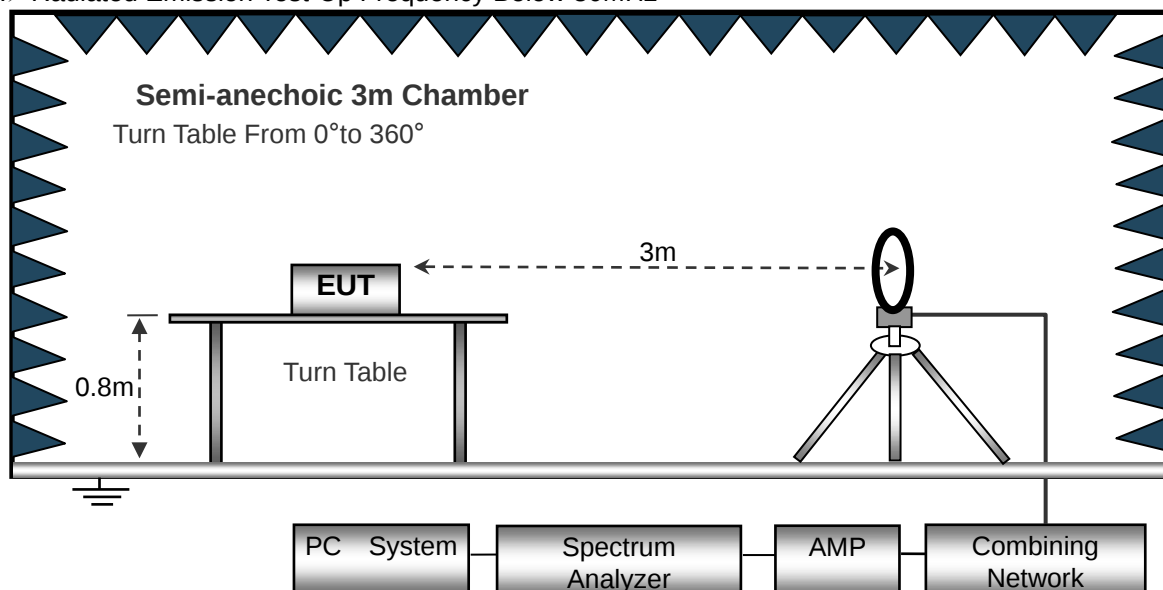

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

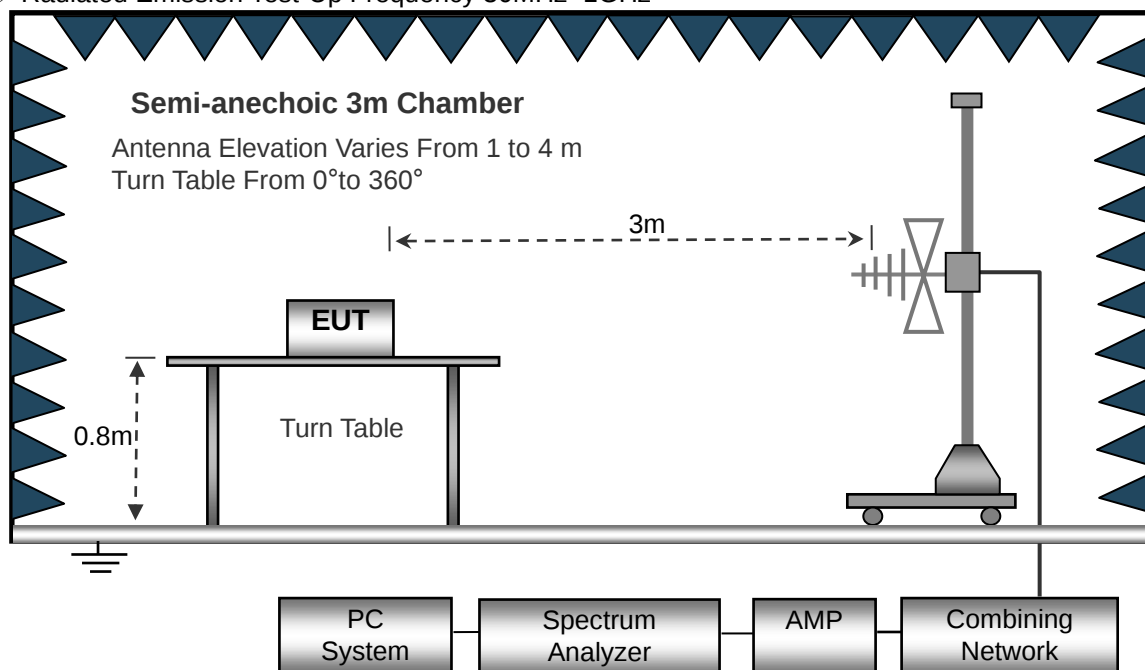

(C) Radiated Emission Test-Up Frequency Above 1GHz

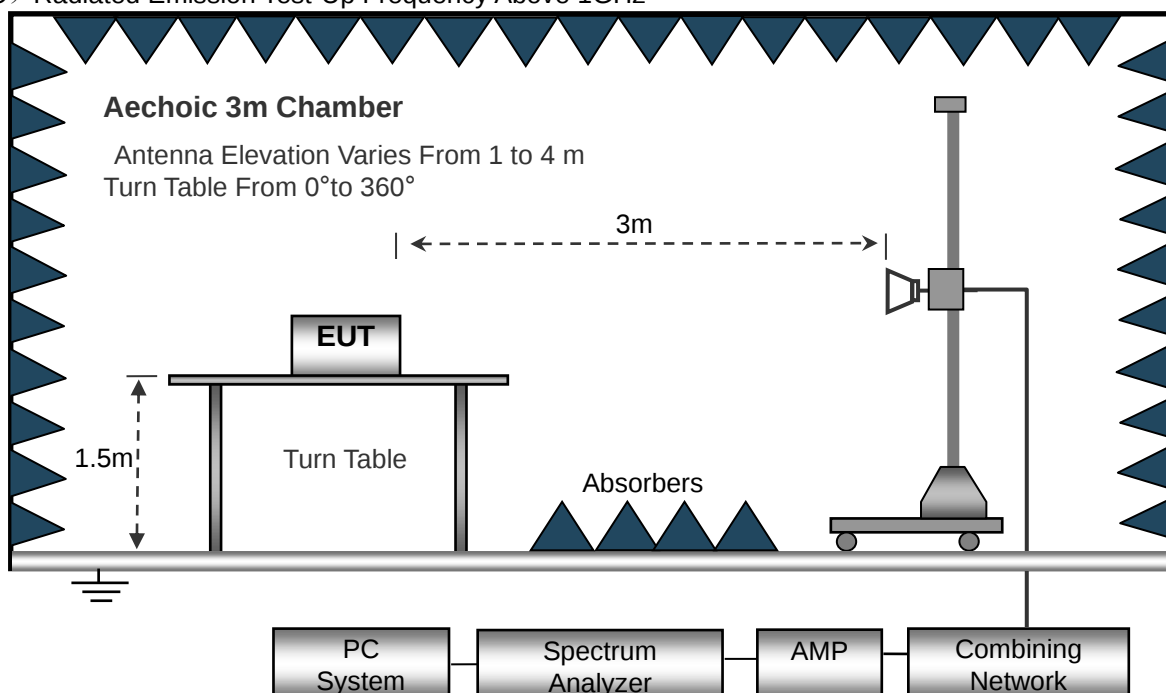

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4(L)		

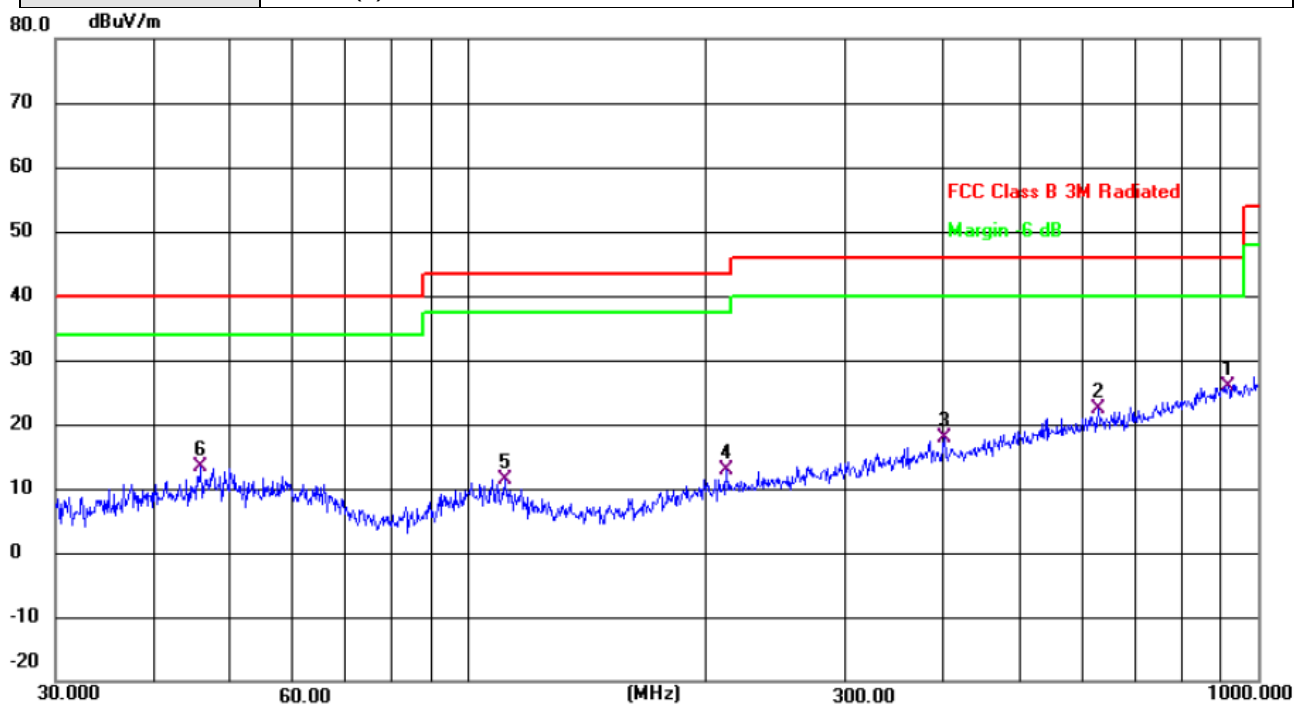

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	916.0687	26.02	-0.20	25.82	46.00	-20.18	QP
2		627.2738	27.25	-4.99	22.26	46.00	-23.74	QP
3		400.4319	27.34	-9.54	17.80	46.00	-28.20	QP
4		212.2695	27.20	-14.36	12.84	43.50	-30.66	QP
5		111.3468	26.62	-15.23	11.39	43.50	-32.11	QP
6		45.8553	26.01	-12.63	13.38	40.00	-26.62	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4(L)		

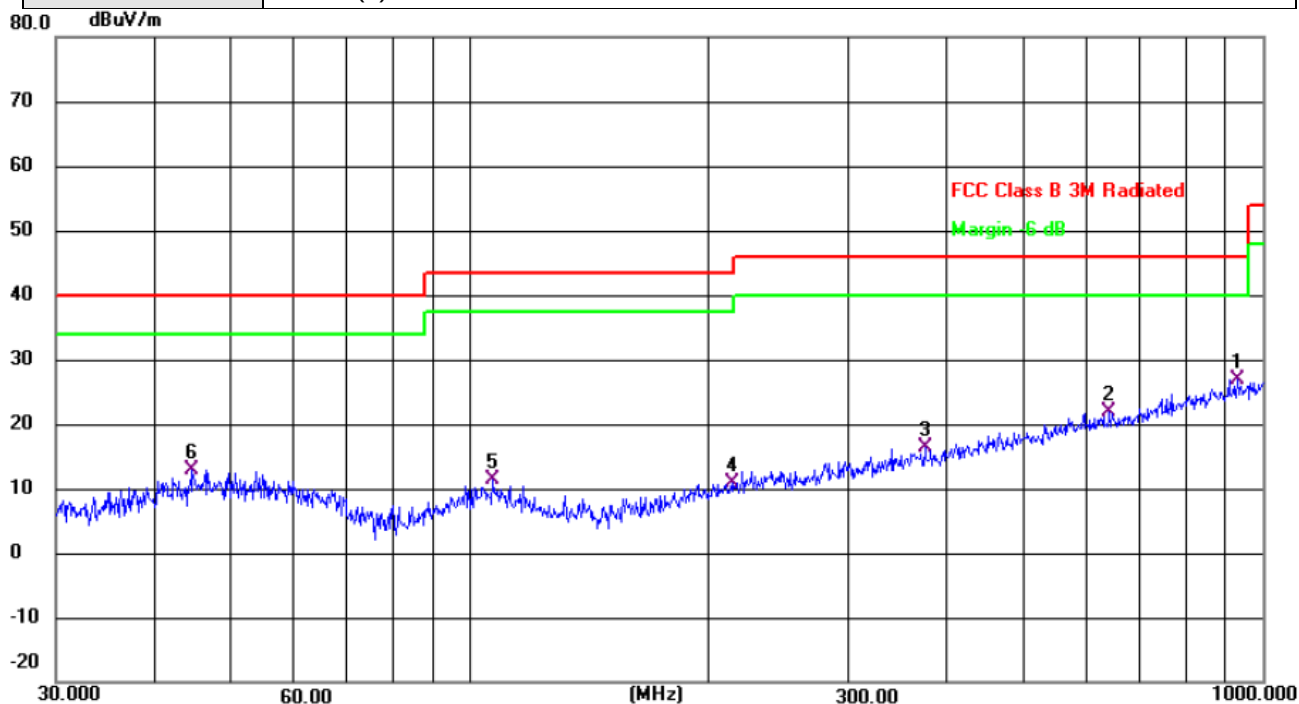

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	929.0082	26.80	0.06	26.86	46.00	-19.14	QP
2		640.6110	26.64	-4.83	21.81	46.00	-24.19	QP
3		374.6225	26.48	-10.09	16.39	46.00	-29.61	QP
4		213.7634	25.28	-14.32	10.96	43.50	-32.54	QP
5		106.7587	26.13	-14.73	11.40	43.50	-32.10	QP
6		44.5868	26.12	-13.14	12.98	40.00	-27.02	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4(R)		

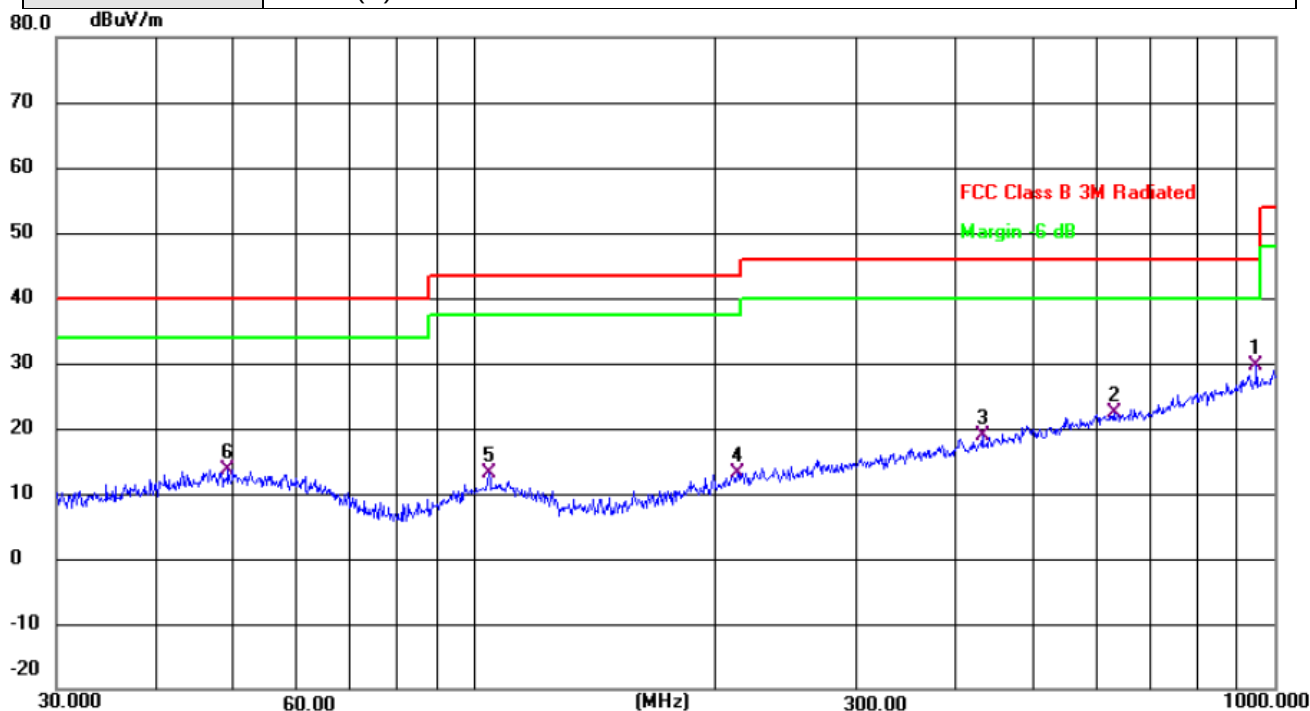

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	948.7610	29.83	-0.27	29.56	46.00	-16.44	QP
2		629.4772	27.24	-4.97	22.27	46.00	-23.73	QP
3		431.0316	27.83	-9.02	18.81	46.00	-27.19	QP
4		213.0151	27.57	-14.35	13.22	43.50	-30.28	QP
5		104.1701	27.56	-14.52	13.04	43.50	-30.46	QP
6		49.1865	26.64	-12.91	13.73	40.00	-26.27	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4(R)		

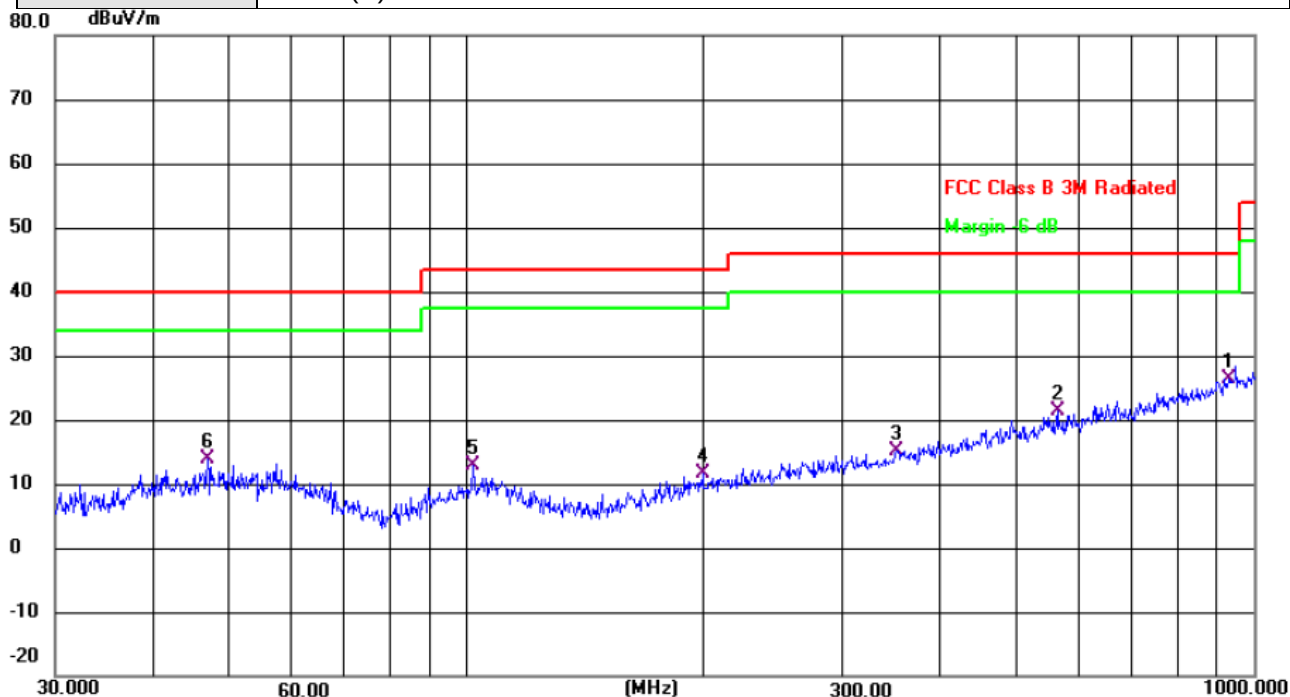

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	929.0082	26.29	0.06	26.35	46.00	-19.65	QP
2		562.6624	27.53	-6.05	21.48	46.00	-24.52	QP
3		351.7079	25.84	-10.71	15.13	46.00	-30.87	QP
4		199.2855	26.59	-15.01	11.58	43.50	-31.92	QP
5		102.0014	28.00	-15.01	12.99	43.50	-30.51	QP
6		46.8303	26.39	-12.62	13.77	40.00	-26.23	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

GFSK(L)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2402.00	113.57	52.16	2.78	27.41	91.6	114	-22.4	PK
V	2402.00	105.71	52.16	2.78	27.41	83.74	94	-10.26	AV
V	4804.00	78.06	51.74	3.08	31.25	60.65	74	-13.35	PK
V	4804.00	60.43	51.74	3.08	31.25	43.02	54	-10.98	AV
V	16132.00	54.58	51.56	7.36	41.57	51.95	74	-22.05	PK
H	2402.00	114.07	52.16	2.78	27.41	92.1	114	-21.9	PK
H	2402.00	104.75	52.16	2.78	27.41	82.78	94	-11.22	AV
H	4804.00	76.5	51.74	3.08	31.25	59.09	74	-14.91	PK
H	4804.00	60.05	51.74	3.08	31.25	42.64	54	-11.36	AV
H	16132.00	55.5	51.56	7.36	41.57	52.87	74	-21.13	PK
operation frequency:2441									
V	2441.00	112.45	52.11	2.82	27.47	90.63	114	-23.37	PK
V	2441.00	105.9	52.11	2.82	27.47	84.08	94	-9.92	AV
V	4882.00	78.06	51.77	3.03	31.34	60.66	74	-13.34	PK
V	4882.00	61.11	51.77	3.03	31.34	43.71	54	-10.29	AV
V	16132.00	54.43	51.56	7.36	41.57	51.8	74	-22.2	PK
H	2441.00	112.55	52.11	2.82	27.47	90.73	114	-23.27	PK
H	2441.00	104.8	52.11	2.82	27.47	82.98	94	-11.02	AV
H	4882.00	76.48	51.77	3.03	31.34	59.08	74	-14.92	PK
H	4882.00	59.9	51.77	3.03	31.34	42.5	54	-11.5	AV
H	16132.00	55.57	51.56	7.36	41.57	52.94	74	-21.06	PK
operation frequency:2480									
V	2480.00	114.18	52.23	2.86	27.44	92.25	114	-21.75	PK
V	2480.00	106.87	52.23	2.86	27.44	84.94	94	-9.06	AV
V	4960.00	79	51.69	3.05	31.39	61.75	74	-12.25	PK
V	4960.00	60.85	51.69	3.05	31.39	43.6	54	-10.4	AV
V	16132.00	54.77	51.56	7.36	41.57	52.14	74	-21.86	PK
H	2480.00	113.56	52.23	2.86	27.44	91.63	114	-22.37	PK
H	2480.00	106.07	52.23	2.86	27.44	84.14	94	-9.86	AV
H	4960.00	77.85	51.69	3.05	31.39	60.6	74	-13.4	PK
H	4960.00	59.8	51.69	3.05	31.39	42.55	54	-11.45	AV
H	16132.00	54.91	51.56	7.36	41.57	52.28	74	-21.72	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



PI/4 DQPSK(L)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2402									
V	2402.00	113.54	52.16	2.78	27.41	91.57	114	-22.43	PK
V	2402.00	104.05	52.16	2.78	27.41	82.08	94	-11.92	AV
V	4804.00	78.07	51.74	3.08	31.25	60.66	74	-13.34	PK
V	4804.00	61.38	51.74	3.08	31.25	43.97	54	-10.03	AV
V	16132.00	54.86	51.56	7.36	41.57	52.23	74	-21.77	PK
H	2402.00	113.88	52.16	2.78	27.41	91.91	114	-22.09	PK
H	2402.00	107	52.16	2.78	27.41	85.03	94	-8.97	AV
H	4804.00	79.85	51.74	3.08	31.25	62.44	74	-11.56	PK
H	4804.00	53.54	51.74	3.08	31.25	36.13	54	-17.87	AV
H	16132.00	55.1	51.56	7.36	41.57	52.47	74	-21.53	PK
operation frequency:2441									
V	2441.00	112.85	52.11	2.82	27.47	91.03	114	-22.97	PK
V	2441.00	105.5	52.11	2.82	27.47	83.68	94	-10.32	AV
V	4882.00	77.43	51.77	3.03	31.34	60.03	74	-13.97	PK
V	4882.00	62.18	51.77	3.03	31.34	44.78	54	-9.22	AV
V	16132.00	56.07	51.56	7.36	41.57	53.44	74	-20.56	PK
H	2441.00	113.07	52.11	2.82	27.47	91.25	114	-22.75	PK
H	2441.00	105.73	52.11	2.82	27.47	83.91	94	-10.09	AV
H	4882.00	77.11	51.77	3.03	31.34	59.71	74	-14.29	PK
H	4882.00	60.34	51.77	3.03	31.34	42.94	54	-11.06	AV
H	16132.00	55.71	51.56	7.36	41.57	53.08	74	-20.92	PK
operation frequency:2480									
V	2480.00	113.44	52.23	2.86	27.44	91.51	114	-22.49	PK
V	2480.00	106.18	52.23	2.86	27.44	84.25	94	-9.75	AV
V	4960.00	78.06	51.69	3.05	31.39	60.81	74	-13.19	PK
V	4960.00	61.11	51.69	3.05	31.39	43.86	54	-10.14	AV
V	16132.00	54.47	51.56	7.36	41.57	51.84	74	-22.16	PK
H	2480.00	113.85	52.23	2.86	27.44	91.92	114	-22.08	PK
H	2480.00	104.86	52.23	2.86	27.44	82.93	94	-11.07	AV
H	4960.00	76.6	51.69	3.05	31.39	59.35	74	-14.65	PK
H	4960.00	59.45	51.69	3.05	31.39	42.2	54	-11.8	AV
H	16132.00	56.07	51.56	7.36	41.57	53.44	74	-20.56	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



8DPSK(L)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2402.00	112.54	52.16	2.78	27.41	90.57	114	-23.43	PK
V	2402.00	105.48	52.16	2.78	27.41	83.51	94	-10.49	AV
V	4804.00	76.69	51.74	3.08	31.25	59.28	74	-14.72	PK
V	4804.00	59.57	51.74	3.08	31.25	42.16	54	-11.84	AV
V	16132.00	55.78	51.56	7.36	41.57	53.15	74	-20.85	PK
H	2402.00	113.07	52.16	2.78	27.41	91.1	114	-22.9	PK
H	2402.00	105.88	52.16	2.78	27.41	83.91	94	-10.09	AV
H	4804.00	76.46	51.74	3.08	31.25	59.05	74	-14.95	PK
H	4804.00	60.9	51.74	3.08	31.25	43.49	54	-10.51	AV
H	16132.00	54.48	51.56	7.36	41.57	51.85	74	-22.15	PK
operation frequency:2441									
V	2441.00	112.91	52.11	2.82	27.47	91.09	114	-22.91	PK
V	2441.00	104.47	52.11	2.82	27.47	82.65	94	-11.35	AV
V	4882.00	76.45	51.77	3.03	31.34	59.05	74	-14.95	PK
V	4882.00	62.4	51.77	3.03	31.34	45	54	-9	AV
V	16132.00	54.74	51.56	7.36	41.57	52.11	74	-21.89	PK
H	2441.00	113.05	52.11	2.82	27.47	91.23	114	-22.77	PK
H	2441.00	103.86	52.11	2.82	27.47	82.04	94	-11.96	AV
H	4882.00	76.07	51.77	3.03	31.34	58.67	74	-15.33	PK
H	4882.00	61.98	51.77	3.03	31.34	44.58	54	-9.42	AV
H	16132.00	55.09	51.56	7.36	41.57	52.46	74	-21.54	PK
operation frequency:2480									
V	2480.00	112.48	52.23	2.86	27.44	90.55	114	-23.45	PK
V	2480.00	104	52.23	2.86	27.44	82.07	94	-11.93	AV
V	4960.00	77.45	51.69	3.05	31.39	60.2	74	-13.8	PK
V	4960.00	60.09	51.69	3.05	31.39	42.84	54	-11.16	AV
V	16132.00	55.88	51.56	7.36	41.57	53.25	74	-20.75	PK
H	2480.00	113.1	52.23	2.86	27.44	91.17	114	-22.83	PK
H	2480.00	103.45	52.23	2.86	27.44	81.52	94	-12.48	AV
H	4960.00	77.9	51.69	3.05	31.39	60.65	74	-13.35	PK
H	4960.00	62.08	51.69	3.05	31.39	44.83	54	-9.17	AV
H	16132.00	55.07	51.56	7.36	41.57	52.44	74	-21.56	PK
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



GFSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2402.00	113.46	52.16	2.78	27.41	91.49	114	-22.51	PK
V	2402.00	105.65	52.16	2.78	27.41	83.68	94	-10.32	AV
V	4804.00	78.07	51.74	3.08	31.25	60.66	74	-13.34	PK
V	4804.00	60.48	51.74	3.08	31.25	43.07	54	-10.93	AV
V	16132.00	54.56	51.56	7.36	41.57	51.93	74	-22.07	PK
H	2402.00	113.43	52.16	2.78	27.41	91.46	114	-22.54	PK
H	2402.00	104.81	52.16	2.78	27.41	82.84	94	-11.16	AV
H	4804.00	76.74	51.74	3.08	31.25	59.33	74	-14.67	PK
H	4804.00	60.08	51.74	3.08	31.25	42.67	54	-11.33	AV
H	16132.00	55.49	51.56	7.36	41.57	52.86	74	-21.14	PK
operation frequency:2441									
V	2441.00	112.91	52.11	2.82	27.47	91.09	114	-22.91	PK
V	2441.00	105.43	52.11	2.82	27.47	83.61	94	-10.39	AV
V	4882.00	78.18	51.77	3.03	31.34	60.78	74	-13.22	PK
V	4882.00	61.06	51.77	3.03	31.34	43.66	54	-10.34	AV
V	16132.00	54.5	51.56	7.36	41.57	51.87	74	-22.13	PK
H	2441.00	112.85	52.11	2.82	27.47	91.03	114	-22.97	PK
H	2441.00	104.76	52.11	2.82	27.47	82.94	94	-11.06	AV
H	4882.00	76.49	51.77	3.03	31.34	59.09	74	-14.91	PK
H	4882.00	59.85	51.77	3.03	31.34	42.45	54	-11.55	AV
H	16132.00	55.85	51.56	7.36	41.57	53.22	74	-20.78	PK
operation frequency:2480									
V	2480.00	114.07	52.23	2.86	27.44	92.14	114	-21.86	PK
V	2480.00	106.46	52.23	2.86	27.44	84.53	94	-9.47	AV
V	4960.00	78.95	51.69	3.05	31.39	61.7	74	-12.3	PK
V	4960.00	60.9	51.69	3.05	31.39	43.65	54	-10.35	AV
V	16132.00	55.18	51.56	7.36	41.57	52.55	74	-21.45	PK
H	2480.00	113.6	52.23	2.86	27.44	91.67	114	-22.33	PK
H	2480.00	105.43	52.23	2.86	27.44	83.5	94	-10.5	AV
H	4960.00	77.9	51.69	3.05	31.39	60.65	74	-13.35	PK
H	4960.00	59.75	51.69	3.05	31.39	42.5	54	-11.5	AV
H	16132.00	54.89	51.56	7.36	41.57	52.26	74	-21.74	PK
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



PI/4 DQPSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2402.00	113.85	52.16	2.78	27.41	91.88	114	-22.12	PK
V	2402.00	104.06	52.16	2.78	27.41	82.09	94	-11.91	AV
V	4804.00	78.04	51.74	3.08	31.25	60.63	74	-13.37	PK
V	4804.00	61.41	51.74	3.08	31.25	44	54	-10	AV
V	16132.00	54.87	51.56	7.36	41.57	52.24	74	-21.76	PK
H	2402.00	113.83	52.16	2.78	27.41	91.86	114	-22.14	PK
H	2402.00	106.95	52.16	2.78	27.41	84.98	94	-9.02	AV
H	4804.00	79.9	51.74	3.08	31.25	62.49	74	-11.51	PK
H	4804.00	53.58	51.74	3.08	31.25	36.17	54	-17.83	AV
H	16132.00	54.63	51.56	7.36	41.57	52	74	-22	PK
operation frequency:2441									
V	2441.00	112.91	52.11	2.82	27.47	91.09	114	-22.91	PK
V	2441.00	105.44	52.11	2.82	27.47	83.62	94	-10.38	AV
V	4882.00	77.48	51.77	3.03	31.34	60.08	74	-13.92	PK
V	4882.00	61.96	51.77	3.03	31.34	44.56	54	-9.44	AV
V	16132.00	56.05	51.56	7.36	41.57	53.42	74	-20.58	PK
H	2441.00	112.43	52.11	2.82	27.47	90.61	114	-23.39	PK
H	2441.00	105.78	52.11	2.82	27.47	83.96	94	-10.04	AV
H	4882.00	76.43	51.77	3.03	31.34	59.03	74	-14.97	PK
H	4882.00	60.38	51.77	3.03	31.34	42.98	54	-11.02	AV
H	16132.00	55.7	51.56	7.36	41.57	53.07	74	-20.93	PK
operation frequency:2480									
V	2480.00	113.48	52.23	2.86	27.44	91.55	114	-22.45	PK
V	2480.00	106.16	52.23	2.86	27.44	84.23	94	-9.77	AV
V	4960.00	78.05	51.69	3.05	31.39	60.8	74	-13.2	PK
V	4960.00	60.63	51.69	3.05	31.39	43.38	54	-10.62	AV
V	16132.00	54.45	51.56	7.36	41.57	51.82	74	-22.18	PK
H	2480.00	113.9	52.23	2.86	27.44	91.97	114	-22.03	PK
H	2480.00	104.85	52.23	2.86	27.44	82.92	94	-11.08	AV
H	4960.00	76.56	51.69	3.05	31.39	59.31	74	-14.69	PK
H	4960.00	59.5	51.69	3.05	31.39	42.25	54	-11.75	AV
H	16132.00	56.08	51.56	7.36	41.57	53.45	74	-20.55	PK
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



8DPSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2402.00	112.43	52.16	2.78	27.41	90.46	114	-23.54	PK
V	2402.00	105.45	52.16	2.78	27.41	83.48	94	-10.52	AV
V	4804.00	76.7	51.74	3.08	31.25	59.29	74	-14.71	PK
V	4804.00	59.55	51.74	3.08	31.25	42.14	54	-11.86	AV
V	16132.00	55.76	51.56	7.36	41.57	53.13	74	-20.87	PK
H	2402.00	113.05	52.16	2.78	27.41	91.08	114	-22.92	PK
H	2402.00	105.89	52.16	2.78	27.41	83.92	94	-10.08	AV
H	4804.00	76.48	51.74	3.08	31.25	59.07	74	-14.93	PK
H	4804.00	60.84	51.74	3.08	31.25	43.43	54	-10.57	AV
H	16132.00	54.85	51.56	7.36	41.57	52.22	74	-21.78	PK
operation frequency:2441									
V	2441.00	112.86	52.11	2.82	27.47	91.04	114	-22.96	PK
V	2441.00	104.58	52.11	2.82	27.47	82.76	94	-11.24	AV
V	4882.00	76.5	51.77	3.03	31.34	59.1	74	-14.9	PK
V	4882.00	62.63	51.77	3.03	31.34	45.23	54	-8.77	AV
V	16132.00	54.78	51.56	7.36	41.57	52.15	74	-21.85	PK
H	2441.00	113.1	52.11	2.82	27.47	91.28	114	-22.72	PK
H	2441.00	103.88	52.11	2.82	27.47	82.06	94	-11.94	AV
H	4882.00	76.06	51.77	3.03	31.34	58.66	74	-15.34	PK
H	4882.00	61.85	51.77	3.03	31.34	44.45	54	-9.55	AV
H	16132.00	55.04	51.56	7.36	41.57	52.41	74	-21.59	PK
operation frequency:2480									
V	2480.00	112.49	52.23	2.86	27.44	90.56	114	-23.44	PK
V	2480.00	103.43	52.23	2.86	27.44	81.5	94	-12.5	AV
V	4960.00	77.48	51.69	3.05	31.39	60.23	74	-13.77	PK
V	4960.00	60.1	51.69	3.05	31.39	42.85	54	-11.15	AV
V	16132.00	55.85	51.56	7.36	41.57	53.22	74	-20.78	PK
H	2480.00	113.06	52.23	2.86	27.44	91.13	114	-22.87	PK
H	2480.00	103.5	52.23	2.86	27.44	81.57	94	-12.43	AV
H	4960.00	77.85	51.69	3.05	31.39	60.6	74	-13.4	PK
H	4960.00	61.63	51.69	3.05	31.39	44.38	54	-9.62	AV
H	16132.00	55.05	51.56	7.36	41.57	52.42	74	-21.58	PK
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

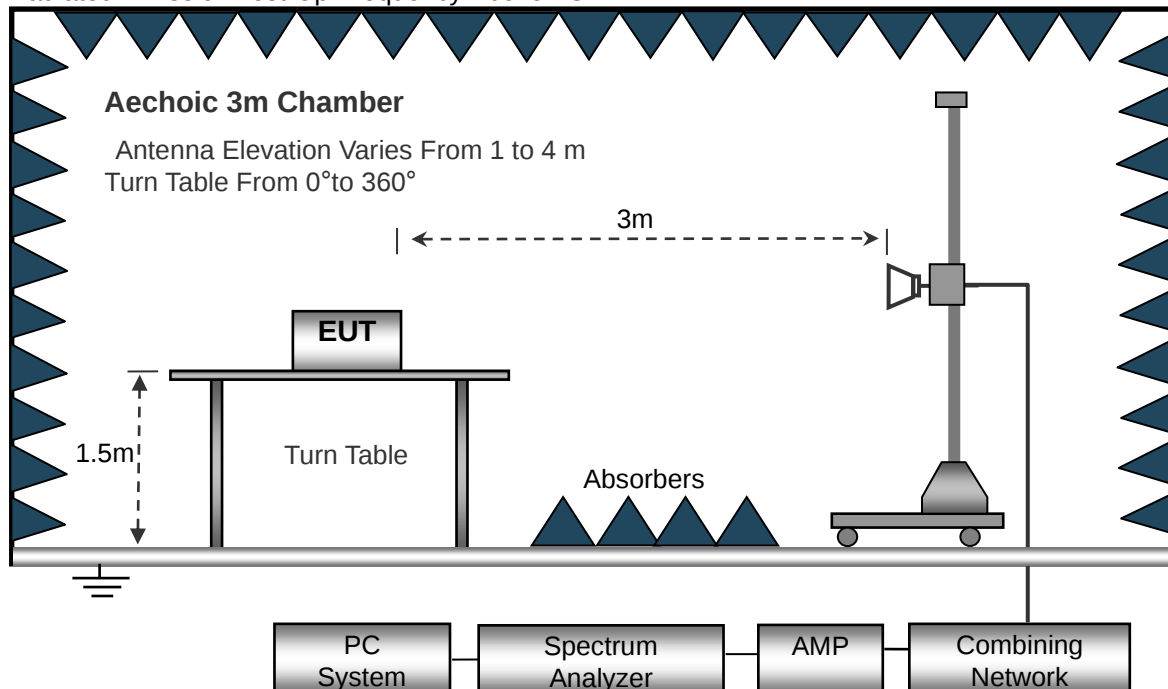

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

GFSK(L)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.20	52.12	2.73	27.38	54.19	74	-19.81	PK
V	2390.00	65.72	52.12	2.73	27.38	43.71	54	-10.29	AV
V	2400.00	77.21	52.16	2.78	27.41	55.24	74	-18.76	PK
V	2400.00	65.41	52.16	2.78	27.41	43.44	54	-10.56	AV
H	2390.00	77.21	52.12	2.73	27.38	55.2	74	-18.8	PK
H	2390.00	65.39	52.12	2.73	27.38	43.38	54	-10.62	AV
H	2400.00	76.44	52.16	2.78	27.41	54.47	74	-19.53	PK
H	2400.00	65.74	52.16	2.78	27.41	43.77	54	-10.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	75.48	52.23	2.86	27.44	53.55	74	-20.45	PK
V	2483.50	66.41	52.23	2.86	27.44	44.48	54	-9.52	AV
V	2500.00	75.74	52.26	2.88	27.49	53.85	74	-20.15	PK
V	2500.00	65.62	52.26	2.88	27.49	43.73	54	-10.27	AV
H	2483.50	75.21	52.23	2.86	27.44	53.28	74	-20.72	PK
H	2483.50	64.51	52.23	2.86	27.44	42.58	54	-11.42	AV
H	2500.00	75.73	52.26	2.88	27.49	53.84	74	-20.16	PK
H	2500.00	66.63	52.26	2.88	27.49	44.74	54	-9.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



PI/4 DQPSK(L)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.47	52.12	2.73	27.38	54.46	74	-19.54	PK
V	2390.00	65.50	52.12	2.73	27.38	43.49	54	-10.51	AV
V	2400.00	76.29	52.16	2.78	27.41	54.32	74	-19.68	PK
V	2400.00	64.45	52.16	2.78	27.41	42.48	54	-11.52	AV
H	2390.00	76.61	52.12	2.73	27.38	54.6	74	-19.4	PK
H	2390.00	65.35	52.12	2.73	27.38	43.34	54	-10.66	AV
H	2400.00	76.06	52.16	2.78	27.41	54.09	74	-19.91	PK
H	2400.00	65.50	52.16	2.78	27.41	43.53	54	-10.47	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.14	52.23	2.86	27.44	54.21	74	-19.79	PK
V	2483.50	65.08	52.23	2.86	27.44	43.15	54	-10.85	AV
V	2500.00	76.51	52.26	2.88	27.49	54.62	74	-19.38	PK
V	2500.00	65.15	52.26	2.88	27.49	43.26	54	-10.74	AV
H	2483.50	76.48	52.23	2.86	27.44	54.55	74	-19.45	PK
H	2483.50	65.15	52.23	2.86	27.44	43.22	54	-10.78	AV
H	2500.00	76.39	52.26	2.88	27.49	54.5	74	-19.5	PK
H	2500.00	65.14	52.26	2.88	27.49	43.25	54	-10.75	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK(L)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.48	52.12	2.73	27.38	54.47	74	-19.53	PK
V	2390.00	65.72	52.12	2.73	27.38	43.71	54	-10.29	AV
V	2400.00	77.67	52.16	2.78	27.41	55.7	74	-18.3	PK
V	2400.00	65.28	52.16	2.78	27.41	43.31	54	-10.69	AV
H	2390.00	77.43	52.12	2.73	27.38	55.42	74	-18.58	PK
H	2390.00	65.52	52.12	2.73	27.38	43.51	54	-10.49	AV
H	2400.00	76.72	52.16	2.78	27.41	54.75	74	-19.25	PK
H	2400.00	65.03	52.16	2.78	27.41	43.06	54	-10.94	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	77.36	52.23	2.86	27.44	55.43	74	-18.57	PK
V	2483.50	65.56	52.23	2.86	27.44	43.63	54	-10.37	AV
V	2500.00	76.40	52.26	2.88	27.49	54.51	74	-19.49	PK
V	2500.00	65.72	52.26	2.88	27.49	43.83	54	-10.17	AV
H	2483.50	77.70	52.23	2.86	27.44	55.77	74	-18.23	PK
H	2483.50	65.11	52.23	2.86	27.44	43.18	54	-10.82	AV
H	2500.00	76.13	52.26	2.88	27.49	54.24	74	-19.76	PK
H	2500.00	66.23	52.26	2.88	27.49	44.34	54	-9.66	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



GFSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.10	52.12	2.73	27.38	54.09	74	-19.91	PK
V	2390.00	65.74	52.12	2.73	27.38	43.73	54	-10.27	AV
V	2400.00	77.47	52.16	2.78	27.41	55.5	74	-18.5	PK
V	2400.00	65.08	52.16	2.78	27.41	43.11	54	-10.89	AV
H	2390.00	77.21	52.12	2.73	27.38	55.2	74	-18.8	PK
H	2390.00	65.44	52.12	2.73	27.38	43.43	54	-10.57	AV
H	2400.00	76.39	52.16	2.78	27.41	54.42	74	-19.58	PK
H	2400.00	65.50	52.16	2.78	27.41	43.53	54	-10.47	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	75.06	52.23	2.86	27.44	53.13	74	-20.87	PK
V	2483.50	66.43	52.23	2.86	27.44	44.5	54	-9.5	AV
V	2500.00	75.72	52.26	2.88	27.49	53.83	74	-20.17	PK
V	2500.00	65.59	52.26	2.88	27.49	43.7	54	-10.3	AV
H	2483.50	75.18	52.23	2.86	27.44	53.25	74	-20.75	PK
H	2483.50	64.55	52.23	2.86	27.44	42.62	54	-11.38	AV
H	2500.00	75.71	52.26	2.88	27.49	53.82	74	-20.18	PK
H	2500.00	66.64	52.26	2.88	27.49	44.75	54	-9.25	AV

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



PI/4 DQPSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.10	52.12	2.73	27.38	54.09	74	-19.91	PK
V	2390.00	65.56	52.12	2.73	27.38	43.55	54	-10.45	AV
V	2400.00	76.37	52.16	2.78	27.41	54.4	74	-19.6	PK
V	2400.00	64.40	52.16	2.78	27.41	42.43	54	-11.57	AV
H	2390.00	76.62	52.12	2.73	27.38	54.61	74	-19.39	PK
H	2390.00	65.28	52.12	2.73	27.38	43.27	54	-10.73	AV
H	2400.00	76.11	52.16	2.78	27.41	54.14	74	-19.86	PK
H	2400.00	65.08	52.16	2.78	27.41	43.11	54	-10.89	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.08	52.23	2.86	27.44	54.15	74	-19.85	PK
V	2483.50	65.15	52.23	2.86	27.44	43.22	54	-10.78	AV
V	2500.00	76.49	52.26	2.88	27.49	54.6	74	-19.4	PK
V	2500.00	65.14	52.26	2.88	27.49	43.25	54	-10.75	AV
H	2483.50	76.48	52.23	2.86	27.44	54.55	74	-19.45	PK
H	2483.50	65.12	52.23	2.86	27.44	43.19	54	-10.81	AV
H	2500.00	76.70	52.26	2.88	27.49	54.81	74	-19.19	PK
H	2500.00	65.13	52.26	2.88	27.49	43.24	54	-10.76	AV

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK(R)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.06	52.12	2.73	27.38	54.05	74	-19.95	PK
V	2390.00	65.23	52.12	2.73	27.38	43.22	54	-10.78	AV
V	2400.00	77.72	52.16	2.78	27.41	55.75	74	-18.25	PK
V	2400.00	65.33	52.16	2.78	27.41	43.36	54	-10.64	AV
H	2390.00	77.38	52.12	2.73	27.38	55.37	74	-18.63	PK
H	2390.00	65.54	52.12	2.73	27.38	43.53	54	-10.47	AV
H	2400.00	76.71	52.16	2.78	27.41	54.74	74	-19.26	PK
H	2400.00	65.05	52.16	2.78	27.41	43.08	54	-10.92	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	77.21	52.23	2.86	27.44	55.28	74	-18.72	PK
V	2483.50	65.51	52.23	2.86	27.44	43.58	54	-10.42	AV
V	2500.00	76.42	52.26	2.88	27.49	54.53	74	-19.47	PK
V	2500.00	65.23	52.26	2.88	27.49	43.34	54	-10.66	AV
H	2483.50	77.68	52.23	2.86	27.44	55.75	74	-18.25	PK
H	2483.50	65.15	52.23	2.86	27.44	43.22	54	-10.78	AV
H	2500.00	76.08	52.26	2.88	27.49	54.19	74	-19.81	PK
H	2500.00	66.24	52.26	2.88	27.49	44.35	54	-9.65	AV

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.215) , Subpart C	
Section	Test Item
15.215	Bandwidth

4.1.1 TEST PROCEDURE

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**

Temperature:	25℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode /CH00, CH39, CH78(L)		


	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	2402	0.862	Pass
	2441	0.913	Pass
	2480	0.927	Pass
PI/4 DQPSK	2402	1.258	Pass
	2441	1.257	Pass
	2480	1.25	Pass
8DPSK	2402	1.329	Pass
	2441	1.309	Pass
	2480	1.312	Pass



GFSK




PI/4 DQPSK

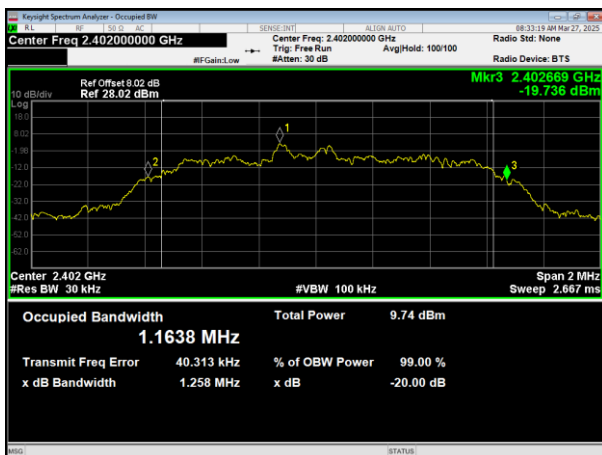


2402MHz




2402MHz

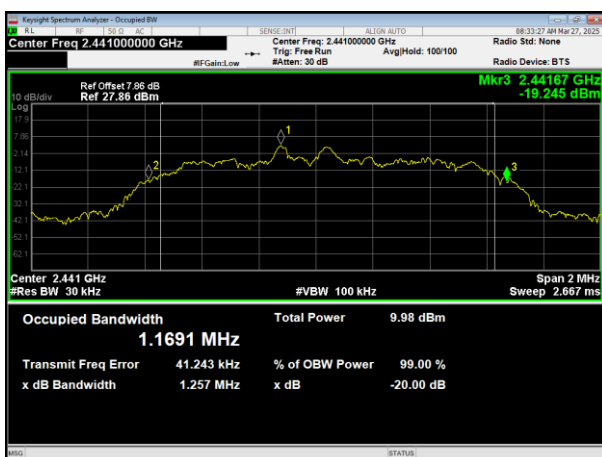

2441MHz

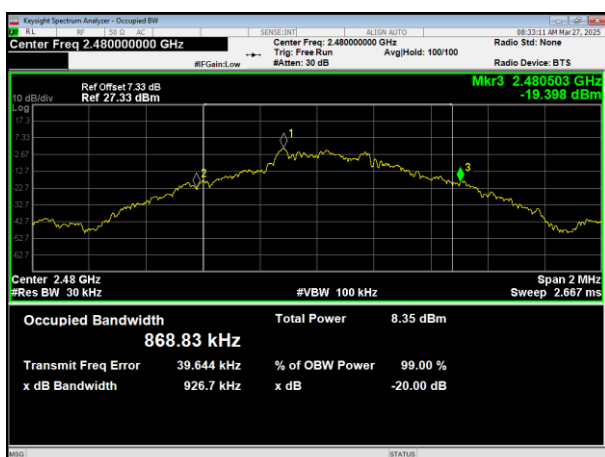

2441MHz

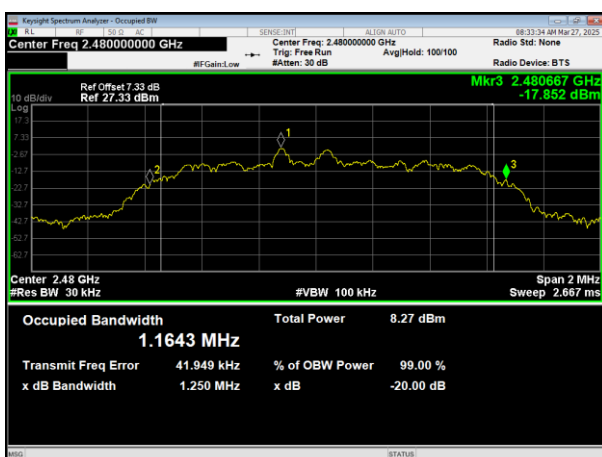


2480MHz


2480MHz




8DPSK

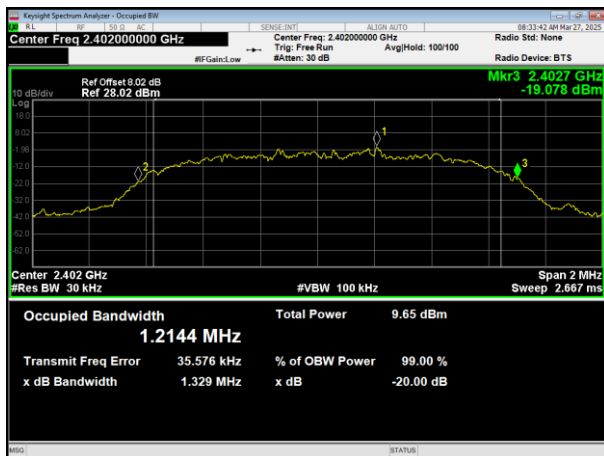

2402MHz

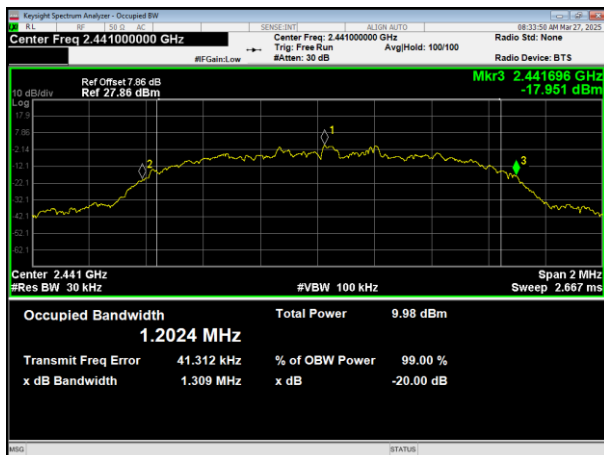

2441MHz

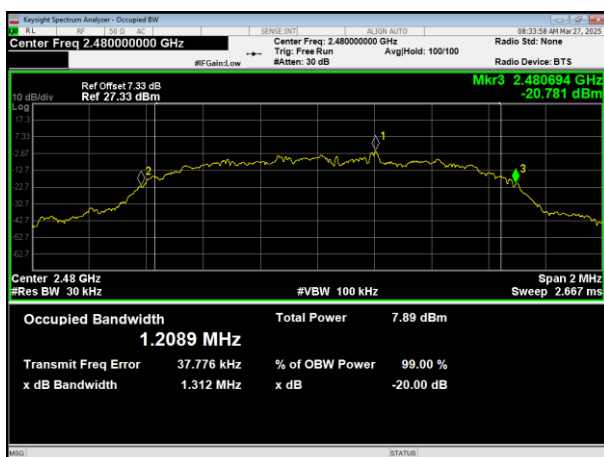

2480MHz



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It comply with the standard requirement.

6. TEST SEUUP PHOTO

Reference to the appendix I for details.

7. EUT PHOTO

Reference to the appendix II for details.

******* END OF REPORT *******