


NOTE :

- 1.The printing should be clear ,without burrs, and the dimension should be accurate.
- 2.Make the film according to the drawing.
- 3.Printing color: C100;M100;Y100;K100 黑色
- 4.Kisscut by the size request.

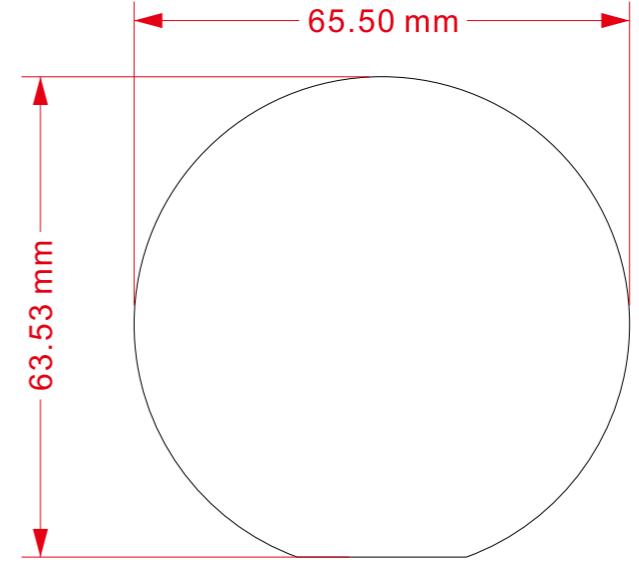

6G

5G

厂商来料

工厂打印内容,  
以实际PE图为准

卷装来料

Modification	Card Paper / Top lineboard				Corrugate list				Cardboard				Unspecialized				PE Bag (A Degree)				Clear		Pink		Label list				(Total Thickness = mm±10%)				Comply with RoHS			
1	Paper	CCNB	SBS	Double SBS	Flute (A Degree)	Single wall	Double wall	GSN (g/m <sup>2</sup> )	Flute (A Degree)	Single wall	Double wall	GSN (g/m <sup>2</sup> )	Bursting Strength	End Crush Test	Die Cut Legend	Die Cut Tolerance = +/- 0.2 mm	Flute (A Degree)	Normal	Anti-Static	ESD Value/μA	Clear	Pink	Material & Thickness	Adhesive (Except all leads in FP label)	Others	Material Spec:	Others	Others	Others							
2	250				A/C	Taiwan	230 X 180 X 230	16	33.6	(C1) Cutting Line	0 - 16	0.05	0.01	0.15	0.04	0.02	0.05	(C1) Crease Line	Normal (None)	Anti-Static	ESD Value/μA = 9-11															
3	280				Yellow	Taiwan	250 X 150 X 250	14	26.2	(PBL) Partial Blunt Line	16 - 63	0.05	0.15	0.2	0.3	0.3	0.08	(PBL) Partial Blunt Line	Normal (None)	Anti-Static	ESD Value/μA < 5															
4	300					Taiwan	230 X 100 X 230	14	22.5	(SO) Slit-Score Line	63 - 250	0.05	0.02	0.25	0.4	0.08	0.12	(SO) Slit-Score Line	Normal (None)	Anti-Static	ESD Value/μA < 5															
5	310					Taiwan	230 X 100 X 250	14	22.5	(SL) Slit Line	250 - 500	0.01	0.05	0.03	0.06	0.08	0.08	(SL) Slit Line	Normal (None)	Anti-Static	ESD Value/μA < 5															
6	340					Taiwan	230X100X100X230	18	37.1	Printing Tolerance = +/- 0.5 mm	500 - 1000	0.03	0.05	0.08	0.12	0.14	0.16	Thickness/mm	0.04	0.06	0.08															
7	350					Taiwan	230 X 100 X 230	16	26	Flute Direction	Print	Recycle Kraft 80%	8 + Newspaper 20%					Bubble Bag	Single layer	Put-in material >= 8 kg																
	Coated	UV	Var	Resistant		Taiwan	220 X 140 X 230	14	28.5	Weight/gs=	205 X 140 X 230	14	28.5					Bubble Bag	Double layer	Put-in material >= 16 kg																
	PP Film	LF / mm	DF / mm			Taiwan	220 X 100 X 200	12	18.6	Manufactury Stamp	175 X 100 X 250	18	37.4					PP Film	White	Pink																
						Taiwan	220 X 100 X 200	12	18.6	Glue Joint	175 X 100 X 250	18	37.4					EPE Foam	White	Pink																
						Taiwan	230X100X100X230	18	37.4	Thickness/mm	1.5	2.0					Density (kg / m <sup>3</sup> )	>=27	Other																	
						Taiwan	175X100X100X250	18	37.4	Draft Angle 3°	Hydrous %	7-14%					Laminated	Non - laminated																		

**Accton** TECHNOLOGY CORP.  
Part No. 246000004023H REV. 01  
Description: UL LABEL AP9720-0624-A1 AP9720  
Approve Jing\_Lin 04.08.25  
Check  
Design Tony 04.08.25  
UNIT SCALE 1 / 1 SIZE A3  
MM (IN) Outside View Sheet 1 of 1  
FMA-MD01005-02 R02

This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.

