

SC2450M3216A1

Specification


1. Product number

SC2450M3216A1

(1) (2) (3) (4) (5) (6)

Numbers Information:

- (1)Product Company: SemitelElectronics Co., Ltd.
- (2)Product Series: Chip Antenna
- (3)Center Frequency: 2440MHz
- (4)Feed Mode: Monopole
- (5)External Dimensions(L×WxH) (mm): 3.20*1.60*0.72
- (6)Antenna Type: A 0

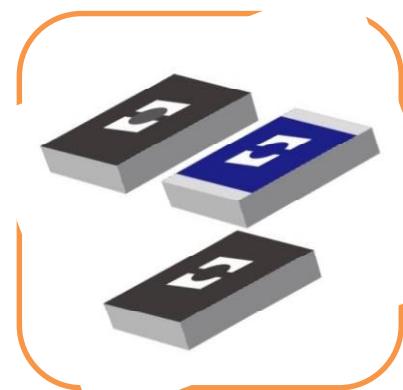

2. Features

- Stable and reliable in performances
- Low profile, compact size
- RoHS compliance
- SMT processes compatible

3. Applications

- ISM 2.4GHz application
- ZigBee/BLE application
- Bluetooth earphone systems
- Hand-held devices when Wi-Fi / Bluetooth functions are needed, e.g., Smart phone
- IEEE802.11 b/g/n
- Wireless PCMCIA cards or USB dongles

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0=\pm 10.0=\pm 0.500.00=\pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

HMCORE

Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0


PAGE1 OF 10

TITLE: SC2450M3216A1 Specification

4. Description

Semitel's chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, it shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

5. Shape and Dimensions

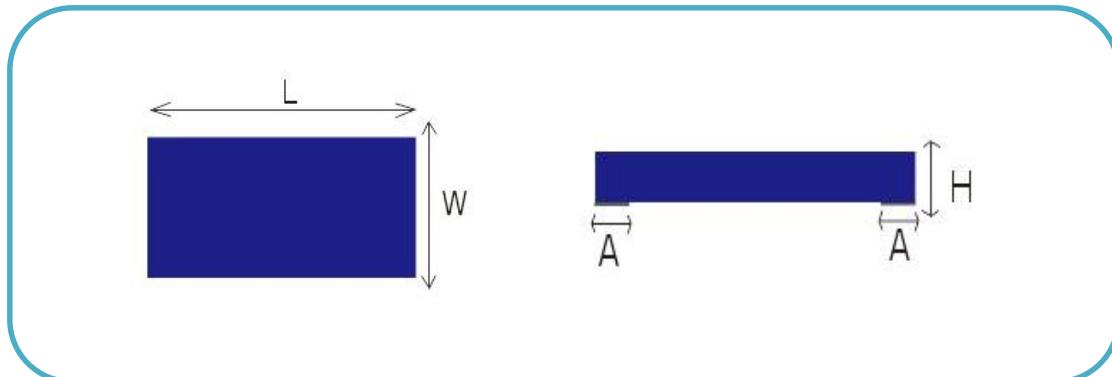

Dimensions:

| | Dimensions(mm) |
|---|----------------|
| L | 3.20±0.20 |
| W | 1.60±0.20 |
| H | 0.72±0.20 |
| A | 0.3±0.25 |

UNLESS OTHER SPECIFIED TOLERANCES ON:

0=±10.0=±0.500.00=±0.20

ANGLES =± HOLE DIA =±

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE

Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0

TITLE: SC2450M3216A1 Specification


PAGE2 OF 10

6. Layout Guide & Electrical Specifications


6.1 Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

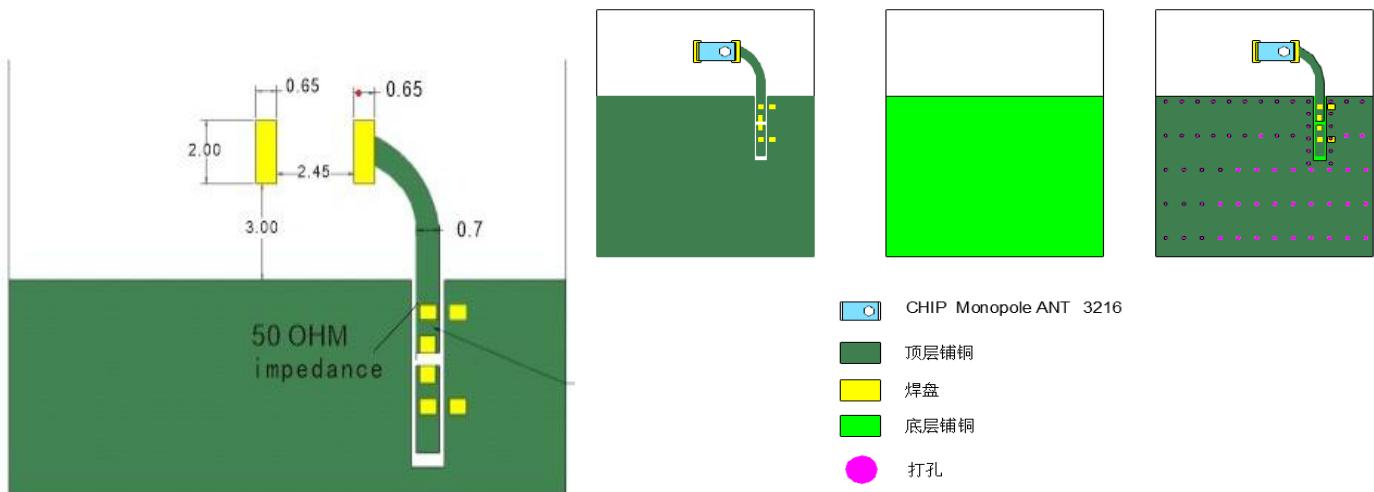

6.2 Application Guide

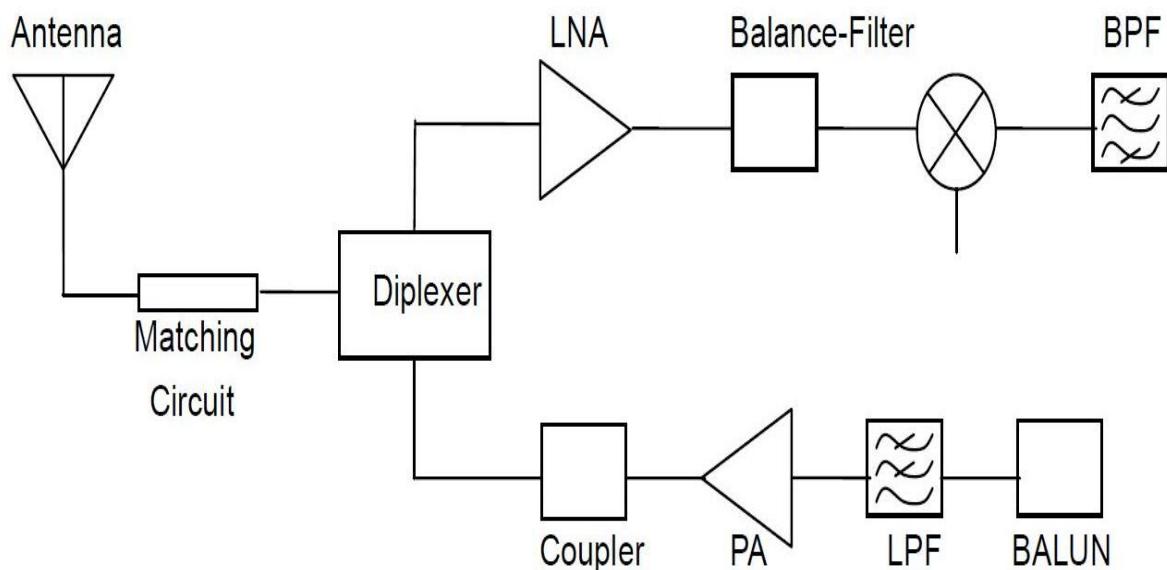

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

HMCORE

Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0

TITLE: SC2450M3216A1 Specification

PAGE3

OF 10


6.3 Electrical Specifications (Evaluation Board Dimensions: 86*50)

Electrical Table (2400~2500 MHz Band)

| | | |
|------------------------------|--------------------|----------|
| Product number | S-C-2450-M-3216-A0 | |
| Central Frequency | 2440 | MHz |
| Bandwidth | 100 (Min.) | MHz |
| Return Loss | -11.96 (Max.) | dB |
| Peak Gain | 2.73 | dBi |
| Impedance | 50 | Ω |
| Operating Temperature | -40~+85 | °C |
| Maximum Power | 5 | W |
| Resistance to soldering heat | 10 (@260 °C) | Sec. |
| Polarization | Linear | |
| Azimuth Beam width | Omni-directional | |
| Termination | Sn (leadless) | |

7. Electrical Characteristics

Return Loss

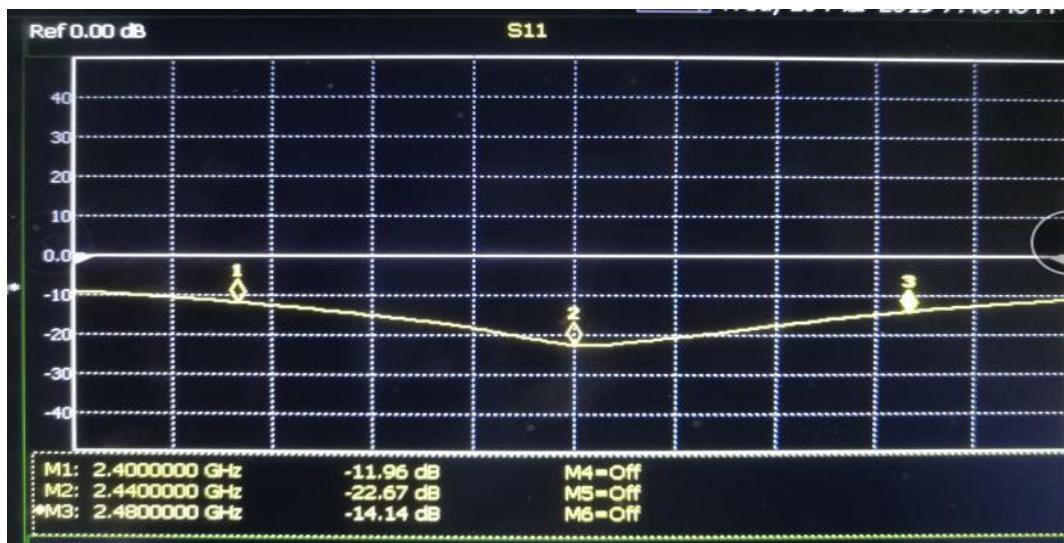

UNLESS OTHER SPECIFIED TOLERANCES ON:

0=±10.0=±0.500.00=±0.20

ANGLES = ±

HOLE DIA = ±

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT NO.

SC2450M3216A1


SPEC REV.
A0

TITLE: SC2450M3216A1 Specification

Smith Chat



VSWR

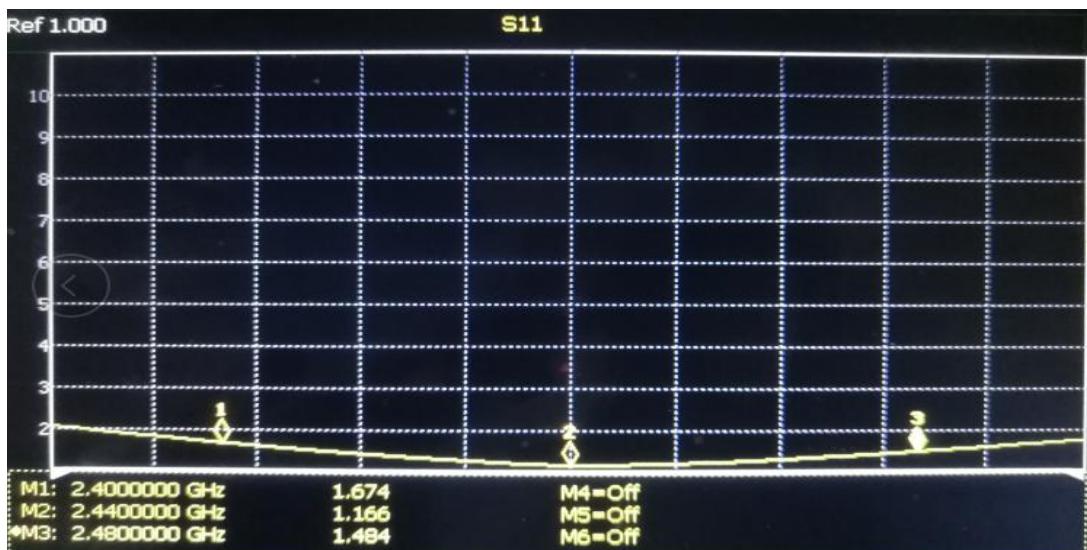

| Mark | Frequency | VSWR |
|------|-----------|-------|
| 1 | 2400 MHz | 1.674 |
| 2 | 2440 MHz | 1.166 |
| 3 | 2480 MHz | 1.484 |

UNLESS OTHER SPECIFIED TOLERANCES ON:

0=±10.0=±0.500.00=±0.20

ANGLES =±

HOLE DIA =±

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

SCALE: N/A
 DRAWN BY: SARA
 DESIGNED BY: HEXIN

UNIT: mm

CHECKED BY: XD

APPROVED BY: XD

TITLE: SC2450M3216A1 Specification

DOCUMENT NO.


SC2450M3216A1

SPEC REV.


A0

□ Radiation Pattern

The Gain pattern is measured in FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

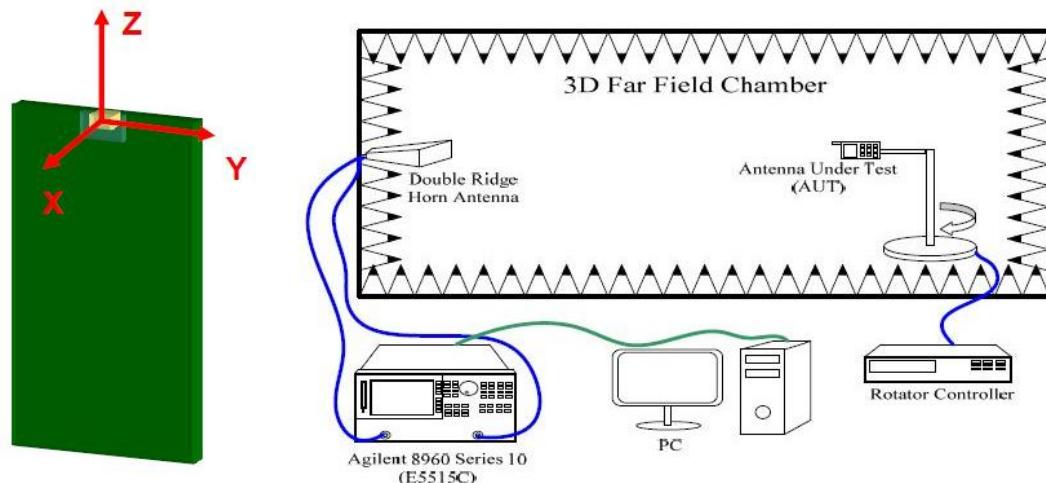

□ Efficiency

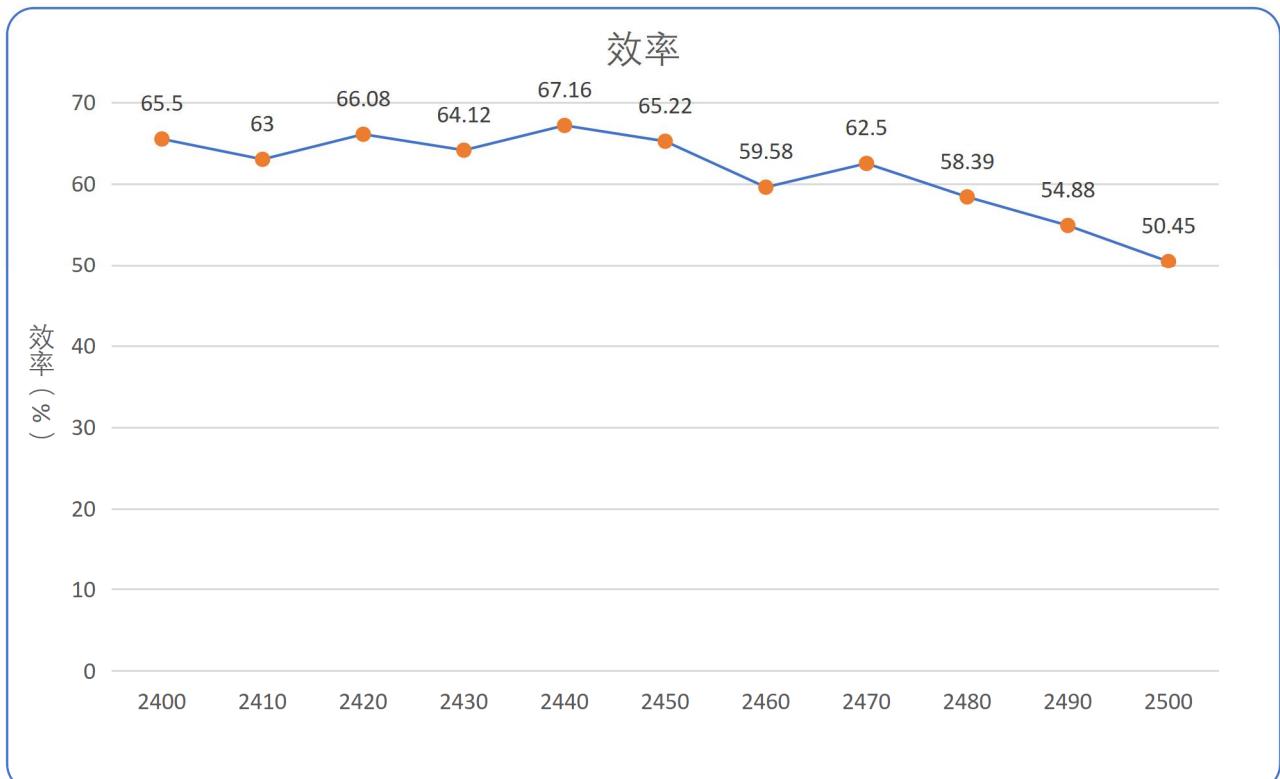

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT NO.

SC2450M3216A1

SPEC REV.


A0

PAGE6


OF

10

□ Peak Gain

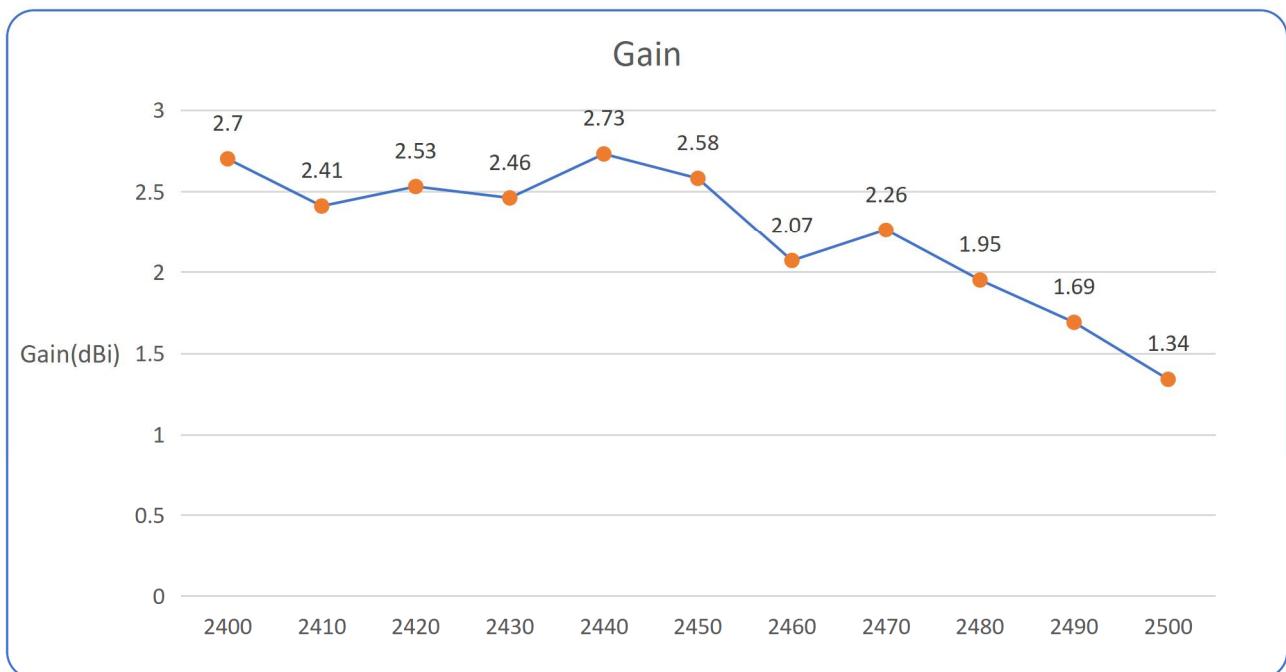

□ 3D Gain Pattern (2400 MHz)

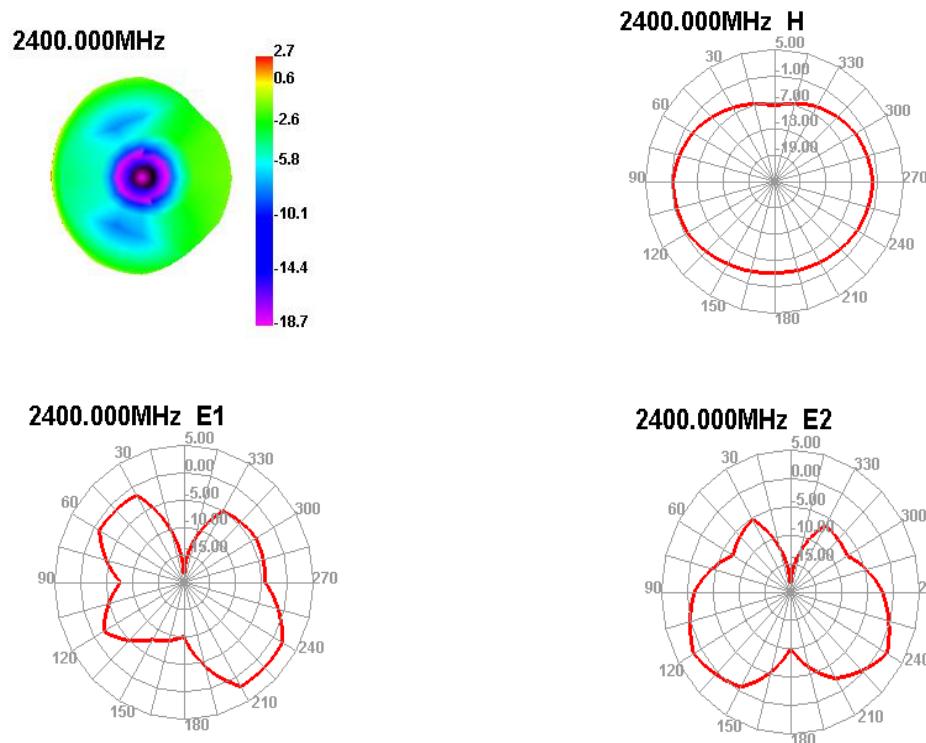

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

TITLE: SC2450M3216A1 Specification

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT NO.

SC2450M3216A1

SPEC REV.





A0

PAGE7





OF

10

□ 3D Gain Pattern (2450 MHz)

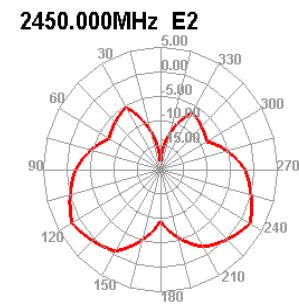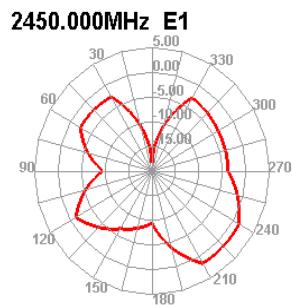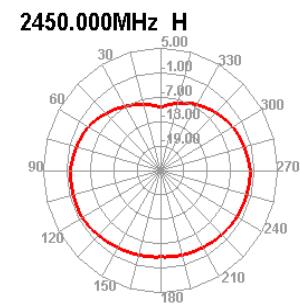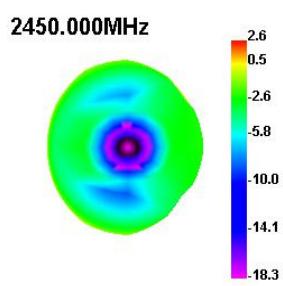

□ 3D Gain Pattern (2500 MHz)

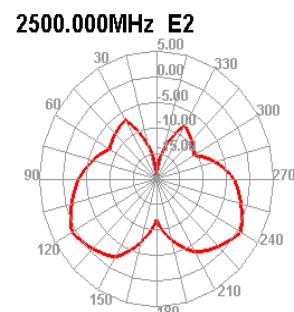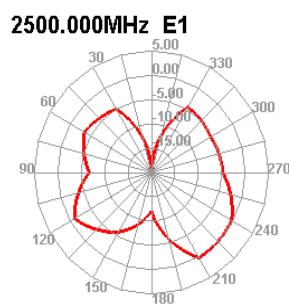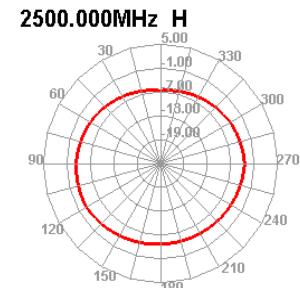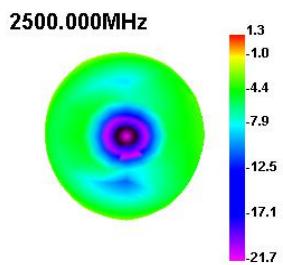

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

TITLE: SC2450M3216A1 Specification

DOCUMENT NO.

SC2450M3216A1

SPEC REV.

A0

PAGE8

OF

10

8.Environmental Characteristics

8.1 Reliability Test

| Item | Condition | Specification |
|-----------------------------|--|--|
| Thermal shock | 1. 30 ± 3 minutes at $-40^\circ C \pm 5^\circ C$, 2. Convert to $+105^\circ C$ (5 minutes) 3. 30 ± 3 minutes at $+105^\circ C \pm 5^\circ C$, 4. Convert to $-40^\circ C$ (5 minutes) 5. Total 100 continuous cycles | No apparent damage Fulfill the electrical spec. after test. |
| Humidity resistance | 1. Humidity: 85% R.H. 2. Temperature: $85 \pm 5^\circ C$ 3. Time: 1000 hours. | No apparent damage Fulfill the electrical spec. after test. |
| High temperature resistance | 1. Temperature: $150^\circ C \pm 5^\circ C$ 2. Time: 1000 hours. | No apparent damage Fulfill the electrical spec. after test. |
| Low temperature resistance | 1. Temperature: $-40^\circ C \pm 5^\circ C$ 2. Time: 1000 hours. | No apparent damage Fulfill the electrical spec. after test. |
| Soldering heat resistance | 1. Solder bath temperature : $260 \pm 5^\circ C$ 2. Bathing time: 10 ± 1 seconds | No apparent damage |
| Solderability | The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of $245 \pm 5^\circ C$ for 3 ± 1 seconds. | No apparent damage |

8.2 Storage Condition

(1) At warehouse:

The temperature should be within $0 \sim 30^\circ C$ and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.

(2) On board:

The temperature should be within $-40 \sim 85^\circ C$ and humidity should be less than 85%RH.

8.3 Operating Temperature Range

Operating temperature range : $-40^\circ C$ to $+105^\circ C$.

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

SCALE: N/A

UNIT: mm

DRAWN BY: SARA

CHECKED BY: XD

DESIGNED BY: HEXIN

APPROVED BY: XD

HMCORE

Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT NO.

SC2450M3216A1

SPEC REV.


A0

PAGE9

OF

10

9. Recommended Reflow Soldering

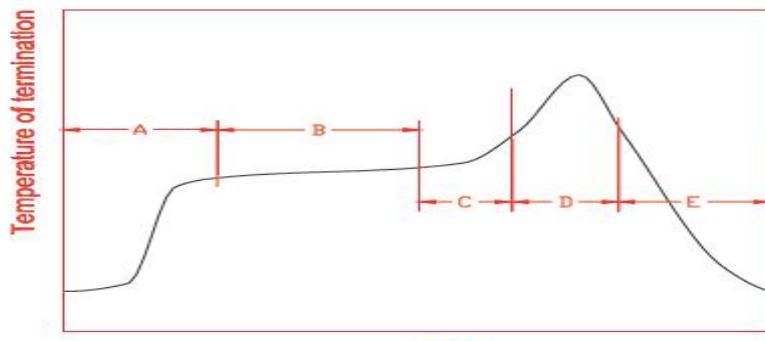

| | | Time | |
|---|------------------------------------|--------------------------------------|---------------|
| A | 1 st rising temperature | The normal to Preheating temperature | 30s to 60s |
| B | Preheating | 140°C to 160°C | 60s to 120s |
| C | 2 nd rising temperature | Preheating to 200°C | 20s to 40s |
| D | Main heating | if 220°C | 50s~60s |
| | | if 230°C | 40s~50s |
| | | if 240°C | 30s~40s |
| | | if 250°C | 20s~40s |
| | | if 260°C | 20s~40s |
| E | Regular cooling | 200°C to 100°C | 1°C/s ~ 4°C/s |

*reference: J-STD-020C

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all waves and re-flow soldering system. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

(1) Soldering Gun Procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350°C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

(2) Soldering Volume

Note that excess of soldering volume will easily get crack the body of this product.

10. Taping Package and Label marking: (unit: mm)

(1) Quantity/Reel: 4000pcs/Reel

UNLESS OTHER SPECIFIED TOLERANCES ON:

$0 = \pm 10.0 = \pm 0.500.00 = \pm 0.20$

ANGLES = \pm

HOLE DIA = \pm

HMCORE

Honmax Technology Limited

This DRAWINGS and specifications are the property of honmax and shall not be reproduced or used as the basis for the manufacture or sale of apparatus or devices without permission

DOCUMENT
NO.

SC2450M3216A1

SPEC REV.
A0

TITLE: SC2450M3216A1 Specification