



FCC PART18 TEST REPORT

Report No.: 20250417G08681X-E

Product Name: Microwave Oven

Trade Name: Midea, TOSHIBA, INSIGNIA, FARBERWARE, CHEFMAN, SHARP Carousel

Model No.: EM0P04##, EM0P04***, EM0P04***-PMB, ML-EM32PA(SS), NS-MW11BK5, FMO11AHTPLB, FMO11AHTBSB, FMO11AHTBKN, FM11SS, FMO11AHTBKB, FMO11AHTBKL, FMO11AHTBKM, FM11WHA, FM11BKA, ML-EM32PA(BS), RJ55-SS-11-CK, SMC1162KS, ZSMC1162KS, SMC1161KB, SMC1161KW, ZSMC1161KB, ZSMC1161KW, MMC11S2AST, MMC11S2ABB, MMC11S2AWW, ML4-EM12PA(SS), MMC11S5AOB, MMC11S5AWM, RJ55-11-CK

FCC ID: 2BOTFXM0P04YY

Applicant: MIDEA CONSUMER ELECTRIC (VIET NAM) CO., LTD

Received Date: 2025.04.16

Test Data: 2023.11.15-2023.11.16

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No.43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Query E-Mail: manager@ccic-set.com,
Feedback E-Mail: integrity@ccic-set.com,
Report Query Tel: 0755-26627338, Feedback Tel: 0755-86185963

This test report consists of **21** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name: Microwave Oven

Model No.: EM0P04##, EM0P04***, EM0P04***-PMB, ML-EM32PA(SS), NS-MW11BK5, FMO11AHTPLB, FMO11AHTBSB, FMO11AHTBKN, FM11SS, FMO11AHTBKB, FMO11AHTBKL, FMO11AHTBKM, FM11WHA, FM11BKA, ML-EM32PA(BS), RJ55-SS-11-CK, SMC1162KS, ZSMC1162KS, SMC1161KB, SMC1161KW, ZSMC1161KB, ZSMC1161KW, MMC11S2AST, MMC11S2ABB, MMC11S2AWW, ML4-EM12PA(SS), MMC11S5AOB, MMC11S5AWM, RJ55-11-CK

Trade name: Midea, TOSHIBA, INSIGNIA, FARBERWARE, CHEFMAN, SHARP Carousel

Applicant: MIDEA CONSUMER ELECTRIC (VIET NAM) CO., LTD

Applicant Address: NA2 Road, Thoi Hoa Industrial Park, Thoi Hoa Ward, Ben Cat City, Binh Duong Province, Vietnam

Manufacturer: MIDEA CONSUMER ELECTRIC (VIET NAM) CO., LTD

Manufacturer Address: NA2 Road, Thoi Hoa Industrial Park, Thoi Hoa Ward, Ben Cat City, Binh Duong Province, Vietnam

Test Standards: 47 CFR Part 18

Test Result: PASS

Tested by: Deng Shanfei
Deng Shanfei, Test Engineer 2025.04.21

Reviewed by: Sun Jiaohui
Sun Jiaohui, Senior Engineer 2025.04.21

Approved by: Chris You
Chris You, Manager 2025.04.21

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EUT.....	5
1.2 Test Standards and Results	6
1.3 Facilities and Accreditations	7
1.3.1 Facilities	7
1.3.2 Test Environment Conditions	7
1.3.3 Measurement Uncertainty	8
2. EQUIPMENTS LIST	8
3. EMC EMISSION TEST.....	9
3.1 Test Procedure	9
3.1.1 Frequency For Normal Voltage	9
3.1.2 Frequency For Line Voltage	9
3.1.3 Measurement data.....	10
3.2 RADIATION HAZARD TEST	10
3.2.1 Test Setup	10
3.2.2 Limit	10
3.2.3 Test results.....	10
3.3 RF OUTPUT POWER MEASUREMENT	10
3.3.1 Test Standard	10
3.3.2 EUT Operating mode	11
3.3.3 Test Data.....	11
4. CONDUCTED EMISSION	12
4.1.1 Conducted Emission Limit.....	12
4.1.2 Test Procedure	12
4.1.3 Test Setup	12
5. RADIATED EMISSION	15
5.1.1 Radiated Emission Limits	15
5.1.2 Test Setup	15
5.1.3 Test Procedure	16
APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION	20



Change History		
Issue	Date	Reason for change
1.0	2025.04.21	First edition

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

EUT Name	Microwave Oven
Trade Name.....:	Midea, TOSHIBA, INSIGNIA, FARBERWARE, CHEFMAN, SHARP Carousel
Model.....:	EM0P04##, EM0P04***, EM0P04***-PMB, ML-EM32PA(SS), NS-MW11BK5, FMO11AHTPLB, FMO11AHTBSB, FMO11AHTBKN, FM11SS, FMO11AHTBKB, FMO11AHTBKL, FMO11AHTBKM, FM11WHA, FM11BKA, ML-EM32PA(BS), RJ55-SS-11-CK, SMC1162KS, ZSMC1162KS, SMC1161KB, SMC1161KW, ZSMC1161KB, ZSMC1161KW, MMC11S2AST, MMC11S2ABB, MMC11S2AWW, ML4-EM12PA(SS), MMC11S5AOB, MMC11S5AWM, RJ55-11-CK model designations as follow: E: Film type keypad; First M: indicates microwave function; 0: indicates the microwave output power is 1000W; P04: indicates the design No.; ## or ***: "#", "*" may be 0~9, A~Z or blank, indicates different appearance; -P: indicates Painted (Steel) Cavity; Second M: indicates Platform Design Character; B: indicates Bakery (canceled). All models are identical to Midea model EM0P042SU except for model number, trade mark and appearance. Model of EM0P042SU was selected for final testing.
Power Supply	120VAC/60Hz
Rated input Power(microwave):	1600W
Rated output Power(microwave):	1000W
Frequency.....:	2450MHz (ClassB / Group 2)
Magnetron Model.....:	2M519J
Magnetron Manufacturer ...:	WITOL
Description of Support Units :	-Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven. -Load for frequency measurement: 1000milliliters of water in the beaker located in the center of the oven. -Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker

located in the center of the oven and with it in the right front corner.

-Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

Note 1: The EUT have the following typical setups during the test:

Setup1: Microwave heating mode (According to FCC PART 18);

Note 2: Based on the original report #: 20231117G15293X-E, change the applicant, manufacturer's name and address, and updated the customer's models and trade mark. Everything else are exactly the same.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 18:

No.	Identity	Document Title
1	47 CFR Part 18	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

Emission			
Standard	Item	Class / Severity	Result
47 CFR PART 18	Conducted Emission (150 kHz to 30 MHz)	18.307(b)	PASS
	Radiated Emission (30 MHz to 1 GHz)	18.305(b)	PASS



1.3 Facilities and Accreditations

1.3.1 Facilities

CCIC-SET Lab 1

Address: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Jun. 30th, 2025.

ISED Registration: 11185A, CAB number: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A on Aug. 04, 2016, valid time is until Jun. 30th, 2025.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

CCIC-SET Lab 4

Address: No.125, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan City, Guangdong Province, China

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C- 35°C
Relative Humidity (%):	25% -75%

Atmospheric Pressure (kPa):	86kPa-106kPa
-----------------------------	--------------

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	U _c = 3.2 dB (k=2)
Uncertainty of Radiated Emission:(30MHz~1GHz)	U _c = 5.8 dB (k=2)
Uncertainty of Radiated Emission:(1~18GHz)	U _c = 5.1 dB (k=2)
Radiation Hazard Measurement	U _c = 2.4 dB (k=2)

2. EQUIPMENTS LIST

A. Equipment List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	Rohde & Schwarz	ESIB26	A0304218	2022.11.29	2023.11.28
LISN	ROHDE&SCHWARZ	NSLK 8127	A210803670	2023.06.08	2024.06.07
Shield Room	Xinju Electronics	L9000*W4500* H3100	A181003230	2021.09.05	2024.09.04
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2023.03.16	2024.03.15
Broadband Ant.	ETC	MCTD2786	A150402240	2021.03.05	2024.03.04
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2021.03.26	2024.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2023.06.08	2024.06.07
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2021.06.08	2024.06.07
EMI Horn Ant.	ETC	1209	A150402241	2021.01.02	2024.01.01
Test Receiver	Rohde & Schwarz	ESIB26	A0304218	2022.11.29	2023.11.28
Spectrum Analyzer	ROHDE&SCHWARZ	ESW26	A180502935	2023.06.08	2024.06.07
Portable Spectrometer	ROHDE&SCHWARZ	FSH8	A140401672	2023.02.14	2024.02.13
Prode	ROHDE&SCHWARZ	TSEMF-B1	A14040167 1	2023.02.14	2024.02.13

3. EMC EMISSION TEST

3.1 Test Procedure

Test Requirement: 47 CFR PART 18

Test Method: FCC/OST MP-5:1986

Power Supply: 120VAC/60Hz

Frequency Range: 2400-2500MHz

Detector: Peak

Limit: ISM equipment may be operated at any frequency above 9KHz and the frequency band 2400-2500MHz is allocated for use by ISM equipment

ISM frequency	Tolerance
6.78 MHz	±15.0 kHz
13.56 MHz	±7.0 kHz
27.12 MHz	±163.0 kHz
40.68 MHz	±20.0 kHz
915 MHz	±13.0 MHz
2,450 MHz	±50.0 MHz
5,800 MHz	±75.0 MHz
24,125 MHz	±125.0 MHz
61.25 GHz	±250.0 MHz
122.50 GHz	±500.0 MHz
245.00 GHz	±1.0 GHz

3.1.1 Frequency For Normal Voltage

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

3.1.2 Frequency For Line Voltage

The EUT was operated / warmed by at least 10 minutes of use with a 1000mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

3.1.3 Measurement data

Operating Mode	Frequency(MHz)
Normal Voltage	2433.7-2462.9
Line Voltage	2446.5-2474.2

3.2 RADIATION HAZARD TEST

3.2.1 Test Setup

The EUT was set-up according to the FCC MP-5 and FCC Part 18 for radiation hazard measurement. The measurement was using a microwave leakage meter to measure the radiation leakage in the as-received condition with the oven door closed. A 700 mL water load in a breaker was located in the center of the oven and the microwave oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.

3.2.2 Limit

A maximum of 1.0mW/cm² is allowed in according with the applicable FCC standards

3.2.3 Test results

Test location	Test result (mW/cm ²)	Limit(mW/cm ²)	Verdict
Left side	0.24	1.0	Pass
Right side	0.23	1.0	Pass
Front	0.34	1.0	Pass
Rear	0.28	1.0	Pass

There was no microwave leakage exceeding a power level of 0.34 m W/cm² observed at any point 5cm or more from the external surface of the oven

3.3 RF OUTPUT POWER MEASUREMENT

3.3.1 Test Standard

Test Requirement	47 CFR PART 18
Test Method	FCC/OST MP-5:1986
Power Supply	120VAC/60Hz

3.3.2 EUT Operating mode

Test the EUT in microwave mode with full power.

3.3.3 Test Data

Mass of Water(g)	Mass of the container(g)	ambient temperature (°C)	Initial temperature(°C)	Final temperature(°C)	Heating Time(S)	Output Power(Watt)
1000	280	20.3	9.7	31.8	120	797.65

Formula:

$$P = \frac{4.2 \times m_w (T_2 - T_1) + 0.9 \times m_c (T_2 - T_0)}{t}$$

P is the microwave power output, in watts

Mw is the mass of the water, in grams

Mc is the mass of the container, in grams

T0 is the ambient temperature, in degrees Celsius

T1 is Initial temperature of the water, in degrees Celsius

T2 is final temperature of the water, in degrees Celsius

T is heating time, in seconds, excluding the magnetron filament heating-up time

4. CONDUCTED EMISSION

4.1.1 Conducted Emission Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


Note:

- a) The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
- b) The lower limit is applicable at the transition frequency.

4.1.2 Test Procedure


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

4.1.3 Test Setup

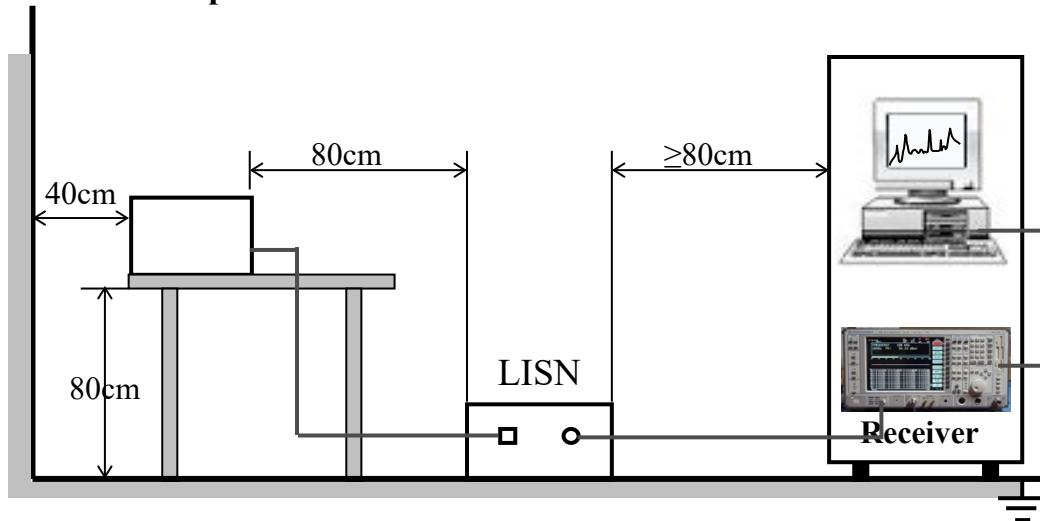

A. Test Result:


Mains terminal disturbance voltage, Setup1, L phase

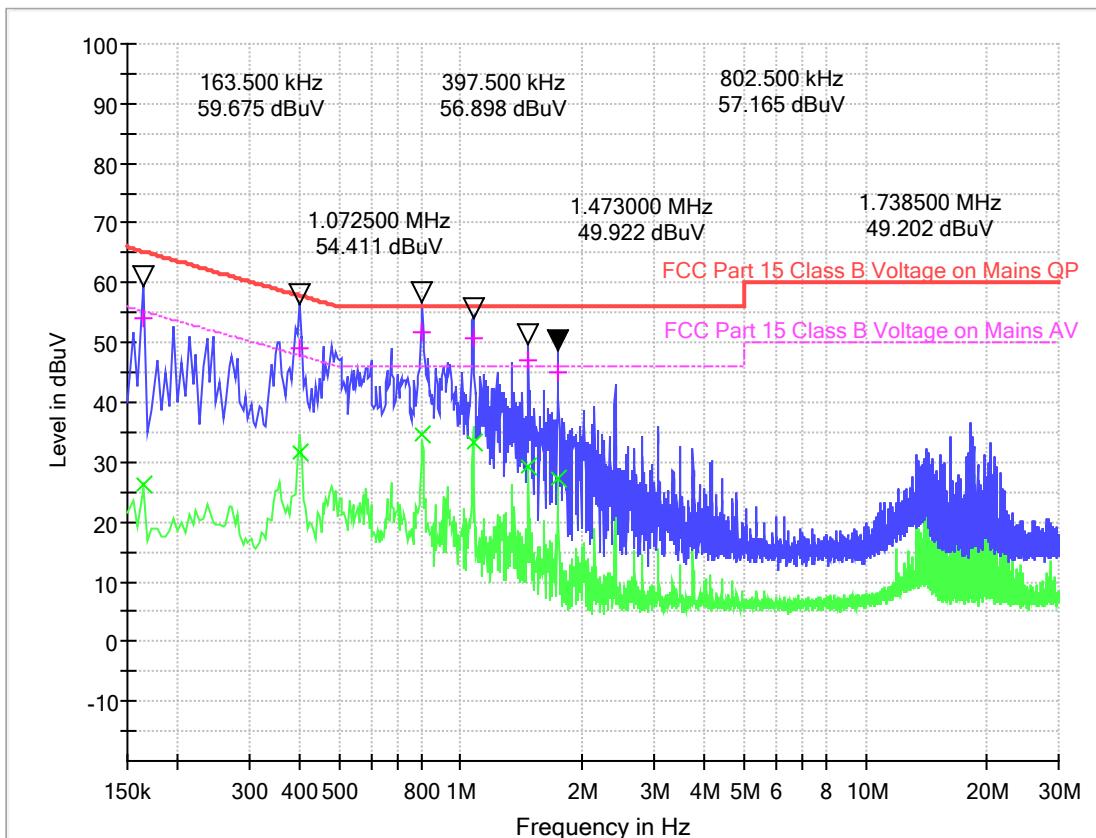

(Plot A: L Phase)

Frequency (MHz)	Quasi Peak	Average (dB μ V)	Cable Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.163500	53.95	26.15	0.1	11.0	11.33	65.3	29.13	55.3
0.397500	48.95	31.64	0.1	11.1	8.96	57.9	16.27	47.9
0.802500	51.87	34.55	0.2	11.0	4.13	56.0	11.45	46.0
1.072500	50.79	33.46	0.2	11.0	5.21	56.0	12.54	46.0
1.473000	47.08	29.28	0.2	10.9	8.92	56.0	16.72	46.0
1.738500	45.12	27.16	0.2	10.9	10.88	56.0	18.84	46.0

Mains terminal disturbance voltage, Setup 1, N phase

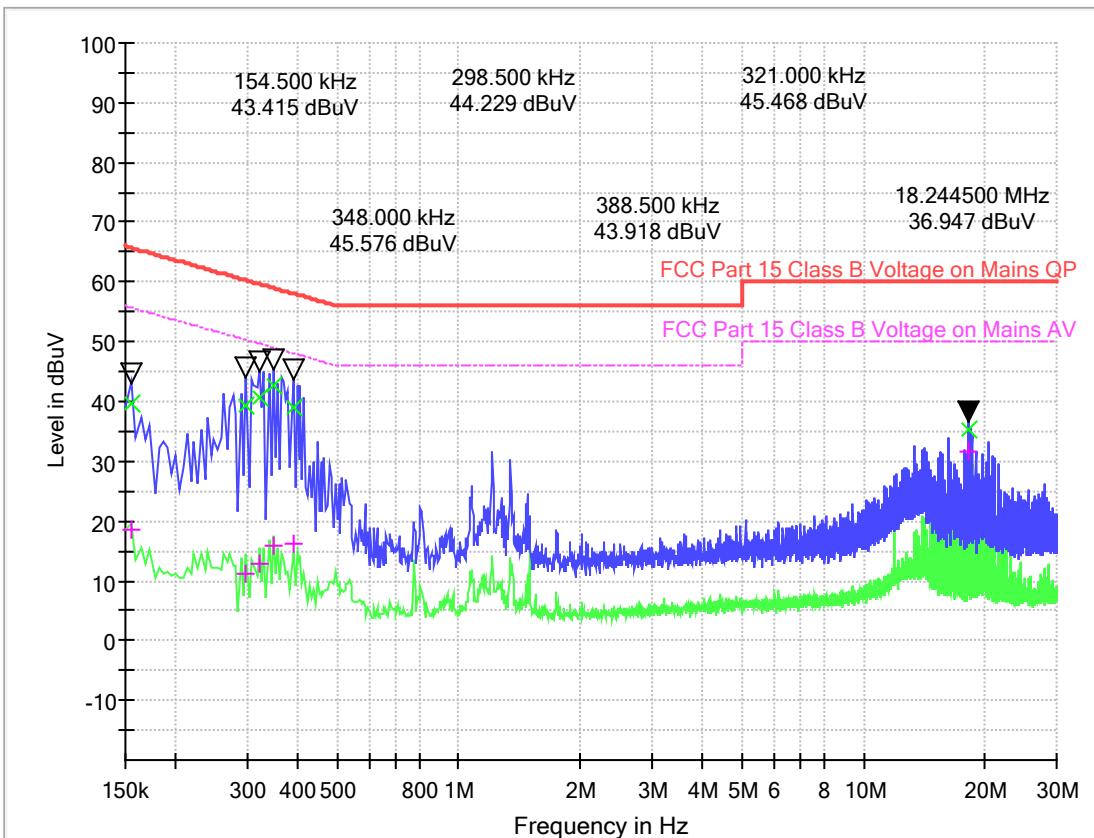

(Plot B: N Phase)

Frequency (MHz)	Quasi Peak	Average (dB μ V)	Cable Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.154500	39.74	18.49	0.1	10.9	26.01	65.8	37.26	55.8
0.298500	39.37	11.26	0.1	11.0	20.91	60.3	39.02	50.3
0.321000	40.79	12.84	0.1	10.9	18.89	59.7	36.84	49.7
0.348000	42.55	15.70	0.1	10.9	16.46	59.0	33.31	49.0
0.388500	38.86	16.07	0.1	10.9	19.24	58.1	32.03	48.1
18.244500	35.26	31.62	0.5	11.1	24.74	60.0	18.38	50.0

Test Result: PASS

5. RADIATED EMISSION

5.1.1 Radiated Emission Limits

- (a) ISM equipment operation on a frequency specified in §18.301 is permitted unlimited radiated energy in the band specified for that frequency.
- (b) The field strength levels of emissions which lie outside the bands specified in §18.301,unless otherwise indicated, shall not exceed the following:


RF Power generated by equipment(watts)	Field strength limit(uV/m) @300m
Below 500	25
500 or more	25*SQRT(power/500)

Power =797.65W


Limit=20lg(25*SQRT(power/500))+20lg(300/3) @ 3m distance.

5.1.2 Test Setup

For radiated emissions from 30MHz to 1GHz

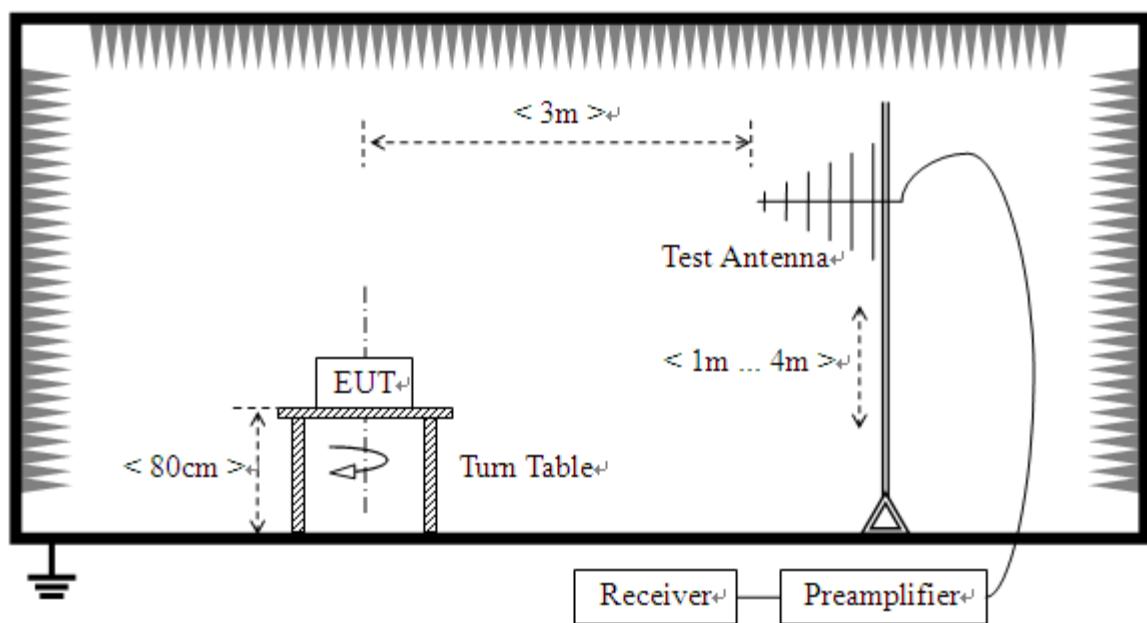

For radiated emissions above 1GHz

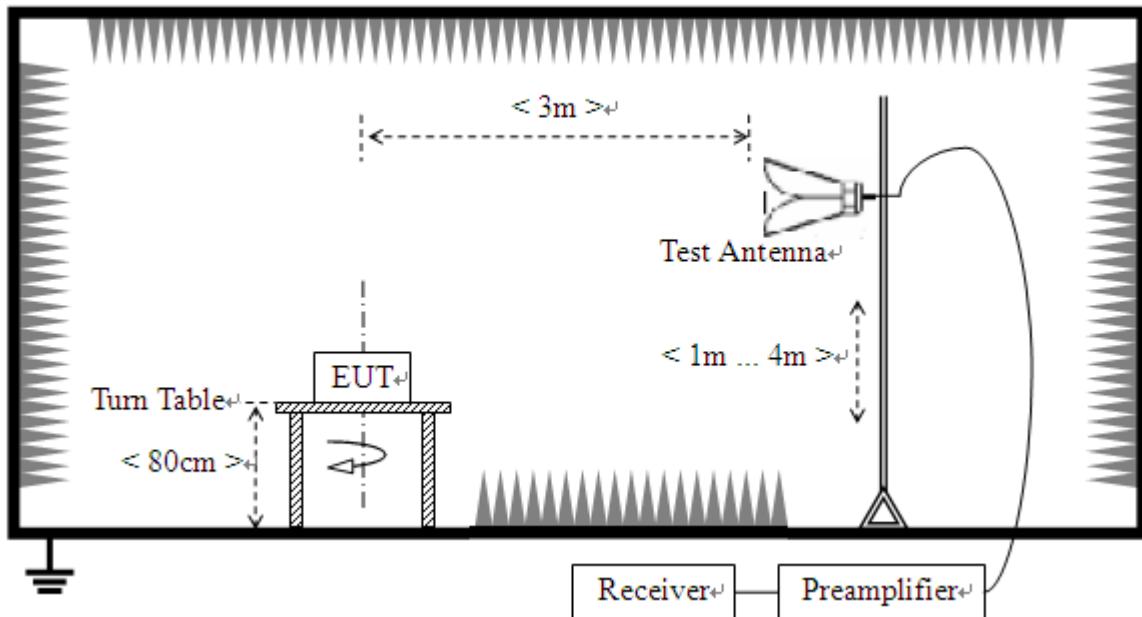


5.1.3 Test Procedure

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Test Result:


Radiation disturbances, antenna polarization: Setup1, Horizontal

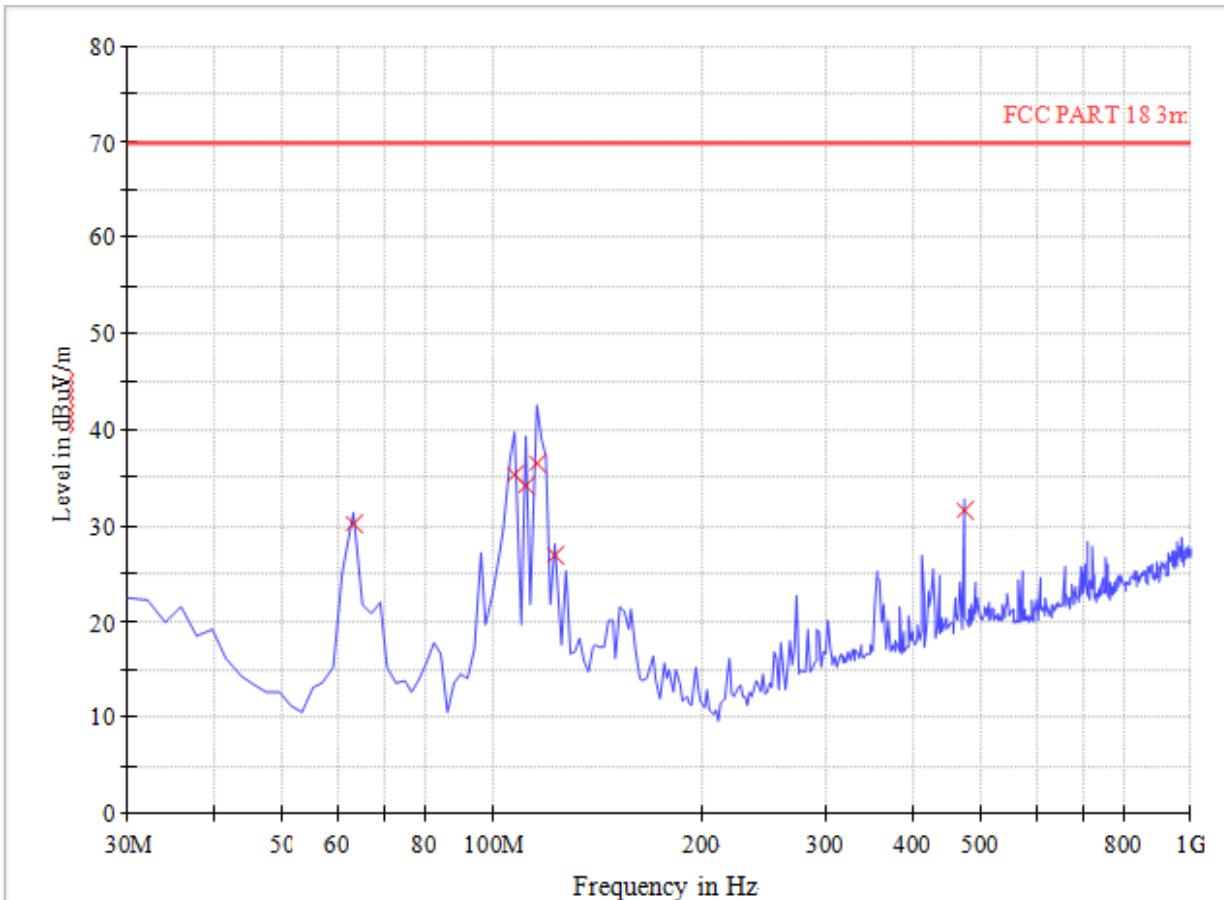

(Plot A: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
63.08	30.23	120.000	100.0	69.99	39.76	Horizontal	Pass
107.80	35.42	120.000	100.0	69.99	34.57	Horizontal	Pass
111.72	34.15	120.000	100.0	69.99	35.84	Horizontal	Pass
115.56	36.50	120.000	100.0	69.99	33.49	Horizontal	Pass
123.32	27.00	120.000	100.0	69.99	42.99	Horizontal	Pass
473.24	31.66	120.000	100.0	69.99	38.33	Horizontal	Pass

Radiation disturbances, antenna polarization: Setup1, Vertical

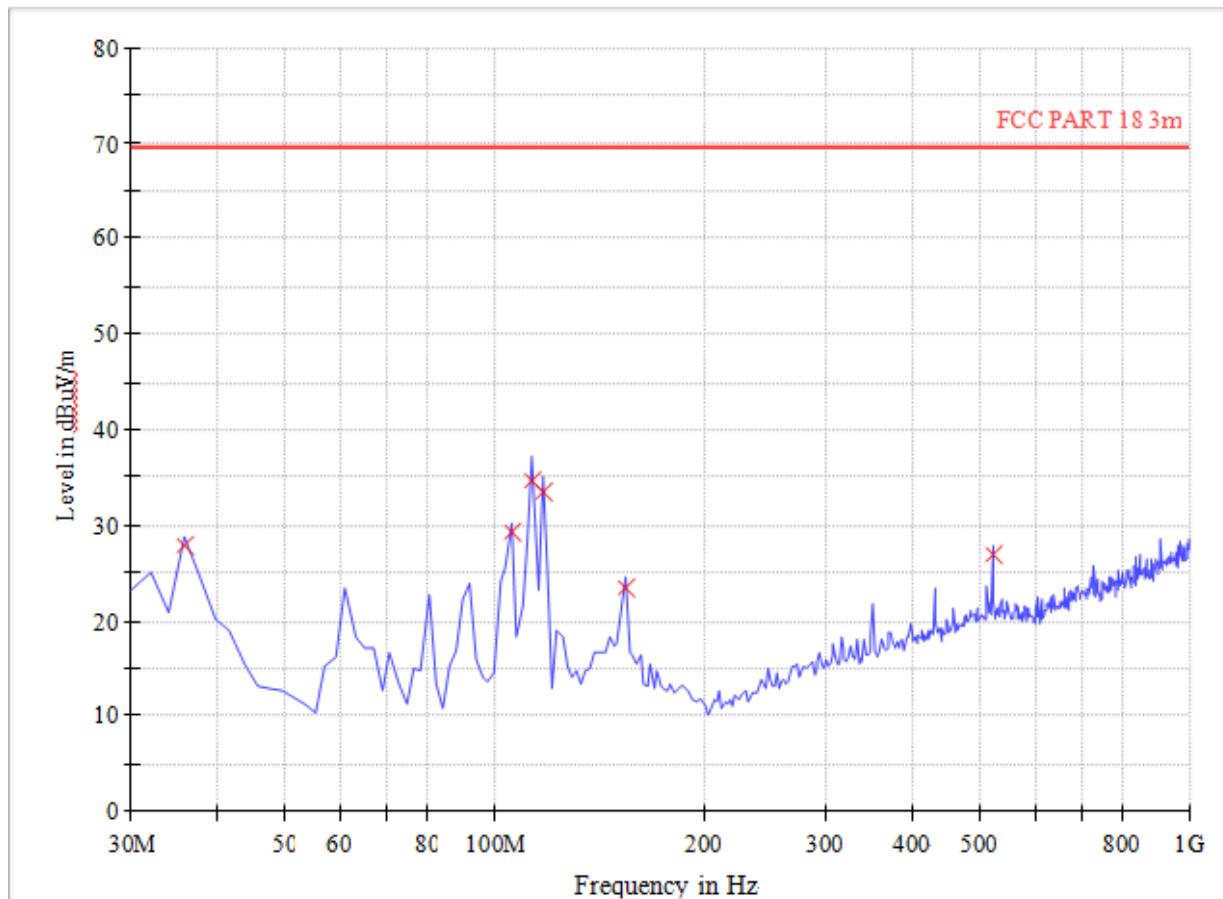

(Plot B: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
35.84	27.73	120.000	100.0	69.99	42.26	Vertical	Pass
105.84	29.26	120.000	100.0	69.99	40.73	Vertical	Pass
113.64	34.65	120.000	100.0	69.99	35.34	Vertical	Pass
117.48	33.40	120.000	100.0	69.99	36.59	Vertical	Pass
154.48	23.48	120.000	100.0	69.99	46.51	Vertical	Pass
521.84	26.88	120.000	100.0	69.99	43.11	Vertical	Pass

Above 1GHz, Setup1

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1837.46	52.78	-12.88	69.99	17.21	100	332	Vertical
2	3435.86	55.75	-7.54	69.99	14.24	100	271	Vertical
3	3682.42	50.38	-6.12	69.99	19.61	100	30	Vertical
4	4247.81	52.91	-3.55	69.99	17.08	100	154	Vertical
5	6122.53	55.61	-0.06	69.99	14.38	100	52	Vertical
6	8341.59	56.06	3.27	69.99	13.93	100	17	Vertical


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1199.80	47.73	-15.03	69.99	22.26	100	203	Horizontal
2	1913.98	54.86	-12.31	69.99	15.13	100	184	Horizontal
3	2283.82	54.01	-11.62	69.99	15.98	100	80	Horizontal
4	5089.52	53.36	-1.84	69.99	16.63	100	162	Horizontal
5	9140.79	62.87	3.95	69.99	7.12	100	14	Horizontal
6	13544.89	60.70	7.55	69.99	9.29	100	93	Horizontal

APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION


1. Radiated Emission Measurement below 1GHz



2. Radiated Emission Measurement above 1GHz

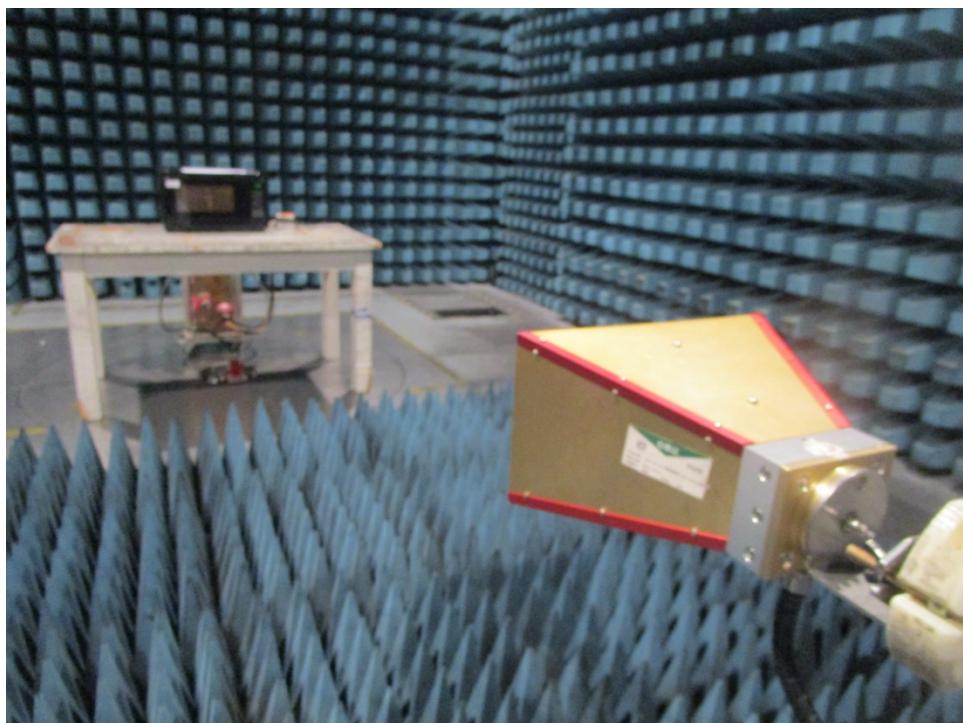

3. Conducted emission at AC mains input/output port Measurement

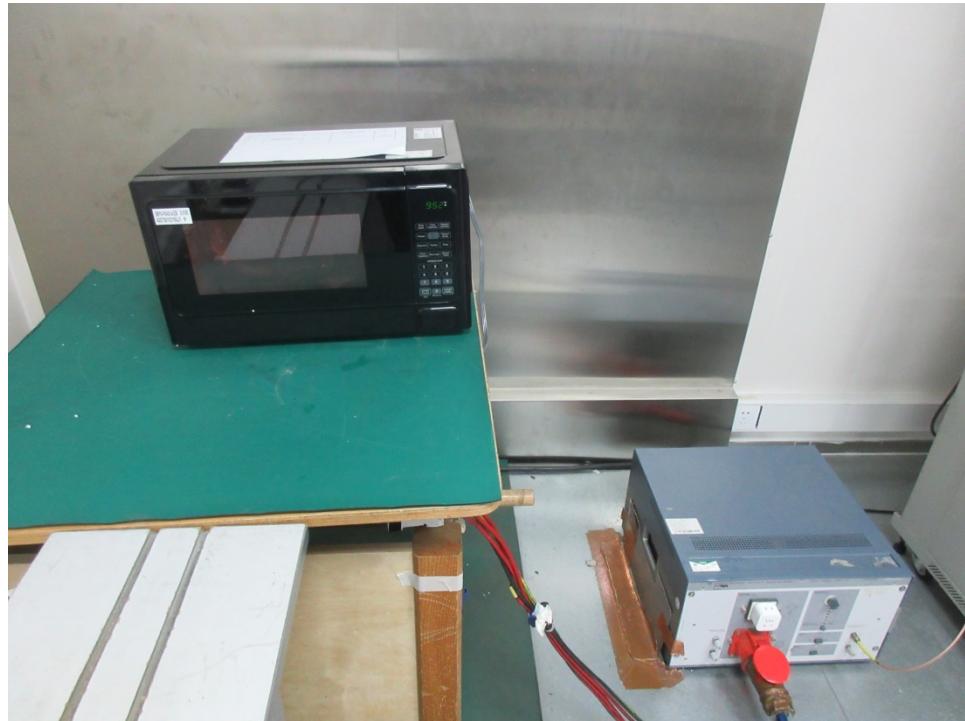

4. Radiation Hazard Test



APPENDIX II: PHOTOGRAPHS OF PRODUCT PHOTO

External Photo





Report No.: 20250417G08681X-E





Report No.: 20250417G08681X-E







Report No.: 20250417G08681X-E

Internal Photo







Report No.: 20250417G08681X-E

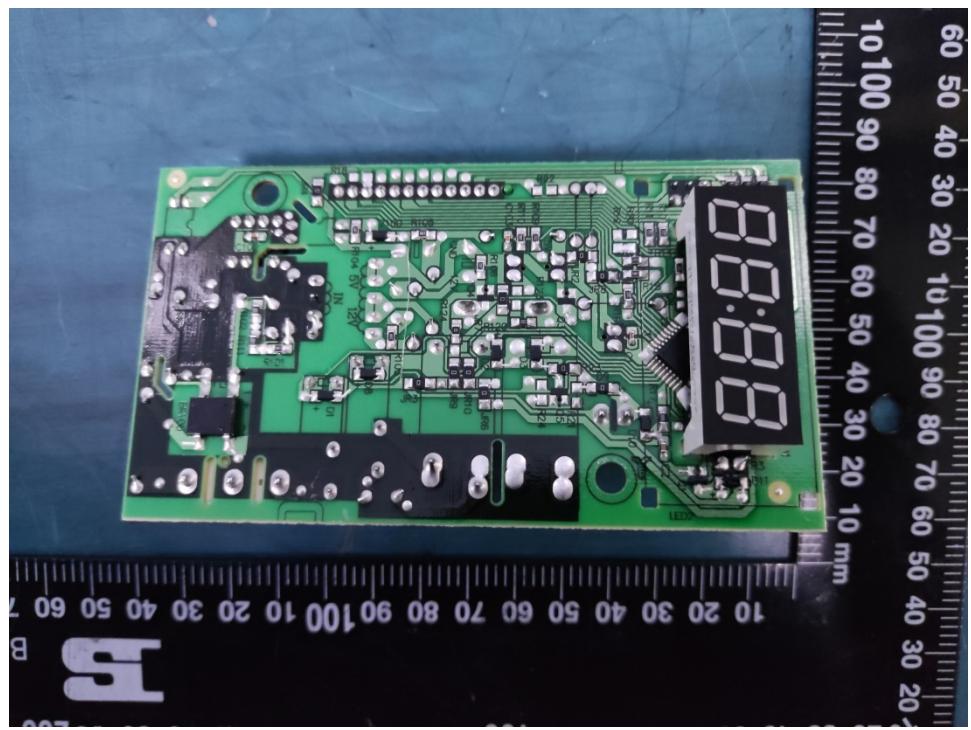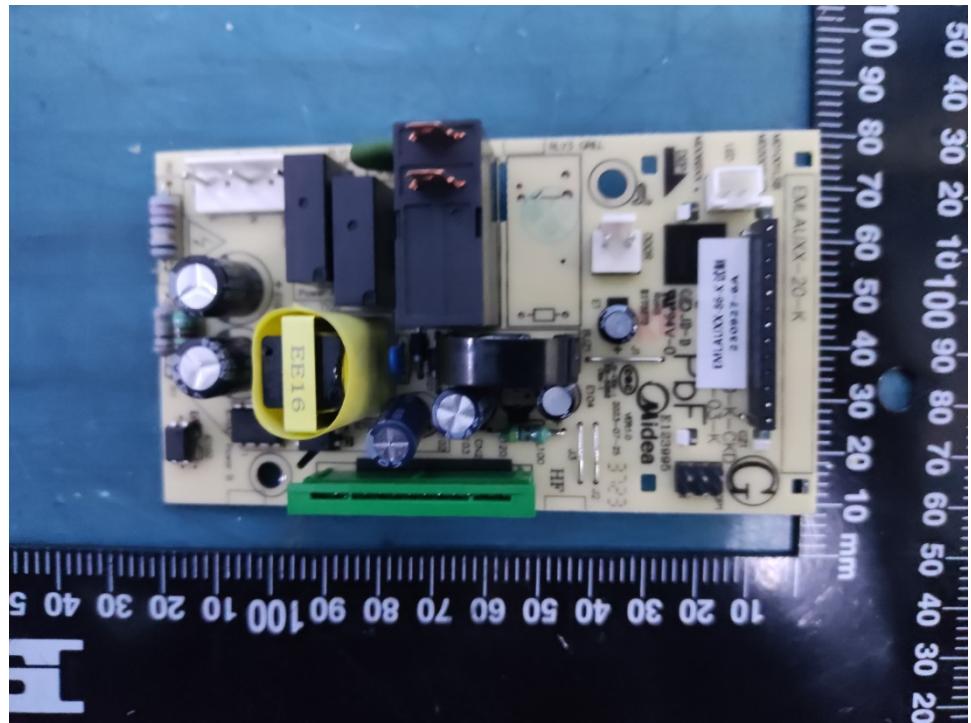




Report No.: 20250417G08681X-E

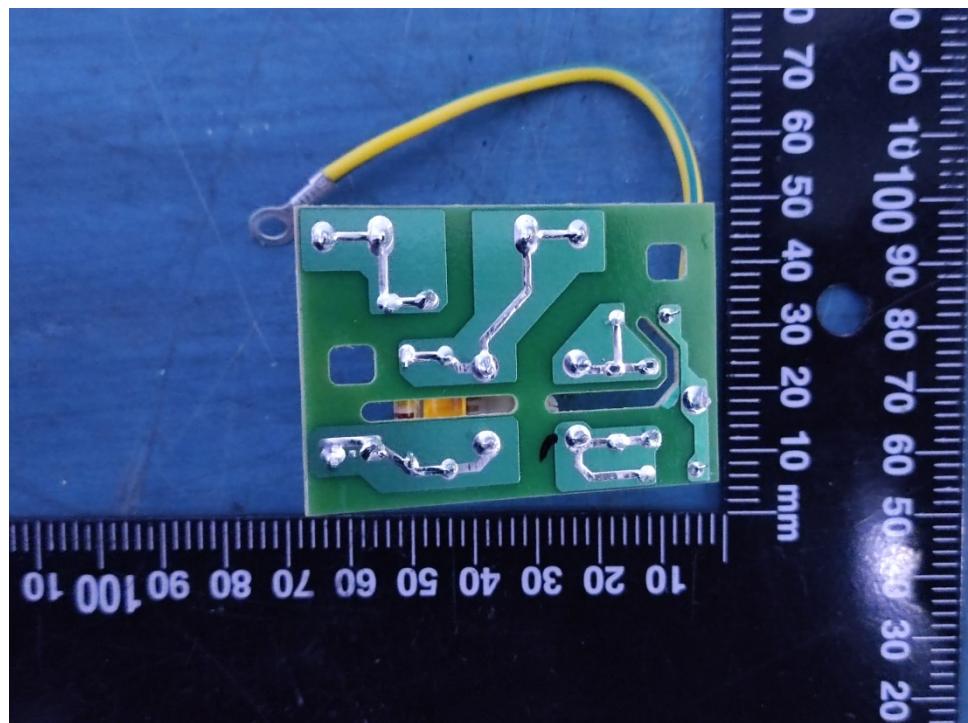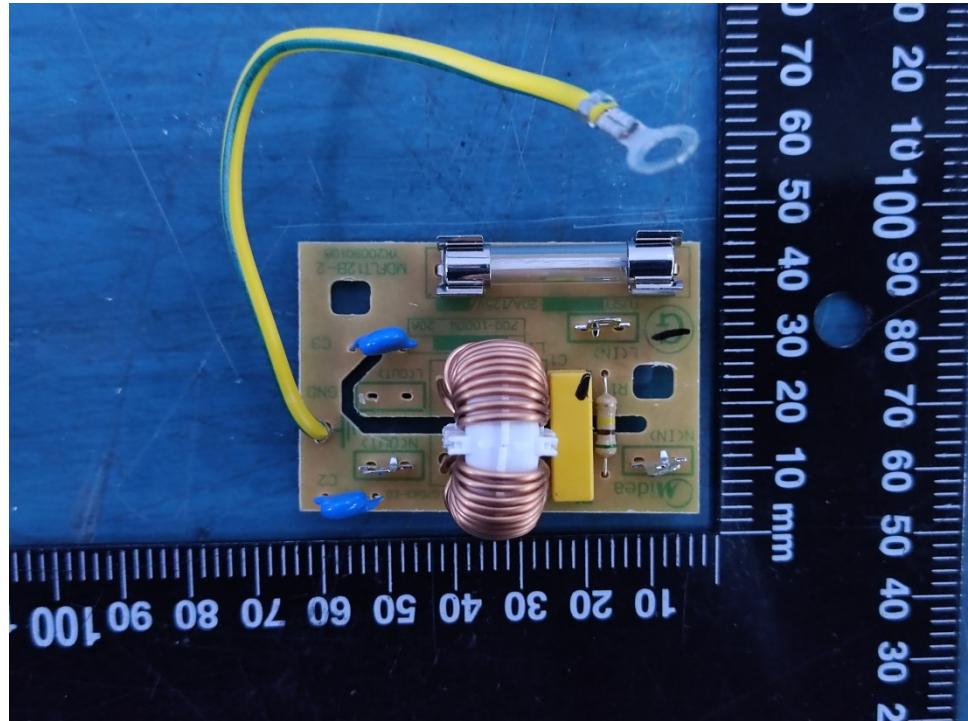



Report No.: 20250417G08681X-E

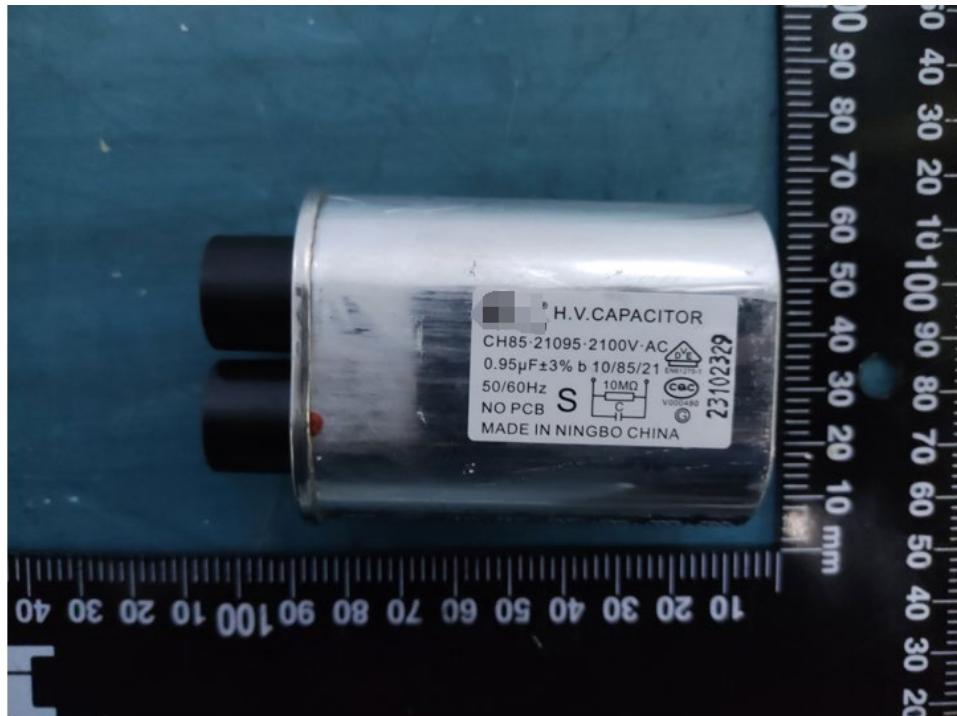

※※※ End of Report ※※※