



FCC TEST REPORT

For

Guangzhou SICI Technical Co., LTD

Magnetic Wireless Power Bank

Test Model: W2

Prepared for : Guangzhou SICI Technical Co., LTD
Address : 5th Floor, No7-8 XinXin Road, Yongning Street, Zengcheng District,
Guangzhou, 511356, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 18, 2025
Number of tested samples : 2
Sample No. : A250416034-1(Engineer sample), A250416034-2(Normal sample)
Date of Test : April 18, 2025 ~ April 28, 2025
Date of Report : April 28, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC TEST REPORT KDB 680106 D01 Wireless Power Transfer v04	
Report Reference No. : LCSA04165114EB	
Date of Issue : April 28, 2025	
Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.	
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China	
Testing Location/ Procedure : Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method □	
Applicant's Name : Guangzhou SICI Technical Co., LTD	
Address : 5th Floor, No7-8 XinXin Road, Yongning Street, Zengcheng District, Guangzhou, 511356, Guangdong, China	
Test Specification Standard : FCC CFR 47 PART 1, § 1.1310 KDB 680106 D01 Wireless Power Transfer v04	
Test Report Form No..... : LCSEMC-1.0	
TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.	
Master TRF..... : Dated 2023-12	
Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
EUT Description. : Magnetic Wireless Power Bank	
Trade Mark : N/A	
Test Model..... : W2	
Ratings : Please Refer to Page 6	
Result : PASS	

Compiled by:

Jack Liu/Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**ISED -- TEST REPORT**

Test Report No. :	LCSA04165114EB	<u>April 28, 2025</u> Date of issue
--------------------------	-----------------------	--

Test Model.....	: W2
EUT.....	: Magnetic Wireless Power Bank
Applicant.....	: Guangzhou SICI Technical Co., LTD
Address.....	: 5th Floor, No7-8 XinXin Road, Yongning Street, Zengcheng District, Guangzhou, 511356, Guangdong, China
Telephone.....	:
Fax.....	:
Manufacturer.....	: Guangzhou SICI Technical Co., LTD
Address.....	: 5th Floor, No7-8 XinXin Road, Yongning Street, Zengcheng District, Guangzhou, 511356, Guangdong, China
Telephone.....	:
Fax.....	:
Factory.....	: Guangzhou SICI Technical Co., LTD
Address.....	: 5th Floor, No7-8 XinXin Road, Yongning Street, Zengcheng District, Guangzhou, 511356, Guangdong, China
Telephone.....	:
Fax.....	:

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Revision	Issue Date	Revisions	Revised By
000	April 28, 2025	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	6
1.3. EXTERNAL I/O CABLE	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. TEST EQUIPMENT	7
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	7
1.8. COIL DESCRIPTION	7
1.10. COIL SPECIFICATIONS	8
1.11. DUTY CYCLE	8
2. TEST METHODOLOGY	10
2.1. REFERENCE EVALUATION METHOD	10
2.2. LIMIT	10
2.3. TEST SETUP DIAGRAM	10
2.4. MEASUREMENT PROCEDURE	11
2.5. EQUIPMENT APPROVAL CONSIDERATIONS OF KDB 680106 D01V04	12
3. TEST RESULTS	13
3.3 CONCLUSION	18
4. TEST SETUP PHOTOS	19





1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Magnetic Wireless Power Bank
Test Model : W2
Ratings : Battery Capacity: 10000mAh / 3.85V / 38.5Wh
Input | USB-C1 or USB-C2: 5V $\equiv$ 3A / 9V $\equiv$ 2A
Output | USB-C1 or USB-C2: 5V $\equiv$ 3A / 9V $\equiv$ 2.22A / 12V $\equiv$ 1.67A
Wireless Charger: 5W / 7.5W / 10W / 15W
Watch Charger: 5V / 2.5W
USB-C + Wireless + Watch Charging: 5V $\equiv$ 3A(15W max.)
Hardware Version : /
Software Version : /
Wireless Charging :
Operating Frequency : 110.2~205.0KHz, 300.0~360.0KHz
Modulation Type : ASK
Antenna Type : Coil Antenna

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	--	FCC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B373	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	2	N/A

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2024-11-11	2025-11-10
B-Field Probe	Narda	100cm ²	M-1154	2024-10-08	2025-10-07

Exposure Level Tester ELT-400 detailed parameters are as follows:

Common parameter	
Operating temperature	-10 °C ~ +50 °C
Operation humidity	< 95 % (30 °C) or < 29 g/m ³
Weight	910 g
Size	180 mm x 100 mm x 55 mm(Main engine) / 290 mm x 125 mm Ø (Probe)
Display	LCD backlit display, 4 refresh rates per second
Battery	Nimh battery (4 x Mignon, AA), rechargeable
Operating time, typical	12 h
Power supply	100 ~240 V AC / 47 ~ 63 Hz
Charging time, typical	2 hours
Recommended calibration cycle	24 months
Country of origin	Germany

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Field Strength Uncertainty	1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes		
Mode 1	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: <1%)	Record
Mode 8	AC/DC Adapter (9V/2A) + EUT +Watch (Battery Status: <50%)	Record
Mode 9	AC/DC Adapter (9V/2A) + EUT +Watch (Battery Status: <100%)	Record
Mode 10	AC/DC Adapter (5V/3A) + EUT + Watch (Battery Status: <1%)	Pre-tested
Mode 11	AC/DC Adapter (5V/3A) + EUT +Watch (Battery Status: <50%)	Pre-tested
Mode 12	AC/DC Adapter (5V/3A) + EUT +Watch (Battery Status: <100%)	Pre-tested
Note: All test modes were pre-tested for ac and dc mode, but we only recorded the worst case in this report for ac mode.		





1.8. Coil Description

Config.	Mode	Descriptions
1	Standby (Flatbed Position) @148.8kHz	EUT Alone powered by AC/DC adapter
2	Operating (Flatbed Position) (Phone @148.8kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to AC/DC Adapter & Wireless Charging to WPT Client. 15W: Direct Contact 15W: 2mm Airgap, 2mm Shift Top as Worst-Case Position

1.9. Coil Size

	A	20.5±0.5
	B	39.0±1.0
	C	43.5±0.5
	D	34±2
	E	4M AX
	F	1.17±0.1
	G	0.6±0.1
	H	1.8±0.1
		unit: MM

(Unit: mm)

1.10. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μ H±10%
Material of enclosure(s):	Multiple strands of enamelled wire
Number of turns:	Transmitter 1: 10 turns

1.11. Duty Cycle

Mode	ON Time (ms)	Period (ms)	Duty Cycle (%)
Operating (110.2-205kHz)	/	/	100
Operating (300.0-360kHz)	/	/	100




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

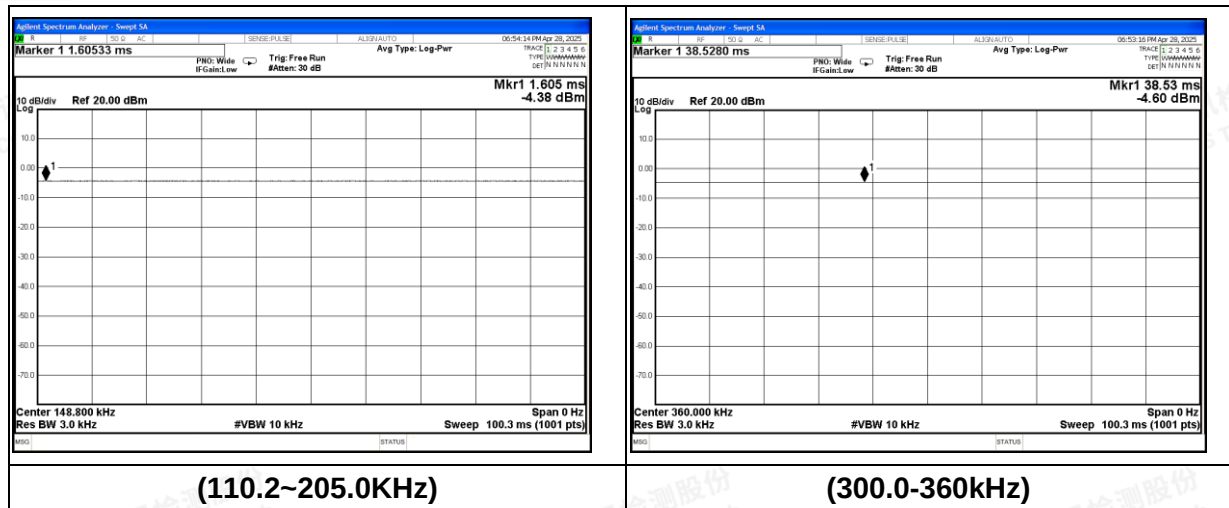

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

2.1. Reference Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1093: Radiofrequency radiation exposure evaluation: portable devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

2.3. Test Setup Diagram

Mobile Exposure Conditions



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Scan code to check authenticity



- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110.2kHz – 205.0kHz, 300.0-360.0kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of each primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No	Mixed mobile and portable exposure conditions
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The E-field and H-field strengths from all simultaneous transmitting coils are demonstrated to less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	Yes	Only one radiating structure and tested at maximum Output Power






3. TEST RESULTS

For portable exposure condition

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) Validation of Field Estimates
 - (a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellowing picture

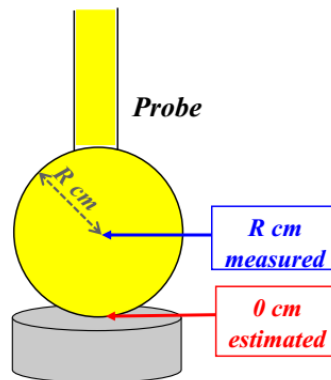


- (b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.
 - (c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.
 - (d) If there is only one estimated value, then a single validation point is sufficient.
 - (e) Validation Example for 4 cm Probe Radius as following
- Step 1






Validation Example for 4 cm Probe Radius

1. Measure the field at 4 cm (closest position)




Step 2


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

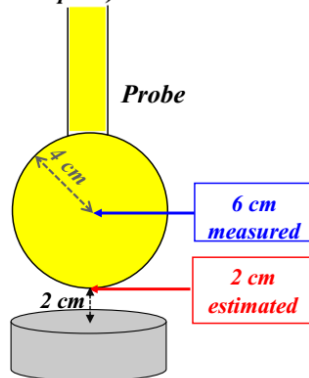

3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1

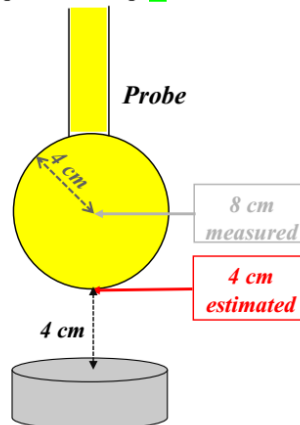


4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2

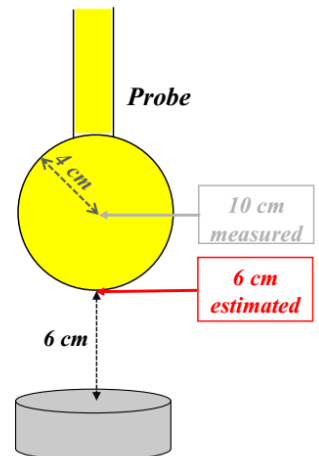


Validation Example for 4 cm Probe Radius

1. Measure the field at 4 cm (closest position)




Step 3


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

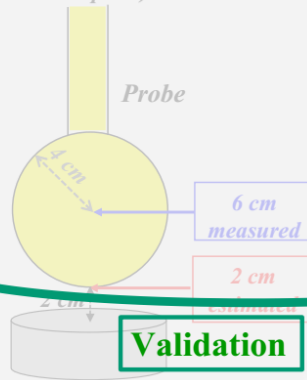

3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1

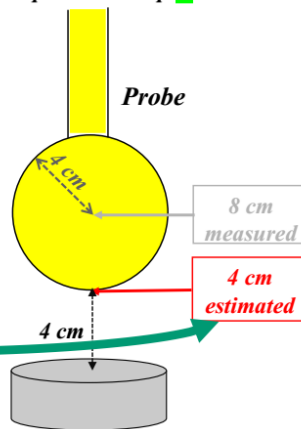

4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2

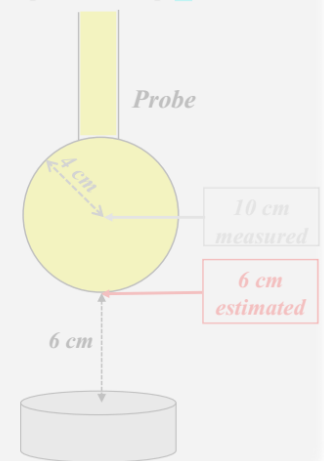

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Validation Example for 4 cm Probe Radius

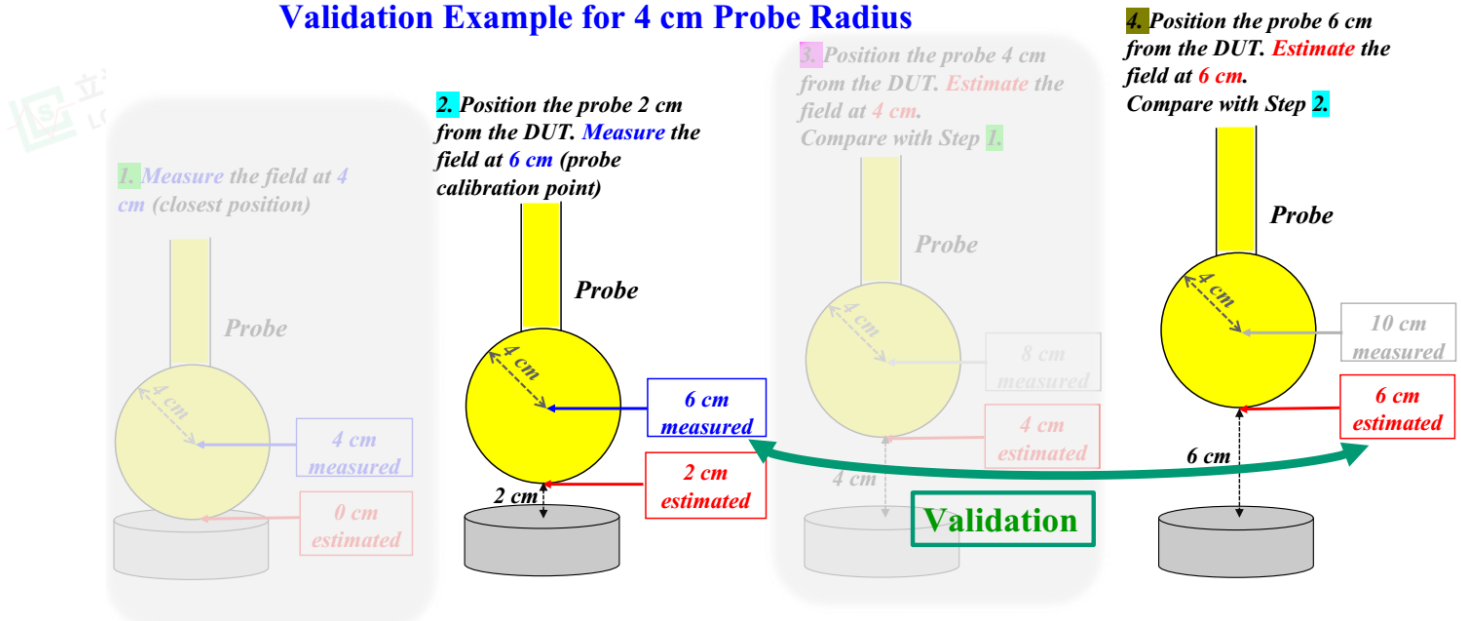

Description of the Validation Example for 4 cm Probe Radius

- Assume that $R=4$ cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe).
 - Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
 - Compare the estimates with the values at the same positions where the field was measured exactly (i.e., 4 cm and 6 cm)
 - The difference between measurements and estimates needs to be no more than 30%.
 - That validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another one at 2.1 cm, that is essentially a repetition
- (6) According to Calibration information and specification about ETL-400 Probe (the B-Field Probe size is 100cm^2 , the probe radius is 5.65cm), The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 5.65cm.
 - (7) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
 - (8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.
 - (9) Validation E-Field and H-Field as bellowing;



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Validation Mode: TM1 H-Field (A/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	0.6297	12.63%	≤ 30%	Compliance
Measured Distance: 5.65 cm	0.5502		≤ 30%	Compliance
Estimated Distance: 2 cm	0.6625	20.44%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.5271		≤ 30%	Compliance
Estimated Distance: 4 cm	0.5595	25.15%	≤ 30%	Compliance
Measured Distance: 9.65 cm	0.4188		≤ 30%	Compliance

Validation Mode: TM1 E-Field (V/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	37.6107	21.17%	≤ 30%	Compliance
Measured Distance: 5.65 cm	29.6471		≤ 30%	Compliance
Estimated Distance: 2 cm	34.6412	21.60%	≤ 30%	Compliance
Measured Distance: 7.65 cm	27.1575		≤ 30%	Compliance
Estimated Distance: 4 cm	31.3803	24.72%	≤ 30%	Compliance
Measured Distance: 9.65 cm	23.6223		≤ 30%	Compliance

Validation Mode: TM7 H-Field (A/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	0.6435	15.59%	≤ 30%	Compliance
Measured Distance: 5.65 cm	0.5432		≤ 30%	Compliance
Estimated Distance: 2 cm	0.6546	17.74%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.5385		≤ 30%	Compliance
Estimated Distance: 4 cm	0.5415	24.52%	≤ 30%	Compliance
Measured Distance: 9.65 cm	0.4087		≤ 30%	Compliance

Validation Mode: TM7 E-Field (V/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	36.8431	23.03%	≤ 30%	Compliance
Measured Distance: 5.65 cm	28.3581		≤ 30%	Compliance
Estimated Distance: 2 cm	35.2136	23.74%	≤ 30%	Compliance
Measured Distance: 7.65 cm	26.8541		≤ 30%	Compliance
Estimated Distance: 4 cm	30.3685	27.04%	≤ 30%	Compliance
Measured Distance: 9.65 cm	22.1561		≤ 30%	Compliance

Note 1: The compliance location as probe tip;

Note 2: The format of difference is;

The E Validation Difference = $(E_{\text{Estimated Distance}} - E_{\text{Measured Distance}}) / E_{\text{Measured Distance}} * 100\%$

The H Validation Difference = $(H_{\text{Estimated Distance}} - H_{\text{Measured Distance}}) / H_{\text{Measured Distance}} * 100\%$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**H-Field and E-Field Emission level with a combination of measured and estimated results.****Test condition: Mode 1**

Operating Frequency :110.2~205.0KHz

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.7383	0.6028	0.6366	0.4887	0.4720	0.4453	1.63
2	Estimate	0.6460	0.4536	0.5184	0.3932	0.5203	0.3443	1.63
4	Estimate	0.5066	0.5230	0.5280	0.5439	0.4068	0.5079	1.63
6	Measured	0.3264	0.4644	0.2934	0.4678	0.2101	0.3479	1.63
8	Measured	0.1956	0.2114	0.2480	0.1435	0.2284	0.2555	1.63
10	Measured	0.0109	0.2303	0.1254	0.0107	0.0850	0.0012	1.63
12	Measured	0.0610	0.0597	0.0939	0.0491	0.0347	0.0270	1.63
14	Measured	0.1294	0.0427	0.0192	0.1233	0.0236	0.0262	1.63
16	Measured	0.1317	0.0546	0.0871	0.0536	0.0883	0.1630	1.63
18	Measured	0.0531	0.0093	0.0008	0.0773	0.0911	0.0500	1.63
20	Measured	0.0047	0.0280	0.0356	0.0215	0.0272	0.0292	1.63

Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.6914	36.1978	36.3371	32.0715	31.7388	31.4742	613
2	Estimate	34.4681	34.3194	33.8986	30.7184	29.6428	29.1950	613
4	Estimate	31.2378	30.7989	31.1333	27.8982	26.9999	26.5299	613
6	Measured	28.9704	26.8192	27.7933	23.7183	22.6032	22.3689	613
8	Measured	24.5342	23.1140	23.7316	20.6142	19.4632	19.2249	613
10	Measured	22.3247	21.1814	21.6532	17.5220	16.1280	16.2219	613
12	Measured	20.0508	19.3254	19.7895	15.3343	13.5094	13.0742	613
14	Measured	17.2280	16.9277	17.0113	13.1148	11.3940	11.1627	613
16	Measured	15.9185	14.7786	15.5646	10.0666	9.2725	9.1665	613
18	Measured	12.7018	11.5583	12.2238	8.3999	7.4132	7.2195	613
20	Measured	7.6273	7.3359	7.5597	5.2825	4.3333	3.9185	613

Test condition: Mode 7

Operating Frequency : 300.0~360.0KHz

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.7223	0.5416	0.6253	0.4836	0.4362	0.5227	1.63
2	Estimate	0.6377	0.4697	0.4820	0.3807	0.4902	0.3418	1.63
4	Estimate	0.5607	0.4785	0.5893	0.4998	0.3874	0.5127	1.63
6	Measured	0.3532	0.3716	0.2647	0.4955	0.2740	0.3485	1.63
8	Measured	0.1778	0.2209	0.2470	0.1854	0.2190	0.2482	1.63
10	Measured	0.0438	0.1811	0.1266	0.0396	0.0959	0.0907	1.63
12	Measured	0.1028	0.0332	0.1235	0.0164	0.0380	0.0200	1.63
14	Measured	0.1394	0.0529	0.0139	0.0900	0.0740	0.0500	1.63
16	Measured	0.1386	0.1098	0.1520	0.0015	0.0487	0.2107	1.63
18	Measured	0.0352	0.0056	0.0397	0.0468	0.0447	0.0067	1.63
20	Measured	0.0539	0.0038	0.0952	0.0181	0.0350	0.0026	1.63



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.6851	36.1998	36.3644	32.0264	31.7701	31.3620	613
2	Estimate	34.4638	34.3357	33.8812	30.7686	29.5556	29.2368	613
4	Estimate	31.2530	30.7397	31.1631	28.0203	26.9722	26.4992	613
6	Measured	28.9373	26.9322	27.8566	23.6616	22.5545	22.4087	613
8	Measured	24.4546	23.0992	23.6534	20.5803	19.5058	19.1949	613
10	Measured	22.2507	21.1026	21.6853	17.5094	16.0302	16.2817	613
12	Measured	20.0620	19.2535	19.8243	15.2279	13.3591	13.1474	613
14	Measured	17.3059	16.8861	16.9814	13.0903	11.3152	11.1385	613
16	Measured	15.9327	14.7223	15.5603	10.0823	9.2332	9.1855	613
18	Measured	12.6062	11.5861	12.1242	8.3927	7.3745	7.2262	613
20	Measured	7.6867	7.2914	7.5373	5.2551	4.3837	3.8917	613

3.3 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. TEST SETUP PHOTOS

(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)




0cm-Left





0cm-Right

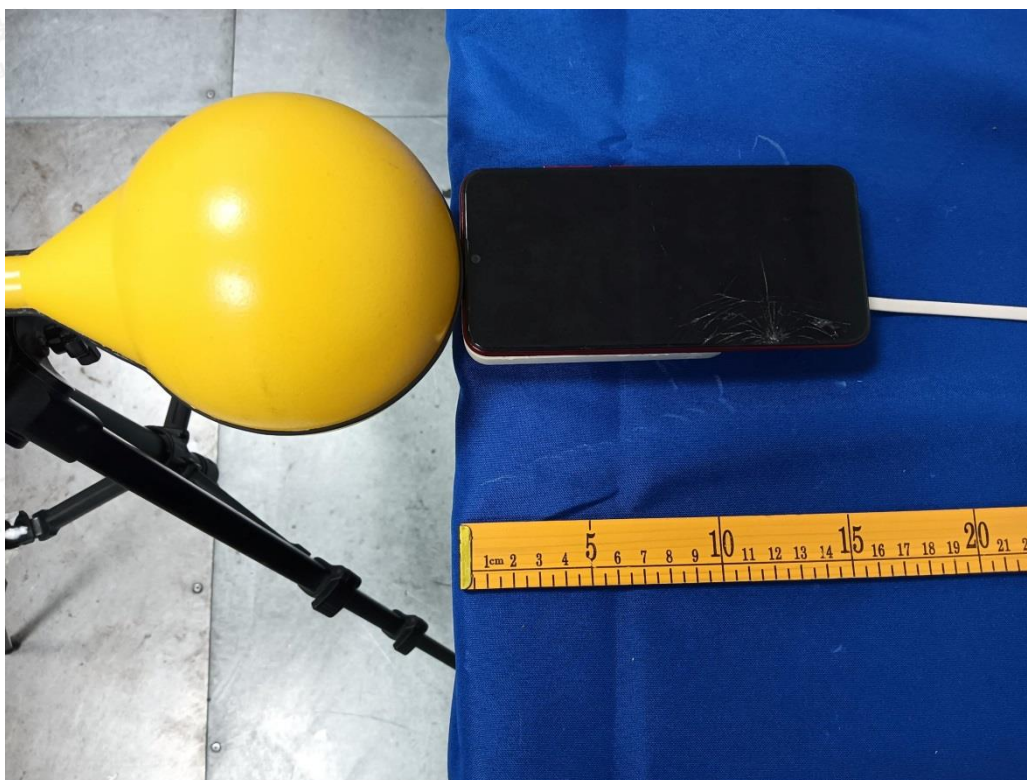

0cm-Top




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

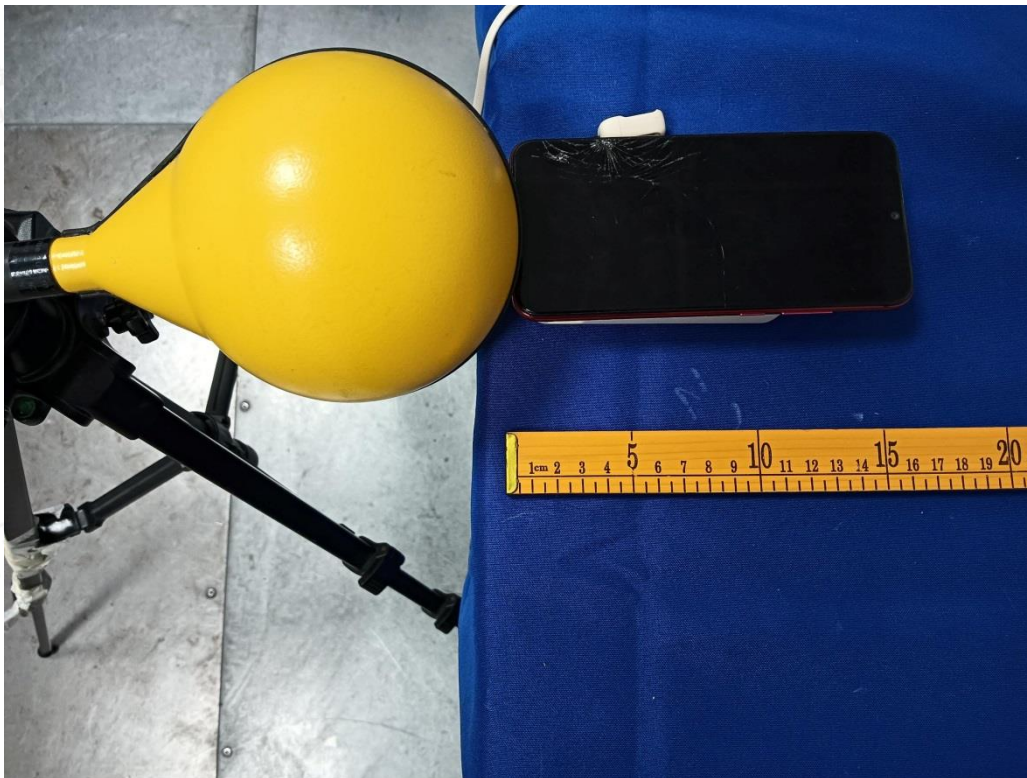

0cm-Bottom

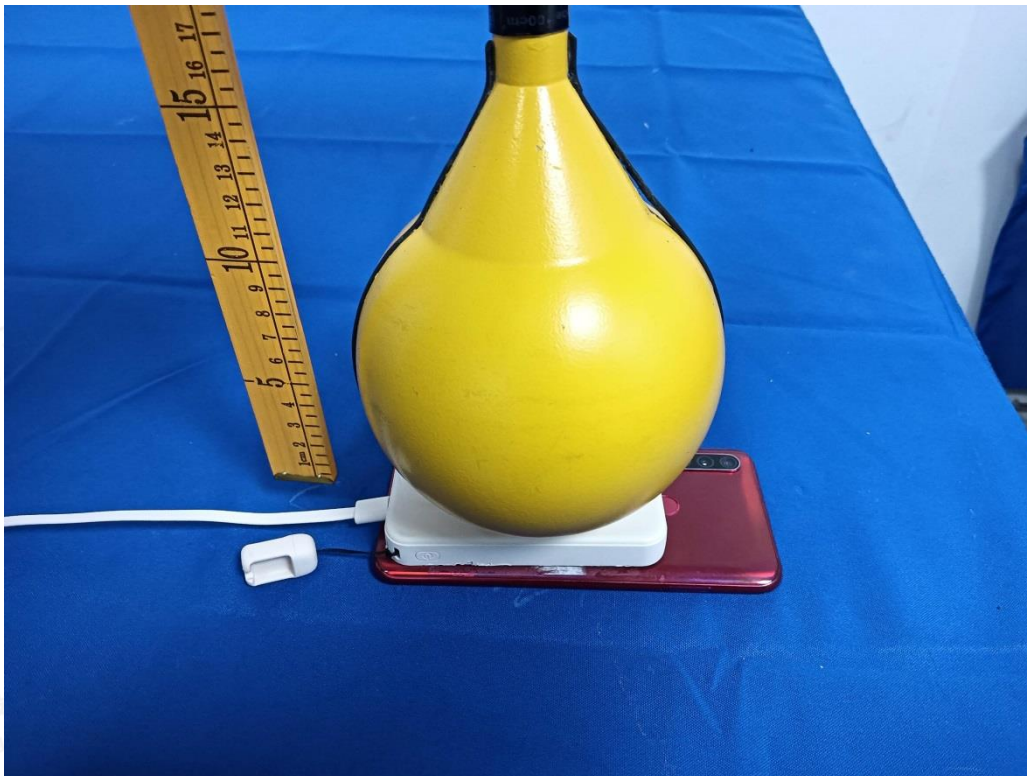

0cm-Front



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



0cm-Back



20cm-Left




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

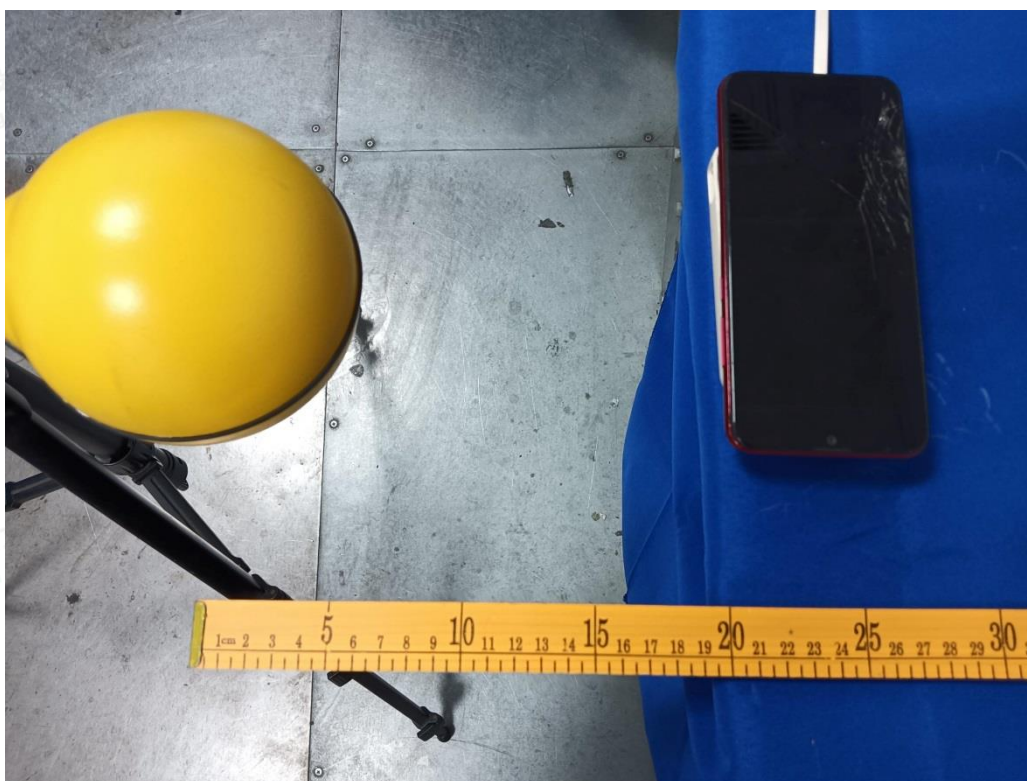

20cm-Right



20cm-Top



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




20cm-Bottom

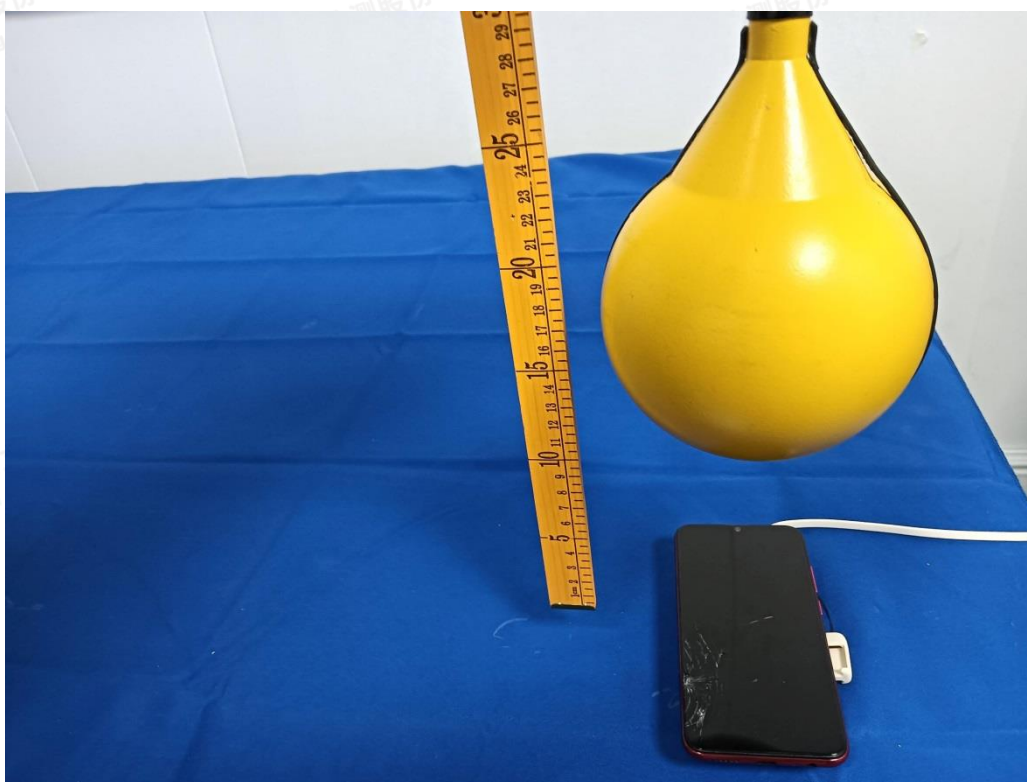

20cm-Front



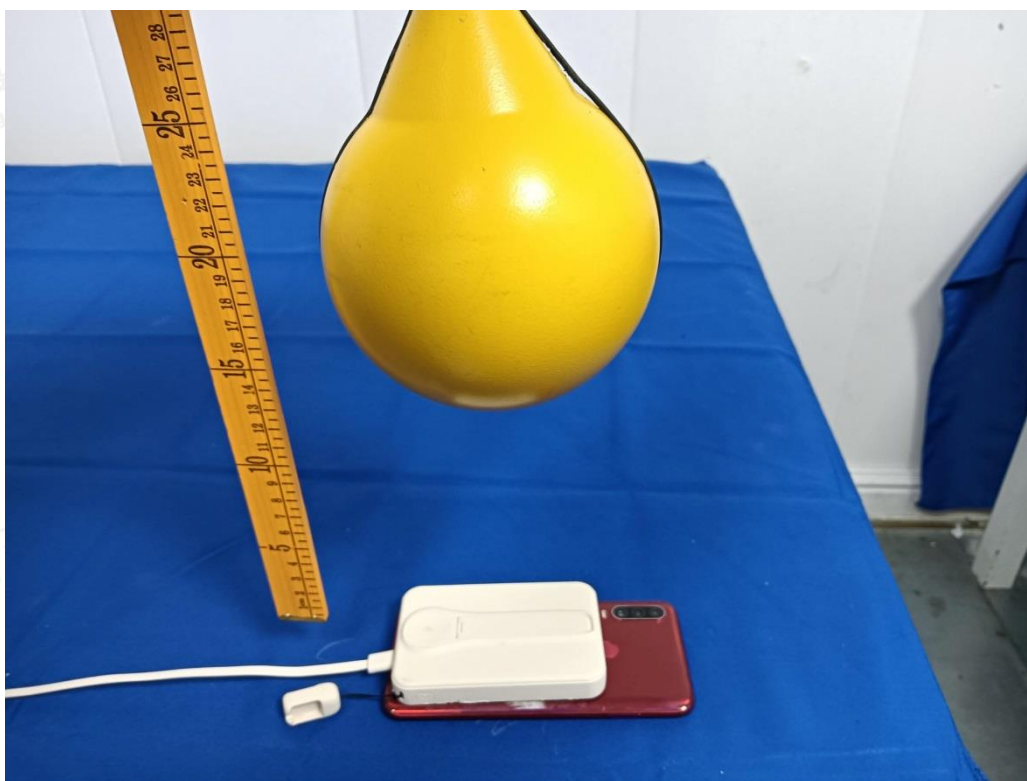

20cm-Back

-----THE END OF REPORT-----

