



SAR Test Report

Report No.: STS2504052H01

Issued for

Shenzhen Zhuozuan Technology Co., Ltd.

202, Building E, No.37 Chaofu Road, Hehua Community,
Pinghu Street, Longgang District, Shenzhen, Guangdong,
China

Product Name: Tablet computer

Brand Name: N/A

Model Name: M66 Pro

Series Model(s): M66,M33,M55,M88,M99,P50,P55,P60,P6
5,P75,P80,P86,P88,P96,P99,W108,W80
9,W109,W101,H101

FCC ID: 2BOX2-M66PRO

Test Standard: ANSI/IEEE Std. C95.1
FCC 47 CFR Part 2 (2.1093)
IEEE Std. 1528-2013

Max. Report
SAR (1g) Body: 0.723 W/kg

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT CERTIFICATION****Applicant's name**: Shenzhen Zhuozuan Technology Co., Ltd.

Address: 202, Building E, No.37 Chaofu Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Manufacturer's Name: Shenzhen Zhuozuan Technology Co., Ltd.

Address: 202, Building E, No.37 Chaofu Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Product description

Product name: Tablet computer

Brand name: N/A

Model name: M66 Pro

Series Model(s) : M66,M33,M55,M88,M99,P50,P55,P60,P65
,P75,P80,P86,P88,P96,P99,W108,W809,W109,W101,H101

Sample Number : 250410005-1

Standards: ANSI/IEEE Std. C95.1
FCC 47 CFR Part 2 (2.1093)
IEEE Std. 1528-2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test.....:

Date (s) of performance of tests.....: 11 Apr. 2025 ~ 30 Apr. 2025

Date of Issue.....: 08 May 2025

Test Result.....: **Pass**

Testing Engineer :

(Xin.Liu)

Technical Manager :

(Shifan. Long)

Authorized Signatory :

(Bovey Yang)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	17
5.1 Validation System	17
5.2 Validation Result	18
6. SAR Evaluation Procedures	19
7. EUT Antenna Location Sketch	20
7.1 SAR test exclusion consider table	21
8. EUT Test Position	26
8.1 Body-worn Position Conditions	26
9. Uncertainty	27
9.1 Measurement Uncertainty	27
10. Conducted Power Measurement	30
10.1 Test Result	30
11. EUT and Test Setup Photo	49
11.1 EUT Photo	49
11.2 Setup Photo	52
12. SAR Result Summary	55
12.1 Body-worn and Hotspot SAR	55
13. Equipment List	60
Appendix A. System Validation Plots	61
Appendix B. SAR Test Plots	77
Appendix C. Probe Calibration and Dipole Calibration Report	91



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	08 May 2025	STS2504052H01	ALL	Initial Issue



1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Tablet computer		
Brand Name	N/A		
Model Name	M66 Pro		
Series Model	M66,M33,M55,M88,M99,P50,P55,P60,P65 ,P75,P80,P86,P88,P96,P99,W108,W809,W109,W101,H101		
Model Difference	The PCB board, circuit, structure and internal of these models are the same, Only model number and colour is different for these model.		
Power supply	DC 3.7V From battery and DC 5.0V From external circuit		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	N/A		
Software Version	N/A		
Frequency Range	GSM 850: 824.2 MHz-848.8 MHz PCS1900: 1850.2 MHz-1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV:1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN 802.11n40: 2422 MHz ~ 2452 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5180 ~ 5240 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5745 ~ 5825 MHz Bluetooth: 2402 MHz to 2480 MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg) Test distance: Body:0mm	Band	Mode	Body Worn and Hotspot(W/kg)
	PCB	GSM 850	0.261
	PCB	GSM 1900	0.574
	PCB	WCDMA Band 2	0.420
	PCB	WCDMA Band 4	0.185
	PCB	WCDMA Band 5	0.723
	DTS	2.4G WLAN	0.071
	NII	5.2G WLAN	0.245
	NII	5.8G WLAN	0.185
	PCB	LTE Band 2	0.431
	PCB	LTE Band 4	0.344
	PCB	LTE Band 5	0.156
	PCB	LTE Band 7	0.215
	PCB	LTE Band 12	0.226
	PCB	LTE Band 17	0.193



1-g Sum SAR		0.968
FCC Equipment Class	Licensed Transmitter (PCB) Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX(NII)	
Operating Mode:	GSM: GSM Voice; GPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN : 802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 5G WLAN: 802.11a(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM):BPSK,QPSK,16-QAM,64-QAM,256-QAM Bluetooth: GFSK + $\pi/4$ DQPSK+8DPSK BLE: GFSK	
Antenna Specification:	GSM/WCDMA/LTE: PIFA Antenna Bluetooth: PIFA Antenna WLAN: PIFA Antenna	
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time	
Hotspot Mode	Support	
DTM Mode	Not Support	
Note: 1. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 2. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 3. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power		



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	IEEE Std C95.1, 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices
11	FCC KDB 616217 D04 v01r02	SAR for laptop and tablets

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

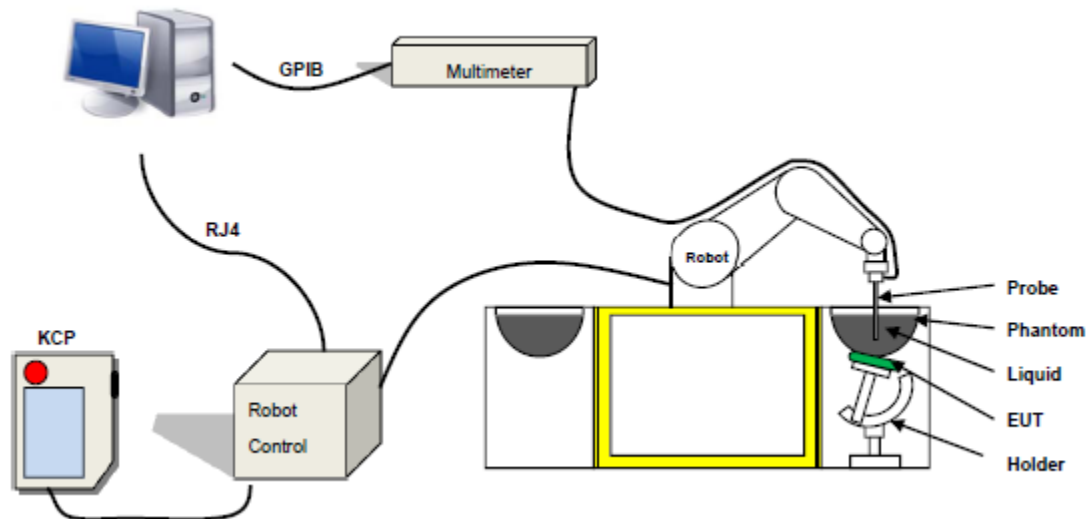

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 08/21 EPGO352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom


For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

	The thickness of the phantom amounts to 2 mm±0.2 mm. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$ The head is filled with tissue simulating liquid. The hand do not have to be modeled.																				
SN 32/14 SAM115																					
TWIN SAM phantom																					
<table><tr><th colspan="2">Mechanical</th><th colspan="2">Electrical</th></tr><tr><td>Overall thickness</td><td>2±0.2 mm(except ear area)</td><td>Relative permittivity</td><td>3.4</td></tr><tr><td>Dimensions</td><td>1000 mm(L) x 500 mm(W) x 200 mm(H)</td><td>Loss tangent</td><td>0.02</td></tr><tr><td>Maximum volume</td><td colspan="3">27 L</td></tr><tr><td>Material</td><td colspan="3">Fiberglass based</td></tr></table>		Mechanical		Electrical		Overall thickness	2±0.2 mm(except ear area)	Relative permittivity	3.4	Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02	Maximum volume	27 L			Material	Fiberglass based		
Mechanical		Electrical																			
Overall thickness	2±0.2 mm(except ear area)	Relative permittivity	3.4																		
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02																		
Maximum volume	27 L																				
Material	Fiberglass based																				

ELLIPTICAL Phantom	
The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.	
 ELLI Phantom Figure-SN 21/21 ELLI48	The shape of the phantom is an ellipse with length 600mm±5mm and width 400mm±5mm. The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan\delta \leq 0.05$ and relative permittivity: $\epsilon_r' \leq 5$ for $f \leq 3$ GHz $3 \leq \epsilon_r' \leq 5$ for $f > 3$ GHz The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of ± 0.2 mm.
Technical & mechanical characteristics	
Shell thickness	2 mm ± 0.2 mm
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max ± 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability. For 1 g averaging, the maximum weighting coefficient for SAR is 0.5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94



5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2025-04-11	20.6	56	704	20.2	Permittivity	42.15	42.09	-0.13	±5
					Conductivity	0.89	0.89	0.35	±5
2025-04-11	20.7	56	710	20.4	Permittivity	42.11	42.50	0.92	±5
					Conductivity	0.89	0.89	0.30	±5
2025-04-11	20.6	56	750	20.3	Permittivity	41.90	42.32	1.00	±5
					Conductivity	0.89	0.86	-3.37	±5
2025-04-11	20.6	56	826.4	20.3	Permittivity	41.54	42.29	1.80	±5
					Conductivity	0.90	0.96	6.79	±5
2025-04-11	20.6	56	829	20.3	Permittivity	41.53	41.16	-0.89	±5
					Conductivity	0.90	0.89	-1.03	±5
2025-04-11	20.7	56	835	20.4	Permittivity	41.50	41.49	-0.02	±5
					Conductivity	0.90	0.96	6.67	±5
2025-04-11	20.7	57	836.6	20.4	Permittivity	41.49	41.52	0.07	±5
					Conductivity	0.90	0.91	1.09	±5
2025-04-11	20.7	56	844	20.4	Permittivity	41.46	41.17	-0.69	±5
					Conductivity	0.90	0.90	-0.12	±5
2025-04-11	20.8	56	846.6	20.4	Permittivity	41.45	41.53	0.20	±5
					Conductivity	0.90	0.90	-0.15	±5
2025-04-13	20.3	48	1720	20.0	Permittivity	40.11	41.10	2.46	±5
					Conductivity	1.35	1.37	1.16	±5
2025-04-13	20.4	48	1732.5	20.1	Permittivity	40.10	41.11	2.53	±5
					Conductivity	1.36	1.33	-2.31	±5
2025-04-13	20.5	49	1740	20.3	Permittivity	40.09	41.14	2.63	±5
					Conductivity	1.37	1.41	3.24	±5
2025-04-13	20.5	49	1800	20.2	Permittivity	40.00	40.49	1.23	±5
					Conductivity	1.40	1.39	-0.71	±5
2025-04-13	20.3	48	1860	20.0	Permittivity	40.00	40.73	1.82	±5
					Conductivity	1.40	1.43	2.14	±5
2025-04-13	20.3	48	1880	20.0	Permittivity	40.00	40.75	1.88	±5
					Conductivity	1.40	1.44	2.86	±5
2025-04-13	20.3	48	1900	20.0	Permittivity	40.00	40.49	1.23	±5
					Conductivity	1.40	1.45	3.57	±5




2025-04-13	20.3	48	1909.8	20.1	Permittivity	40.00	40.62	1.55	±5
					Conductivity	1.40	1.36	-2.86	±5
2025-04-15	22.1	52	2412	21.8	Permittivity	39.27	40.51	3.16	±5
					Conductivity	1.77	1.74	-1.48	±5
2025-04-15	22.1	52	2450	21.8	Permittivity	39.20	40.48	3.27	±5
					Conductivity	1.80	1.79	-0.56	±5
2025-04-15	22.1	52	2510	21.9	Permittivity	39.12	40.14	2.61	±5
					Conductivity	1.86	1.86	-0.21	±5
2025-04-15	22.1	52	2600	21.7	Permittivity	39.00	39.76	1.95	±5
					Conductivity	1.96	2.01	2.55	±5
2025-04-30	23.0	59	5200	22.7	Permittivity	36.00	36.77	2.14	±5
					Conductivity	4.66	4.60	-1.29	±5
2025-04-30	23.1	59	5240	22.8	Permittivity	35.96	36.41	1.25	±5
					Conductivity	4.70	4.70	-0.04	±5
2025-04-30	21.9	55	5755	21.7	Permittivity	35.35	36.10	2.14	±5
					Conductivity	5.22	5.20	-0.44	±5
2025-04-30	21.9	55	5800	21.6	Permittivity	35.30	35.67	1.05	±5
					Conductivity	5.27	5.27	0.00	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

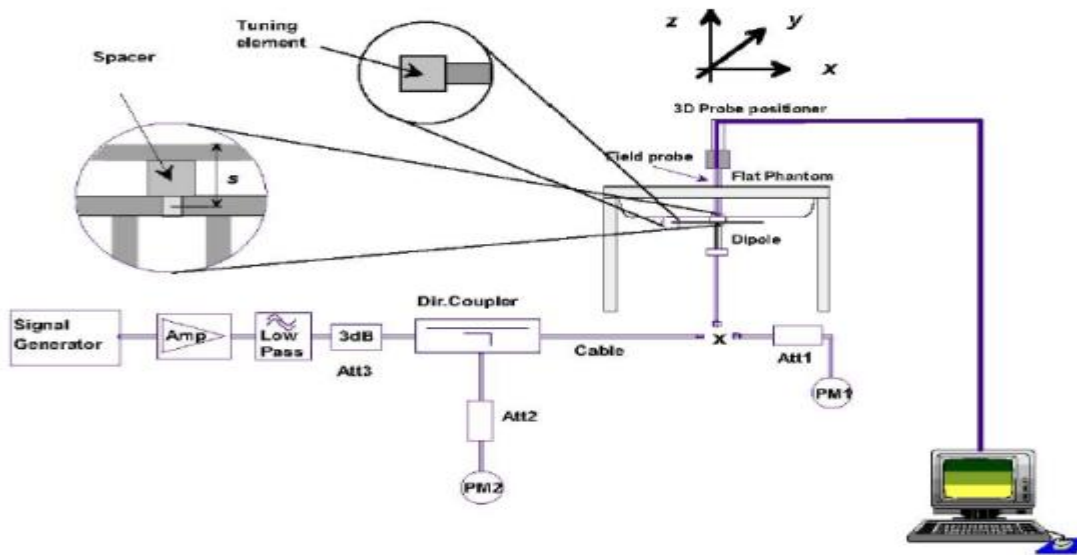



5.2 Validation Result

Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (>20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole		Date of Measurement	Return Loss (dB)	Delta (%)	Impedance	Delta(ohm)
SN 30/14 DIP0G750-331	Head Liquid	2023-07-04	-25.47	/	55.2	/
		2024-07-01	-25.98	2.00	54.86	-0.62
SN 30/14 DIP0G835-332	Head Liquid	2023-07-04	-28.13	/	51.4	/
		2024-07-01	-28.43	1.07	52.62	2.37
5023-DIP1G800-747	Head Liquid	2023-12-20	-27.38	/	50.2	/
		2024-12-11	-27.04	-1.23	48.48	-3.43
SN 30/14 DIP1G900-333	Head Liquid	2023-09-14	-23.66	/	51.4	/
		2024-09-13	-23.62	-0.17	50.73	-1.30
SN 30/14 DIP2G450-335	Head Liquid	2023-07-04	-26.03	/	46.3	/
		2024-07-01	-26.42	1.50	47.25	2.05
SN 30/14 DIP2G600-336	Head Liquid	2023-07-04	-34.32	/	50.3	/
		2024-07-01	-34.78	1.34	49.61	-1.37
SN 13/14 WGA32	Head Liquid	2023-07-04	< -8.23	/	/	/
		2024-07-01	-13.17	/	/	/

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2025-04-11	750	100	0.829	8.29	8.49	-2.36	10
2025-04-11	835	100	0.976	9.76	9.63	1.35	10
2025-04-13	1800	100	3.830	38.30	38.40	-0.26	10
2025-04-13	1900	100	3.817	38.17	39.84	-4.19	10
2025-04-15	2450	100	5.506	55.06	54.70	0.66	10
2025-04-15	2600	100	5.366	53.66	56.19	-4.50	10
2025-04-30	5200	100	16.420	164.20	163.88	0.20	10
2025-04-30	5800	100	18.247	182.47	188.95	-3.43	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position


- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a TABLET CON CHIP (4G), support GSM/WCDMA/LTE/WLAN/BT mode.

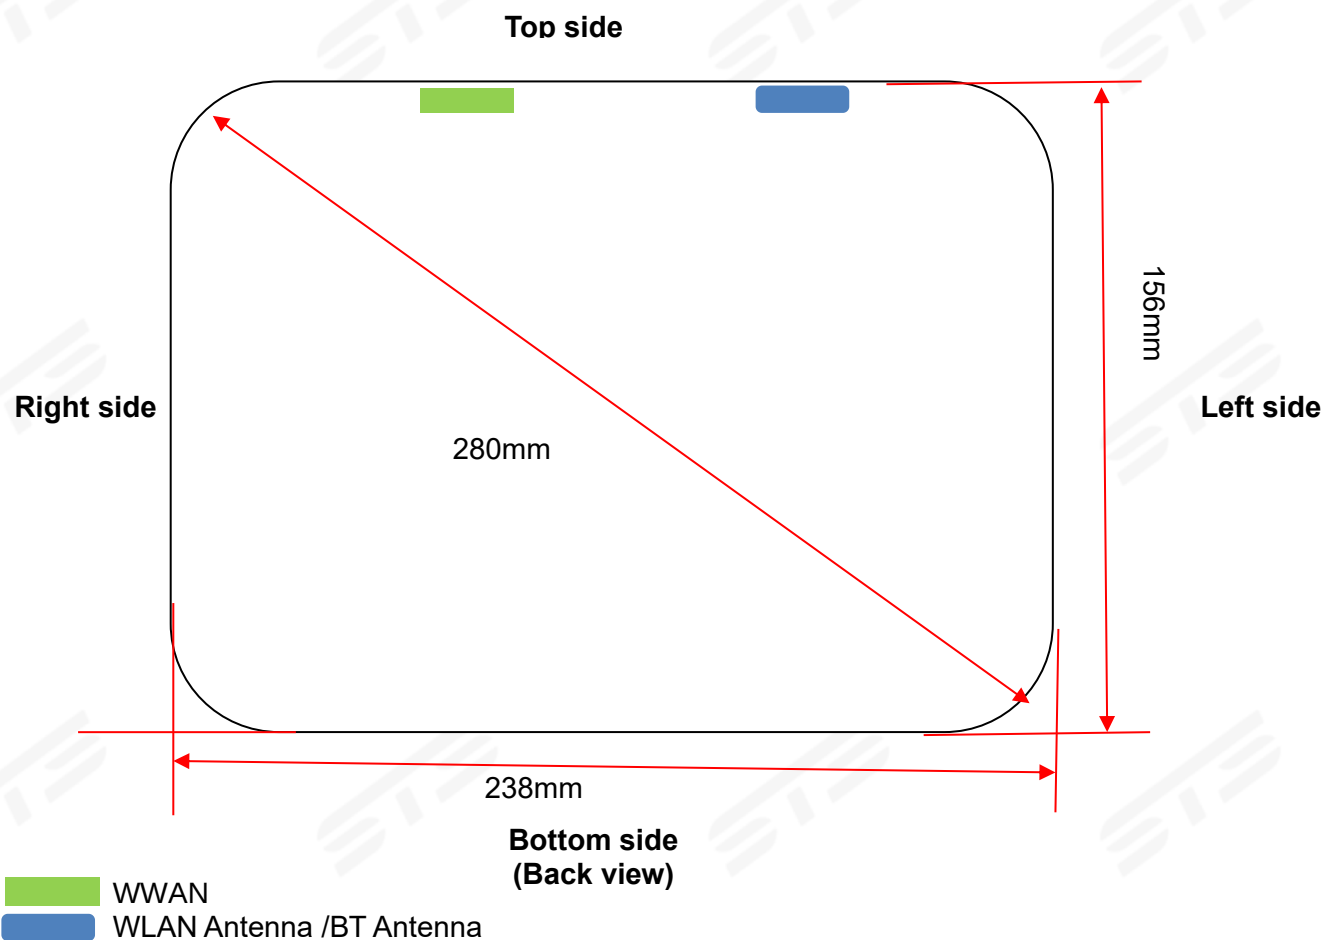

Antenna Separation Distance(cm)					
ANT	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN	≤ 0.5	14	8	≤ 0.5	16
WLAN/BT	≤ 0.5	4	13.5	≤ 0.5	17

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA 2	WCDMA 4	WCDMA 5
	Calculated Frequency(GHz)	0.8366	1.9098	1.88	1.74	0.8366
	Maximum Turn-up power (dBm)	30.5	29.5	23.5	24	24
	Maximum rated power(mW)	1122.02	891.25	223.87	251.19	251.19
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	9.22	3.35	3.39	3.61	9.22
	Testing required?	YES	YES	YES	YES	YES
Left Side	Separation distance (cm)	14	14	14	14	14
	exclusion threshold(mW)	1030.20	1582.90	1584.83	1594.35	1030.20
	Testing required?	YES	NO	NO	NO	NO
Right Side	Separation distance (cm)	8	8	8	8	8
	exclusion threshold(mW)	466.62	562.73	564.50	573.26	466.62
	Testing required?	YES	YES	NO	NO	NO
Top Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.22	3.35	3.39	3.61	9.22
	Testing required?	YES	YES	YES	YES	YES
Bottom Side	Separation distance (cm)	16	16	16	16	16
	exclusion threshold(mW)	1244.50	2025.94	2027.48	2035.10	1244.50
	Testing required?	NO	NO	NO	NO	NO



Exposure Position	Wireless Interface	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12
	Calculated Frequency(GHz)	1.88	1.7325	0.829	2.51	0.704
	Maximum Turn-up power (dBm)	24	24	24	24	24
	Maximum rated power(mW)	251.19	251.19	251.19	251.19	251.19
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.39	3.62	9.34	2.69	11.75
	Testing required?	YES	YES	YES	YES	YES
Left Side	Separation distance (cm)	14	14	14	14	14
	exclusion threshold(mW)	1584.83	1594.89	1023.01	1549.75	902.38
	Testing required?	NO	NO	NO	NO	NO
Right Side	Separation distance (cm)	8	8	8	8	8
	exclusion threshold(mW)	564.50	573.75	464.90	532.95	435.26
	Testing required?	NO	NO	NO	NO	NO
Top Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.39	3.62	9.34	2.69	11.75
	Testing required?	YES	YES	YES	YES	YES
Bottom Side	Separation distance (cm)	16	16	16	16	16
	exclusion threshold(mW)	2027.48	2035.52	1234.83	1999.28	1073.85
	Testing required?	NO	NO	NO	NO	NO



Exposure Position	Wireless Interface	LTE Band 17	BT	2.4G WLAN	5.2G WLAN	5.8G WLAN
	Calculated Frequency(GHz)	0.71	2.48	2.412	5.24	5.755
	Maximum Turn-up power (dBm)	24	-0.5	15	13.5	12
	Maximum rated power(mW)	251.19	0.89	31.62	22.39	15.85
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	11.61	2.72	2.78	1.49	1.38
	Testing required?	YES	NO	YES	YES	YES
Left Side	Separation distance (cm)	14	4	4	4	4
	exclusion threshold(mW)	908.28	142.67	144.06	109.85	106.31
	Testing required?	NO	NO	NO	NO	NO
Right Side	Separation distance (cm)	8	13.5	13.5	13.5	13.5
	exclusion threshold(mW)	436.75	1447.37	1450.81	1357.85	1347.03
	Testing required?	NO	NO	NO	NO	NO
Top Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	11.61	2.72	2.78	1.49	1.38
	Testing required?	YES	NO	YES	YES	YES
Bottom Side	Separation distance (cm)	16	17	17	17	17
	exclusion threshold(mW)	1081.67	2245.32	2247.53	2186.82	2179.60
	Testing required?	NO	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, if the maximum time-averaged power available does not exceed 1 mW. This stand-alone SAR exemption test.



4. Per KDB 447498 D04, the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5. Per KDB 447498 D04, An alternative to the SAR-based exemption is using below table and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in below table to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

RF Source frequency (MHz)	Threshold ERP(watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.



6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.
8. Per KDB 248227, as maximum rated power for U-NII-1 > U-NII-2A, U-NII-1 was chosen for SAR evaluation. Based on the measurements obtained, SAR measurements on U-NII-2A are not required as highest reported SAR from U-NII-1 band is $\leq 1.2\text{W/Kg}$.


8. EUT Test Position

This EUT was tested in Back Side, Left Side, Right Side, Bottom Side and Top Side.

8.1 Body-worn Position Conditions

Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D04 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

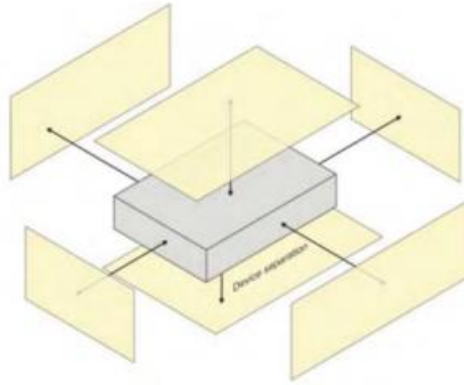



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

SATIMO Uncertainty- SN 08/21 EPG0352									
Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+ %)	10g Ui (+ %)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.71	0.71	0.07	0.07	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.71	0.71	0.42	0.42	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	1.00	1.00	1.97	1.97	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	1.00	1.00	0.10	0.10	∞
Integration Time	E.2.8	1.43	R	1.73	1.00	1.00	0.83	0.83	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions- reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
Test sample Related									
Test sample positioning	E.4.2	3.10	N	1.00	1.00	1.00	3.10	3.10	∞
Device holder uncertainty	E.4.1	3.80	N	1.00	1.00	1.00	3.80	3.80	∞
Output power variation— SAR drift measurement	E.2.9	4.50	R	1.73	1.00	1.00	2.60	2.60	∞
SAR scaling	E.6.5	1.80	R	1.73	1.00	1.00	1.04	1.04	∞
Phantom and tissue parameters									
Phantom shell uncertainty— shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	M
Liquid permittivity measurement	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity— temperature uncertainty	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity— temperature uncertainty	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	∞
Combined Standard Uncertainty			RSS				10.08	9.59	
Expanded Uncertainty (95% Confidence interval)			K=2				19.58	19.18	



SATIMO Uncertainty- SN 08/21 EPGO352									
System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	1.00	1.00	0.10	0.10	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions-reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	4.80	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.10	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.40	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and set-up									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid conductivity (measured)	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid permittivity (temperature uncertainty)	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity (measured)	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				9.72	9.52	
Expanded Uncertainty (95% Confidence interval)			K=2				19.44	19.03	



SATIMO Uncertainty- SN 08/21 EPG0352									
。 System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+ -%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	E.2.1.3	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.00	0.00	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.8	R	1.73	0.00	0.00	0.00	0.00	∞
Linearity	E.2.4	1.25	R	1.73	0.00	0.00	0.00	0.00	∞
System detection limits	E.2.4	1.20	R	1.73	0.00	0.00	0.00	0.00	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	0.00	0.00	0.00	0.00	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions- Noise	E.6.1	3.51	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions- reflections	E.6.1	3.15	R	1.73	0.00	0.00	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.2	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	3.9	R	1.73	0.00	0.00	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	4.8	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.1	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.4	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and tissue parameters									
Phantom shell uncertainty— shape, thickness, and permittivity	E.3.1	3.7	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.4	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid permittivity measurement	E.3.3	4.1	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity— temperature uncertainty	E.3.4	2.7	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity— temperature uncertainty	E.3.4	4.8	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				5.56	5.20	
Expanded Uncertainty (95% Confidence interval)			K=2				11.12	10.41	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	32.94	32.98	32.66	29.81	30.02	29.79
GPRS (GMSK, 1-Slot)	32.48	32.43	32.15	29.55	29.72	29.50
GPRS (GMSK, 2-Slot)	31.64	31.30	31.44	28.72	27.89	29.03
GPRS (GMSK, 3-Slot)	29.41	30.02	29.26	26.89	26.77	26.36
GPRS (GMSK, 4-Slot)	27.79	28.03	27.51	25.30	25.71	25.99
Remark: GPRS, CS4 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link						

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	23.91	23.95	23.63	20.78	20.99	20.76
GPRS (GMSK, 1-Slot)	23.45	23.40	23.12	20.52	20.69	20.47
GPRS (GMSK, 2-Slot)	25.62	25.28	25.42	22.70	21.87	23.01
GPRS (GMSK, 3-Slot)	25.15	25.76	25.00	22.63	22.51	22.10
GPRS (GMSK, 4-Slot)	24.78	25.02	24.50	22.29	22.70	22.98
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum Burst - averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB						

**WCDMA**

Band	WCDMA Band 2			WCDMA Band 4			WCDMA Band 5		
Channel	9262	9400	9538	1312	1413	1513	4132	4183	4233
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740	1752.4	826.4	836.6	846.6
RMC 12.2Kbps	23.32	23.47	23.05	23.50	23.69	22.83	23.12	23.52	22.56
HSDPA Subtest-1	22.63	22.26	22.03	22.16	21.95	21.83	22.08	22.18	21.95
HSDPA Subtest-2	21.15	21.44	20.68	20.58	21.41	21.32	20.82	21.50	21.51
HSDPA Subtest-3	20.80	20.45	20.45	22.01	20.94	21.73	21.72	21.14	21.84
HSDPA Subtest-4	20.14	20.53	19.93	19.83	20.66	20.37	19.93	20.40	20.55
HSUPA Subtest-1	22.38	22.16	21.84	21.89	21.99	22.67	21.61	21.90	22.41
HSUPA Subtest-2	20.34	21.45	20.87	20.92	21.63	21.45	21.24	21.88	21.57
HSUPA Subtest-3	20.23	21.65	20.78	21.84	21.25	22.09	22.14	21.56	22.23
HSUPA Subtest-4	19.80	19.92	20.43	20.14	20.62	20.42	20.48	20.68	20.46
HSUPA Subtest-5	19.68	19.97	19.76	20.85	21.52	21.35	21.08	21.38	21.47

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**2.4G WLAN**

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)	Output Power (mW)
802.11b	1	2412	14.59	28.77
	6	2437	13.26	21.18
	11	2462	13.39	21.83
802.11g	1	2412	13.26	21.18
	6	2437	12.47	17.66
	11	2462	12.20	16.60
802.11 n-HT20	1	2412	13.14	20.61
	6	2437	12.58	18.11
	11	2462	12.07	16.11
802.11 n-HT40	3	2422	12.51	17.82
	6	2437	11.98	15.78
	9	2452	13.05	20.18

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-2.30	0.59
	39	2441	-1.18	0.76
	78	2480	-0.85	0.82
$\pi/4$ -QPSK(2Mbps)	0	2402	-3.09	0.49
	39	2441	-1.84	0.65
	78	2480	-1.61	0.69
8DPSK(3Mbps)	0	2402	-3.03	0.50
	39	2441	-1.95	0.64
	78	2480	-1.52	0.70

**BLE**

BLE				
Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-2.78	0.53
	19	2440	-3.38	0.46
	39	2480	-3.72	0.42
GFSK(2Mbps)	0	2402	-2.87	0.52
	19	2440	-3.45	0.45
	39	2480	-3.76	0.42

WLAN (5.2Gband)

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11a	36	5180	13.29	21.33
	44	5220	12.57	18.07
	48	5240	13.37	21.73
802.11 n-HT20	36	5180	12.97	19.82
	44	5220	13.33	21.53
	48	5240	13.12	20.51
802.11 n-HT40	38	5190	11.54	14.26
	46	5230	10.90	12.30
802.11ac-VHT20	36	5180	13.34	21.58
	44	5220	12.98	19.86
	48	5240	12.81	19.10
802.11ac-VHT40	38	5190	13.12	20.51
	46	5230	10.77	11.94
802.11ac-VHT80	42	5210	12.37	17.26

**WLAN (5.8Gband)**

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11a	149	5745	11.15	13.03
	157	5785	10.06	10.14
	165	5825	10.33	10.79
802.11 n-HT20	149	5745	11.22	13.24
	157	5785	10.71	11.78
	165	5825	10.39	10.94
802.11 n-HT40	151	5755	11.79	15.10
	159	5795	11.54	14.26
802.11ac-VHT20	149	5745	11.63	14.55
	157	5785	10.54	11.32
	165	5825	10.32	10.76
802.11ac-VHT40	151	5755	11.74	14.93
	159	5795	11.38	13.74
802.11ac-VHT80	155	5775	11.15	13.03



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.43	23.46	23.59
1.4	1	2		23.48	23.51	22.86
1.4	1	5		23.52	23.59	23.58
1.4	3	0		22.17	21.85	22.15
1.4	3	1		22.13	21.95	22.08
1.4	3	2		22.4	22.08	22.14
1.4	6	0		21.89	21.88	22.06
1.4	1	0	16-QAM	22.02	21.98	22.08
1.4	1	2		22.4	22.43	22.36
1.4	1	5		22.07	22.05	22.12
1.4	3	0		21.19	21.46	21.19
1.4	3	1		21.28	21.03	21.08
1.4	3	2		21.17	21.21	21.41
1.4	6	0		21.06	21.09	21.36
3	1	0	QPSK	23.67	23.3	22.99
3	1	7		23.28	23.26	23.54
3	1	14		23.63	23.5	23.11
3	8	0		22.02	22.03	22.05
3	8	4		21.9	22.14	21.91
3	8	7		22.07	21.96	22.02
3	15	0		21.93	21.97	22.04
3	1	0	16-QAM	22.16	22.18	22.06
3	1	7		22.13	22.1	22.1
3	1	14		22.13	22.1	22.09
3	8	0		21.29	21.46	21.31
3	8	4		21.45	21.31	21.3
3	8	7		21.23	21.09	21.4
3	15	0		21.31	21.24	21.35



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.52	23.19	23.09
5	1	12		23.57	23.54	23.45
5	1	24		23.24	23.63	23.13
5	12	0		22.15	21.95	22.36
5	12	6		22.25	22.21	21.99
5	12	11		22.13	22.17	22.05
5	25	0		22.02	22.18	21.98
5	1	0	16-QAM	21.98	22.27	22.29
5	1	12		22.32	22.36	22.18
5	1	24		22.08	22.25	22.25
5	12	0		21.28	21.19	21.16
5	12	6		21.24	21.15	21.32
5	12	11		21.12	21.43	21.13
5	25	0		21.48	21.22	21.21
10	1	0	QPSK	23.32	23.16	23.05
10	1	24		23.66	23.61	23.07
10	1	49		23.54	23.51	23.55
10	25	0		22.11	22.3	21.93
10	25	12		22.17	22.15	22.2
10	25	24		22.21	22.14	22.03
10	50	0		22.16	22.15	22.41
10	1	0	16-QAM	22.41	22.39	21.97
10	1	24		22.35	22.44	22.06
10	1	49		22.29	22.37	22.17
10	25	0		21.01	21.25	21.35
10	25	12		21.28	21.16	21.32
10	25	24		21.32	21.33	21.55
10	50	0		21.08	21.43	21.41



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.23	23.16	23.06
15	1	37		23.25	23.49	23.43
15	1	74		22.88	23.32	23.05
15	36	0		22.24	22.19	22.22
15	36	18		22.25	21.96	21.98
15	36	39		22.25	22.28	22.01
15	75	0		22.03	22	22.13
15	1	0	16-QAM	22.21	22.1	22.06
15	1	38		22.01	22.22	22.4
15	1	75		22.03	21.9	21.9
15	36	0		21.48	21.01	21.09
15	36	18		21.02	21.13	21.15
15	36	39		21.44	21.46	21.41
15	75	0		21.02	21.44	21.01
20	1	0	QPSK	23.02	23.6	23.4
20	1	49		23.11	23.44	23.49
20	1	99		23.06	23.56	23.08
20	50	0		22.03	22.09	22.22
20	50	24		22.34	22.11	22.06
20	50	49		22.3	22.29	22.12
20	100	0		22.28	22.01	22.12
20	1	0	16-QAM	22.26	22.29	22.4
20	1	49		22.24	22.3	22.27
20	1	99		22.27	22.27	21.91
20	50	0		21.25	21.34	21.43
20	50	24		21.25	21.12	21.44
20	50	49		21.24	21.18	21.15
20	100	0		21.32	21.43	21.25



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.16	23.1	22.85
1.4	1	2		23.32	23.43	23.62
1.4	1	5		23.44	22.97	23.08
1.4	3	0		22.14	22.35	22.12
1.4	3	1		21.9	22.12	21.77
1.4	3	2		22.02	22.18	22.21
1.4	6	0		22.38	22.14	22.42
1.4	1	0	16-QAM	21.92	22.21	22.23
1.4	1	2		22.12	21.85	22.31
1.4	1	5		21.92	22.05	21.96
1.4	3	0		21.38	21.01	21.27
1.4	3	1		21.28	20.95	21.23
1.4	3	2		21.23	21.06	21.15
1.4	6	0		20.98	21.31	21
3	1	0	QPSK	23.4	23.33	22.76
3	1	7		23.38	23.45	23.2
3	1	14		23.38	23.46	23.34
3	8	0		21.99	22.12	22.18
3	8	4		21.93	22.25	22.19
3	8	7		21.8	22.14	22.28
3	15	0		21.82	21.9	22.12
3	1	0	16-QAM	22.09	22.12	22.2
3	1	7		22.28	21.95	22.34
3	1	14		22	22.22	22.16
3	8	0		21.24	21.13	21.22
3	8	4		21.14	21.45	21.09
3	8	7		21.45	21.04	21.09
3	15	0		21.14	21.36	21.22



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.13	23.52	23
5	1	12		23.41	23.42	23.58
5	1	24		23.08	23.26	23.6
5	12	0		22.1	21.94	21.88
5	12	6		22.05	21.87	21.97
5	12	11		22.13	22.24	22.23
5	25	0		21.9	22.25	22.15
5	1	0	16-QAM	22.03	22	22.13
5	1	12		21.94	22.02	22.07
5	1	24		22.36	21.98	21.9
5	12	0		21.33	21.23	21.31
5	12	6		21.14	21.23	21.27
5	12	11		21.32	21.49	21.32
5	25	0		21.1	21.29	21.25
10	1	0	QPSK	23.27	23.48	23.15
10	1	24		23.36	23	23.3
10	1	49		23.61	22.96	23.61
10	25	0		22.27	22.04	22.18
10	25	12		22.07	22.32	22.14
10	25	24		22.17	22.08	22.06
10	50	0		22.04	22.16	22.08
10	1	0	16-QAM	21.84	21.78	22.28
10	1	24		21.89	21.88	22.01
10	1	49		21.73	22.34	21.91
10	25	0		21.39	21.24	20.98
10	25	12		21.11	21.24	21.17
10	25	24		20.93	20.9	21.46
10	50	0		21.12	21.38	21.35



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.18	23.38	23.42
15	1	37		23.59	22.81	23.51
15	1	74		23.17	23.5	23.59
15	36	0		21.9	22.18	22.12
15	36	18		22.11	21.97	21.97
15	36	39		21.77	22.17	22.15
15	75	0		21.78	21.97	21.98
15	1	0	16-QAM	21.88	22.15	22.18
15	1	38		22.22	22.22	22.12
15	1	75		22.31	22.03	22.24
15	36	0		21.03	21.3	21.03
15	36	18		21.15	21.24	21.24
15	36	39		21.27	21.3	21.17
15	75	0		21.1	21.21	21.13
20	1	0	QPSK	23.36	23.53	23.27
20	1	49		23.5	23.33	23.01
20	1	99		23.46	23.22	23.45
20	50	0		22.02	21.82	22.16
20	50	24		21.77	22.16	21.92
20	50	49		22.24	22.21	21.92
20	100	0		22.23	22.3	22.21
20	1	0	16-QAM	21.98	21.96	22
20	1	49		22.19	22.25	21.83
20	1	99		21.88	21.88	22.06
20	50	0		21.42	20.96	21.35
20	50	24		21.07	21.16	21.23
20	50	49		21.42	21.17	21
20	100	0		21.16	21.37	20.98



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.47	22.99	23.47
1.4	1	2		23.62	23.36	23.53
1.4	1	5		23.36	23.48	23.68
1.4	3	0		22.2	21.96	22.3
1.4	3	1		21.96	22.21	21.81
1.4	3	2		22.11	22	22.04
1.4	6	0		21.91	21.97	22.37
1.4	1	0	16-QAM	21.8	22.26	22.21
1.4	1	2		22.18	22.31	22.38
1.4	1	5		21.78	21.9	22.13
1.4	3	0		21.14	21.09	21.25
1.4	3	1		21.2	21.3	21.09
1.4	3	2		21.5	21.2	21.05
1.4	6	0		21.41	21.31	21.34
3	1	0	QPSK	22.93	23.39	23.27
3	1	7		23.14	23.43	22.86
3	1	14		23.31	23.48	23.07
3	8	0		22.38	22.08	21.9
3	8	4		21.97	22.37	22.15
3	8	7		22.25	21.98	21.8
3	15	0		21.9	22.33	21.92
3	1	0	16-QAM	22.38	21.89	22.01
3	1	7		22.06	22.37	22.23
3	1	14		21.77	22.19	22.38
3	8	0		21.1	20.95	21.08
3	8	4		21.07	21.18	21.26
3	8	7		20.95	21.05	20.92
3	15	0		21.26	21.08	20.97



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.03	23.35	22.91
5	1	12		23.25	23.3	22.94
5	1	24		23.31	23.06	23.43
5	12	0		21.9	22.06	21.81
5	12	6		22.42	22.02	22.22
5	12	11		22.36	22.03	22.07
5	25	0		22.13	22.06	21.92
5	1	0	16-QAM	22.18	21.92	22.23
5	1	12		22.1	21.96	22.12
5	1	24		21.95	22.26	21.85
5	12	0		21.08	21.21	21.29
5	12	6		21.08	21.17	21.23
5	12	11		21.22	21.16	21.22
5	25	0		21.42	21.15	21.35
10	1	0	QPSK	23.43	23.19	23.38
10	1	24		23.53	23.27	23.31
10	1	49		23.62	23.11	22.98
10	25	0		21.97	22.09	22.21
10	25	12		21.98	22.1	22.18
10	25	24		22.07	22.12	22.11
10	50	0		22.16	22.07	22.02
10	1	0	16-QAM	22.22	22.08	22.32
10	1	24		22.09	22.17	21.83
10	1	49		22.06	21.93	22.33
10	25	0		21.07	21.24	21.15
10	25	12		21.26	21.51	20.88
10	25	24		21.21	21.03	21.06
10	50	0		21.41	21.36	21.16



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.07	23.1	22.96
5	1	12		23.43	23.38	23.42
5	1	24		23.42	23.4	23.43
5	12	0		22.12	22.21	22.14
5	12	6		22.04	22.25	22.02
5	12	11		21.92	22.1	22.04
5	25	0		22.13	21.93	22.15
5	1	0	16-QAM	21.85	22.12	22.23
5	1	12		21.75	21.87	22.24
5	1	24		22.17	22.25	22.35
5	12	0		21	21.19	21.23
5	12	6		21.36	21.34	21.36
5	12	11		21.49	21.36	21.34
5	25	0		21.24	21.22	21.28
10	1	0	QPSK	23.62	23.2	23.09
10	1	24		23.06	22.81	23.4
10	1	49		23.17	23.38	23.47
10	25	0		21.81	21.96	21.98
10	25	12		21.89	22.25	21.8
10	25	24		22.33	21.94	21.85
10	50	0		22.27	22.09	21.93
10	1	0	16-QAM	22.15	22.12	22.21
10	1	24		22.27	21.99	22.01
10	1	49		22.27	22.03	21.86
10	25	0		21	21.06	21.23
10	25	12		21.02	21.18	21.32
10	25	24		21.5	21.22	21.04
10	50	0		21.07	21.2	21.01



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.51	23.24	23.34
15	1	37		23.05	23.06	22.9
15	1	74		23.62	23.33	23.55
15	36	0		21.94	22.04	22.18
15	36	18		22.18	21.85	21.92
15	36	39		21.91	22.18	22.21
15	75	0		21.94	22.19	21.92
15	1	0	16-QAM	22.14	22.12	21.99
15	1	38		21.99	21.98	22.22
15	1	75		22.22	22	22.12
15	36	0		21.09	21.2	21.48
15	36	18		21.19	21.49	21.47
15	36	39		21.04	21.14	21.35
15	75	0		21.13	21.06	21.34
20	1	0	QPSK	23.58	23.3	23.33
20	1	49		23.2	23.51	23.15
20	1	99		23.46	23.4	23.14
20	50	0		21.81	22.05	21.9
20	50	24		22.1	22.05	21.8
20	50	49		21.81	21.94	21.92
20	100	0		22.07	21.89	22.22
20	1	0	16-QAM	22.22	21.95	22.2
20	1	49		22.06	22.09	22.02
20	1	99		22.15	21.86	22.19
20	50	0		21.15	21.17	21.16
20	50	24		21.12	21.24	21.48
20	50	49		21.38	21.2	21.2
20	100	0		21.01	21.15	20.96



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.19	23	22.93
1.4	1	2		23.23	23.22	23.39
1.4	1	5		23.4	23.5	23.7
1.4	3	0		22.29	22.11	22.07
1.4	3	1		21.93	22.08	22.11
1.4	3	2		21.78	22.03	22.01
1.4	6	0		21.96	21.81	21.99
1.4	1	0	16-QAM	21.88	21.95	22.34
1.4	1	2		21.98	22.04	22.38
1.4	1	5		22.31	22.14	22.3
1.4	3	0		21.1	21.09	21.2
1.4	3	1		21.21	21.32	21.33
1.4	3	2		21.29	21.21	21.16
1.4	6	0		21.1	21.06	21.31
3	1	0	QPSK	23.52	23.32	23.32
3	1	7		23.05	22.89	23.28
3	1	14		23.43	23.19	23.45
3	8	0		22	21.99	22.12
3	8	4		21.99	22.08	21.99
3	8	7		22.26	22.05	21.91
3	15	0		22.13	22.01	21.84
3	1	0	16-QAM	22.07	22.12	22.12
3	1	7		22.12	21.9	21.9
3	1	14		22.27	22.22	22.12
3	8	0		20.95	21	21.49
3	8	4		21.03	21.39	21.13
3	8	7		21.37	21.28	21.05
3	15	0		20.92	21.03	20.88



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.57	23.1	23.34
5	1	12		22.99	23.09	22.93
5	1	24		23.56	23.2	23.35
5	12	0		21.97	21.79	22.07
5	12	6		22.17	21.72	21.87
5	12	11		21.77	22.18	22.21
5	25	0		22.01	22.2	22.05
5	1	0	16-QAM	22.05	22.3	21.97
5	1	12		21.91	21.81	22.27
5	1	24		22.32	22.07	22.26
5	12	0		21.18	21.07	21.37
5	12	6		21.2	21.51	21.43
5	12	11		21.16	21.08	21.44
5	25	0		20.92	20.94	21.34
10	1	0	QPSK	23.53	23.29	23.56
10	1	24		23.01	23.27	23.27
10	1	49		23.66	23.46	23.37
10	25	0		21.98	21.97	22
10	25	12		22.08	21.93	22
10	25	24		21.91	21.81	21.9
10	50	0		22.2	22	22.31
10	1	0	16-QAM	22.21	21.92	22.24
10	1	24		21.97	22.09	21.82
10	1	49		22.02	22.07	21.98
10	25	0		21.14	21.33	20.88
10	25	12		21.37	21.03	21.4
10	25	24		21.14	21.22	21.1
10	50	0		21.15	21.21	21.1




LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.15	23.48	22.97
5	1	12		23.33	23.55	23.29
5	1	24		23.2	23.36	23.07
5	12	0		21.96	22.1	21.87
5	12	6		22.24	22.01	22.41
5	12	11		22.12	21.82	22.18
5	25	0		22.12	22.32	22.16
5	1	0	16-QAM	22.27	22.01	22.2
5	1	12		22.21	22.04	22.02
5	1	24		21.91	21.94	22.22
5	12	0		21.1	21.23	21.04
5	12	6		21.39	21.35	21.34
5	12	11		21.27	20.91	21.32
5	25	0		20.91	21.16	21.18
10	1	0	QPSK	23.62	23	23.13
10	1	24		23.53	23.28	23.07
10	1	49		23.26	23.7	23.32
10	25	0		21.76	22.15	21.92
10	25	12		22.11	22.16	21.85
10	25	24		22.12	22.01	21.96
10	50	0		21.91	22.06	22.07
10	1	0	16-QAM	22.2	21.99	21.97
10	1	24		22.18	22.04	22.01
10	1	49		22.32	22.24	22.15
10	25	0		21.24	21.43	21.34
10	25	12		20.97	20.9	21.32
10	25	24		21.43	21.19	21.43
10	50	0		21.32	21.06	21.29


11. EUT and Test Setup Photo

11.1 EUT Photo

Front side

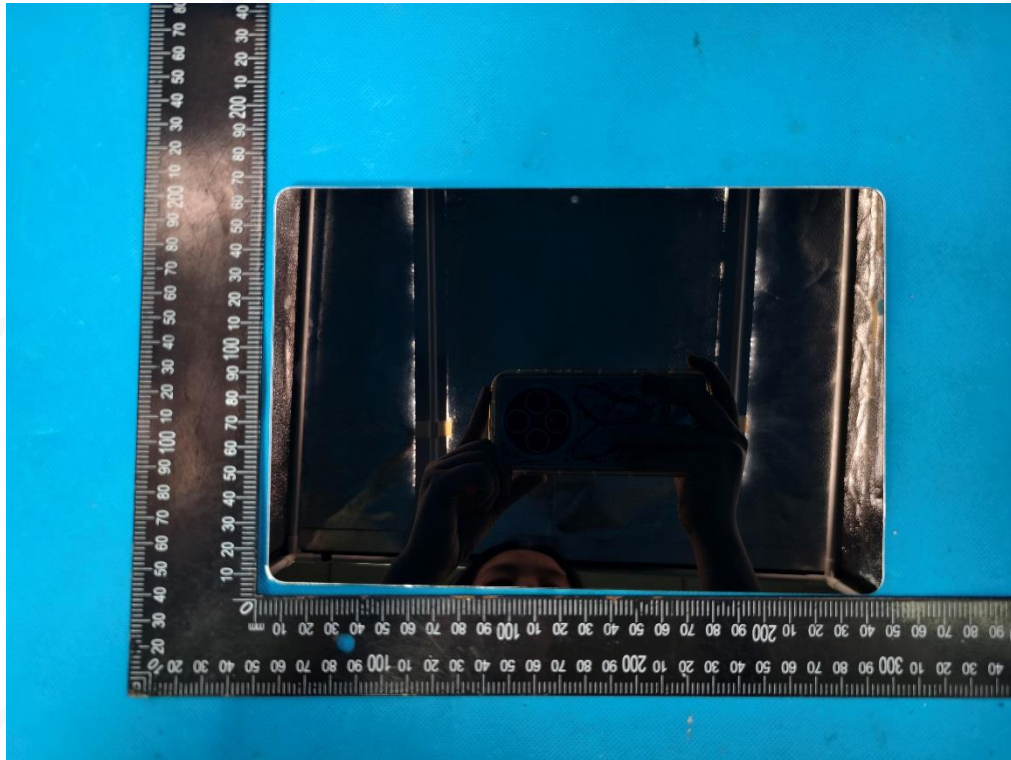


Back side

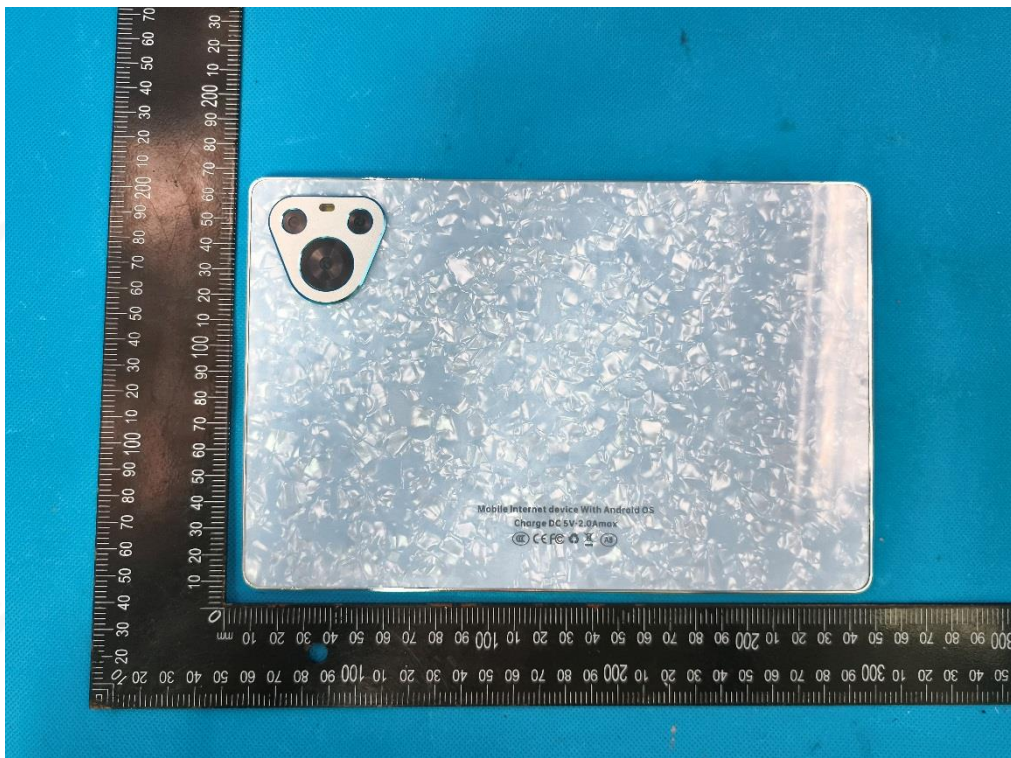




Top side

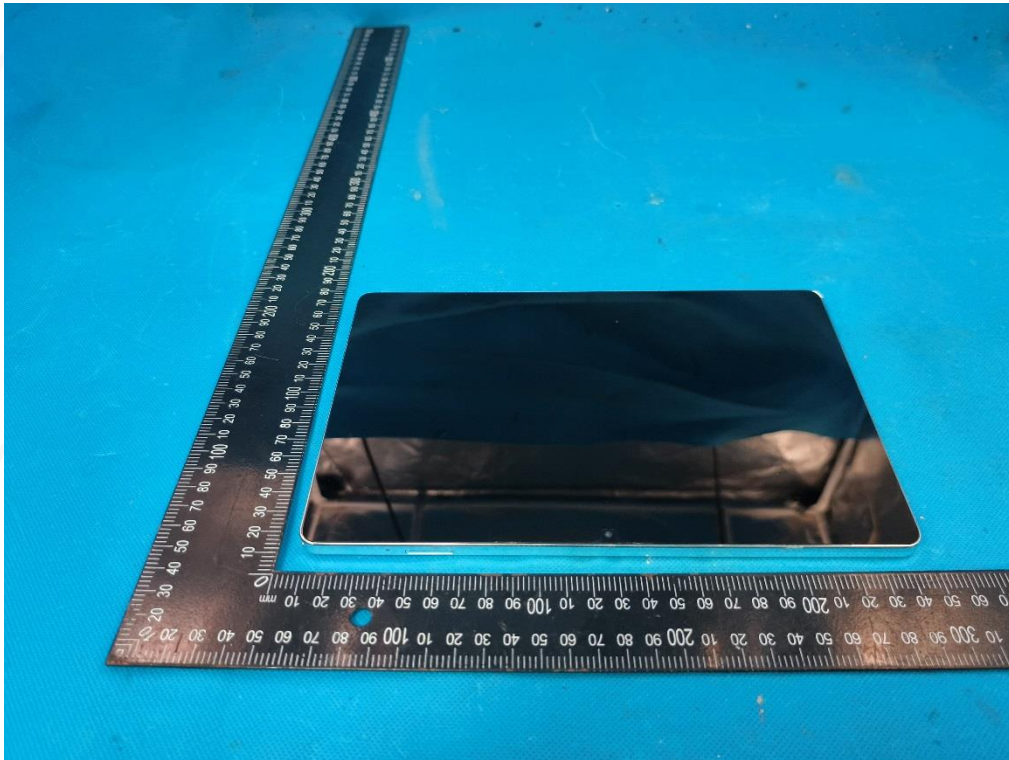


Bottom side

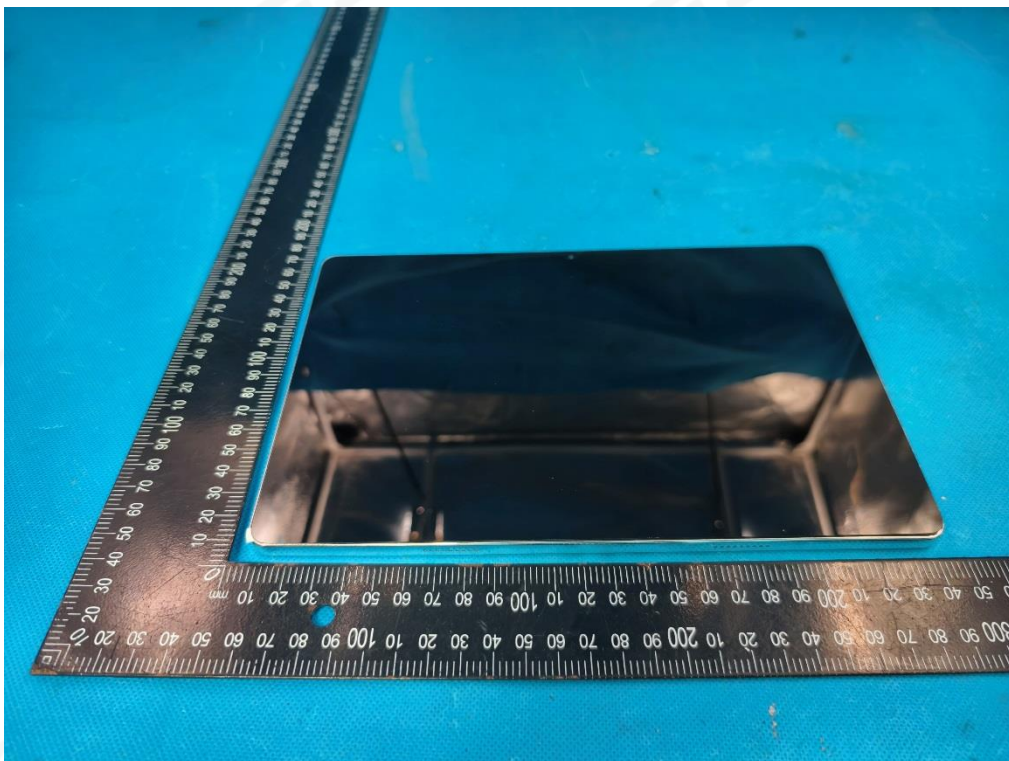




Left side

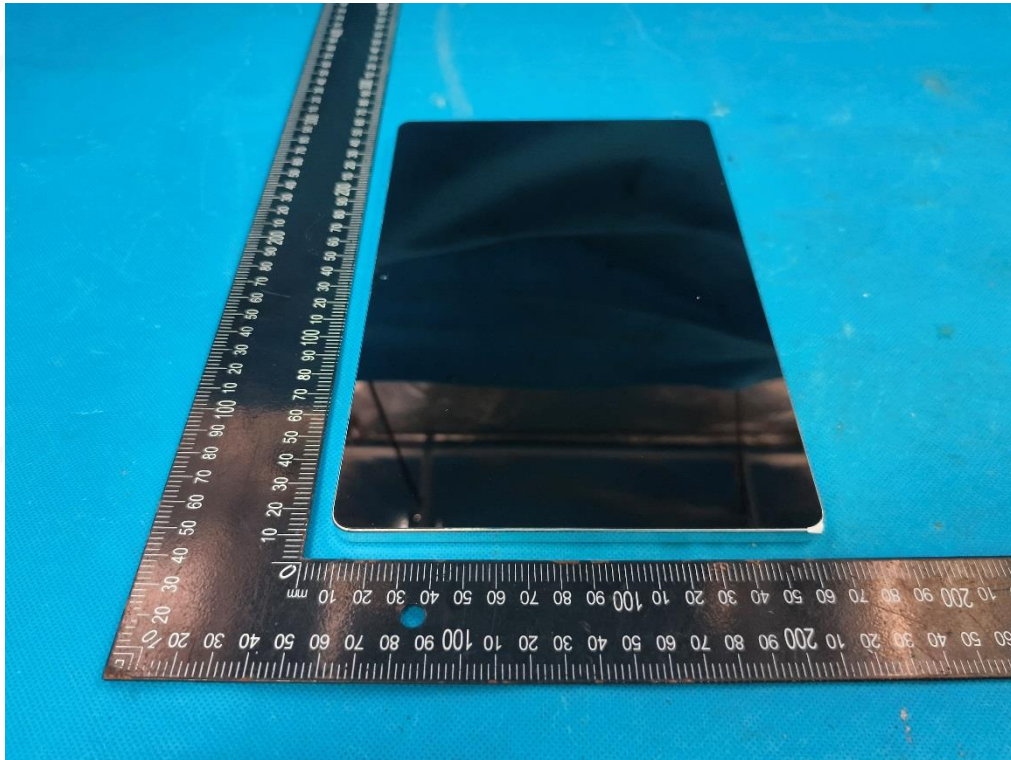


Right side

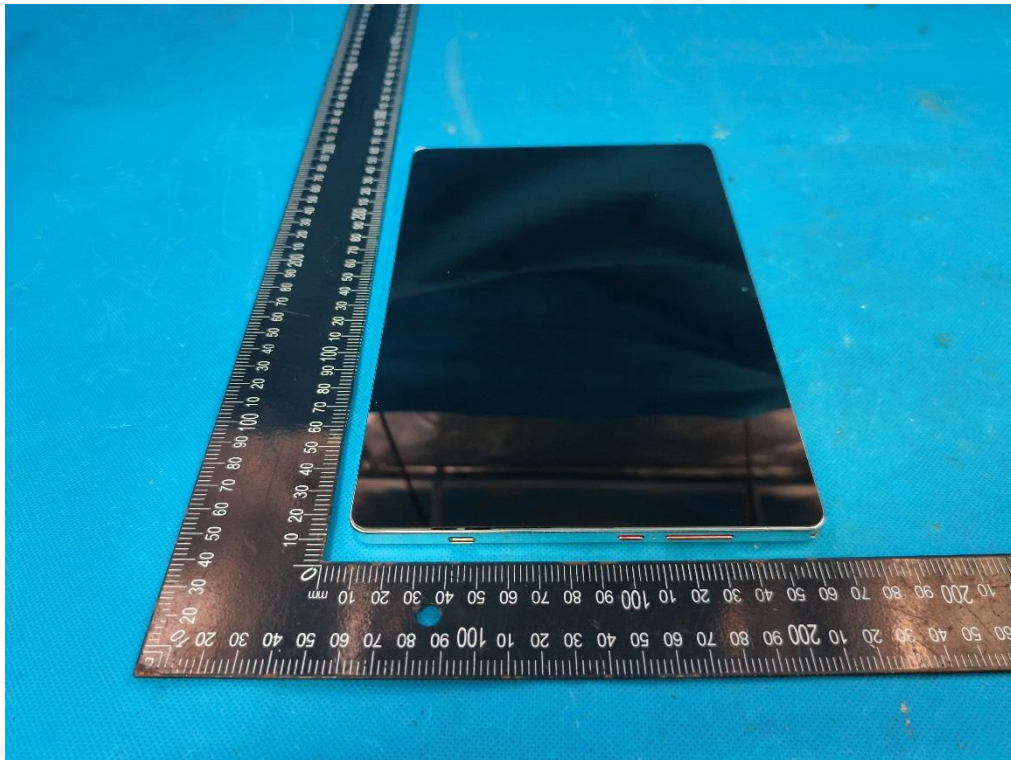



11.2 Setup Photo

Body Back side(separation distance is 0mm)

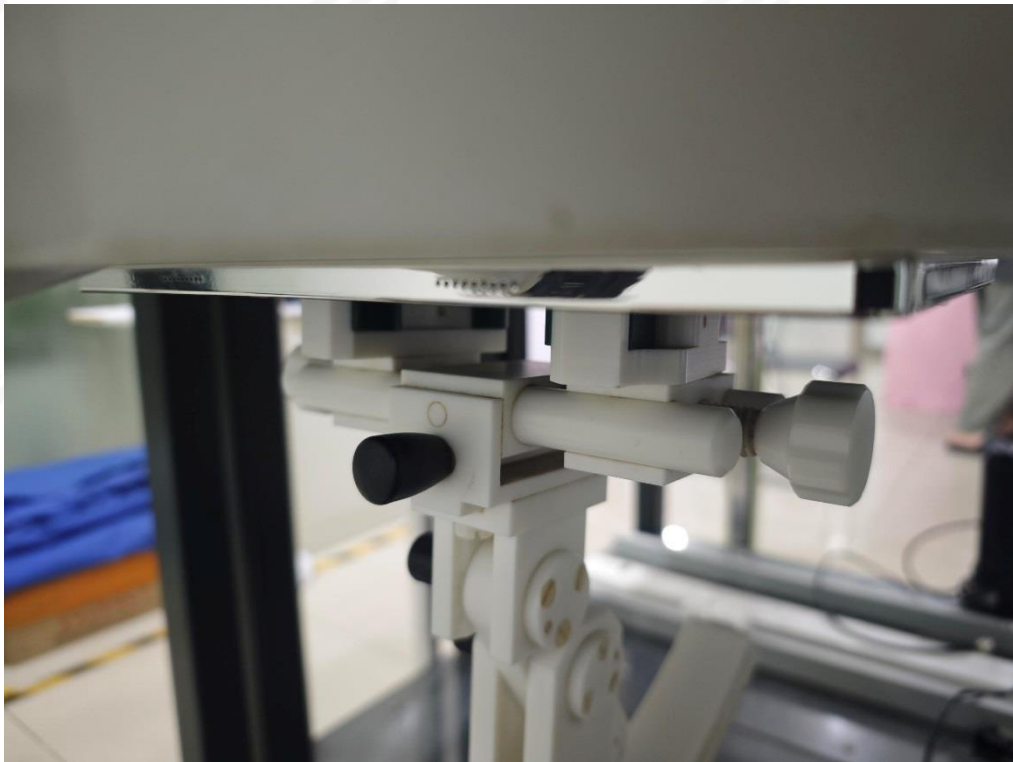

Body Left side(separation distance is 0mm)



Body Right Side (separation distance is 0mm)




Body Top side (separation distance is 0mm)





Liquid depth (15 cm)

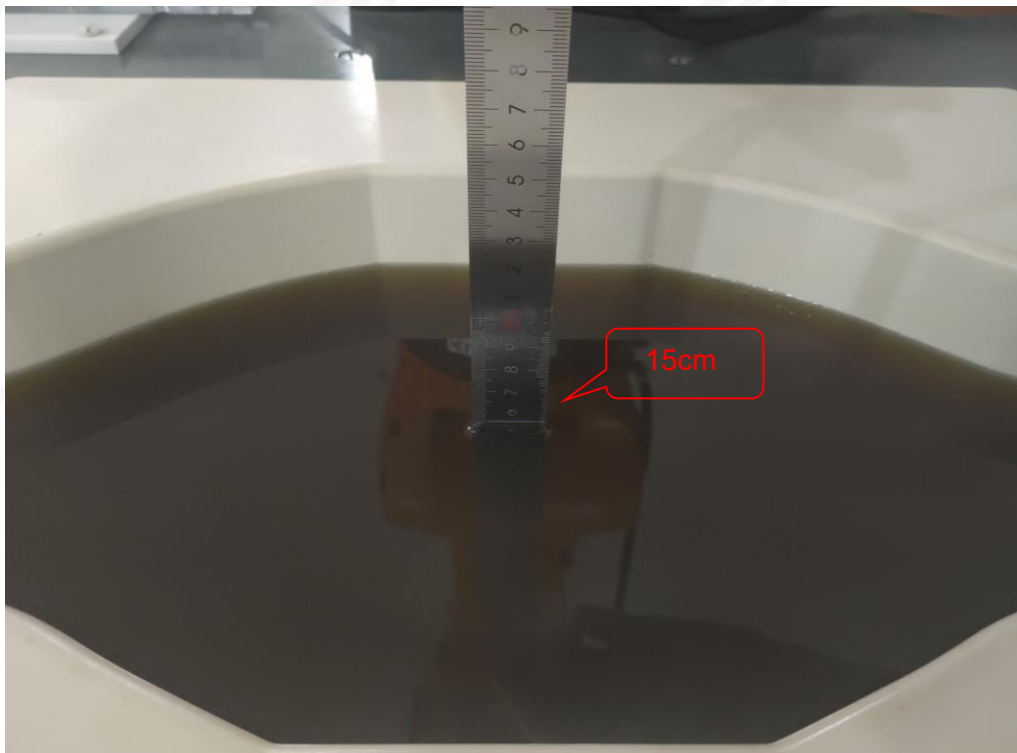



12. SAR Result Summary

12.1 Body-worn and Hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas.No.
GSM850	GPRS Data-4 Slot	Back Side	836.6	0.155	0.26	30.50	30.02	1.117	0.173	/
		Left Side	836.6	0.021	1.62	30.50	30.02	1.117	0.023	/
		Right Side	836.6	0.012	-1.51	30.50	30.02	1.117	0.013	/
		Top Side	836.6	0.234	-0.21	30.50	30.02	1.117	0.261	1
GSM1900	GPRS Data-4 Slot	Back Side	1909.8	0.366	3.15	29.50	29.03	1.114	0.408	/
		Right Side	1909.8	0.022	-0.73	29.50	29.03	1.114	0.025	/
		Top Side	1909.8	0.515	-0.81	29.50	29.03	1.114	0.574	2
WCDMA Band 2	RMC	Back Side	1880	0.202	3.21	23.50	23.47	1.007	0.203	/
		Top Side	1880	0.417	-2.35	23.50	23.47	1.007	0.420	3
WCDMA Band 4	RMC	Back Side	1740	0.098	1.55	24.00	23.69	1.074	0.105	/
		Top Side	1740	0.172	-1.46	24.00	23.69	1.074	0.185	4
WCDMA Band 5	RMC	Back Side	836.6	0.441	0.12	24.00	23.52	1.117	0.493	/
		Top Side	826.4	0.568	1.61	24.00	23.12	1.225	0.696	/
		Top Side	836.6	0.647	3.95	24.00	23.52	1.117	0.723	5
		Top Side	846.6	0.514	-0.88	24.00	22.56	1.393	0.716	/
2.4GHz WLAN	802.11b	Back Side	2412	0.044	3.74	15.00	14.59	1.099	0.048	/
		Top Side	2412	0.065	-3.26	15.00	14.59	1.099	0.071	6
5.2GHz WLAN	802.11a	Back Side	5240	0.169	1.40	13.50	13.37	1.030	0.174	/
		Top Side	5240	0.238	3.85	13.50	13.37	1.030	0.245	7
5.8GHz WLAN	802.11n-HT40	Back Side	5755	0.144	-3.57	12.00	11.79	1.050	0.151	/
		Top Side	5755	0.176	-1.40	12.00	11.79	1.050	0.185	8



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn- up Power (dBm)	Meas. Output Power (dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	0	Back Side	1880	0.211	-0.38	24.00	23.60	1.096	0.231	/
			50	24	Back Side	1860	0.202	2.85	23.00	22.34	1.164	0.235	/
			1	0	Top Side	1880	0.393	-1.73	24.00	23.60	1.096	0.431	9
			50	24	Top Side	1860	0.356	-2.28	23.00	22.34	1.164	0.414	/
LTE Band 4	20M	QPSK	1	0	Back Side	1732.5	0.214	1.73	24.00	23.53	1.114	0.238	/
			50	49	Back Side	1720	0.204	-2.01	22.50	22.24	1.062	0.217	/
			1	0	Top Side	1732.5	0.309	1.63	24.00	23.53	1.114	0.344	10
			50	49	Top Side	1720	0.298	0.92	22.50	22.24	1.062	0.316	/
LTE Band 5	10M	QPSK	1	49	Back Side	829	0.085	-2.40	24.00	23.62	1.091	0.093	/
			25	0	Back Side	844	0.079	-1.37	22.50	22.21	1.069	0.084	/
			1	49	Top Side	829	0.143	-0.71	24.00	23.62	1.091	0.156	11
			25	0	Top Side	844	0.125	-2.20	22.50	22.21	1.069	0.134	/
LTE Band 7	20M	QPSK	1	0	Back Side	2510	0.133	-3.52	24.00	23.58	1.102	0.147	/
			50	24	Back Side	2510	0.147	-1.58	22.50	22.10	1.096	0.161	/
			1	0	Top Side	2510	0.195	0.69	24.00	23.58	1.102	0.215	12
			50	0	Top Side	2510	0.178	2.30	22.50	22.10	1.096	0.195	/
LTE Band 12	10M	QPSK	1	49	Back Side	704	0.147	-3.32	24.00	23.66	1.081	0.159	/
			25	12	Back Side	704	0.133	-2.43	22.50	22.08	1.102	0.147	/
			1	49	Top Side	704	0.209	-0.16	24.00	23.66	1.081	0.226	13
			25	12	Top Side	704	0.201	2.16	22.50	22.08	1.102	0.221	/



LTE Band 17	10M	QP SK	1	49	Back Side	710	0.144	-3.26	24.00	23.70	1.072	0.154	/
			25	12	Back Side	710	0.132	-3.33	22.50	22.16	1.081	0.143	/
			1	49	Top Side	710	0.180	0.09	24.00	23.70	1.072	0.193	14
			25	12	Top Side	710	0.174	0.28	22.50	22.16	1.081	0.188	/

Note:

1. The test separation of all above table is 0mm.
2. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
3. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
4. Per KDB 248227- When the highest reported SAR for U-NII-1 is adjusted by the ratio of U-NII-2A to U-NII-1 specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 5.
6. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Application Simultaneous Transmission information:

Position	Simultaneous State
Body	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion: a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f (GHz) /x] W/kg for test separation distances≤ 50 mm; Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR. b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR		Maximum Average Power		Dis.	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Body	-0.5	0.891	5	2.48	0.037



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Body	GSM	0.574	0.645
		2.4G WLAN	0.071	
GSM + Bluetooth	Body	GSM	0.574	0.611
		Bluetooth	0.037	
GSM + 5G WLAN	Body	GSM	0.574	0.819
		5G WLAN	0.245	
WCDMA + 2.4G WLAN	Body	WCDMA	0.723	0.794
		2.4G WLAN	0.071	
WCDMA + Bluetooth	Body	WCDMA	0.723	0.760
		Bluetooth	0.037	
WCDMA + 5G WLAN	Body	WCDMA	0.723	0.968
		5G WLAN	0.245	
LTE + 2.4G WLAN	Body	LTE	0.431	0.502
		2.4G WLAN	0.071	
LTE + Bluetooth	Body	LTE	0.431	0.468
		Bluetooth	0.037	
LTE + 5G WLAN	Body	LTE	0.431	0.676
		5G WLAN	0.245	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2023.07.04	2026.07.03
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2023.07.04	2026.07.03
1800MHz Dipole	MVG	SID1800	5023-DIP1G800-747	2023.12.20	2026.12.19
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2023.09.14	2026.09.13
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2023.07.04	2026.07.03
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2023.07.04	2026.07.03
Waveguide	MVG	SWG5500	SN 13/14 WGA32	2023.07.04	2026.07.03
E-Field Probe	MVG	SSE2	SN 08/21 EPOG352	2024.09.18	2025.09.17
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2024.09.18	2025.09.17
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom3	MVG	SAM	SN 21/21 ELLI48	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	HXT-10-8-SMA	240327017	2025-02-22	2026-02-21
Directional coupler	Xi'an Xingbo	XBOH-OA08-20dB	211123-4-3	2025-02-22	2026-02-21
Network Analyzer	Agilent	E5071C	MY46520378	2024-09-25	2025-09-26
Multi Meter	Keithley	Multi Meter 2000	4050073	2024-09-25	2025-09-26
Signal Generator	Agilent	N5182A	MY50140530	2024-09-25	2025-09-26
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2025-02-22	2026-02-21
Wireless Communication Test Set	R&S	CMW500	156324	2024-09-25	2025-09-26
Power Amplifier	DESAY	ZHL-42W	9638	2024-09-25	2025-09-26
Power Meter	R&S	NRP	100510	2024-09-25	2025-09-26
Power Sensor	R&S	NRP-Z11	101919	2024-09-25	2025-09-26
Power Sensor	Keysight	U2021XA	MY56280002	2024-09-25	2025-09-26
Temperature hygrometer	SuWei	SW-108	N/A	2024.10.15	2025.10.14
Thermograph	Elitech	RC-4	S/N EF7176501537	2024.10.15	2025.10.14



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-11

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	42.32
Conductivity (S/m)	0.86
Probe	SN 08/21 EPGO352
ConvF	1.56
Crest factor	1:1

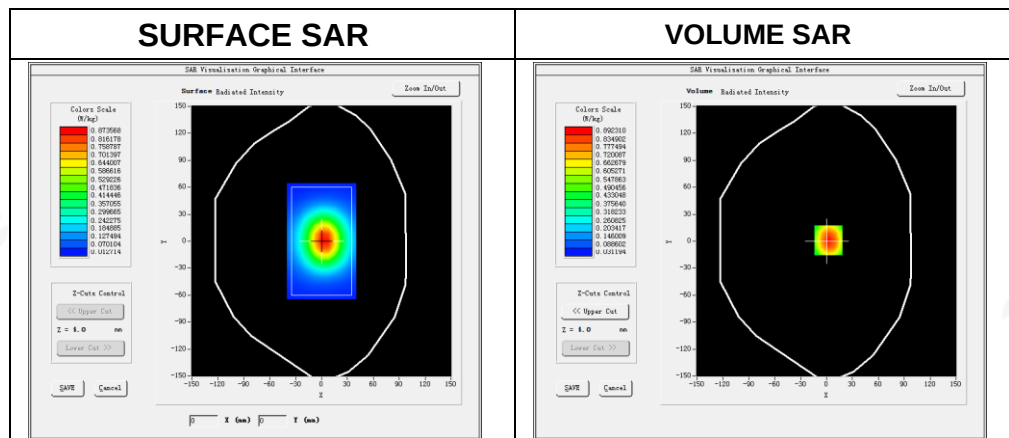

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.553671
SAR 1g (W/Kg)	0.828709

Z Axis Scan

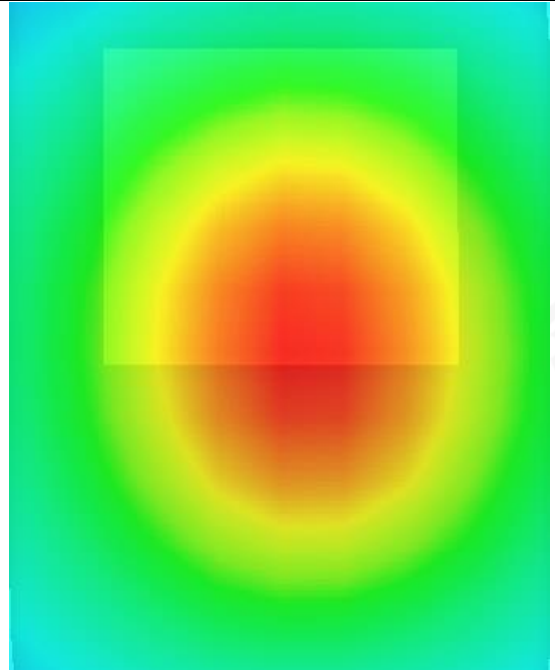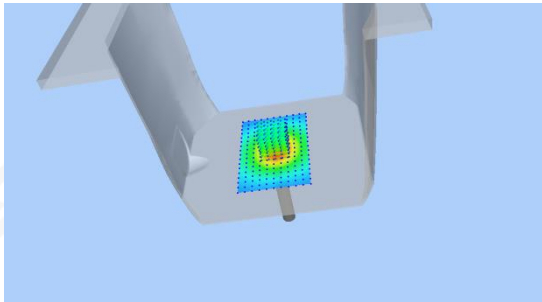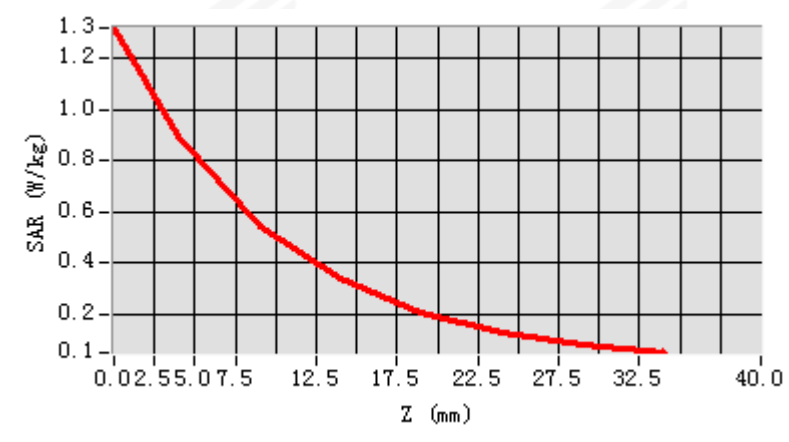

**System Performance Check Data (835MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-11


Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.49
Conductivity (S/m)	0.96
Probe	SN 08/21 EPGO352
ConvF:	1.44
Crest factor:	1:1

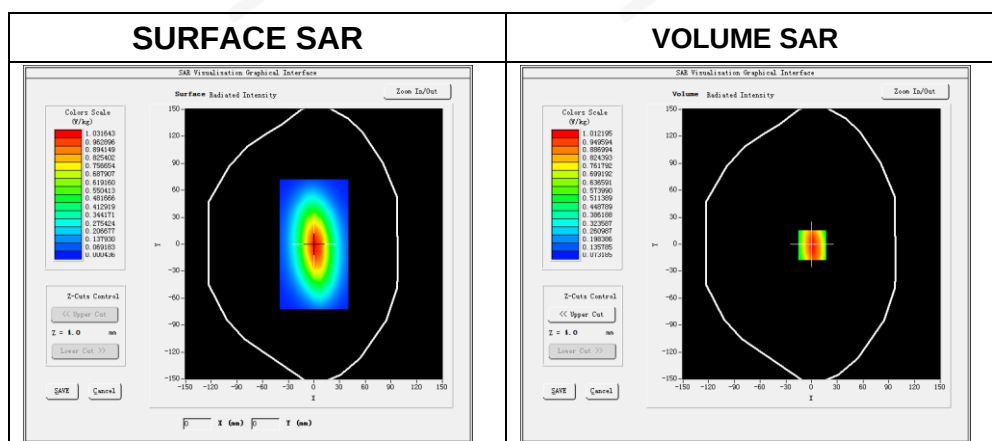**Maximum location: X=-7.00, Y=-1.00**

SAR 10g (W/Kg)	0.663322
SAR 1g (W/Kg)	0.975705

Z Axis Scan

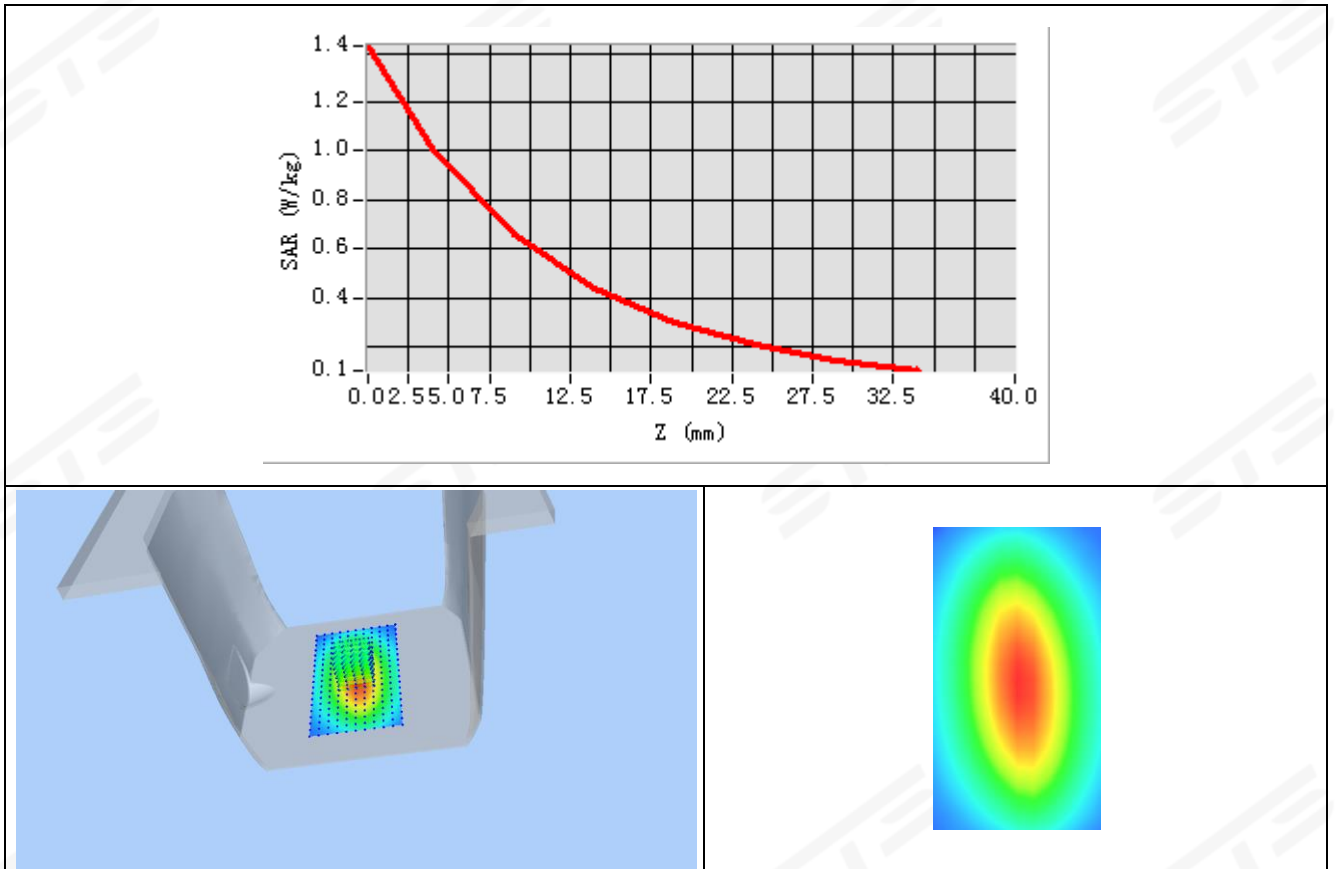

**System Performance Check Data(1800MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-13




Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	40.49
Conductivity (S/m)	1.39
Probe	SN 08/21 EPGO352
ConvF	1.58
Crest factor:	1:1

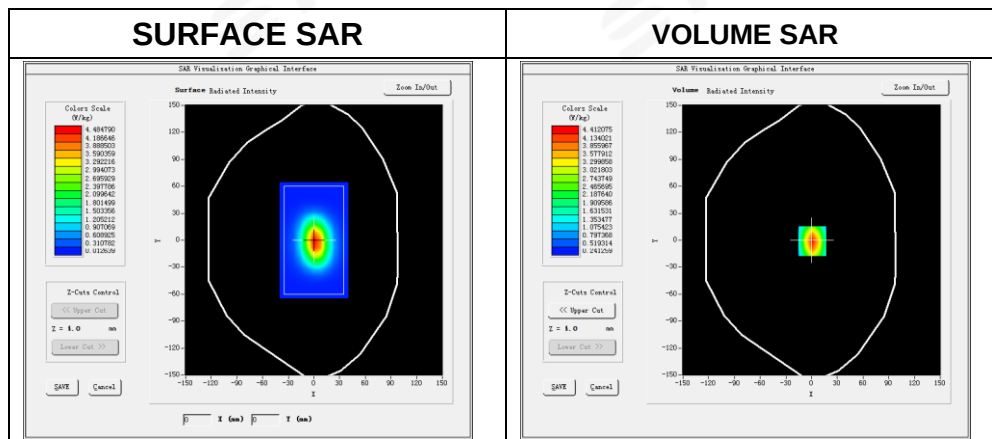**Maximum location: X=5.00, Y=1.00**

SAR 10g (W/Kg)	1.948448
SAR 1g (W/Kg)	3.829803

Z Axis Scan

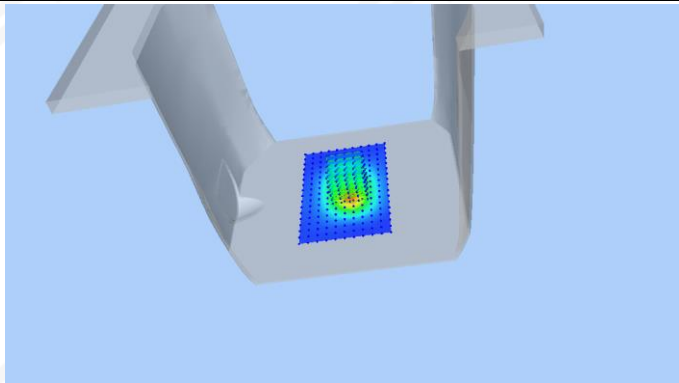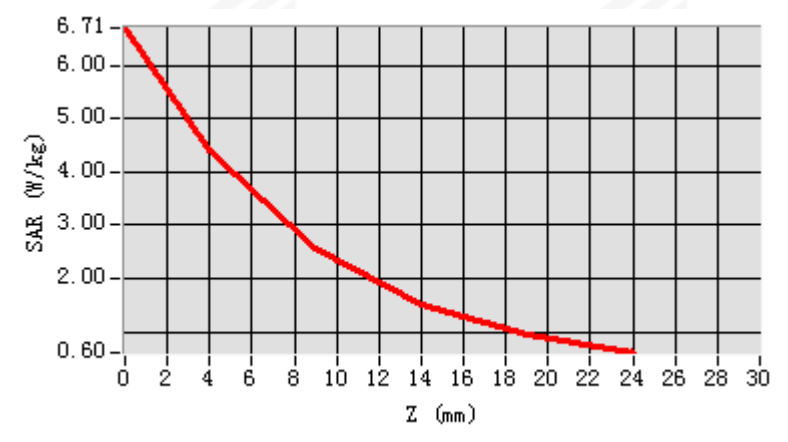

**System Performance Check Data (1900MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-13




Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.49
Conductivity (S/m)	1.45
Probe	SN 08/21 EPGO352
ConvF:	1.72
Crest factor:	1:1

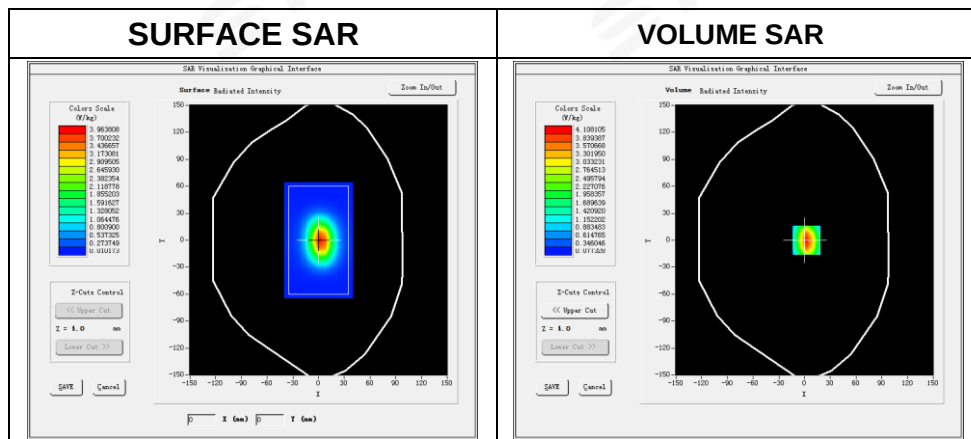**Maximum location: X=3.00, Y=-2.00**

SAR 10g (W/Kg)	2.054166
SAR 1g (W/Kg)	3.817147

Z Axis Scan

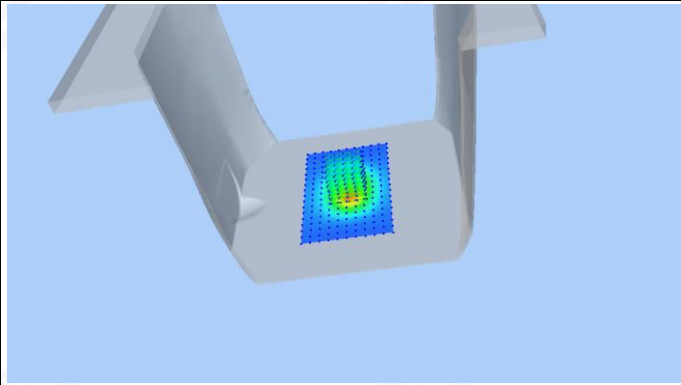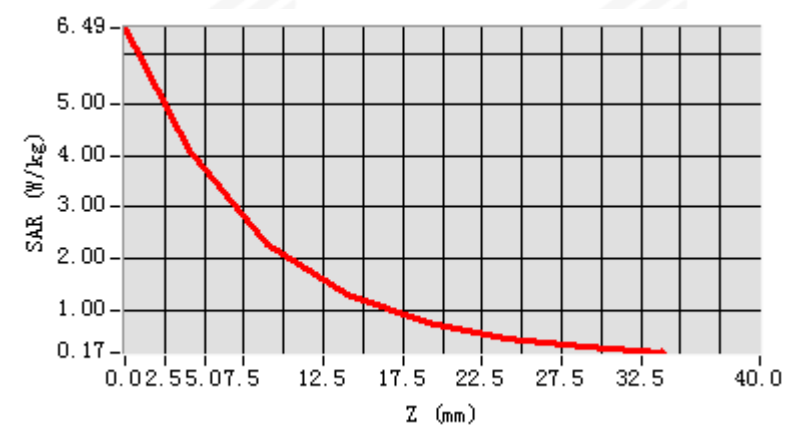

**System Performance Check Data (2450MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-15




Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	40.48
Conductivity (S/m)	1.79
Probe	SN 08/21 EPG0352
ConvF	1.80
Crest factor:	1:1

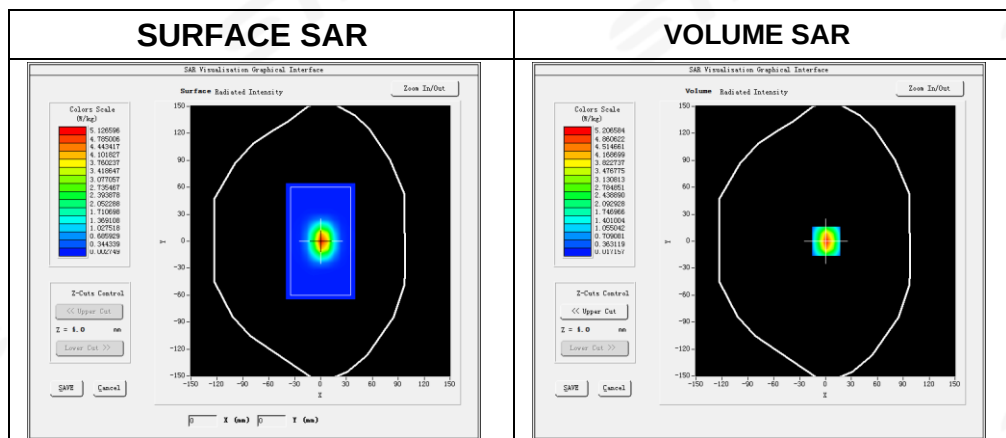**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	2.539451
SAR 1g (W/Kg)	5.506245

Z Axis Scan

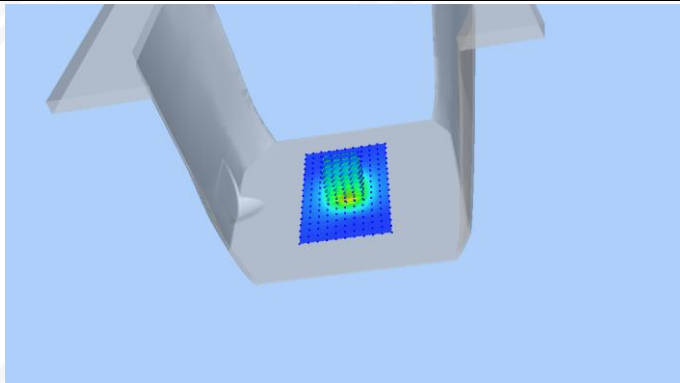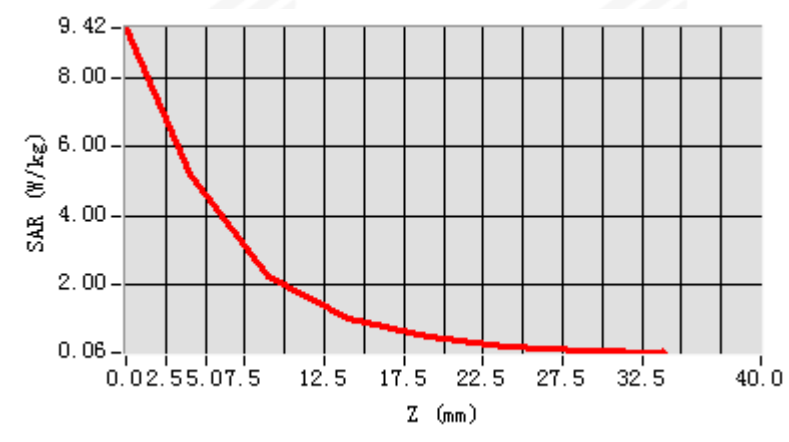

**System Performance Check Data (2600MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2025-04-15




Experimental conditions.

Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	39.76
Conductivity (S/m)	2.01
Probe	SN 08/21 EPG0352
ConvF	1.74
Crest factor:	1:1

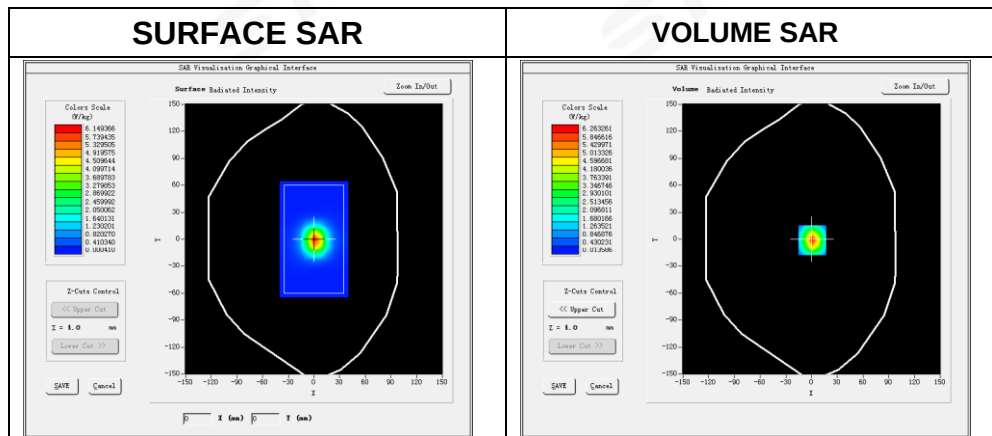**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	2.490551
SAR 1g (W/Kg)	5.366074

Z Axis Scan

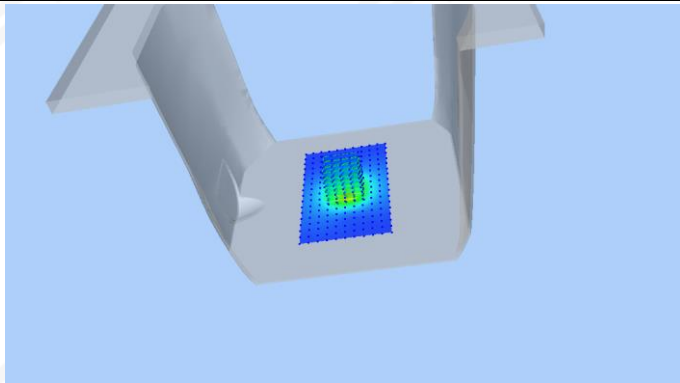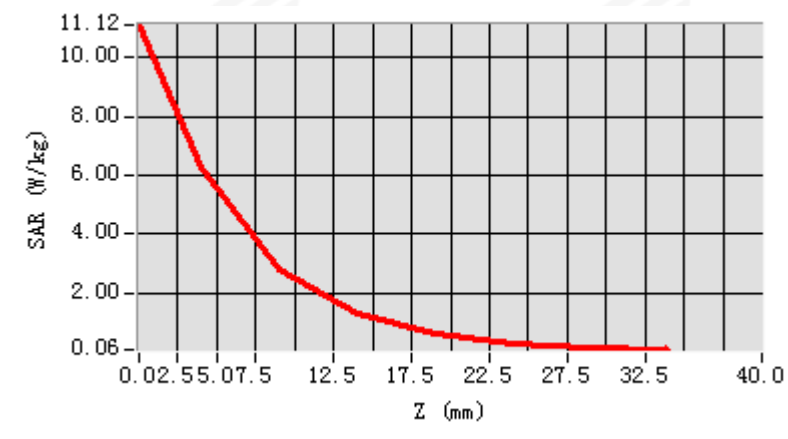

**System Performance Check Data (5200MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-04-30


Experimental conditions.

Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	36.77
Conductivity (S/m)	4.60
Probe	SN 08/21 EPGO352
ConvF	1.33
Crest factor:	1:1

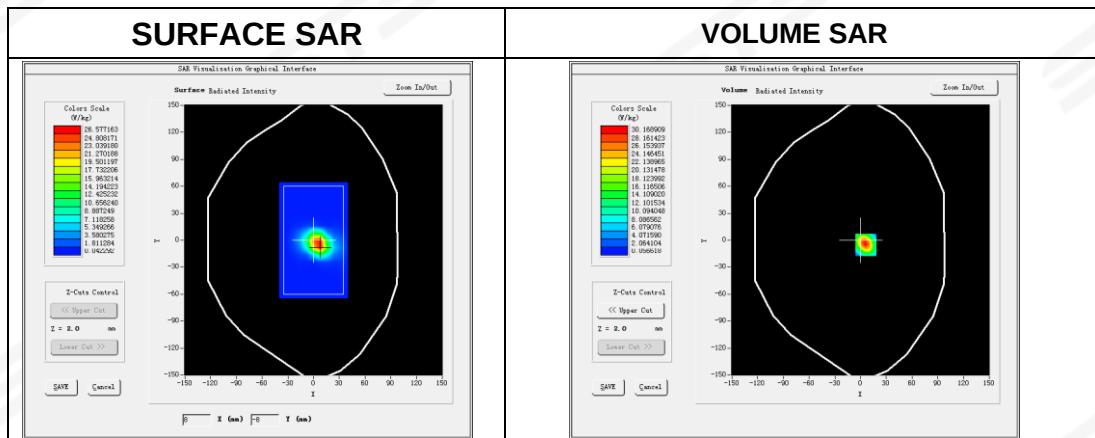**Maximum location: X=7.00, Y=2.00**

SAR 10g (W/Kg)	5.768676
SAR 1g (W/Kg)	16.420381

Z Axis Scan

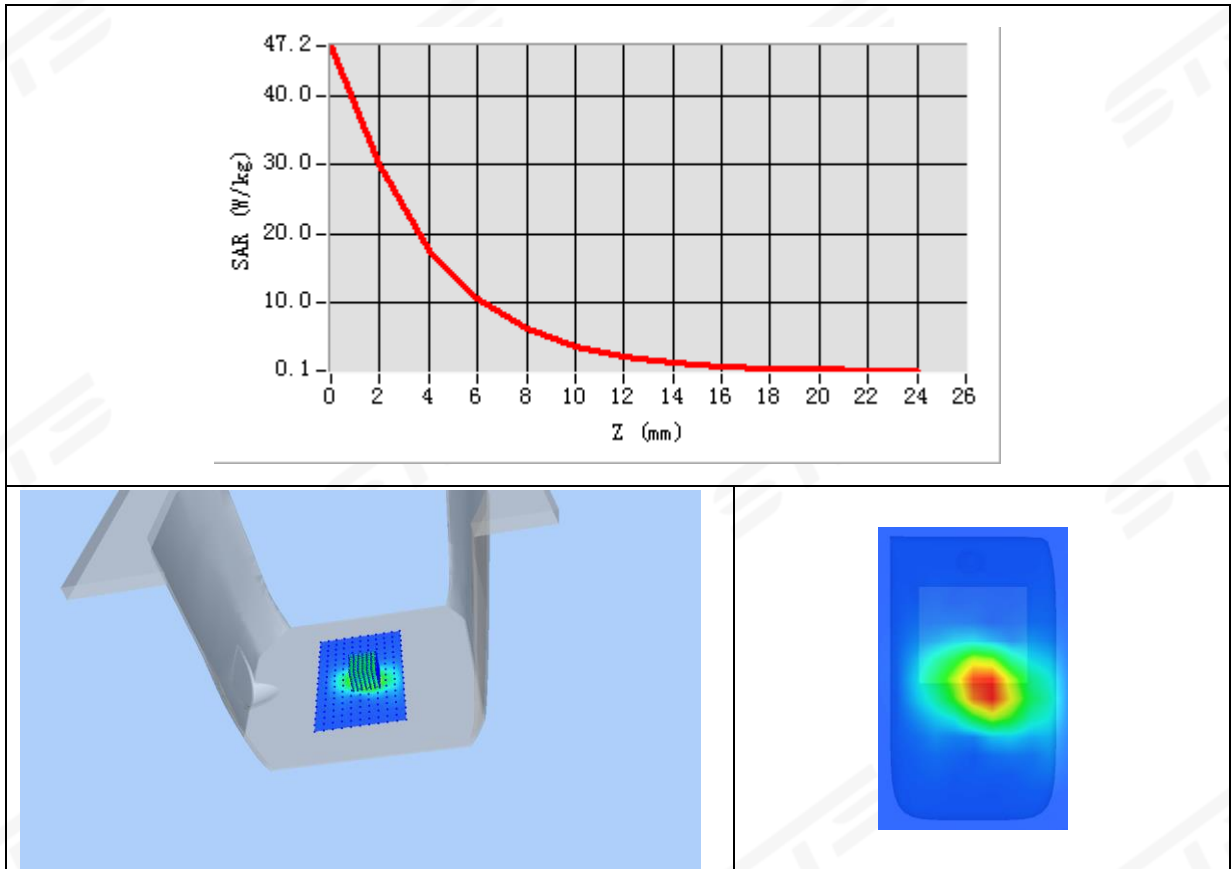

**System Performance Check Data (5800MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-04-30


Experimental conditions.

Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	35.67
Conductivity (S/m)	5.27
Probe	SN 08/21 EPGO352
ConvF	1.35
Crest factor:	1:1

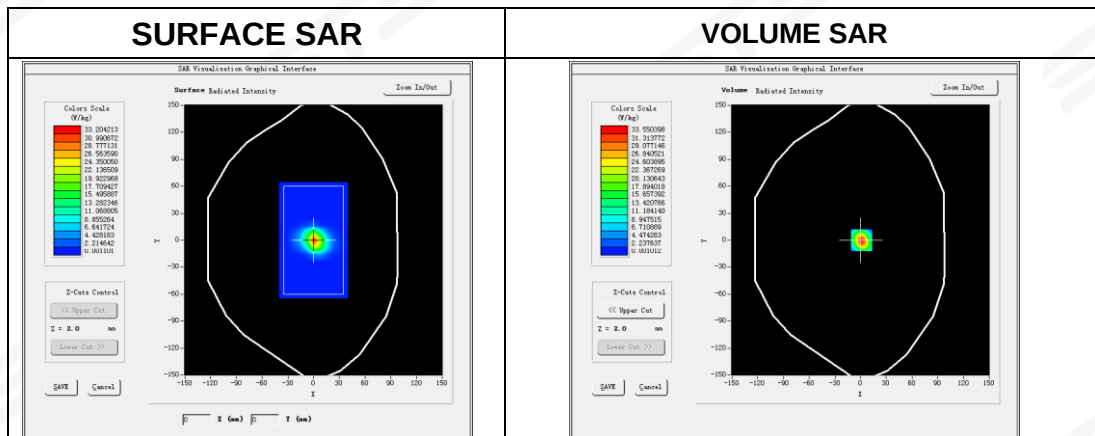**Maximum location: X=7.00, Y=2.00**

SAR 10g (W/Kg)	6.383153
SAR 1g (W/Kg)	18.247425

Z Axis Scan

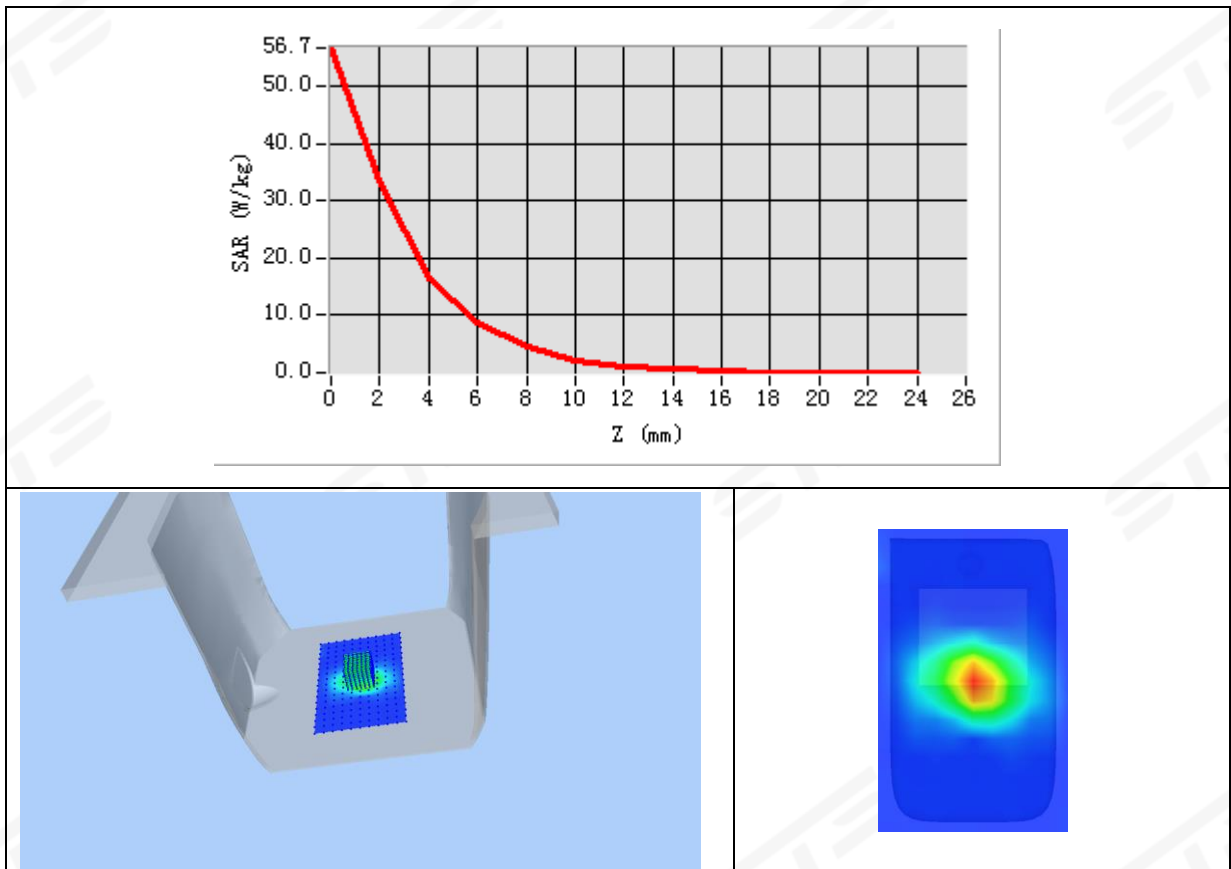


**Appendix B. SAR Test Plots****Plot 1: DUT: Tablet computer; EUT Model: M66 Pro**

Test Date	2025-04-11
Probe	SN 08/21 EPG0352
ConvF	1.44
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	GPRS 850
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	836.6
Relative permittivity (real part)	41.52
Conductivity (S/m)	0.91

Maximum location: X=-8.00, Y=-1.00

SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.136522
SAR 1g (W/Kg)	0.234441

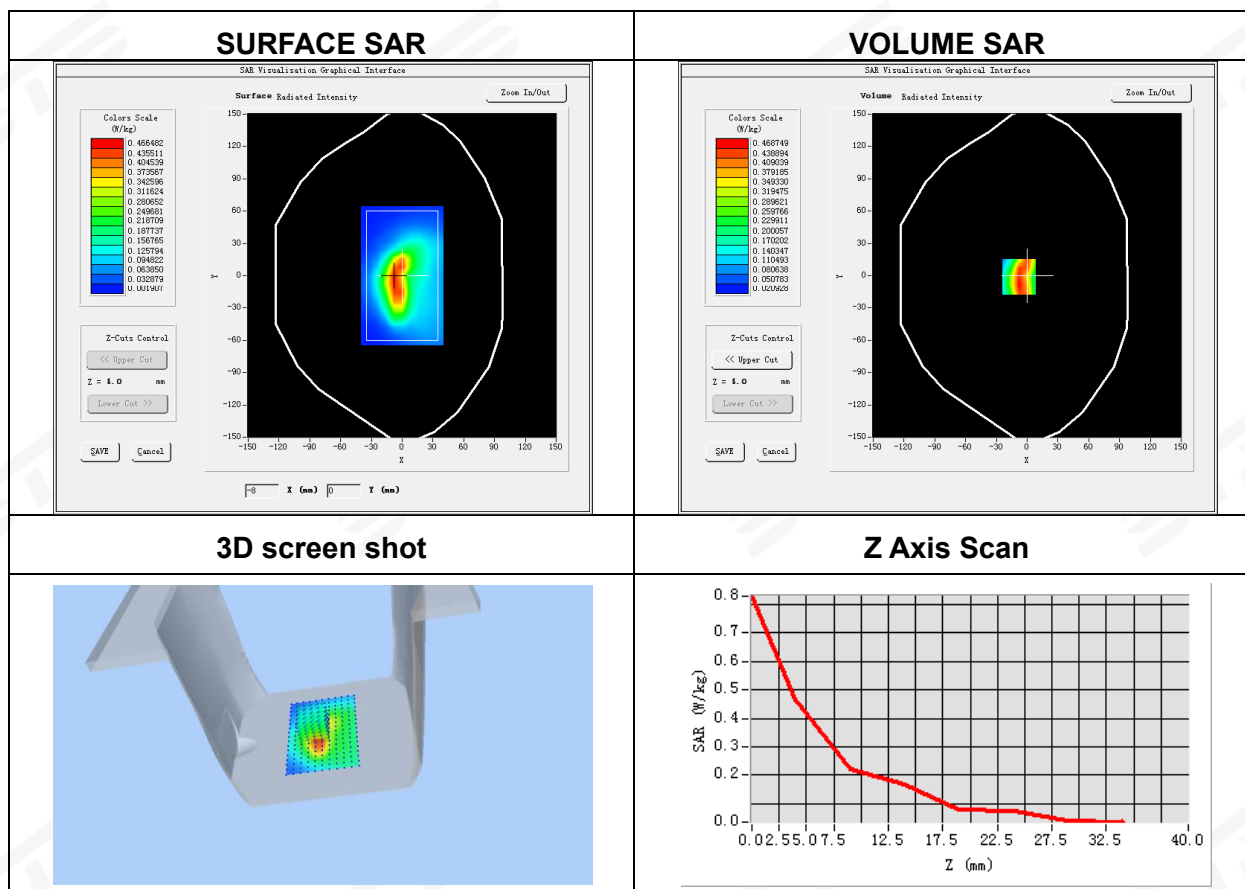




Plot 2: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-13
Probe	SN 08/21 EPG0352
ConvF	1.72
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	GPRS 1900
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1909.8
Relative permittivity (real part)	40.62
Conductivity (S/m)	1.36

Maximum location: X=-13.00, Y=-11.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.277230
SAR 1g (W/Kg)	0.515443

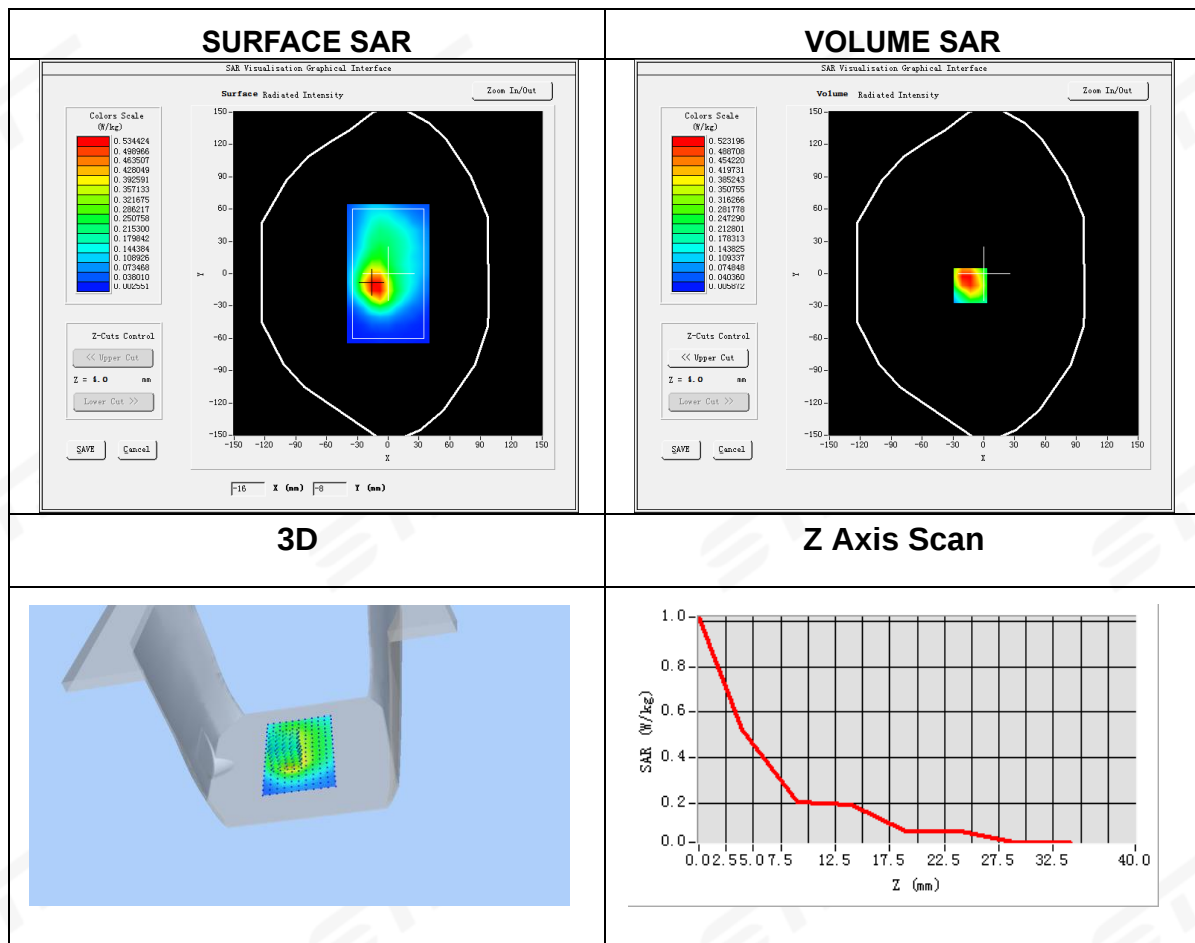




Plot 3: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-13
Probe	SN 08/21 EPGO352
ConvF	1.72
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	WCDMA 2
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.75
Conductivity (S/m)	1.44

Maximum location: X=31.00, Y=15.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.230609
SAR 1g (W/Kg)	0.416927

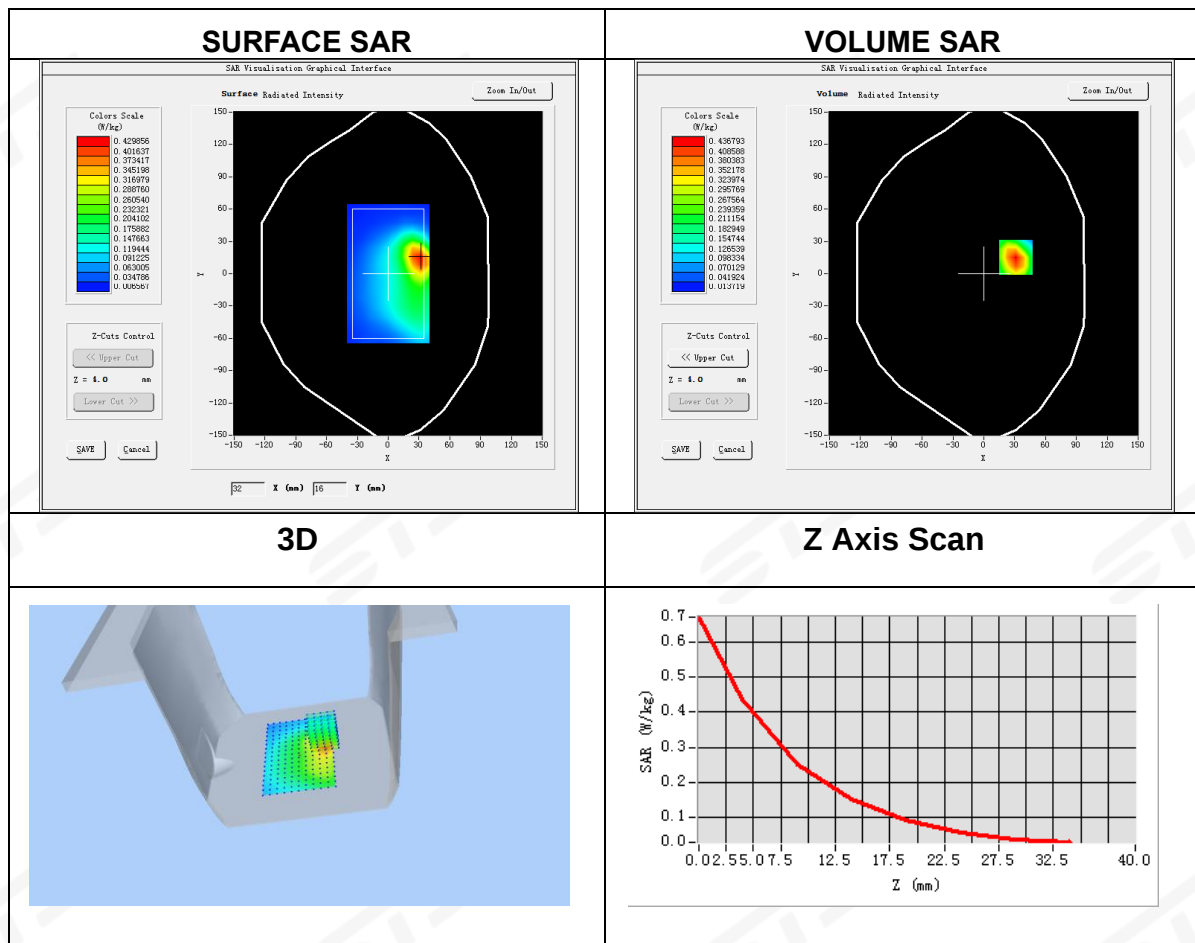




Plot 4: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-13
Probe	SN 08/21 EPGO352
ConvF	1.58
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	WCDMA Band 4
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1740
Relative permittivity (real part)	41.14
Conductivity (S/m)	1.41

Maximum location: X=-26.00, Y=24.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.103963
SAR 1g (W/Kg)	0.172105

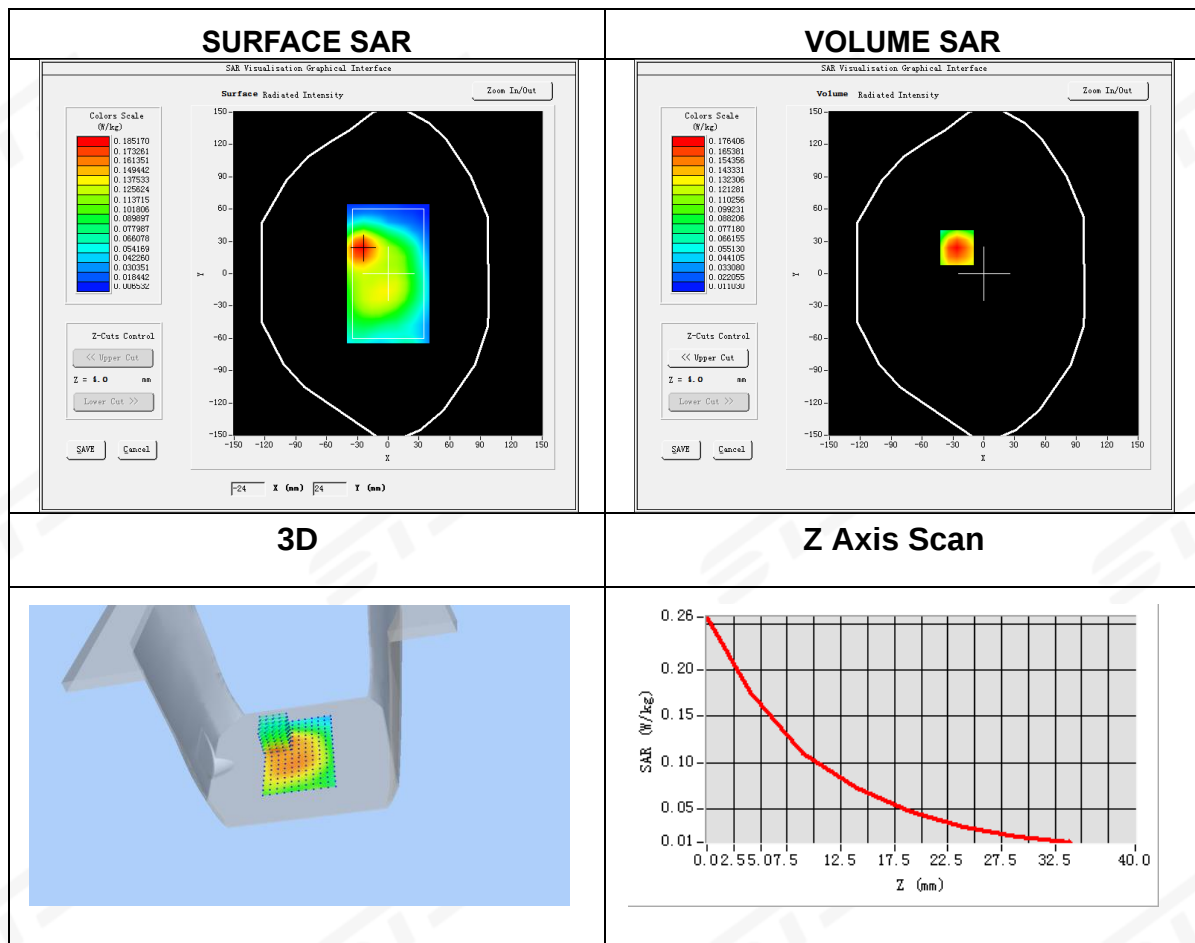




Plot 5: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-11
Probe	SN 08/21 EPGO352
ConvF	1.44
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	WCDMA 5
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	836.6
Relative permittivity (real part)	41.52
Conductivity (S/m)	0.91

Maximum location: X=0.00, Y=-9.00

SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.290439
SAR 1g (W/Kg)	0.646756

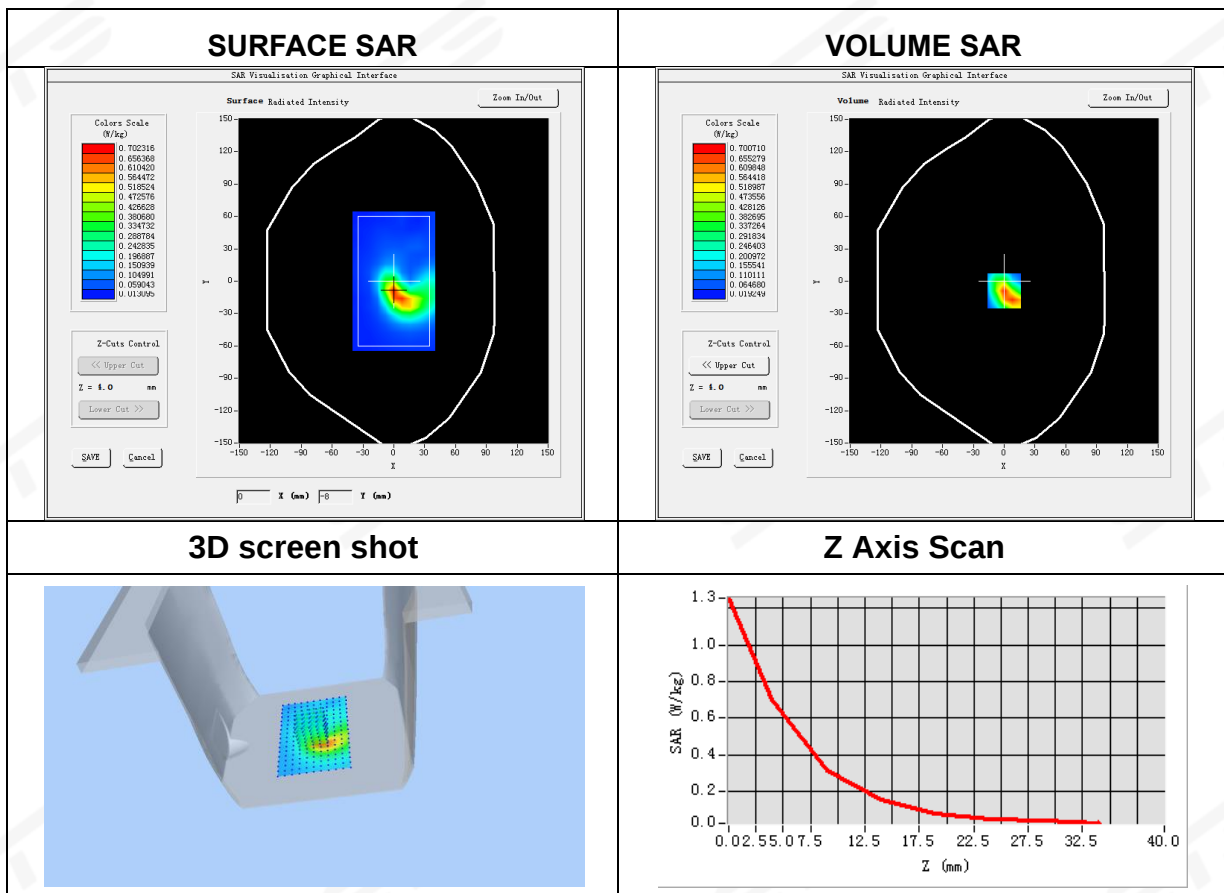




Plot 6: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-15
Probe	SN 08/21 EPGO352
ConvF	1.80
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	40.51
Conductivity (S/m)	1.74

Maximum location: X=-16.00, Y=-3.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.038463
SAR 1g (W/Kg)	0.064902

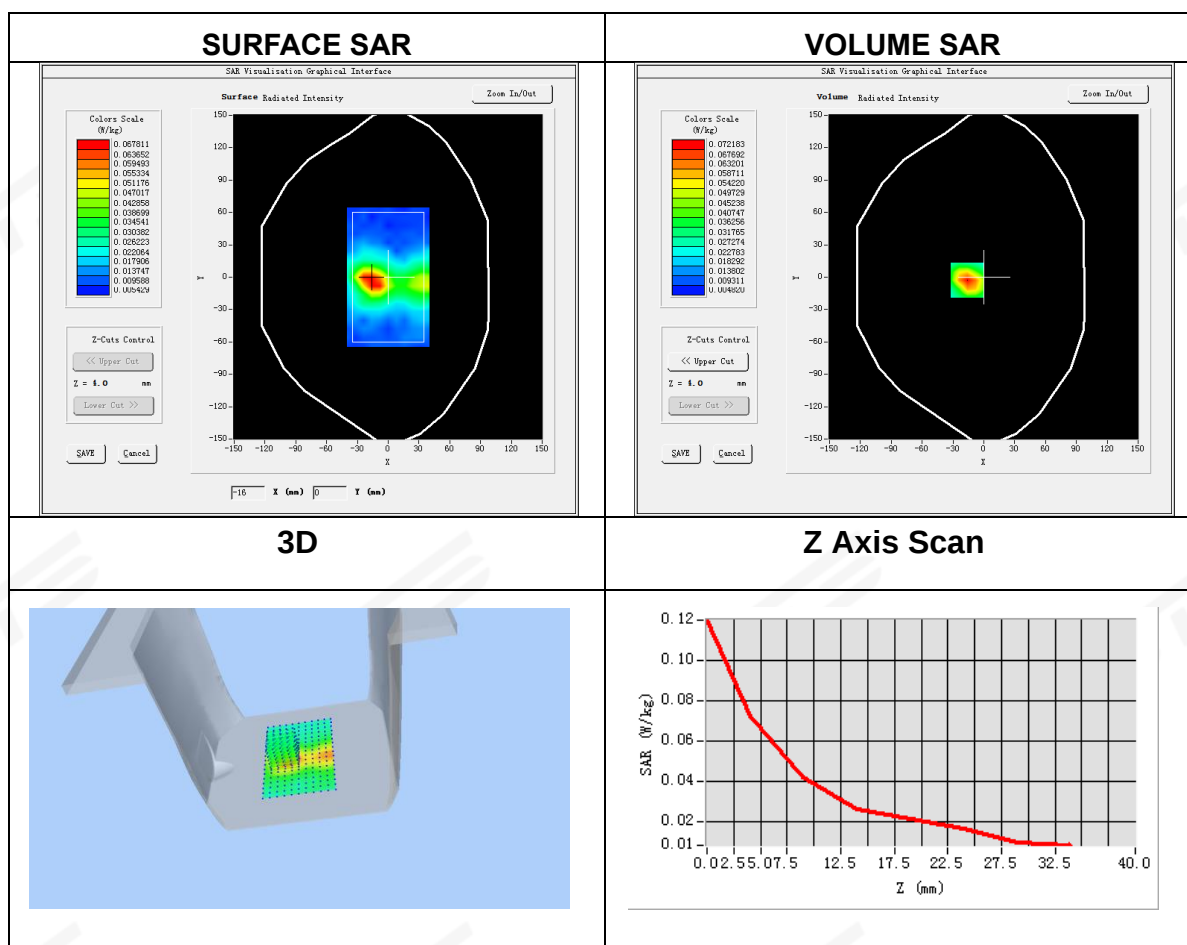



Plot 7: DUT: Tablet computer; EUT Model: M66 Pro


Test Date	2025-04-30
Probe	SN 08/21 EPGO352
ConvF	1.33
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Top Side
Band	5.2GHz WLAN
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5240
Relative permittivity (real part)	36.41
Conductivity (S/m)	4.70

Maximum location: X=18.00, Y=-16.00


SAR Peak: 0.38W/kg

SAR 10g (W/Kg)	0.113561
SAR 1g (W/Kg)	0.238443


SURFACE SAR

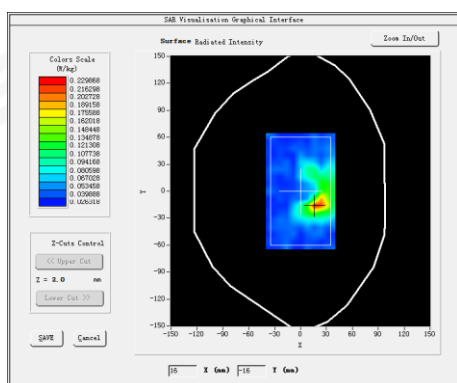


VOLUME SAR

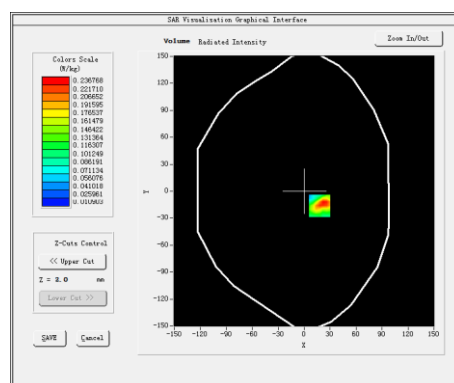

3D

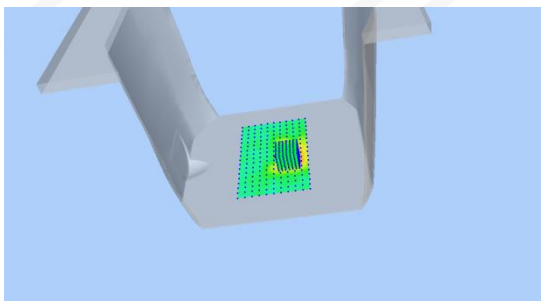

Z Axis Scan

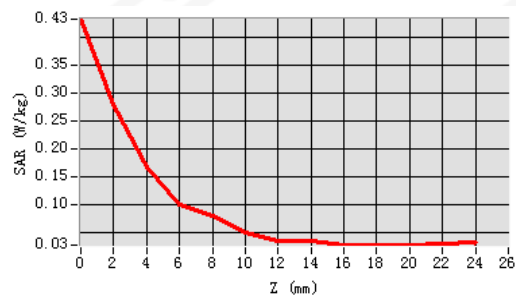


Plot 8: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-30
Probe	SN 08/21 EPGO352
ConvF	1.35
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Top Side
Band	5.8GHz WLAN
Signal	802.11 n-HT40 (Crest factor: 1.0)
Frequency (MHz)	5755
Relative permittivity (real part)	36.10
Conductivity (S/m)	5.20

Maximum location: X=-23.00, Y=1.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.081066
SAR 1g (W/Kg)	0.175504

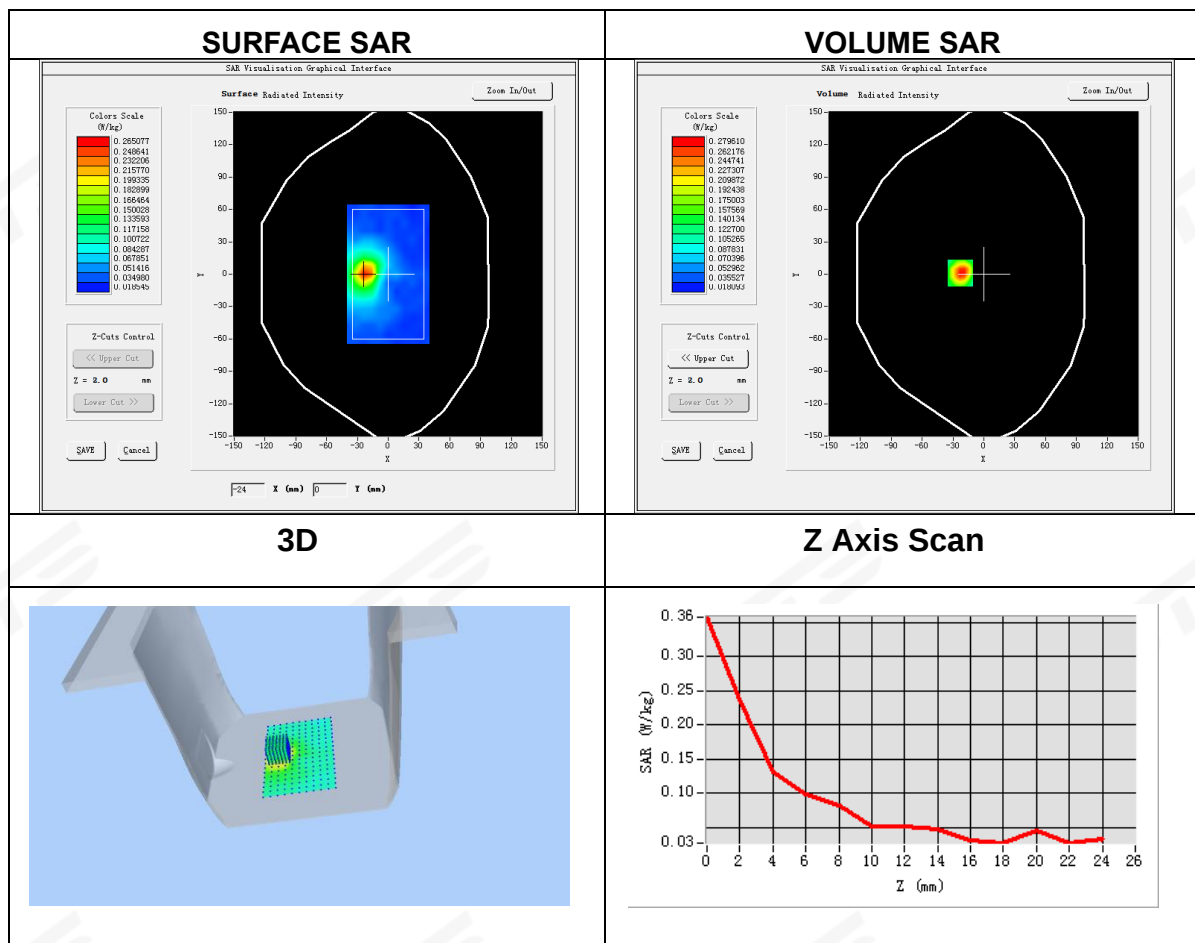




Plot 9: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-13
Probe	SN 08/21 EPGO352
ConvF	1.72
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 2(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.75
Conductivity (S/m)	1.44

Maximum location: X=0.00, Y=-40.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.215491
SAR 1g (W/Kg)	0.393077

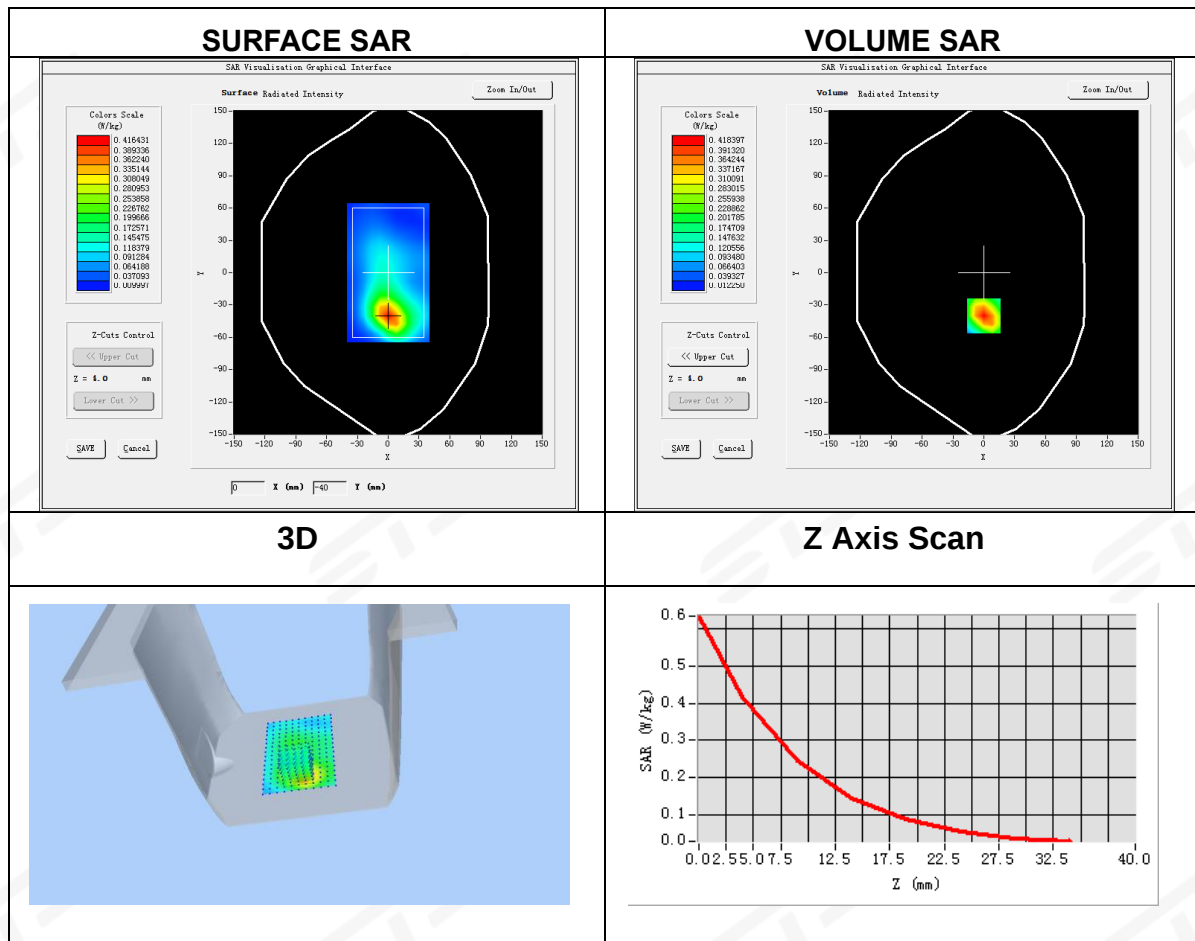




Plot 10: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-13
Probe	SN 08/21 EPGO352
ConvF	1.58
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	41.11
Conductivity (S/m)	1.33

Maximum location: X=-15.00, Y=-17.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.166602
SAR 1g (W/Kg)	0.308554

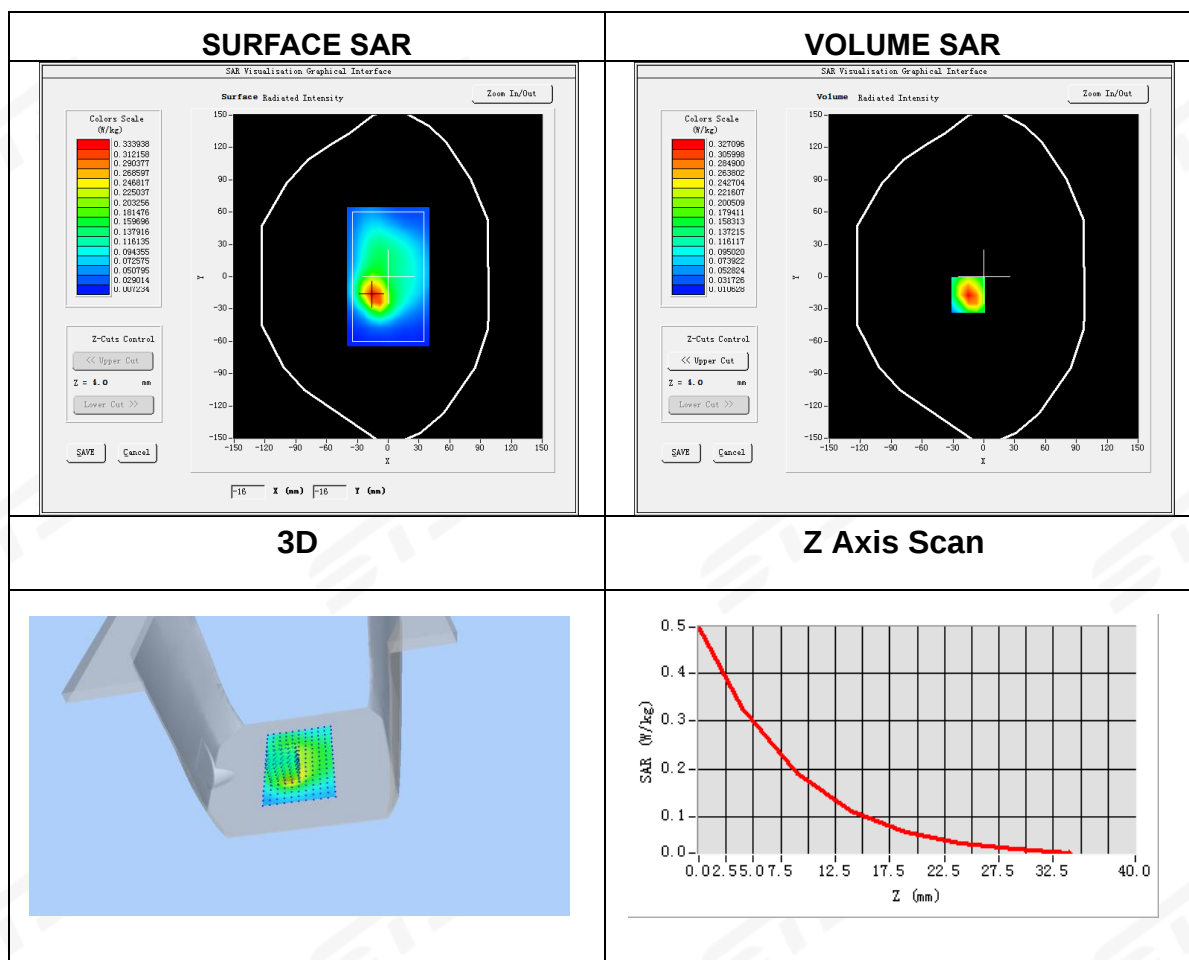




Plot 11: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-11
Probe	SN 08/21 EPGO352
ConvF	1.44
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829
Relative permittivity (real part)	41.16
Conductivity (S/m)	0.89

Maximum location: X=8.00, Y=31.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.110110
SAR 1g (W/Kg)	0.143363

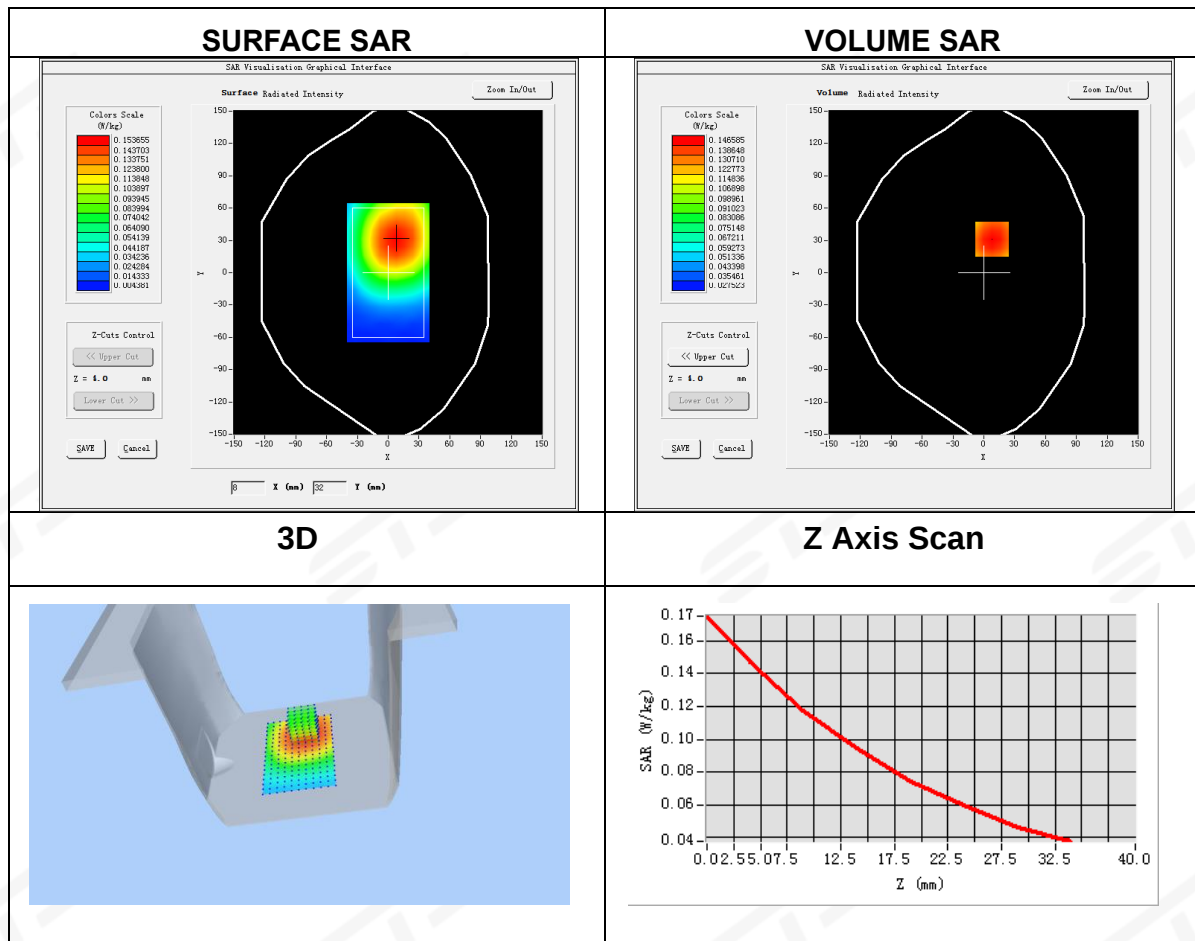




Plot 12: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-15
Probe	SN 08/21 EPGO352
ConvF	1.74
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2510
Relative permittivity (real part)	40.14
Conductivity (S/m)	1.86

Maximum location: X=-1.00, Y=-18.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.123863
SAR 1g (W/Kg)	0.195221

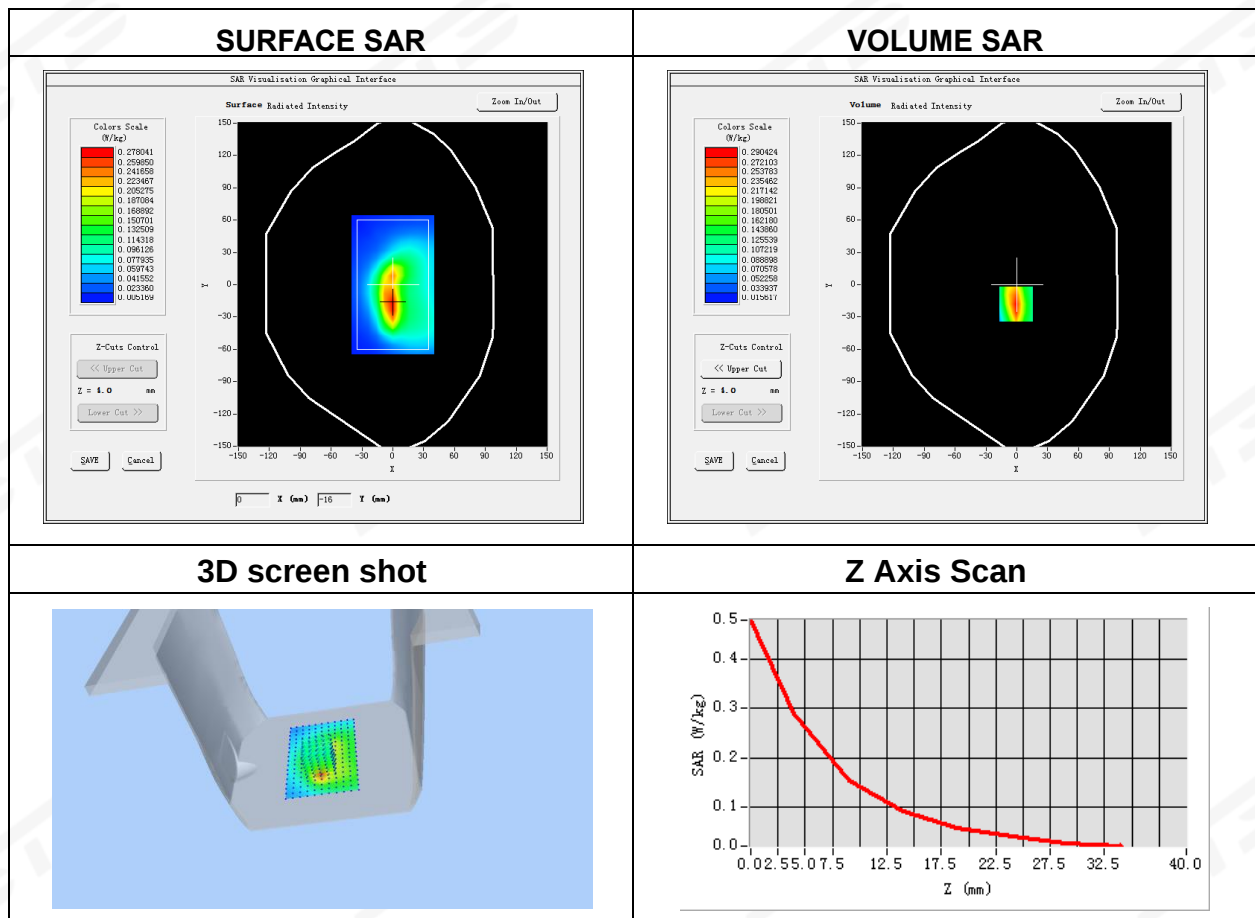




Plot 13: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-11
Probe	SN 08/21 EPGO352
ConvF	1.56
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.09
Conductivity (S/m)	0.89

Maximum location: X=9.00, Y=-14.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.143863
SAR 1g (W/Kg)	0.209225

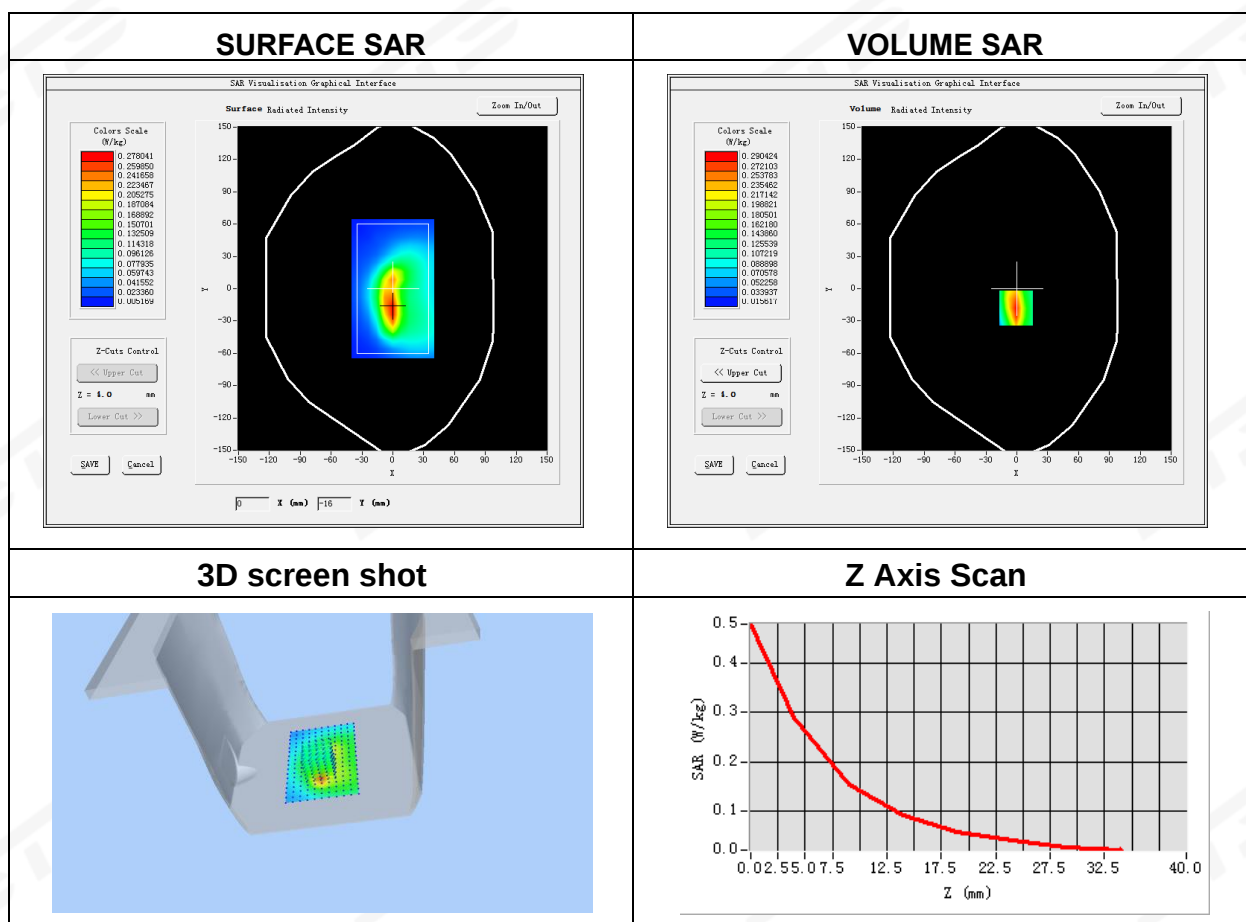




Plot 14: DUT: Tablet computer; EUT Model: M66 Pro

Test Date	2025-04-11
Probe	SN 08/21 EPGO352
ConvF	1.56
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	710
Relative permittivity (real part)	42.50
Conductivity (S/m)	0.89

Maximum location: X=11.00, Y=33.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.124912
SAR 1g (W/Kg)	0.180180

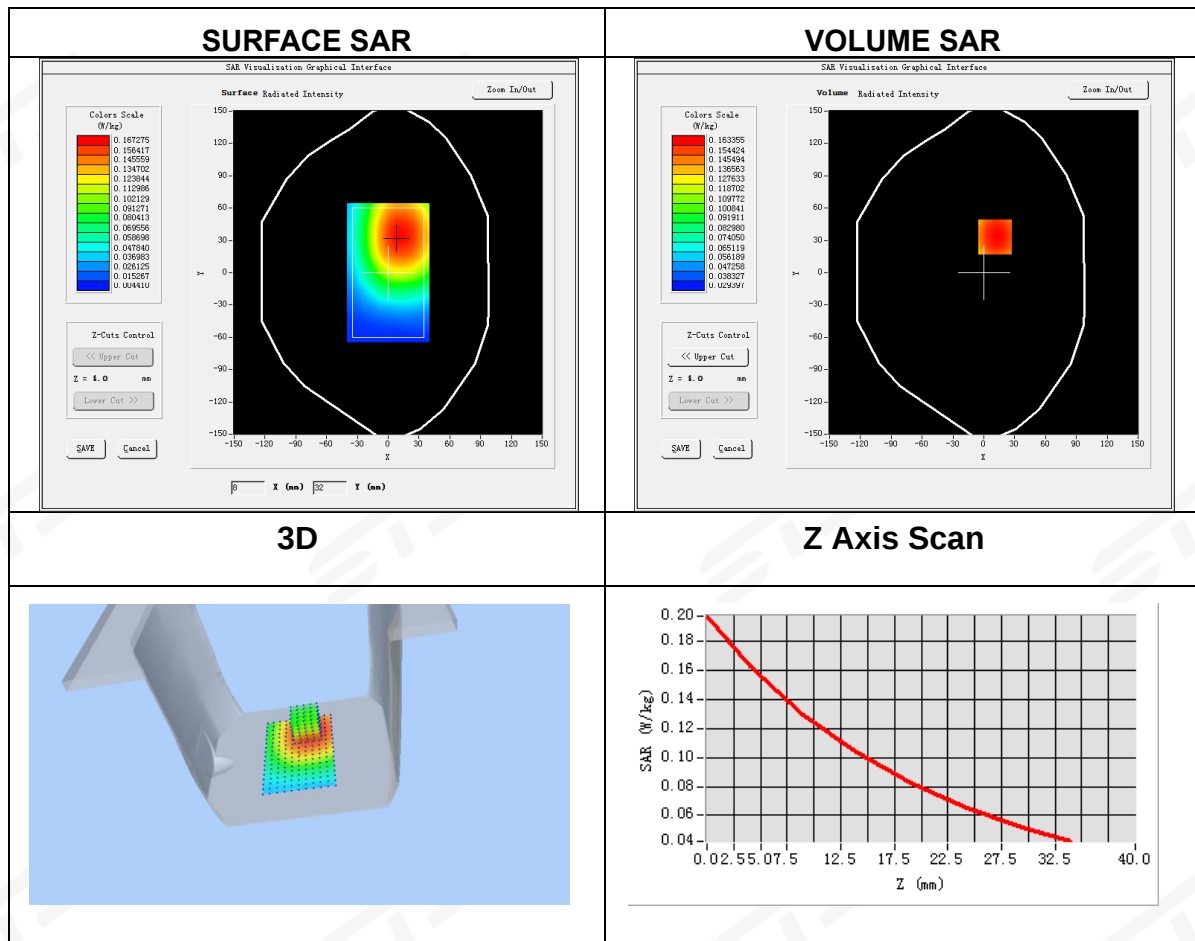



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※