

# TEST REPORT

## Client Information:

Applicant: SHANTOU CHENGHAI JIANHANG TOYS FACTORY

Applicant add.: LONGXIA ROAD, LANE 1 AND ROAD 2, DIANSHI, LONGDU TOWN, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA

Manufacturer: SHANTOU CHENGHAI JIANHANG TOYS FACTORY

Manufacturer add.: LONGXIA ROAD, LANE 1 AND ROAD 2, DIANSHI, LONGDU TOWN, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA

## Product Information:

Product Name: Aircraft toy series

Model No.: Please refer to page 6 for detail.

Brand Name: N/A

FCC ID: 2BOX4-S2

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

## Prepared By:

**Dongguan Yaxu (AiT) Technology Limited**

No.22, Jinqianling 3rd Street, Jitigang, Huangjiang,Dongguan, Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: Apr. 03, 2025 Date of Test: Apr. 03, 2025~ Apr. 20, 2025

Date of Issue: Apr. 21, 2025 Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: Emiya Lin  
Emiya Lin

Approved by: Simba Huang  
Simba Huang

## 1 Contents

	Page
COVER PAGE	
<b>1 CONTENTS</b> .....	<b>2</b>
<b>2 TEST SUMMARY</b> .....	<b>4</b>
2.1 Statement of the Measurement Uncertainty .....	4
2.2 Measurement Uncertainty .....	4
<b>3 TEST FACILITY</b> .....	<b>5</b>
3.1 Deviation from standard .....	5
3.2 Abnormalities from standard conditions .....	5
3.3 Test Location .....	5
<b>4 GENERAL INFORMATION</b> .....	<b>6</b>
4.1 Test frequencies .....	7
4.2 EUT Peripheral List .....	8
4.3 Test Peripheral List .....	8
4.4 TEST METHODOLOGY .....	9
4.5 Description of Test Modes .....	10
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>11</b>
<b>6 TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>13</b>
6.1 Antenna requirement .....	13
6.2 20 dB Spectrum Bandwidth Measurement .....	14
6.3 Radiated Emissions Measurement .....	17
6.4 Conducted Emissions .....	30
<b>7 TEST SETUP PHOTO</b> .....	<b>34</b>
<b>8 EUT CONSTRUCTIONAL DETAILS</b> .....	<b>34</b>

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 21, 2025	Valid	Initial release

## 2 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	§15.203	Pass
AC Power Line Conducted Emission	§15.207	Pass
Fundamental & Radiated Spurious Emission Measurement	§15.249 (a)/ §15.209	Pass
20dB Channel Bandwidth	15.215(c)	Pass
Band Edge	§15.249 (d)/ §15.205	Pass

**Note**

1. Test according to ANSI C63.10:2013.
2. The measurement uncertainty is not included in the test result.

### 2.1 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AiT quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 2.2 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

### 3 Test Facility

#### **The test facility is recognized, certified or accredited by the following organizations:**

##### **CNAS- Registration No: L6177**

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on April 18, 2022

##### **FCC-Registration No.: 703111 Designation Number: CN1313**

Dongguan Yaxu (AiT) technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

##### **IC —Registration No.: 6819A CAB identifier: CN0122**

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

##### **A2LA-Lab Cert. No.: 6317.01**

Dongguan Yaxu (AiT) technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **3.1 Deviation from standard**

None

#### **3.2 Abnormalities from standard conditions**

None

#### **3.3 Test Location**

##### **Dongguan Yaxu (AiT) Technology Limited**

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

## 4 General Information

EUT Name:	Aircraft toy series
Model No:	S2
Serial Model:	G1, G2, G3, G5, G6, G7, G8, G9, G20, G21, G22, G23, G25, G26, G27, G28, G29, G101, G102, G103, G105, G106, G107, G108, G109, G110, G111, G112, G113, G115, G116, G117, G118, G119, G122, G133, G155, G166, G177, G188, G199, G100, G200, G300, G400, G500, G600, G700, G800, G900, G53, G63, G59, G69, G79, G89, G58, G68, G78, G88, G98, G128, G138, G168, G178, G188, G198, S3, S6, S17, S25, S28, S112, S119, E58, E88, E99, GT3, E88MAX, E99MAX, E88PRO, E99PRO
Test sample(s) ID:	AiTDG-250403011-1
Sample(s) Status:	Engineer sample:
Operation frequency:	2420MHz-2460MHz
Channel Number:	40 channels
Modulation Technology:	GFSK
Antenna Type:	Wire Antenna
Antenna gain:	0.17dBi
H/W No.:	N/A
S/W No.:	N/A
Power supply:	DC 3.7V by 1200mAh Rechargeable Li-ion battery
Model different:	PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

#### 4.1 Test frequencies

**EUT channels and frequencies list**

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	16	2435	31	2451
2	2421	17	2436	32	2452
3	2422	18	2437	33	2453
4	2423	19	2438	34	2454
5	2424	20	2439	35	2455
6	2425	21	2440	36	2456
7	2426	22	2441	37	2457
8	2427	23	2442	38	2458
9	2428	24	2443	39	2459
10	2429	25	2445	40	2460
11	2430	26	2446		
12	2431	27	2447		
13	2432	28	2448		
14	2433	29	2449		
15	2434	30	2450		

## 4.2 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	Signal cord
1	N/A	N/A	N/A	N/A	N/A	N/A

## 4.3 Test Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	Signal cord
1	Adapter	NOKIA	AD-10WU	N/A	N/A	N/A

## 4.4 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Dongguan Yaxu (AiT) Technology Limit.

### EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT Exercise

The EUT was operated in the normal operating mode and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C and RSS-247 Issue 2, RSS-Gen Issue 5.

### General Test Procedures

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

#### 4.5 Description of Test Modes

The EUT has been tested under operating condition.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be TX(1Mbps-Low Channel).

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Transmitting mode	Keep the EUT in continuously transmitting mode.		
Test software:	fixed in EUT by manufacturer		
Frequency	2420 MHz	2440 MHz	2460 MHz
Parameters(1Mbps)	Default	Default	Default

## 5 Equipment Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2024.09.23	2025.09.22
2	EMI Measuring Receiver	R&S	ESR	101660	2024.09.23	2025.09.22
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2024.09.23	2025.09.22
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2024.09.23	2025.09.22
5	Passive Loop	ETS	6512	00165355	2024.09.04	2025.09.04
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2024.08.29	2025.08.28
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2024.08.29	2025.08.28
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA917036 7d	2023.11.24	2026.11.23
9	EMI Test Receiver	R&S	ESCI	100124	2024.09.23	2025.09.22
10	LISN	R&S	ESH3-Z5	892785/016	2024.09.23	2025.09.22
11	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA0811250 1	2024.09.23	2025.09.22
12	RF Automatic Test system	MW	MW100-RFCB	21033016	2024.09.23	2025.09.22
13	Signal Generator	Agilent	N5182A	MY50143009	2024.09.23	2025.09.22
14	Wideband Radio communication tester	R&S	CMW500	1201.0002K5 0	2024.09.23	2025.09.22
15	RF Automatic Test system	MW	MW100-RFCB	21033016	2024.09.23	2025.09.22
16	Pulse Limiter	R&S	ESH3-Z2	03578810.54	2024.09.23	2025.09.22
17	Switch	MFJ Rhinos	MFJ-2702	CZ3457	2024.09.23	2025.09.22
18	DC power supply	ZHAOXIN	RXN-305D-2	2807000255 9	N/A	N/A
19	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
20	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
21	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
22	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6 Test Results and Measurement Data

### 6.1 Antenna requirement

#### 6.1.1 Standard requirement:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 6.1.2 EUT Antenna:

*Refer to Section 4(General Information), reference to the Internal photos for details.*

## 6.2 20 dB Spectrum Bandwidth Measurement

### 6.4.1 Standard requirement:

FCC Part15 C Section part 15.249/15.215(c):

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
Part 15.215(c)	Bandwidth	2400-2483.5	PASS


### 6.4.2 Measuring Instruments:

Please refer to equipment's list in this report.

### 6.4.3 Test Procedures

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 6.4.4 Test Setup Layout

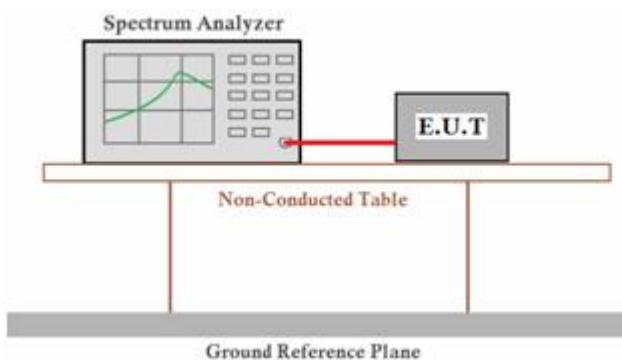


### 6.4.5 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 6.4.6 Test result

PASS

Frequency (MHz)	Ant.	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2420	Ant1	0.942	/	Pass
2440	Ant1	0.944	/	Pass
2460	Ant1	0.955	/	Pass

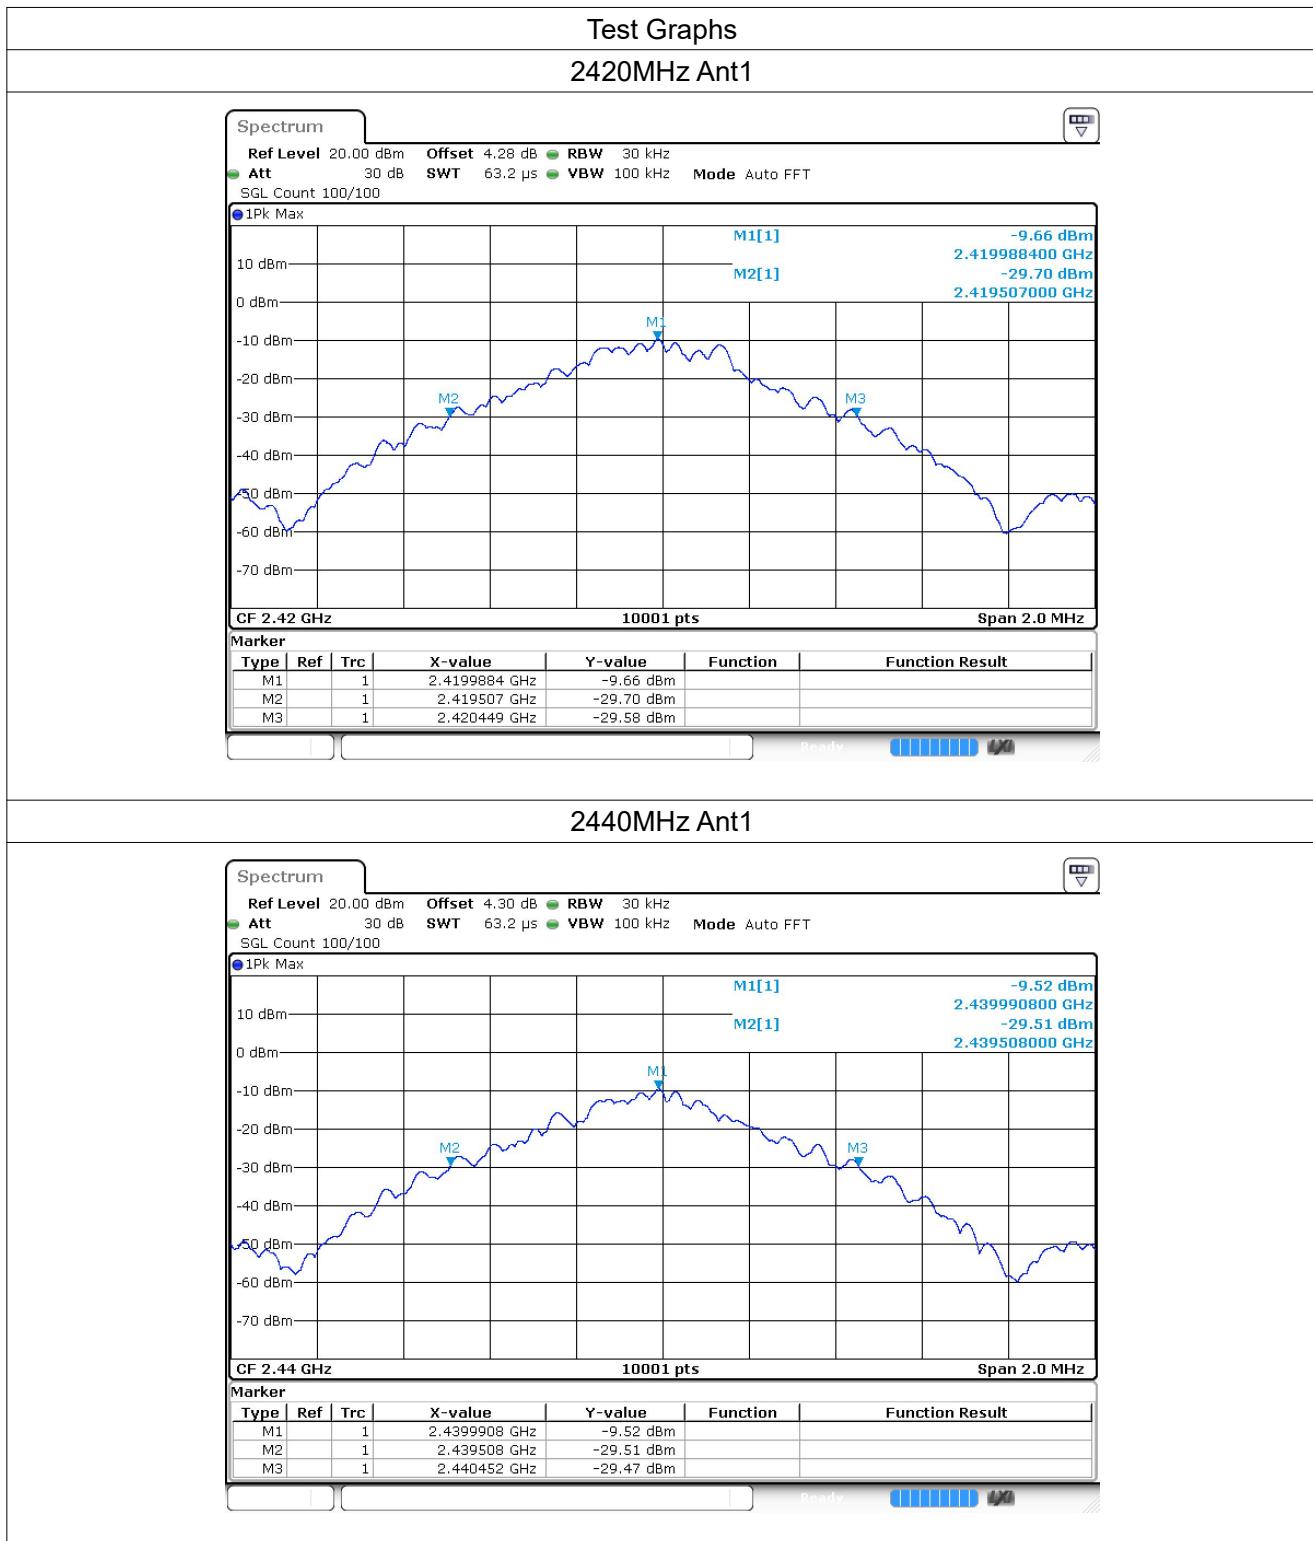

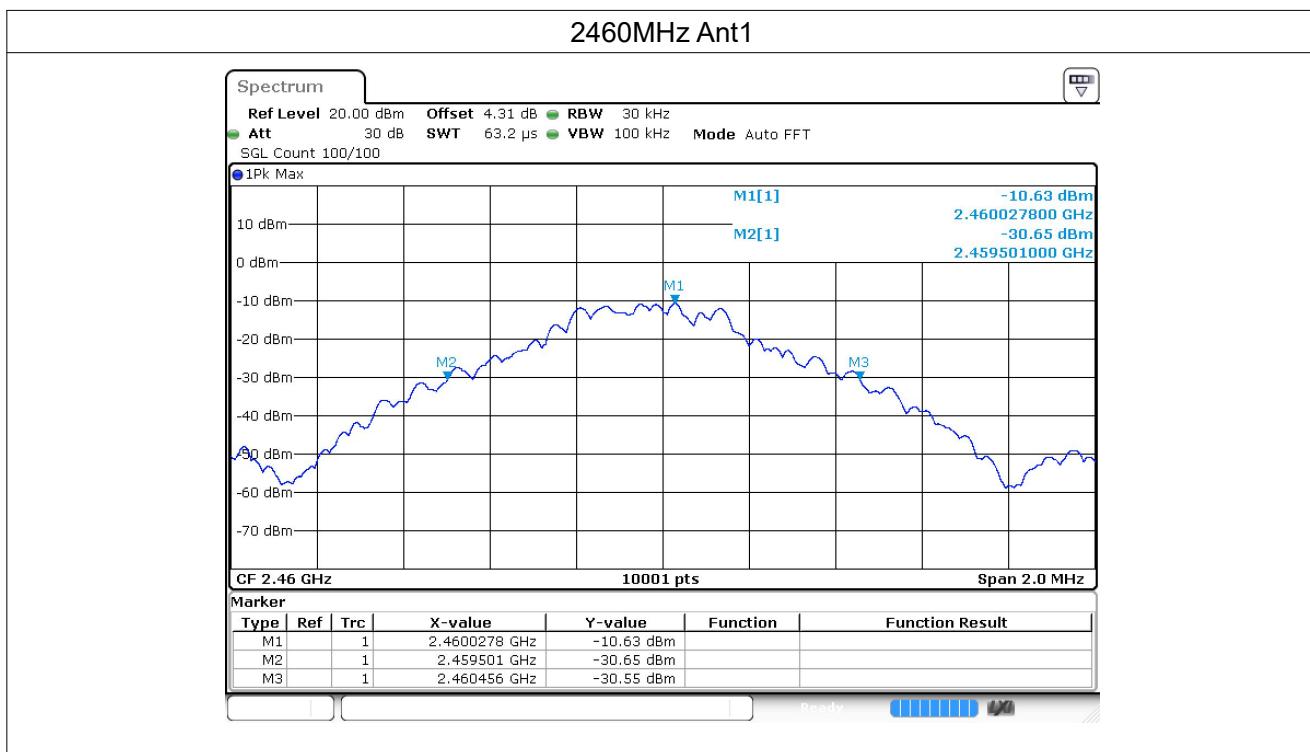**Remark:**

- 1). Measured 20dB Bandwidth at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;

## 6.3 Radiated Emissions Measurement

### 6.8.1 Standard requirement:

FCC Part15 C Section 15.209 :

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

#### Band-edge Measurements

According to §15.249 (d)Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

### 6.8.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1kHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 6.8.3 Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

##### Premeasurement:


--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

##### Final measurement:


--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


#### 6.8.4 Test Setup Layout

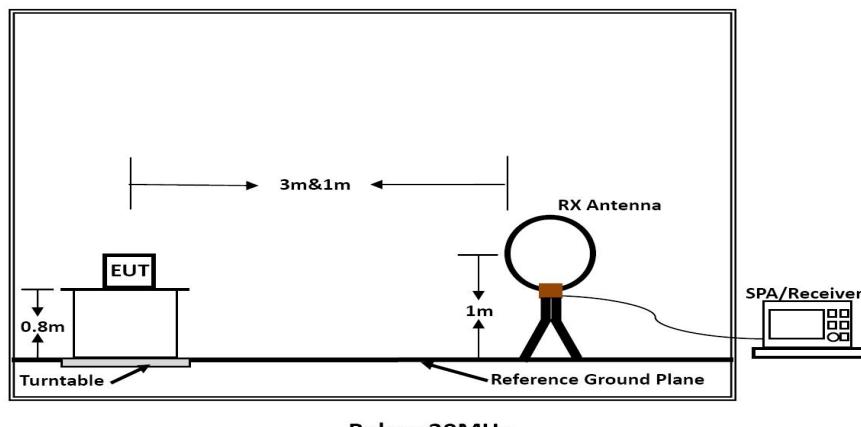

Below 30MHz

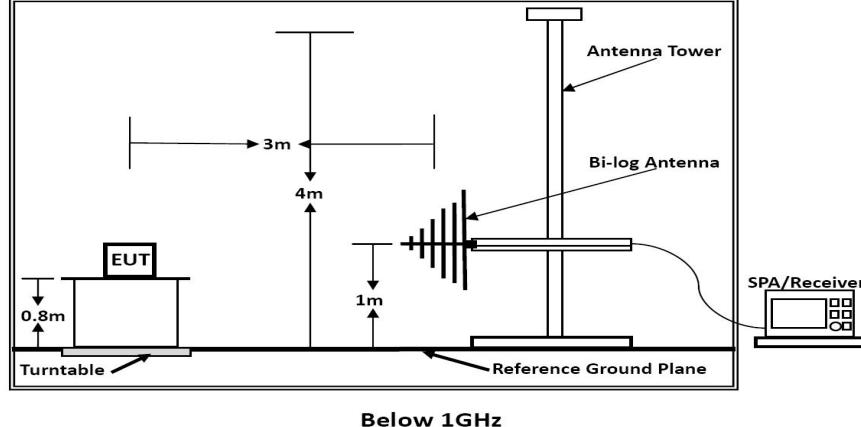

Below 1GHz

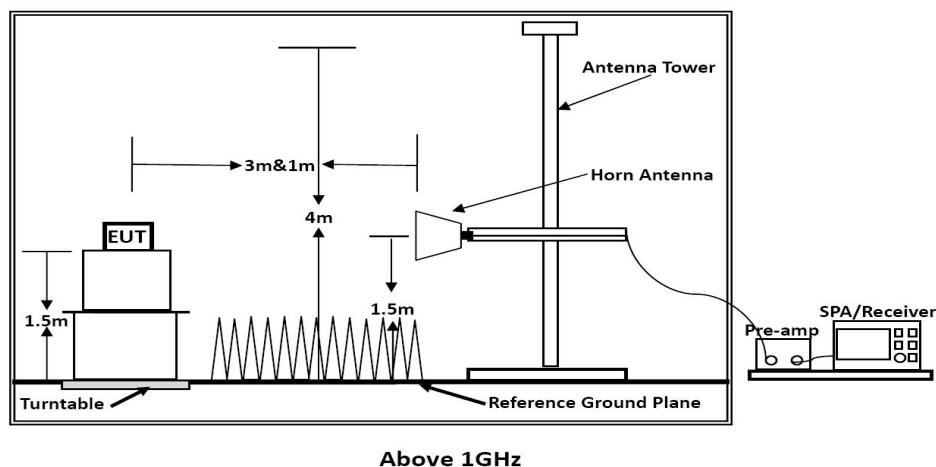

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

### 6.8.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.8.6 Test result

Temperature	24.5°C	Humidity	52.6%
Test Engineer	Emiya Lin	Configurations	TX

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which is worse case.

### 6.3.1 Field Strength of the Fundamental Signal

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2420	96.40	-5.53	90.87	114.00	-23.13	Vertical
2420	99.49	-5.53	93.96	114.00	-20.04	Horizontal
2440	96.12	-5.36	90.76	114.00	-23.24	Vertical
2440	99.52	-5.36	94.16	114.00	-19.84	Horizontal
2460	96.70	-5.18	91.52	114.00	-22.48	Vertical
2460	99.13	-5.18	93.95	114.00	-20.05	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2420	80.53	-5.53	75.00	94.00	-19.00	Vertical
2420	86.56	-5.53	81.03	94.00	-12.97	Horizontal
2440	81.47	-5.36	76.11	94.00	-17.89	Vertical
2440	85.08	-5.36	79.72	94.00	-14.28	Horizontal
2460	80.44	-5.18	75.26	94.00	-18.74	Vertical
2460	84.82	-5.18	79.64	94.00	-14.36	Horizontal

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

### 6.3.2 Spurious emissions

#### ■ Results of Radiated Emissions (9 KHz~30MHz)

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note


Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);  
Limit line = specific limits (dBuV) + distance extrapolation factor.

## ■ Results of Radiated Emissions (30MHz~1GHz)

Pre-scan all test modes, found worst case at GFSK (LCH), and so only show the test result of GFSK (LCH).

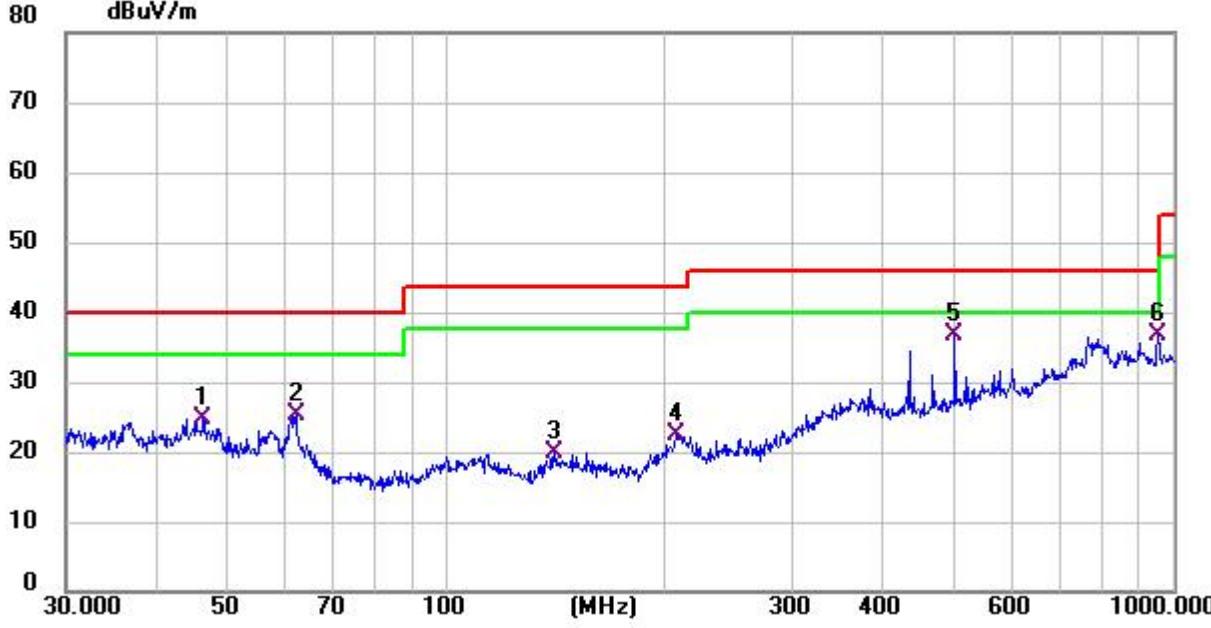Model name:	S2	Test Date :	2025-04-13																																																																
Polarization :	Horizontal	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																																																																
<hr/>																																																																			
																																																																			
<p>Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.        Measurement Result=Reading Level +Correct Factor;        Over Limit= Measurement Result- Limit;</p>																																																																			
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure-ment</th> <th>Limit</th> <th>Over</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>46.3402</td> <td>23.85</td> <td>0.91</td> <td>24.76</td> <td>40.00</td> <td>-15.24</td> <td>QP</td> </tr> <tr> <td>2</td> <td>62.2128</td> <td>27.34</td> <td>-2.14</td> <td>25.20</td> <td>40.00</td> <td>-14.80</td> <td>QP</td> </tr> <tr> <td>3</td> <td>141.3298</td> <td>21.34</td> <td>-1.54</td> <td>19.80</td> <td>43.50</td> <td>-23.70</td> <td>QP</td> </tr> <tr> <td>4</td> <td>207.1226</td> <td>21.19</td> <td>1.24</td> <td>22.43</td> <td>43.50</td> <td>-21.07</td> <td>QP</td> </tr> <tr> <td>5 *</td> <td>501.1790</td> <td>31.85</td> <td>4.89</td> <td>36.74</td> <td>46.00</td> <td>-9.26</td> <td>QP</td> </tr> <tr> <td>6</td> <td>952.0937</td> <td>25.83</td> <td>10.89</td> <td>36.72</td> <td>46.00</td> <td>-9.28</td> <td>QP</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over			MHz	dBuV	dB	dBuV/m	dB	Detector	1	46.3402	23.85	0.91	24.76	40.00	-15.24	QP	2	62.2128	27.34	-2.14	25.20	40.00	-14.80	QP	3	141.3298	21.34	-1.54	19.80	43.50	-23.70	QP	4	207.1226	21.19	1.24	22.43	43.50	-21.07	QP	5 *	501.1790	31.85	4.89	36.74	46.00	-9.26	QP	6	952.0937	25.83	10.89	36.72	46.00	-9.28	QP
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over																																																												
		MHz	dBuV	dB	dBuV/m	dB	Detector																																																												
1	46.3402	23.85	0.91	24.76	40.00	-15.24	QP																																																												
2	62.2128	27.34	-2.14	25.20	40.00	-14.80	QP																																																												
3	141.3298	21.34	-1.54	19.80	43.50	-23.70	QP																																																												
4	207.1226	21.19	1.24	22.43	43.50	-21.07	QP																																																												
5 *	501.1790	31.85	4.89	36.74	46.00	-9.26	QP																																																												
6	952.0937	25.83	10.89	36.72	46.00	-9.28	QP																																																												

Model name:	S2	Test Date :	2025-04-13
Polarization :	Vertical	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

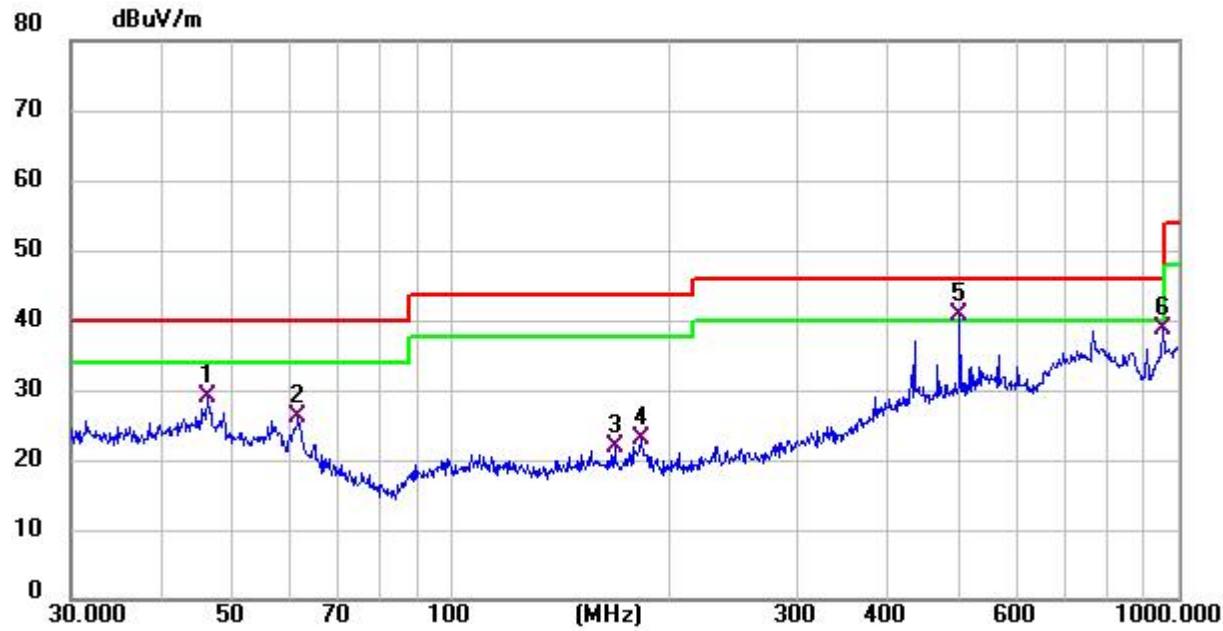

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB		
1		46.1779	25.54	3.40	28.94	40.00	-11.06	QP
2		61.5618	27.68	-1.48	26.20	40.00	-13.80	QP
3		167.8242	23.34	-1.54	21.80	43.50	-21.70	QP
4		182.5592	22.42	0.61	23.03	43.50	-20.47	QP
5	*	501.1790	32.15	8.44	40.59	46.00	-5.41	QP
6		952.0937	26.13	12.55	38.68	46.00	-7.32	QP

**Results for Radiated Emissions (1- 26 GHz)**

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4840.000	48.08	5.10	53.18	74.00	-20.82	Vertical
7260.000	39.04	7.26	46.30	74.00	-27.70	Vertical
4840.000	48.33	5.10	53.43	74.00	-20.57	Horizontal
7260.000	40.25	7.26	47.51	74.00	-26.49	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4840.000	33.24	5.10	38.34	54.00	-15.66	Vertical
7260.000	30.46	7.26	37.72	54.00	-16.28	Vertical
4840.000	38.68	5.10	43.78	54.00	-10.22	Horizontal
7260.000	32.04	7.26	39.30	54.00	-14.70	Horizontal

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.000	48.40	5.14	53.54	74.00	-20.46	Vertical
7320.000	43.12	7.52	50.64	74.00	-23.36	Vertical
4880.000	49.17	5.14	54.31	74.00	-19.69	Horizontal
7320.000	42.30	7.52	49.82	74.00	-24.18	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.000	35.74	5.14	40.88	54.00	-13.12	Vertical
7320.000	32.60	7.52	40.12	54.00	-13.88	Vertical
4880.000	36.44	5.14	41.58	54.00	-12.42	Horizontal
7320.000	32.84	7.52	40.36	54.00	-13.64	Horizontal

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4920.000	48.34	5.18	53.52	74.00	-20.48	Vertical
7380.000	44.87	7.80	52.67	74.00	-21.33	Vertical
4920.000	49.14	5.18	54.32	74.00	-19.68	Horizontal
7380.000	42.81	7.80	50.61	74.00	-23.39	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4920.000	33.03	5.18	38.21	54.00	-15.79	Vertical
7380.000	32.35	7.80	40.15	54.00	-13.85	Vertical
4920.000	35.46	5.18	40.64	54.00	-13.36	Horizontal
7380.000	31.79	7.80	39.59	54.00	-14.41	Horizontal

**Remarks:**

- 1). Measuring frequencies from 9 KHz - 10<sup>th</sup> harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Margin= Final Level – Limit
- 5).Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 6). All the modes have been tested and the only shows the worst case GFSK mode

### 6.3.3 Band-edge Measurements

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310.000	45.05	-5.92	39.13	74.00	-34.87	Vertical
2390.000	43.73	-5.79	37.94	74.00	-36.06	Vertical
2310.000	44.82	-5.92	38.90	74.00	-35.10	Horizontal
2390.000	44.36	-5.79	38.57	74.00	-35.43	Horizontal

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310.000	30.50	-5.92	24.58	54.00	-29.42	Vertical
2390.000	30.48	-5.79	24.69	54.00	-29.31	Vertical
2310.000	29.43	-5.92	23.51	54.00	-30.49	Horizontal
2390.000	30.00	-5.79	24.21	54.00	-29.79	Horizontal

Test channel:	Highest channel
---------------	-----------------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.500	46.11	-4.98	41.13	74.00	-32.87	Vertical
2500.00	46.35	-4.83	41.52	74.00	-32.48	Vertical
2483.500	45.12	-4.98	40.14	74.00	-33.86	Horizontal
2500.000	45.24	-4.83	40.41	74.00	-33.59	Horizontal

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.500	32.29	-4.98	27.31	54.00	-26.69	Vertical
2500.00	35.10	-4.83	30.27	54.00	-23.73	Vertical
2483.500	30.97	-4.98	25.99	54.00	-28.01	Horizontal
2500.000	29.09	-4.83	24.26	54.00	-29.74	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

## 6.4 Conducted Emissions

### 6.9.1 Standard requirement:

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.9.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

### 6.9.3 Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 6.9.4 Test Setup Layout

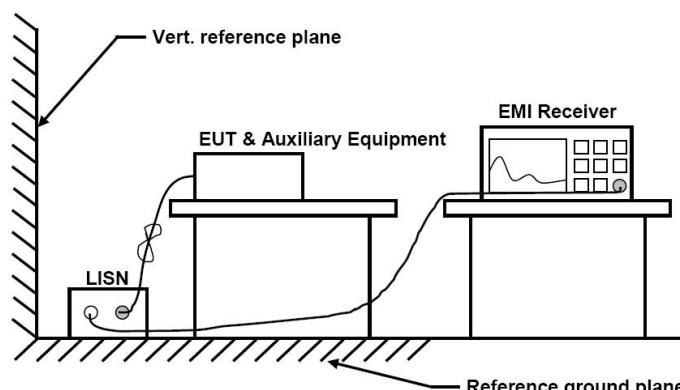

### 6.9.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.9.6 Test result


PASS

The test data please refer to following page.

**Measurement data:**

Pre-scan all test modes, found worst case at GFSK (LCH), and so only show the test result of GFSK (LCH).

Model name:	S2	Test Date :	2025-04-13
Temperature:	25.4C	Relative Humidity:	52.1%
ATM Pressure:	101 kPa	Test by:	Emiya Lin
Phase :	Line	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

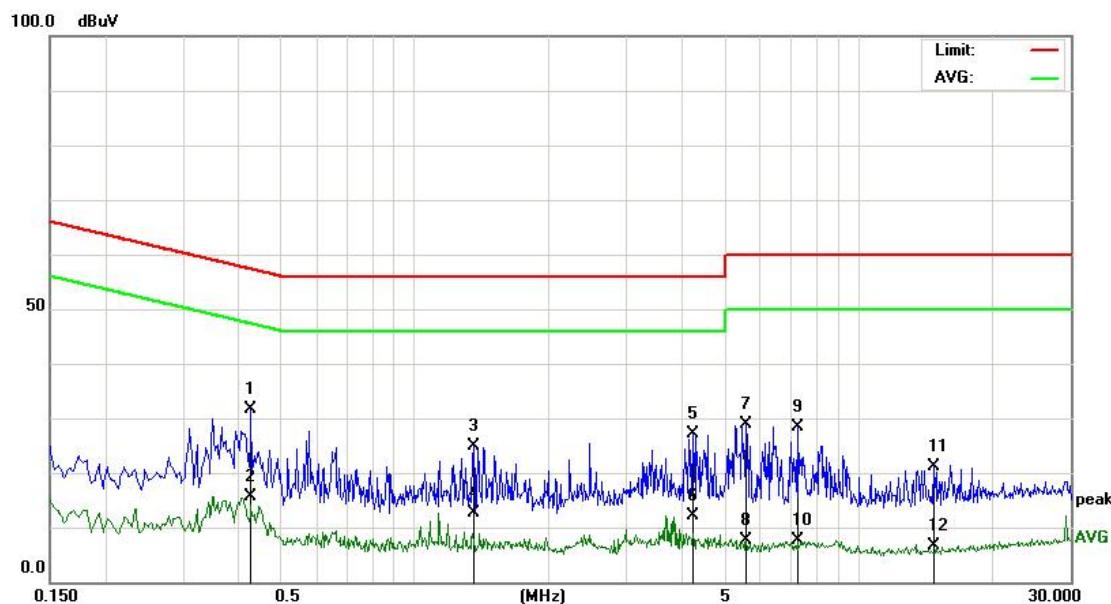


Remark: Factor =insertion loss of LISN + Cable loss +insertion loss of Pulse Limiter +insertion loss of Switch.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1	*	0.4260	21.44	10.10	31.54	57.33	-25.79
2		0.4260	5.55	10.10	15.65	47.33	-31.68
3		1.3540	14.96	9.96	24.92	56.00	-31.08
4		1.3540	2.62	9.96	12.58	46.00	-33.42
5		4.2420	16.99	10.06	27.05	56.00	-28.95
6		4.2420	2.03	10.06	12.09	46.00	-33.91
7		5.5700	18.68	10.12	28.80	60.00	-31.20
8		5.5700	-2.40	10.12	7.72	50.00	-42.28
9		7.2900	18.08	10.18	28.26	60.00	-31.74
10		7.2900	-2.62	10.18	7.56	50.00	-42.44
11		14.7540	19.86	1.39	21.25	60.00	-38.75
12		14.7540	5.12	1.39	6.51	50.00	-43.49

Model name:	S2	Test Date :	2025-04-13
Temperature:	25.4C	Relative Humidity:	52.1%
ATM Pressure:	101 kPa	Test by:	Emiya Lin
Phase :	Neutral	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

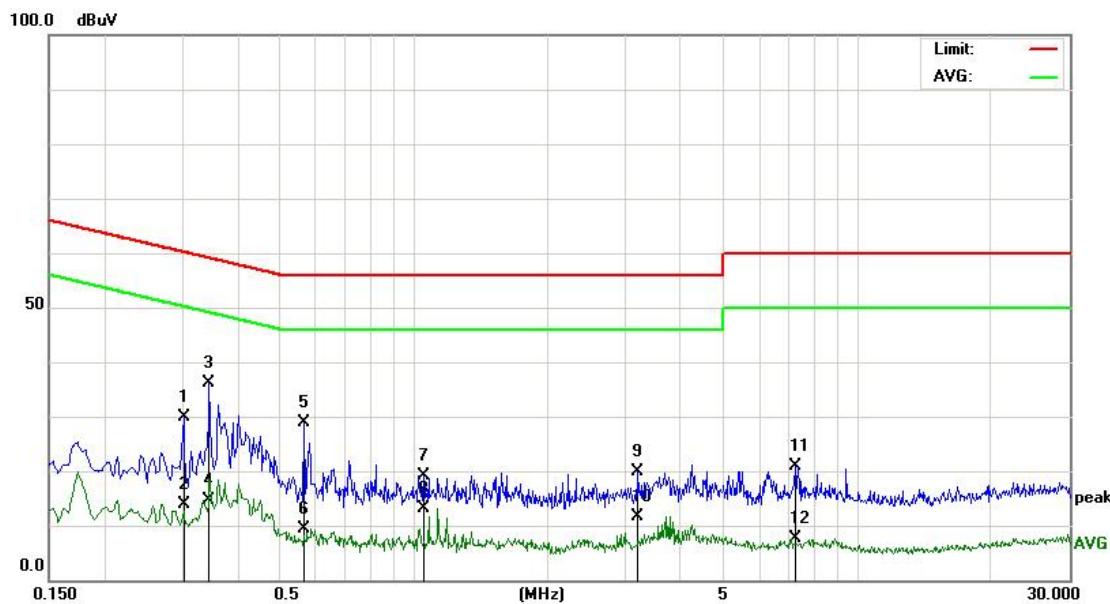

Remark: Factor =insertion loss of LISN + Cable loss +insertion loss of Pulse Limiter +insertion loss of Switch.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.3020	19.75	10.21	29.96	60.19	-30.23
2		0.3020	3.78	10.21	13.99	50.19	-36.20
3 *		0.3460	26.00	10.17	36.17	59.06	-22.89
4		0.3460	4.42	10.17	14.59	49.06	-34.47
5		0.5660	18.83	10.00	28.83	56.00	-27.17
6		0.5660	-0.70	10.00	9.30	46.00	-36.70
7		1.0540	9.26	9.94	19.20	56.00	-36.80
8		1.0540	3.20	9.94	13.14	46.00	-32.86
9		3.1940	9.93	10.04	19.97	56.00	-36.03
10		3.1940	1.54	10.04	11.58	46.00	-34.42
11		7.2500	10.66	10.17	20.83	60.00	-39.17
12		7.2500	-2.65	10.17	7.52	50.00	-42.48

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

*If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7 Test Setup Photo

Reference to the **appendix Setup photo** for details.

## 8 EUT Constructional Details

Reference to the appendix **External EUT photo & Internal EUT photo** for details.

-----End-----