

# ter of acceptance

## SPECIFICATION FOR APPROVAL

CUSTOMER's name: Yu Xin Wei Ye

Customer Item (CUSTOMER P/N):6569

Name (DESCRIPTION): Wireless charging coil DATE:2025/5/12

SPECIFICATION) : G41.5 slotting+magnetic tape adhesive /0.08\*24\*2P/ i EV.NO.:A0

Hongri Shengwei Technology admits to signing and sealing.

| departm<br>ent  | Confirmation/<br>date | Audit/date | Approval/<br>date | (official<br>seal of the<br>company)                                                 |
|-----------------|-----------------------|------------|-------------------|--------------------------------------------------------------------------------------|
| quality         | Dong wanhong          | Lu Hui     | Wei hanman        |  |
| enginee<br>ring | He weihua             | Wei lihong | Wei lihong        |                                                                                      |

Remarks:

Yuxin Technology acknowledges signing and sealing.

| departm<br>ent  | Confirmation/<br>date | Audit/date | Approval/<br>date | seal of the |
|-----------------|-----------------------|------------|-------------------|-------------|
| Develop<br>ment |                       |            |                   |             |
| purchas<br>e    |                       |            |                   |             |
| quality         |                       |            |                   |             |

Remarks:

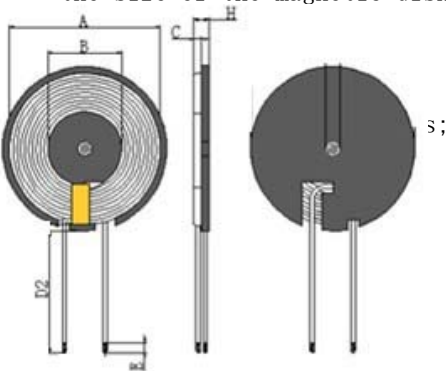
henzhen Hongri Shengwei Technology Limited Compan  
HRSW ELECTRONICS CO.,LTD

ADD: Floor 2, Building 1, No.48 Guanlan Huanguan Middle Road, Longhua New TEL: 13682412162

FAX: +86-0755-28015170

page:1/2

# SPECIFICATION FOR APPROVAL

|                                                                                                                                                                                           |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  |                      |  |                                                      |  |        |  |   |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------|--|---------------------------------------------------|--|---------------|--|----------------------|--|------------------------------------------------------|--|--------|--|---|--|
| <b>1.MECHANICAL DIMENSION (UNIT:mm)</b><br>magnetic disk, the size of the magnetic disk.<br>$41.5 \pm 0.5$ mm, a<br>$0.6 \pm 0.5$ mm.<br>Open 1-slot.<br>2. Coil outlet<br>3. Adhesive is |  | <b>2. SCHEMATICS:</b><br> |  |                                                   |  |                                                   |  |               |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | A                                                                                                          |  | B                                                 |  | C                                                 |  | D2            |  | E                    |  | H                                                    |  |        |  | I |  |
|                                                                                                                                                                                           |  | $41.5 \pm 0.5$                                                                                             |  | $20.5 \pm 1$                                      |  | $0.6 \pm 0.5$                                     |  | $30 \pm 3$    |  | $3.5 \pm 2$          |  | 1.5MAX                                               |  |        |  |   |  |
| <b>3.WINDING: 1.1 botto</b>                                                                                                                                                               |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | STE P                                                                                                      |  | START-FINISH                                      |  | WIRE TYPE                                         |  |               |  | TURNS                |  | TAPE                                                 |  | REMARK |  |   |  |
|                                                                                                                                                                                           |  | N1                                                                                                         |  | S-F                                               |  | $\varnothing 0.08 \times 24 \times 2$ P 2UEW      |  |               |  | 10TS (Ref)           |  |                                                      |  |        |  |   |  |
| <b>4. ELECTRICAL SPECIFICATION:</b>                                                                                                                                                       |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | ITEM                                                                                                       |  | L                                                 |  | DCR                                               |  | Q value       |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | TEST CONDITION                                                                                             |  | 1 plus magnetic sh                                |  | S-F                                               |  | S-F           |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  |                                                                                                            |  | 100KHz, 0.25V                                     |  | AT 25°C                                           |  | 100KHz, 0.25V |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | SPEC                                                                                                       |  | $6.4\mu H \pm 10\%$                               |  | 60mΩ Max                                          |  | 75            |  |                      |  |                                                      |  |        |  |   |  |
| <b>5.BILF OF MATERIAL:</b>                                                                                                                                                                |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  |                      |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | NO.                                                                                                        |  | ITEM                                              |  | MATERIAL SPECIFICATION                            |  |               |  | MANUFACTURER         |  | SGS NO.                                              |  |        |  |   |  |
|                                                                                                                                                                                           |  | 1                                                                                                          |  | Hot air line<br>$0.08 \times 24 \times 2$ strands |  | Hot air line $0.08 \times 24 \times 2$ strands    |  |               |  | NANJINGJINNINGCO,LTD |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | 2                                                                                                          |  | Lead-free tin bar                                 |  | Lead-free tin bar                                 |  |               |  | QIAODO               |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | 3                                                                                                          |  | magnetic sheet                                    |  | 41.5 * 0.6 Mn-Zn hard magnetic sheet with L slot. |  |               |  | TAIYI CO.,LTD        |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | 4                                                                                                          |  | glue                                              |  | Yellow gum 9999                                   |  |               |  | LIANCHENG CO.,LTD    |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | 5                                                                                                          |  | High temperature adhesive tape                    |  | 8mm wide high temperature adhesive tape           |  |               |  | CUDAK CO.,LTD        |  |                                                      |  |        |  |   |  |
|                                                                                                                                                                                           |  | 6                                                                                                          |  | gum                                               |  | White adhesive on the back of magnetic disk       |  |               |  | CUDAK CO.,LTD        |  |                                                      |  |        |  |   |  |
| HRSW ELECTRONICS CO.,LTD                                                                                                                                                                  |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  | PART NO              |  | etic tape adhesive $0.08 \times 24 \times 2$ P Inner |  |        |  |   |  |
|                                                                                                                                                                                           |  |                                                                                                            |  |                                                   |  |                                                   |  |               |  | TITLE                |  |                                                      |  |        |  |   |  |
| DRAWN BY                                                                                                                                                                                  |  |                                                                                                            |  |                                                   |  | CHECKED BY                                        |  |               |  |                      |  | APPROVED BY                                          |  |        |  |   |  |
| He weihua                                                                                                                                                                                 |  |                                                                                                            |  |                                                   |  | Wei lihong                                        |  |               |  |                      |  | Wei lihong                                           |  |        |  |   |  |