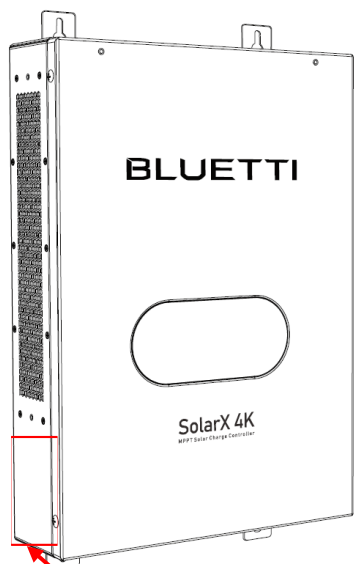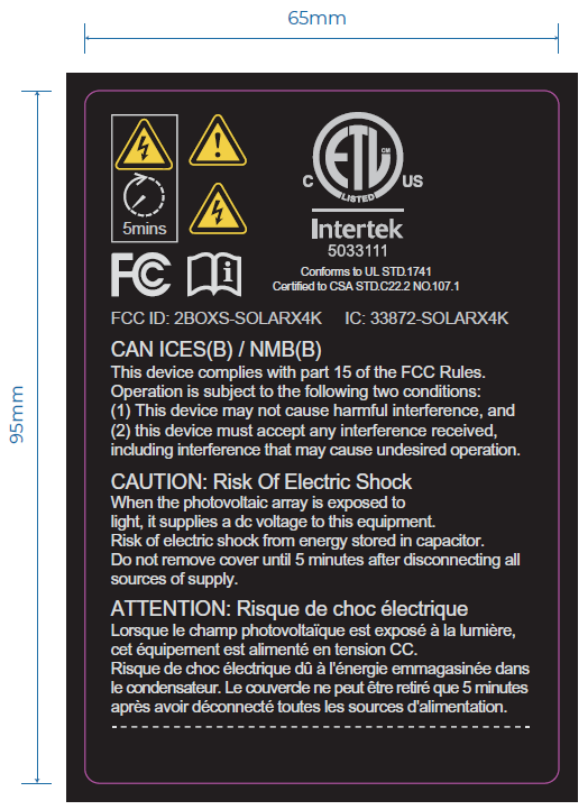# Label Artwork and Location

Model: SolarX 4K

Label and Size:

65mm

95mm

⚡ ⚠

🕐 5mins ⚡

FC [i]

FCC ID: 2BOXS-SOLARX4K   IC: 33872-SOLARX4K

c (ETL) us
LISTED
Intertek
5033111
Conforms to UL STD.1741
Certified to CSA STD.C22.2 NO.107.1

CAN ICES(B) / NMB(B)
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

CAUTION: Risk Of Electric Shock
When the photovoltaic array is exposed to
light, it supplies a dc voltage to this equipment.
Risk of electric shock from energy stored in capacitor.
Do not remove cover until 5 minutes after disconnecting all
sources of supply.

ATTENTION: Risque de choc électrique
Lorsque le champ photovoltaïque est exposé à la lumière,
cet équipement est alimenté en tension CC.
Risque de choc électrique dû à l'énergie emmagasinée dans
le condensateur. Le couvercle ne peut être retiré que 5 minutes
après avoir déconnecté toutes les sources d'alimentation.

BLUETTI

SolarX 4K
MPPT Solar Charge Controller

Location