

Königswinkel 10
32825 Blomberg, Germany
Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10
office@phoenix-testlab.de
www.phoenix-testlab.de

Test Report

Report Number:

F241823E4

Equipment under Test (EUT):

ANYiScan 2

Applicant:

CAISLEY International GmbH

Manufacturer:

CAISLEY International GmbH



References

- [1] **ANSI C63.4:2014** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 2:** General Rules and Regulations
- [3] **FCC 47 CFR Part 15:** Radio Frequency Devices (Subpart B)
- [4] **ICES-003 Issue 7: (October 2020)** Spectrum Management and Telecommunications. Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) —Limits and Methods of Measurement

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account as stated in clause 10.2.8.2 of ANSI C63.4 (2014). However, the measurement uncertainty is calculated and shown in this test report.

Tested and written
by:

Signature

Reviewed and
approved by:

Signature

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:

	Page
1 Identification	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Test Laboratory	5
1.4 EUT (Equipment under Test)	6
1.5 Technical Data of Equipment	7
1.6 Dates	7
2 Operational States	8
3 Additional Information	8
4 Overview.....	9
5 Results.....	10
5.1 Test setups	10
5.1.1 Radiated: 30 MHz to 1 GHz.....	10
5.1.1.1 Preliminary and final measurement 30 MHz to 1 GHz	10
5.2 Radiated emissions	12
5.2.1 Test setup (Maximum unwanted emissions)	12
5.2.2 Test method (Maximum unwanted emissions).....	12
5.2.3 Test results (Maximum unwanted emissions)	12
5.2.3.1 Test results (30 MHz – 1 GHz)	12
6 Measurement Uncertainties	15
7 Test Equipment used for Tests	15
8 Test site Verification.....	16
9 Report History	16
10 List of Annexes	16

1 Identification

1.1 Applicant

Name:	CAISLEY International GmbH
Address:	Harderhook 31, 46395 Bocholt
Country:	Germany
Name for contact purposes:	Mr. Thomas GÜLDENBERG
Phone:	02871-239-39-0
eMail address:	info@caisley.de
Applicant represented during the test by the following person:	None

1.2 Manufacturer

Name:	CAISLEY International GmbH
Address:	Harderhook 31, 46395 Bocholt
Country:	Germany
Name for contact purposes:	Mr. Thomas GÜLDENBERG
Phone:	02871-239-39-0
eMail address:	info@caisley.de
Manufacturer represented during the test by the following person:	None

1.3 Test Laboratory

The tests were carried out by:

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Germany

accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) according to DIN EN ISO/IEC 17025:2018. The accreditation is only valid for the scope of accreditation listed in the annex of the certificate D-PL-17186-01-00. FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

1.4 EUT (Equipment under Test)

Test object: *	RFID reader for electronic animal identification
Model name: *	ANYiScan 2
Model number: *	n.a.
Order number: *	n.a.
FCC ID: *	2BOY9-ANYISCAN2

	EUT number		
	1	2	3
Serial number: *	TG0000024	-	-
PCB identifier: *	C00001	-	-
Hardware version: *	V1.0.1	-	-
Software version: *	V1.0.1	-	-

* Declared by the applicant

One EUT was used for all tests.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

General			
Power supply EUT: *	DC via iPhone		
Supply voltage EUT: *	$U_{\text{nom}} = 3.6 \text{ V}_{\text{DC}}$	$U_{\text{min}} = 3.5 \text{ V}_{\text{DC}}$	$U_{\text{max}} = 4.2 \text{ V}_{\text{DC}}$
Temperature range: *	-10°C to $+55^{\circ}\text{C}$		
Lowest / highest internal frequency: *	19.2 kHz / 17.1776 MHz		

* Declared by the applicant

RFID part			
Operating frequency: *	134 kHz		
Number of channels: *	1		
Type of modulation: *	ASK		
Data rate: *	2/4 kHz		
Duty cycle: *	50 %		
Antenna type: *	Coil		

* Declared by the applicant

Ports / Connectors				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
Lightning plug	Lightning plug	Lightning socket	-	-

Equipment used for testing	
-	-
-	-

*¹ Provided by the applicant

*² Provided by the laboratory

Ancillary equipment	
iPhone: * ¹	Apple iPhone SE
TAG: * ¹	Caisley (XY 00123456848)

*¹ Provided by the applicant

1.6 Dates

Date of receipt of test sample:	09.12.2024
Start of test:	14.03.2025
End of test:	14.03.2025

2 Operational States

Description of function of the EUT:

The EUT is a RFID reader working at 134.2 kHz running in normal operation mode. RFID is used for electronic animal identification.

The following states were defined as the operating conditions:

The EUT was supplied by an Apple iPhone SE during all tests. During all tests, software ANYiSCAN App (delivered by the applicant) was used to monitor the connection between the iPhone and the EUT.

The system was setup as follows:



3 Additional Information

The EUT was not labeled as required by FCC / IC.

4 Overview

Conducted emissions FCC 47 CFR Part 15 section 15.107 (a), (b) [3] ICES-003 Issue 7 section 3.2.1[4]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
AC supply line Class B	0.15 to 0.5 MHz 0.5 to 5 MHz 5 to 30 MHz	66 to 56 dB(µV) QP* 56 to 46 dB(µV) AV* 56 dB(µV) QP 46 dB(µV) AV 60 dB(µV) QP 50 dB(µV) AV	ANSI C63.4	-	Not applicable

*: Decreases with the logarithm of the frequency

Radiated emissions FCC 47 CFR Part 15 section 15.109 (a), (b) [3]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
Radiated Emission Class B	30 to 88 MHz 88 to 216 MHz 216 to 960 MHz 960 to 1000 MHz above 1000 MHz	40.0 dB(µV/m) QP at 3 m 43.5 dB(µV/m) QP at 3 m 46.0 dB(µV/m) QP at 3 m 54.0 dB(µV/m) QP at 3 m 54.0 dB(µV/m) AV at 3 m and 74.0 dB(µV/m) PK at 3 m	ANSI C63.4	1	Passed

Radiated emissions ICES-003 Issue 7 section 3.2.2 [4]					
Application	Frequency range	Limits	Reference standard	Tested EUT	Status
Radiated Emission Class B	30 to 88 MHz 88 to 216 MHz 216 to 230 MHz 230 to 960 MHz 960 to 1000 MHz above 1000 MHz	40.0 dB(µV/m) QP at 3 m 43.5 dB(µV/m) QP at 3 m 46.0 dB(µV/m) QP at 3 m 47.0 dB(µV/m) QP at 3 m 54.0 dB(µV/m) QP at 3 m 54 dB(µV/m) AV at 3 m and 74 dB(µV/m) PK at 3 m	ANSI C63.4	1	Passed

Remark: As declared by the applicant the highest internal clock frequency is < 108 MHz.
Therefore, the radiated emission measurement must be carried out up to 1 GHz.

The EUT was classified by the applicant as CLASS B equipment.

5 Results

5.1 Test setups

5.1.1 Radiated: 30 MHz to 1 GHz


5.1.1.1 Preliminary and final measurement 30 MHz to 1 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber with a metal ground plane at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	30 MHz to 1 GHz	30 kHz	120 kHz	-	Peak Average
Frequency peak search	± 120 kHz	10 kHz	120 kHz	1 s	Peak
Final measurement	30 MHz to 1 GHz	-	120 kHz	1 s	QuasiPeak

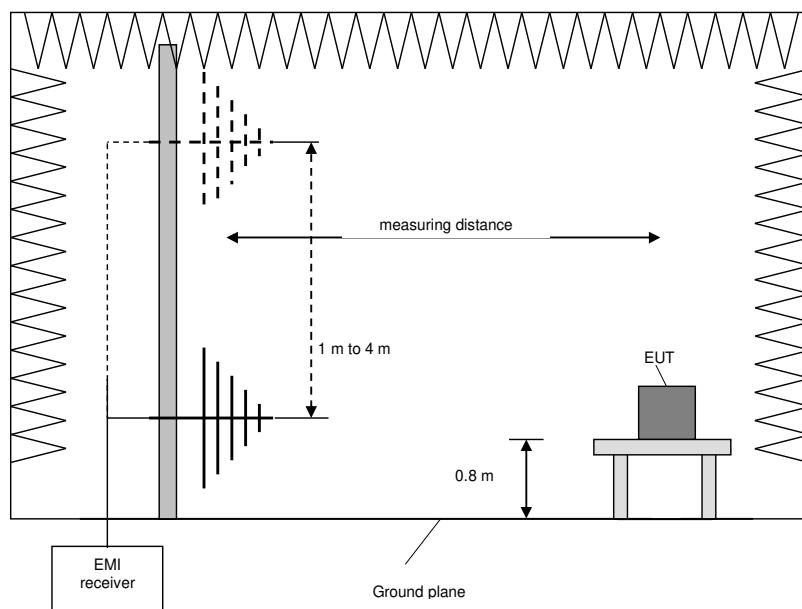

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:

- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x, y, z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by ± 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by ± 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

5.2 Radiated emissions

5.2.1 Test setup (Maximum unwanted emissions)

Test setup (Maximum unwanted emissions)			
Used	Setup	See sub-clause	Comment
<input checked="" type="checkbox"/>	Radiated: 30 MHz to 1 GHz	5.1.1	-

5.2.2 Test method (Maximum unwanted emissions)

Test method (radiated) see sub-clause 5.1.1 as described herein

5.2.3 Test results (Maximum unwanted emissions)

5.2.3.1 Test results (30 MHz – 1 GHz)

Ambient temperature:	23 °C	Date:	14.03.2025
Relative humidity:	17 %	Tested by:	S. KREHS

Position of EUT: For tests for f between 30 MHz to 1 GHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: As pretests have shown, only worst case position was tested

Calculations:

Result [dB μ V/m] = Reading [dB μ V] + Correction [dB/m]


Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]

Margin [dB] = Limit [dB μ V/m] - Result [dB μ V/m]

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with “◆” are the measured results of the standard subsequent measurement in a semi-anechoic chamber.

Worst case plot:

Spurious emissions from 30 MHz to 1 GHz:

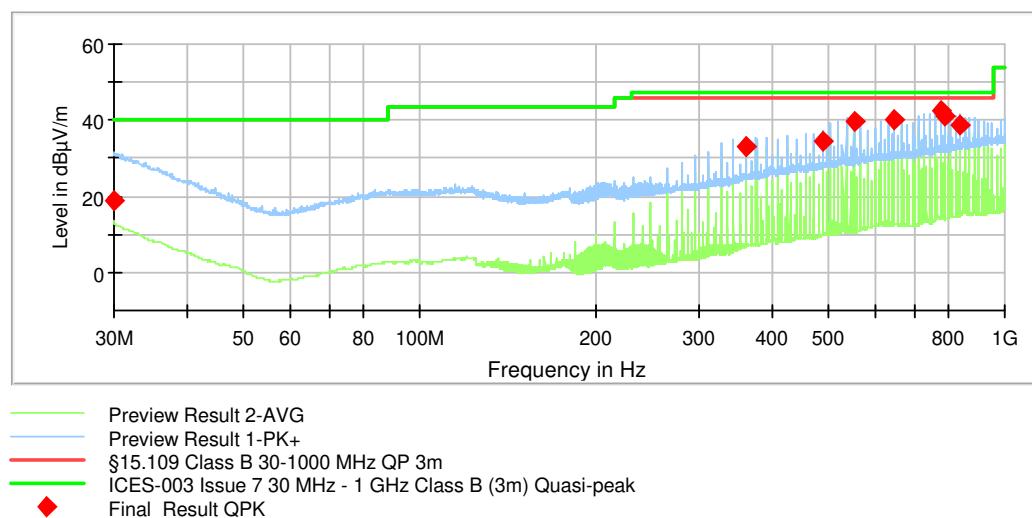

Result tables:

Results according to FCC 47 CFR Part 15 section 15.109 (a), (b) [3]

Frequency [MHz]	Result (QP) [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Readings [dBμV]	Correction [dB/m]	Height [cm]	Azimuth [deg]	Pol. (H/V)
30.048	19.0	40.0	21.0	-6.7	25.7	167.0	299.0	H
359.994	33.2	46.0	12.8	12.7	20.5	100.0	78.0	H
487.998	34.3	46.0	11.7	10.5	23.8	205.0	269.0	H
552.006	39.7	46.0	6.3	15.0	24.7	178.0	265.0	H
647.994	40.1	46.0	5.9	13.5	26.6	144.0	265.0	H
775.998	42.5	46.0	3.5	14.3	28.2	114.0	255.0	H
791.982	41.1	46.0	4.9	12.8	28.3	111.0	254.0	H
839.994	38.5	46.0	7.5	9.6	28.9	113.0	259.0	H

Results according to ICES-003 Issue 7 section 3.2.2 [4]

Frequency [MHz]	Result (QP) [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Readings [dB μ V]	Correction [dB/m]	Height [cm]	Azimuth [deg]	Pol. (H/V)
30.048	19.0	40.0	21.0	-6.7	25.7	167.0	299.0	H
359.994	33.2	47.0	13.8	12.7	20.5	100.0	78.0	H
487.998	34.3	47.0	12.7	10.5	23.8	205.0	269.0	H
552.006	39.7	47.0	7.3	15.0	24.7	178.0	265.0	H
647.994	40.1	47.0	6.9	13.5	26.6	144.0	265.0	H
775.998	42.5	47.0	4.5	14.3	28.2	114.0	255.0	H

Test result: Passed

Test equipment (please refer to chapter 7 for details)

1 - 8

6 Measurement Uncertainties

Conducted measurements		
Measurement method	Standard used for calculating measurement uncertainty	Expanded measurement uncertainty (95 %) U_{lab}
Conducted emissions from 150 kHz to 30 MHz with LISN	CISPR 16-4-2	2.8 dB

Radiated measurements		
Radiated field strength M153		
R&S HL562E @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	4.8 dB
R&S HL050 @ 3 m	-	
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 18 – 40 GHz	-	5.9 dB

7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Semi anechoic chamber M153	SAC-5	Albatross Projects		482784	Calibration not necessary	
2	OSP 220	OSP 220	Rohde & Schwarz	101376	483141	Calibration not necessary	
3	OSP 220 Master	OSP 220	Rohde & Schwarz	101367	483142	Calibration not necessary	
4	Satellit OSP	OSP 220	Rohde & Schwarz	101423	483143	Calibration not necessary	
5	EMC test software	EMC32 Ver. 10.60.15	Rohde & Schwarz	100622	483150	Calibration not necessary	
6	Boresight Antenna Mast BAM 4.0P	BAM 4.0P	Maturo	-	483222	Calibration not necessary	
7	Ultralog Antenna	HL562E	Rohde & Schwarz	101061	483152	23.05.2024	05.2026
8	EMI receiver / Spectrum analyser	ESW 44	Rohde & Schwarz	103001	484013	27.12.2024	12.2026

8 Test site Verification

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Semi anechoic chamber M153	482784	30 – 1000 MHz	NSA	ANSI C63.4-2014 ANSI C63.4a-2017	21.02.2023	20.02.2026

9 Report History

Report Number	Date	Comment
F241823E4	13.08.2025	Initial Test Report
-	-	-
-	-	-

10 List of Annexes

Annex A	Test Setup Photos	1 pages
Annex B	EUT External Photos	4 pages
Annex C	EUT Internal Photos	5 pages

----- end of test report -----