



TEST REPORT

Applicant: Shenzhen Juxingcheng Technology Co., Ltd.

Address: 903, No.16, 7th Lane, Daguangkan Village, Bantian Street, Longgang, Shenzhen, China

Product Name: Car Stereo

FCC ID: 2BOYC-A2882

47 CFR Part 15, Subpart E (15.407)

Standard(s): ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules
v02r01

Report Number: 2402A112883E-RF-00A

Report Date: 2025/5/24

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Reviewed By: Pedro Yun

Approved By: Gavin Xu

Title: Project Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	8
3.5 BLOCK DIAGRAM OF TEST SETUP	8
3.6 TEST FACILITY	9
3.7 MEASUREMENT UNCERTAINTY	9
4. REQUIREMENTS AND TEST PROCEDURES	10
4.1 AC LINE CONDUCTED EMISSIONS	10
4.1.1 Applicable Standard	10
4.1.2 EUT Setup	11
4.1.3 EMI Test Receiver Setup	11
4.1.4 Test Procedure	12
4.1.5 Corrected Amplitude & Margin Calculation	12
4.1.6 Test Result	12
4.2 RADIATION SPURIOUS EMISSIONS	13
4.2.1 Applicable Standard	13
4.2.2 EUT Setup	14
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
4.2.4 Test Procedure	16
4.2.5 Corrected Result & Margin Calculation	17
4.2.6 Test Result	17
4.3 EMISSION BANDWIDTH	18
4.3.1 Applicable Standard	18
4.3.2 EUT Setup	18
4.3.3 Test Procedure	18
4.3.4 Test Result	19
4.4 MAXIMUM CONDUCTED OUTPUT POWER	20
4.4.1 Applicable Standard	20
4.4.2 EUT Setup	20
4.4.3 Test Procedure	20
4.4.4 Test Result	20
4.5 MAXIMUM POWER SPECTRAL DENSITY	21

4.5.1 Applicable Standard	21
4.5.2 EUT Setup	21
4.5.3 Test Procedure	22
4.5.4 Test Result	22
4.6 DUTY CYCLE	23
4.6.1 EUT Setup	23
4.6.2 Test Procedure	23
4.6.3 Judgment	23
4.7 ANTENNA REQUIREMENT	24
4.7.1 Applicable Standard	24
4.7.2 Judgment	24
5. Test DATA AND RESULTS	25
 5.1 AC LINE CONDUCTED EMISSIONS.....	25
 5.2 RADIATION SPURIOUS EMISSIONS.....	26
 5.3 EMISSION BANDWIDTH	44
 5.4 99% OCCUPIED BANDWIDTH.....	47
 5.5 MAXIMUM CONDUCTED OUTPUT POWER	50
 5.6 POWER SPECTRAL DENSITY	51
 5.7 DUTY CYCLE	54
EXHIBIT A - EUT PHOTOGRAPHS	56
EXHIBIT B - TEST SETUP PHOTOGRAPHS	57

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402A112883E-RF-00A	Original Report	2025/5/24

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Car Stereo
EUT Model:	A2882
Multiple Models:	A3506, A3082, A3398, A3397, A3491, A3044, A2762, A3205, A3206, A3207, A3009, A3047, A3048, A3149, A3150, A3111, A3204, A3652
Operation Frequency:	5180-5240 MHz (802.11a/n ht20) 5190-5230 MHz (802.11n ht40)
Maximum Average Conducted Output Power:	11.96dBm
Modulation Type:	802.11a/n: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Rated Input Voltage:	DC 11-16V; Typical Voltage: DC 12V
Serial Number:	2WPT-1 (for Radiated Emissions Test) 2WPT-2 (for RF Conducted Test)
EUT Received Date:	2024/12/27
EUT Received Status:	Good

Note: The multiple models are electrically identical with the test model except the model name. Please refer to the declaration letter for more detail, which was provided by manufacturer.

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Backup Camera RCA CAM-N Connector (with WIFI/BT Antenna)	Unknown	Unknown	Unshielded without Ferrite Core, 0.15m in length
GPS Antenna	Unknown	Unknown	Unshielded without Ferrite Core, 1.7m in length
4 PIN USB External Extension Cable	Unknown	Unknown	Unshielded without Ferrite Core, 0.7m in length
Power Cable	Unknown	Unknown	Unshielded without Ferrite Core, 0.15m in length
RCA Cable	Unknown	Unknown	Unshielded without Ferrite Core, 0.15m in length

1.3 Antenna Information Detail ▲

Antenna Type	Input Impedance (Ohm)	Frequency Range	Antenna Gain
Monopole Antenna	50	5180~5240MHz	1.81dBi
The design of compliance with §15.203:			
<input type="checkbox"/> Unit uses a permanently attached antenna. <input checked="" type="checkbox"/> Unit uses a unique coupling to the intentional radiator. <input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Not Applicable
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant

Not Applicable: The EUT is a vehicle-mounted device, not applicable for this test item.
Note 1: For Radiated Spurious Emissions 9kHz~ 1GHz and 18GHz~40GHz, the maximum output power mode and channel was tested.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 5 150-5250MHz Band:

802.11a/n ht20		802.11n ht40	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

Note: The above frequencies in bold were performed the test.

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The EUT configuration is below:

EUT Exercise Software: Engineering Mode				
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	20
	Middle	5200	6Mbps	20
	Highest	5240	6Mbps	20
802.11n ht20	Lowest	5180	MCS0	19
	Middle	5200	MCS0	19
	Highest	5240	MCS0	19
802.11n ht40	Lowest	5190	MCS0	19
	Highest	5230	MCS0	19

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DK	DC power supply	DK-60V50A	T-08-EE140
Unknown	Test BOX	Unknown	Unknown
Lenovo	Laptop	G510	EMZBPC21103006
Kingston	U-Disk	32G	EMZBUD21103001
SANDisk	USB Flash Disk	16G	BL201026331
Unknown	FM Antenna	Unknown	Unknown
Unknown	GPS Antenna	Unknown	Unknown
Unknown	Loudspeaker	Unknown	Unknown
Unknown	Loudspeaker*3	Unknown	Unknown
Shenzhen Cheyang	Car Stereo	A2893	Unknown
Unknown	Microphone	Unknown	Unknown
Unknown	Camera	Unknown	Unknown
GB	Sound	D-418	Unknown
Epik	Phone	E500	EMZBSP21103002
Epik	Phone	K500	EMZBSP21103003


3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	0.15	EUT	Detachable Busbar Harness
RCA Cable	No	No	0.15	EUT	Microphone Cable / Audio & Video Cable / Camera Cable / Audio Cable
Microphone Cable	No	No	1.2	RCA Cable	Microphone
USB Cable	No	No	1	Laptop	Test BOX
Detachable Busbar Harness	No	No	2	Power Cable	Test BOX
Audio & Video Cable*8	No	No	2	Power Cable / RCA Cable	Car Stereo
Audio Cable*3	No	No	2	Power Cable	Loudspeaker*3
Audio Cable	No	No	1.5	Power Cable	Loudspeaker
Audio Cable	No	No	2	RCA Cable	Sound
FM Cable	No	No	3	EUT	FM Antenna
Camera Cable	No	No	1.5	RCA Cable	Camera
4 PIN USB External Extension Cable	No	No	1.5	EUT	Phone
6 PIN USB External Extension Cable	No	No	1.5	EUT	Phone

3.5 Block Diagram of Test Setup

RE Below 1GHz:

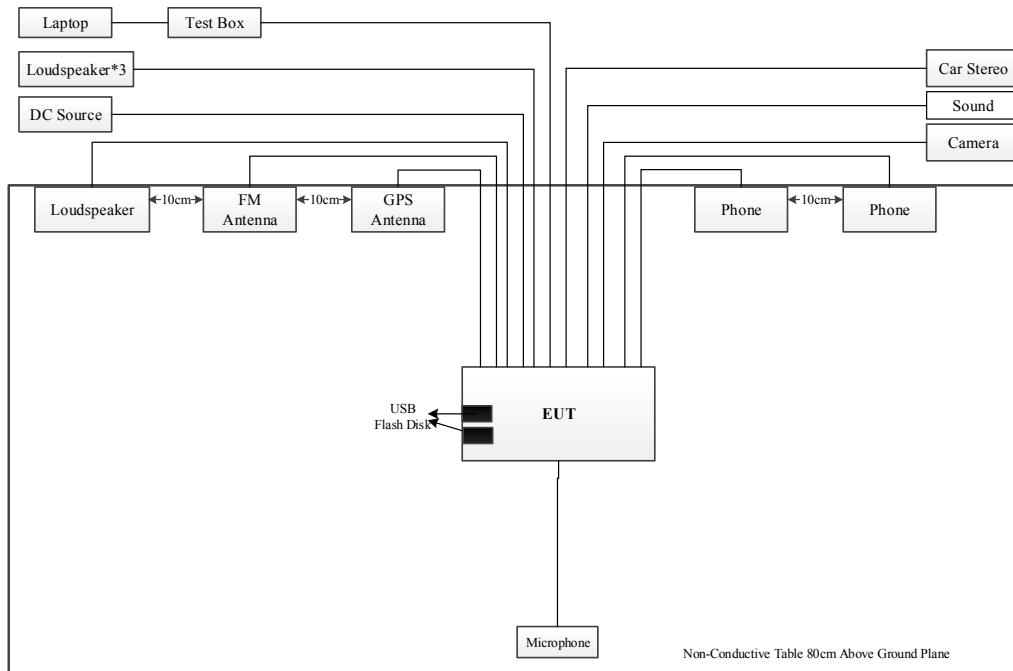

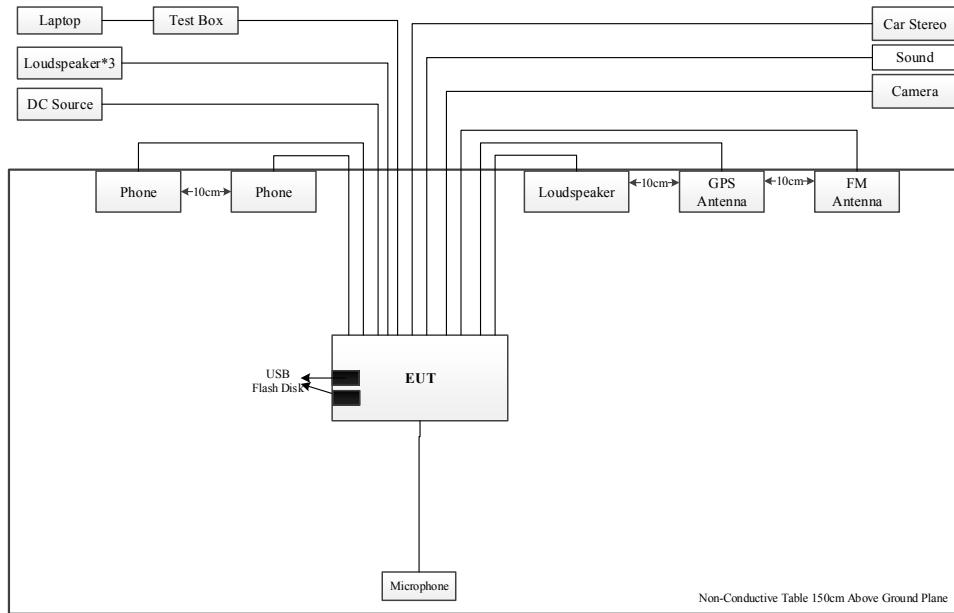RE Above 1GHz:**3.6 Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB
Unwanted Emissions, conducted	$\pm 2.47\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

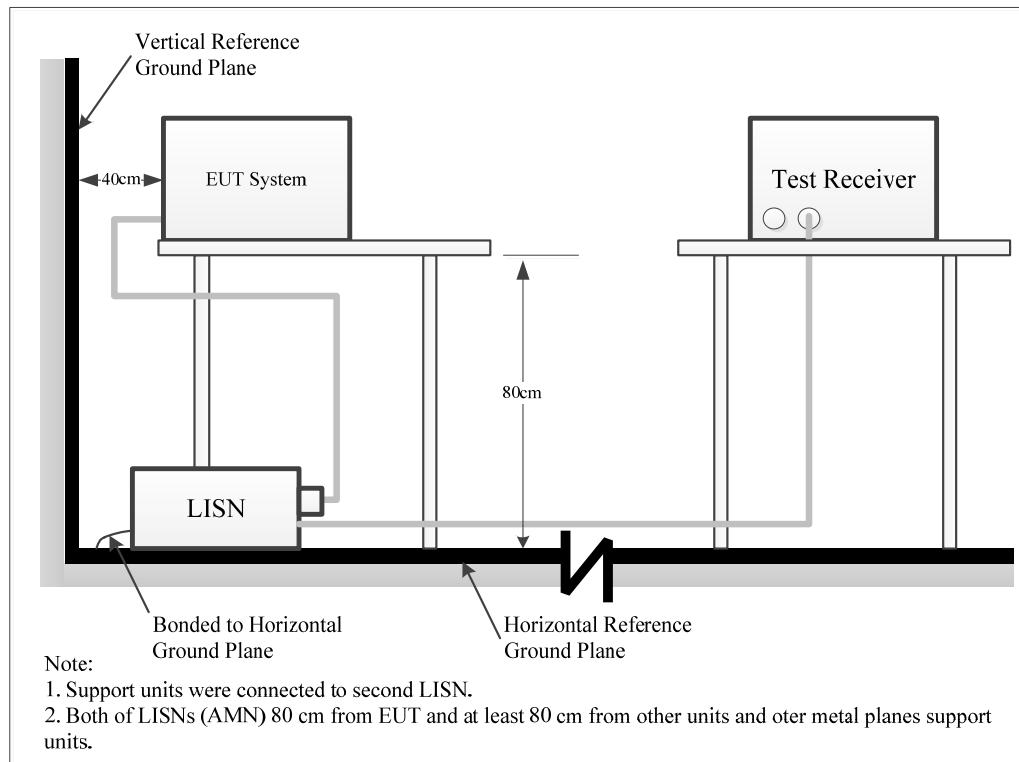

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard


FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.



4.2.2 EUT Setup

9kHz~30MHz:

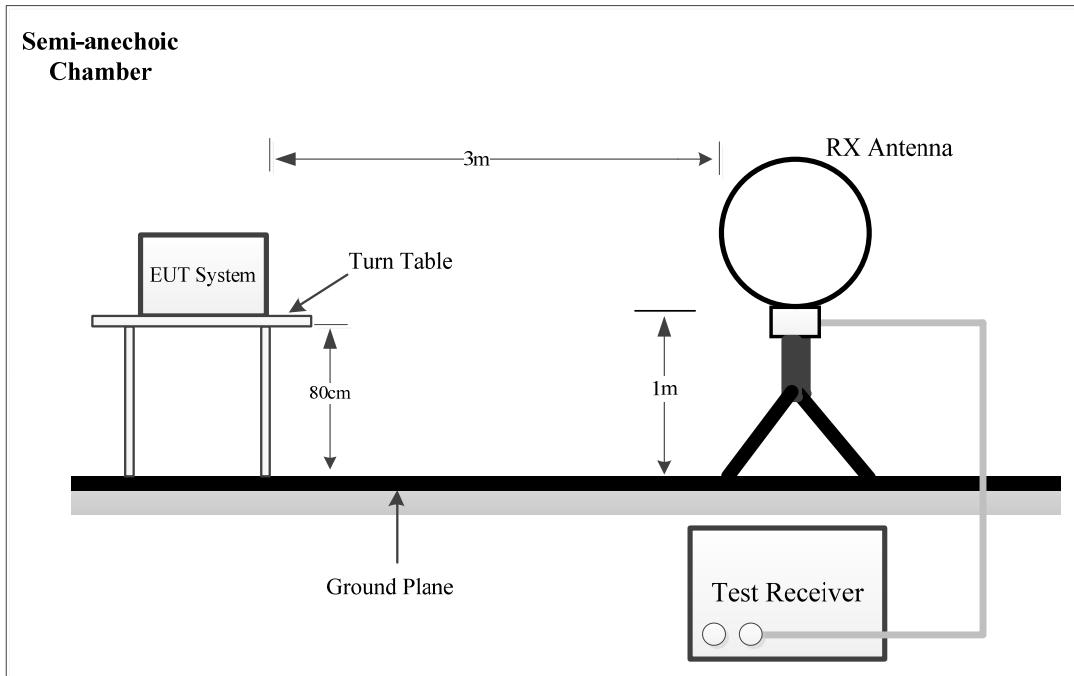

30MHz~1GHz:

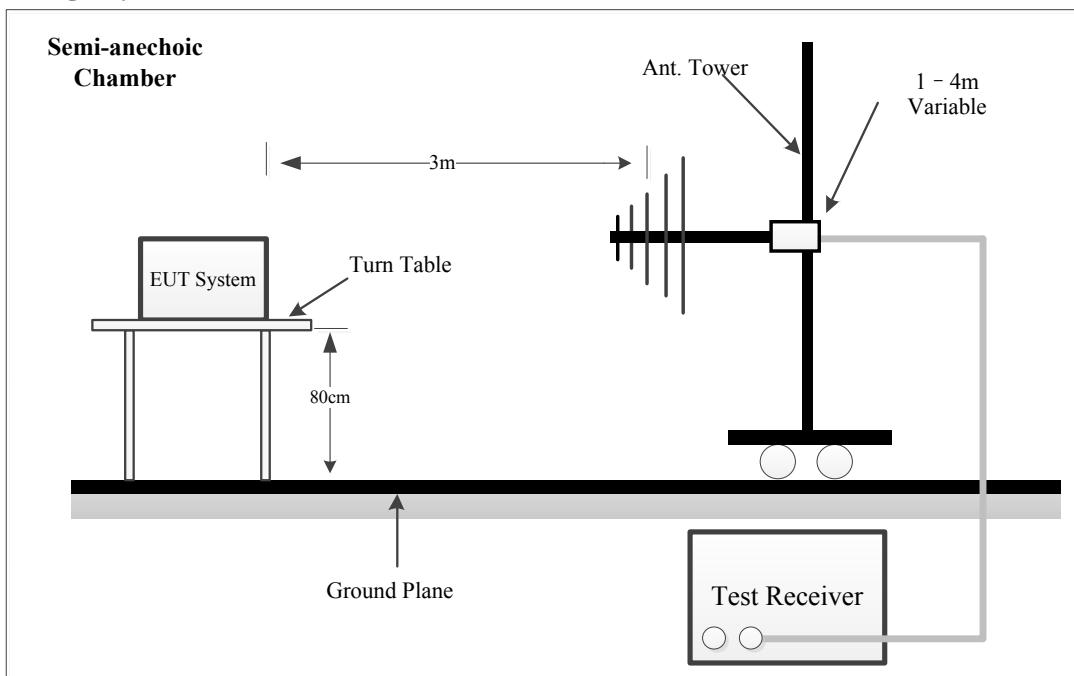

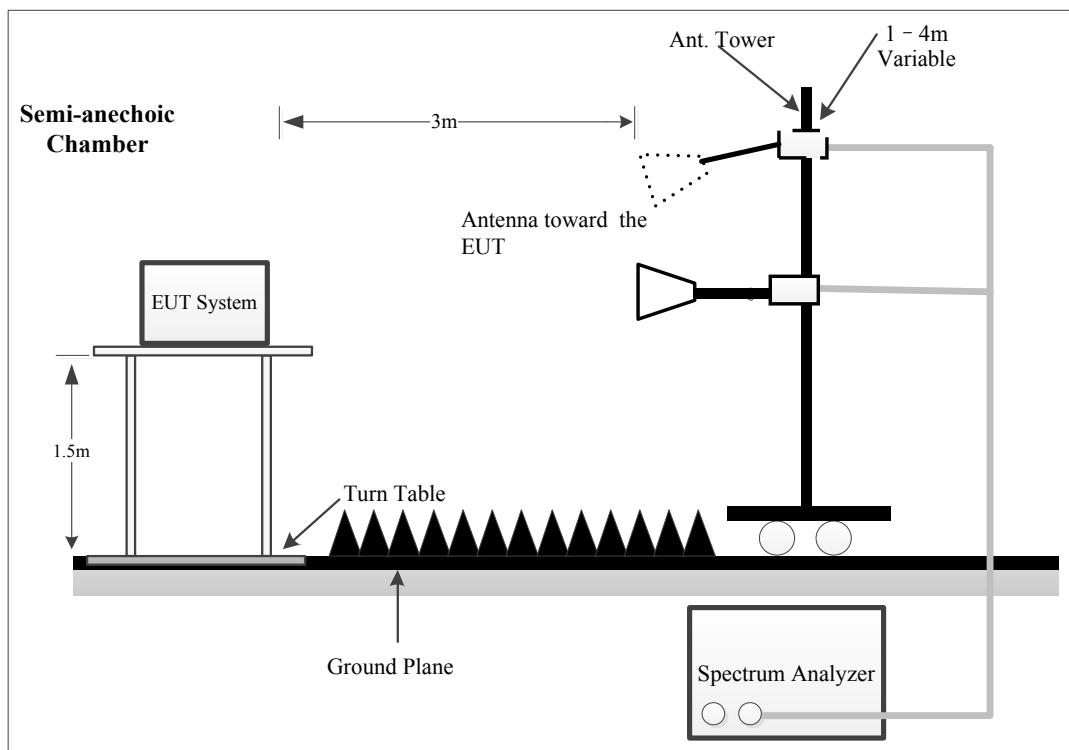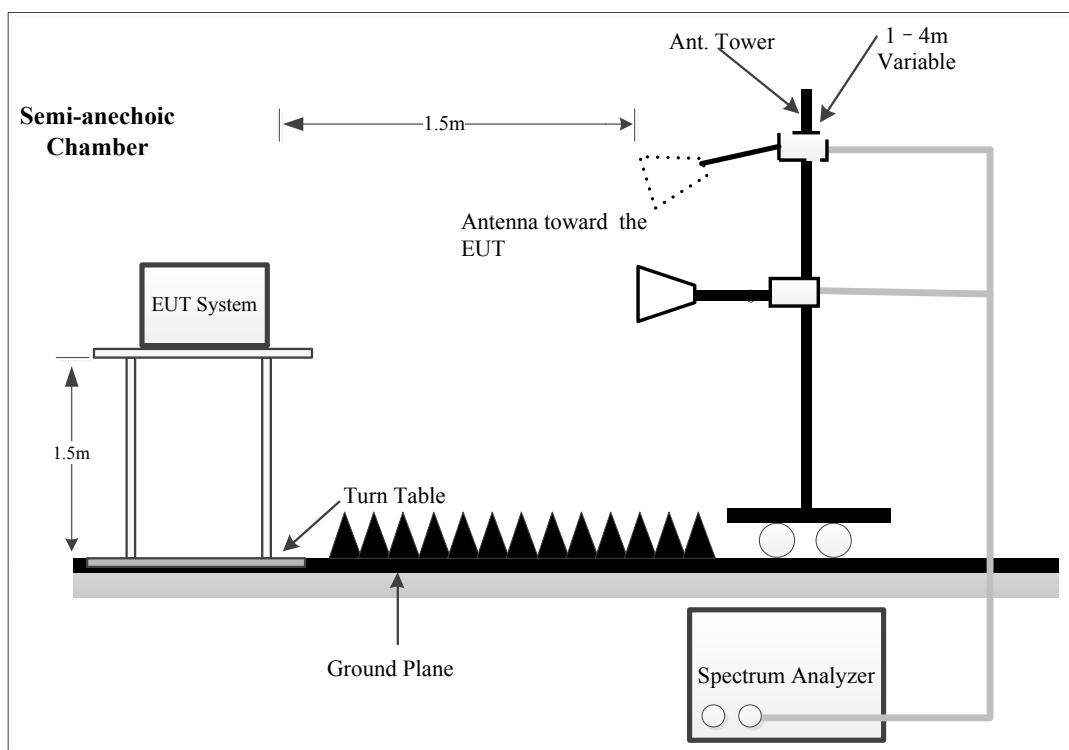1-26.5GHz:**26.5-40GHz:**

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	300Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	10 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for d = 3 meters.

For Radiated 26.5-40GHz test, which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.0 dB

4.2.5 Corrected Result & Margin Calculation

The basic equation except 26.5-40GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 26.5-40GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Emission Bandwidth

4.3.1 Applicable Standard


FCC §15.407 (a), (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3.2 EUT Setup

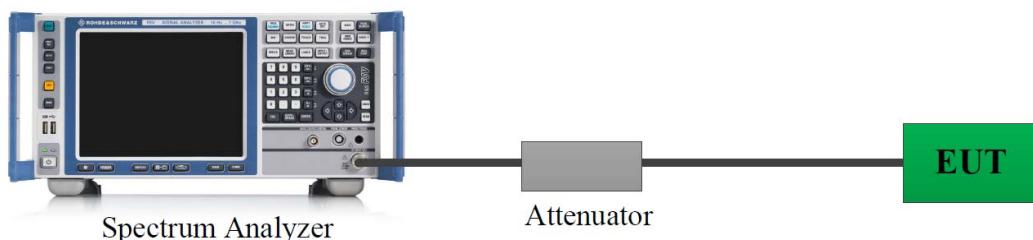

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) \geq 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with

the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Result

Please refer to section 5.3 and section 5.4.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.4.4 Test Result

Please refer to section 5.5.

4.5 Maximum Power Spectral Density

4.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.5.2 EUT Setup

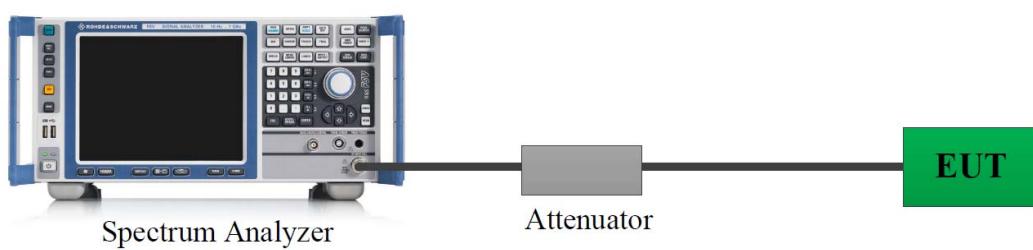

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.5.4 Test Result

Please refer to section 5.6.

4.6 Duty Cycle

4.6.1 EUT Setup

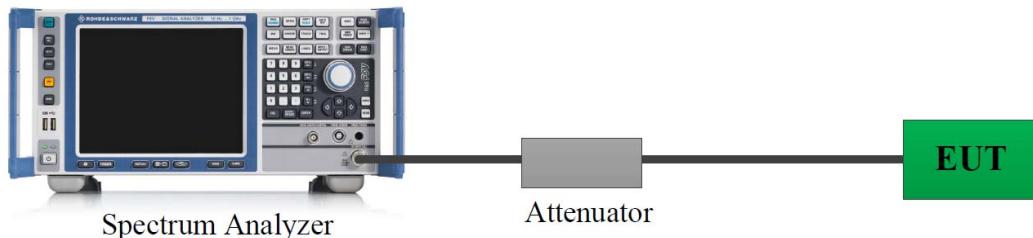

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.6.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.6.3 Judgment

Report Only. Please refer to section 5.7.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.7.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Not Applicable, the EUT is a vehicle-mounted device, not applicable for this test item.

5.2 Radiation Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	2WPT-1	Test Date:	2025/1/22
Test Site:	Chamber A	Test Mode:	Transmitting
Tester:	Jayce Wang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	20.4	Relative Humidity: (%)	32	ATM Pressure: (kPa)	101.2
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	372193	2024/8/16	2025/8/15
R&S	EMI Test Receiver	ESR3	102453	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


Note: The maximum output power mode and channel: 802.11a lowest channel (5180MHz) was tested.

9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) were measured, the worst orientations were below:

Project No.: 2402A112883E-RF
 Polarization: Parallel
 Test Mode: Transmitting
 Note: RBW:300Hz,VBW:1kHz
 :


Serial No.: 2WPT-1
 Tester: Jayce Wang

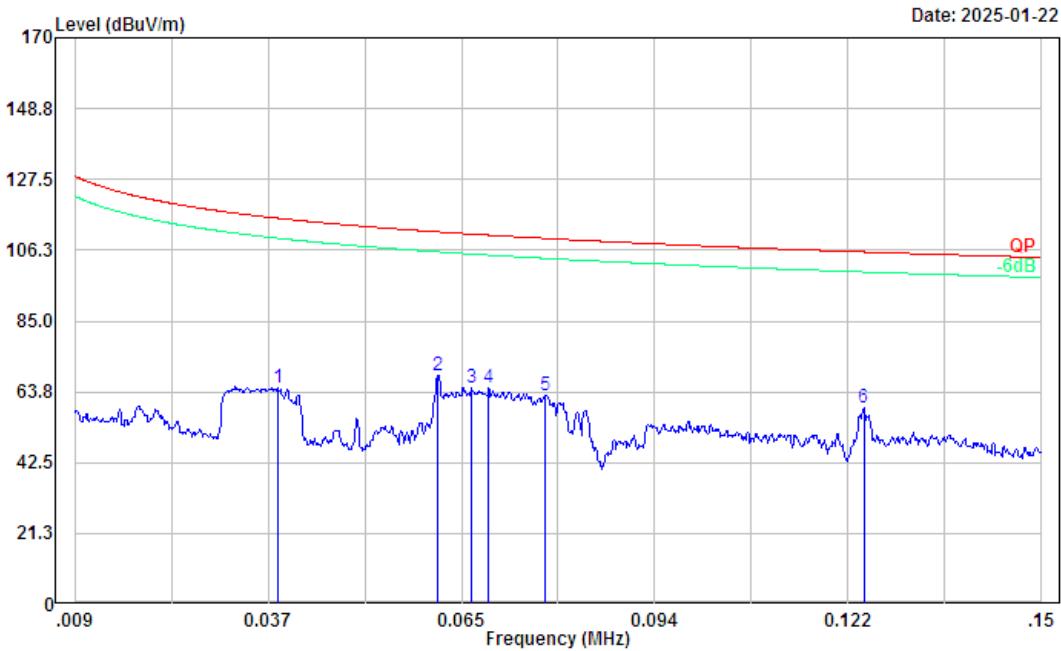

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.039	19.83	45.19	65.02	115.87	50.85	Peak
2	0.062	27.38	41.48	68.86	111.75	42.89	Peak
3	0.067	24.30	40.67	64.97	111.09	46.12	Peak
4	0.069	24.54	40.28	64.82	110.78	45.96	Peak
5	0.078	23.76	38.81	62.57	109.82	47.25	Peak
6	0.124	25.40	33.63	59.03	105.73	46.70	Peak

Project No.: 2402A112883E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: RBW:10kHz,VBW:30kHz
:

Serial No.: 2WPT-1
Tester: Jayce Wang

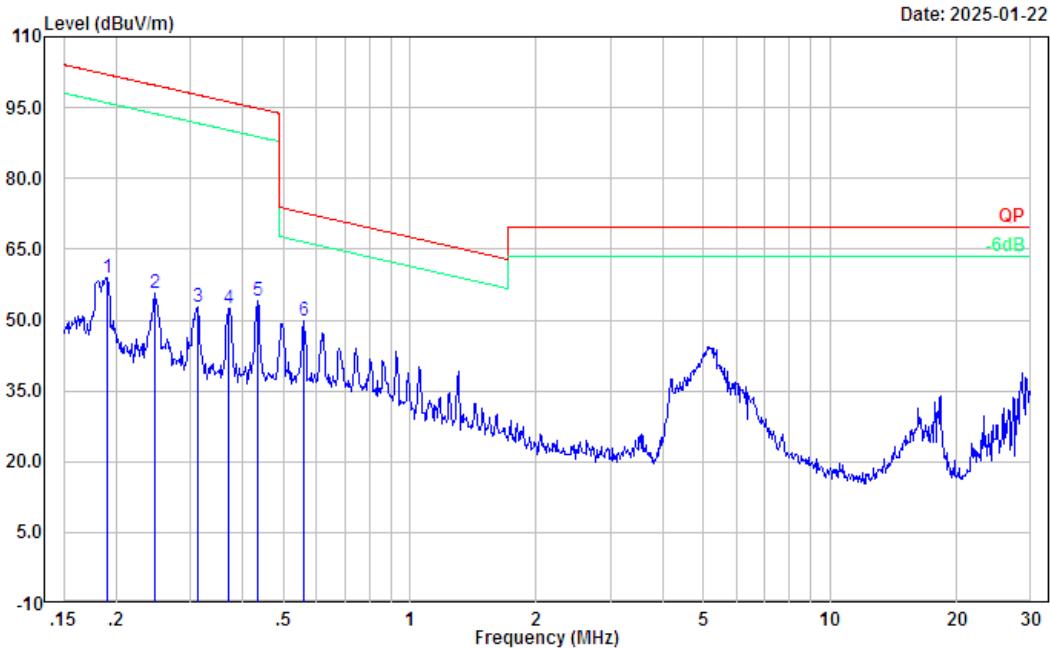


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	0.190	29.26	29.76	59.02	102.01	42.99	Peak
2	0.248	29.33	26.34	55.67	99.71	44.04	Peak
3	0.313	29.64	23.23	52.87	97.69	44.82	Peak
4	0.371	29.38	23.01	52.39	96.21	43.82	Peak
5	0.435	31.14	22.81	53.95	94.83	40.88	Peak
6	0.561	27.61	22.17	49.78	72.60	22.82	Peak

30MHz-1GHz

Project No.: 2402A112883E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: RBW:100kHz,VBW:300kHz
:


Serial No.: 2WPT-1
Tester: Jayce Wang

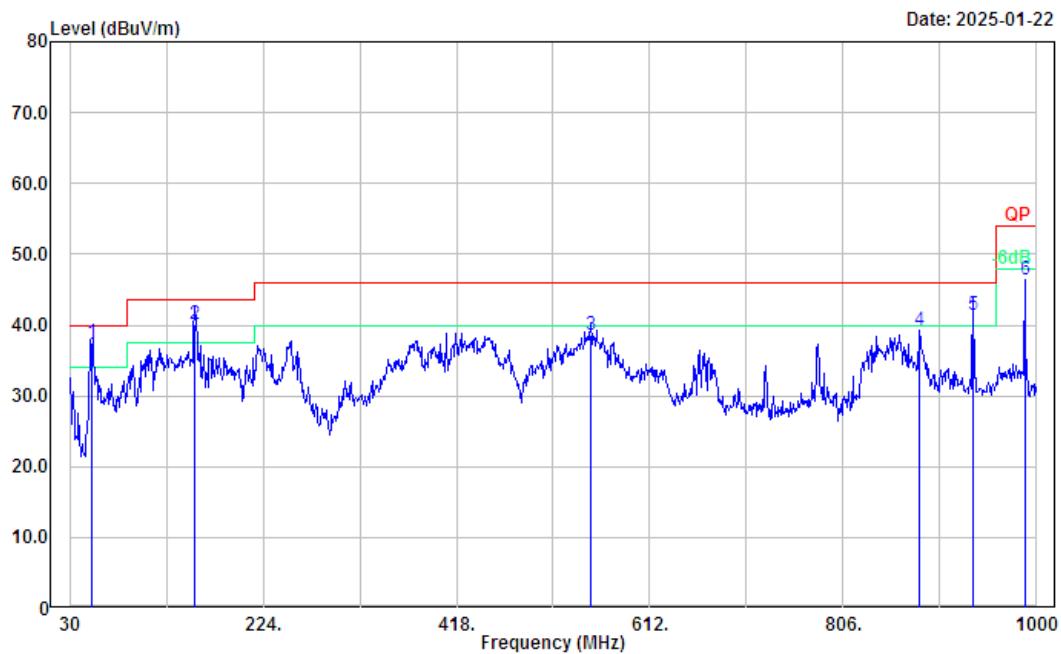

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	52.31	54.02	-16.57	37.45	40.00	2.55	QP
2	156.10	51.50	-11.47	40.03	43.50	3.47	QP
3	552.83	42.15	-3.46	38.69	46.00	7.31	QP
4	882.63	36.01	3.18	39.19	46.00	6.81	Peak
5	935.98	37.24	4.15	41.39	46.00	4.61	QP
6	988.36	41.52	4.83	46.35	54.00	7.65	Peak

Project No.: 2402A112883E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: RBW:100kHz,VBW:300kHz
:

Serial No.: 2WPT-1
Tester: Jayce Wang

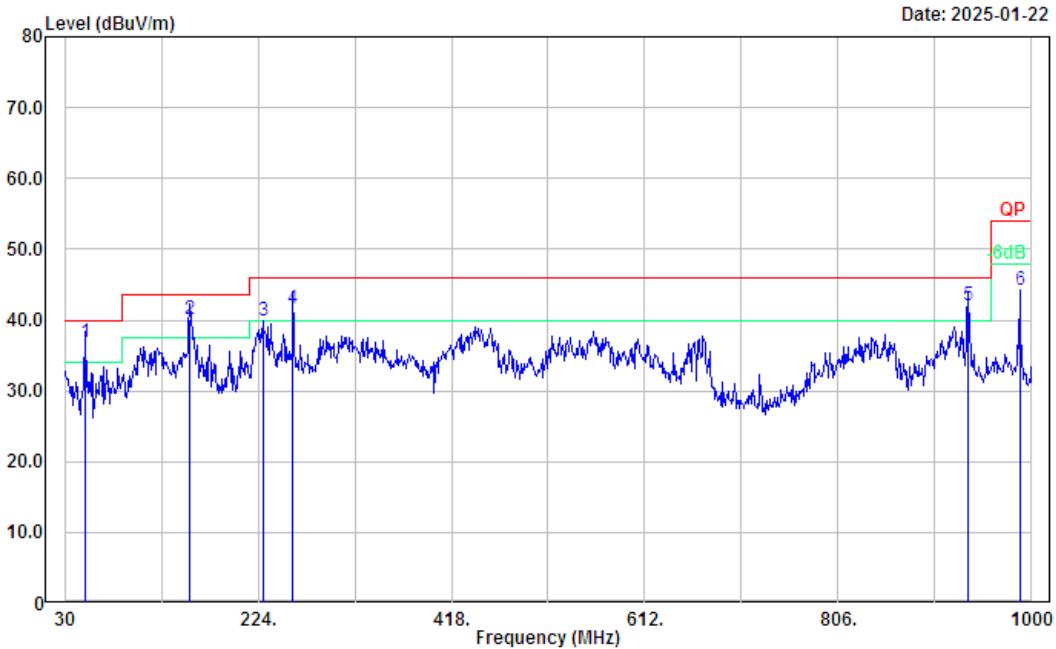

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement
1	50.37	53.36	-16.47	36.89	40.00	3.11	QP
2	156.10	51.59	-11.47	40.12	43.50	3.38	QP
3	228.85	51.05	-11.09	39.96	46.00	6.04	Peak
4	258.92	52.47	-10.79	41.68	46.00	4.32	QP
5	936.95	37.96	4.16	42.12	46.00	3.88	QP
6	988.36	39.37	4.83	44.20	54.00	9.80	Peak

2) 1-40GHz:

Serial Number:	2WPT-1	Test Date:	2025/1/24
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.5	Relative Humidity: (%)	56	ATM Pressure: (kPa)	100.9
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:


Please refer to the below table and plots.


**1GHz-18GHz:
5150-5250MHz:**

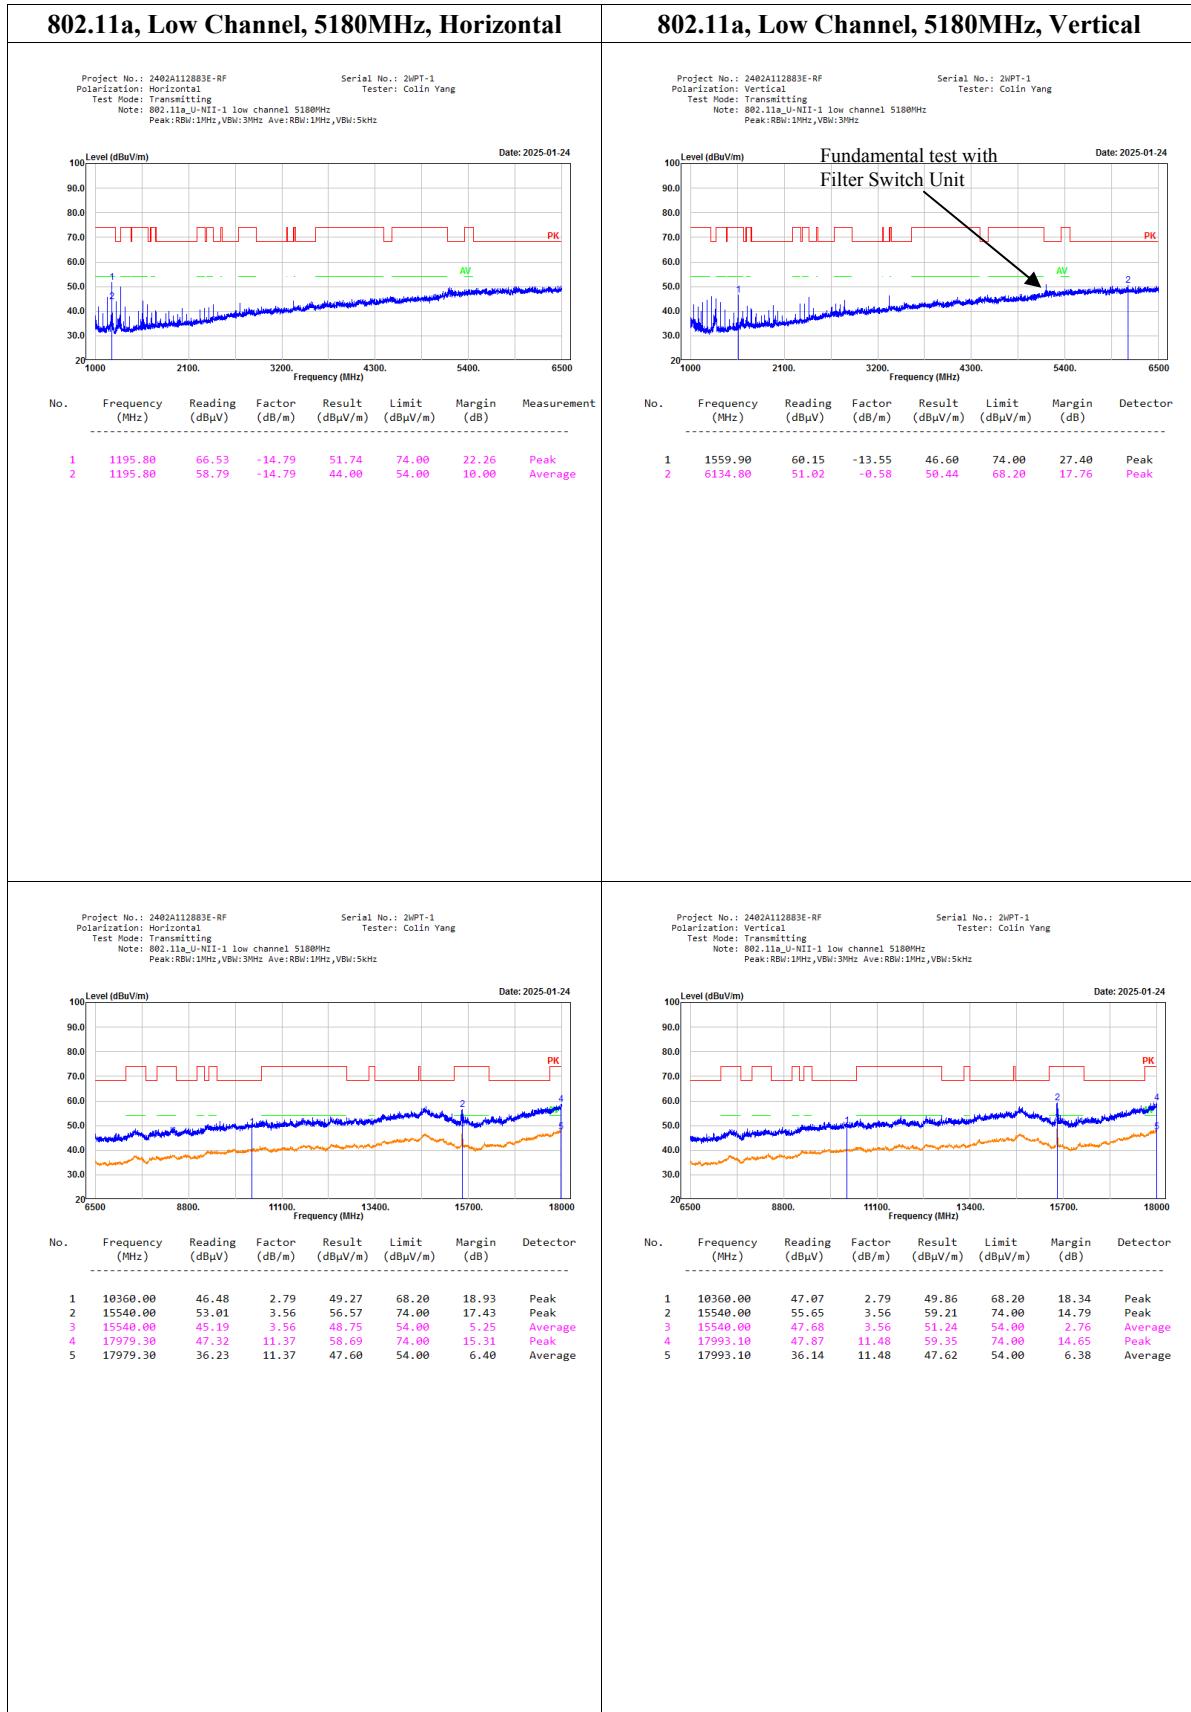


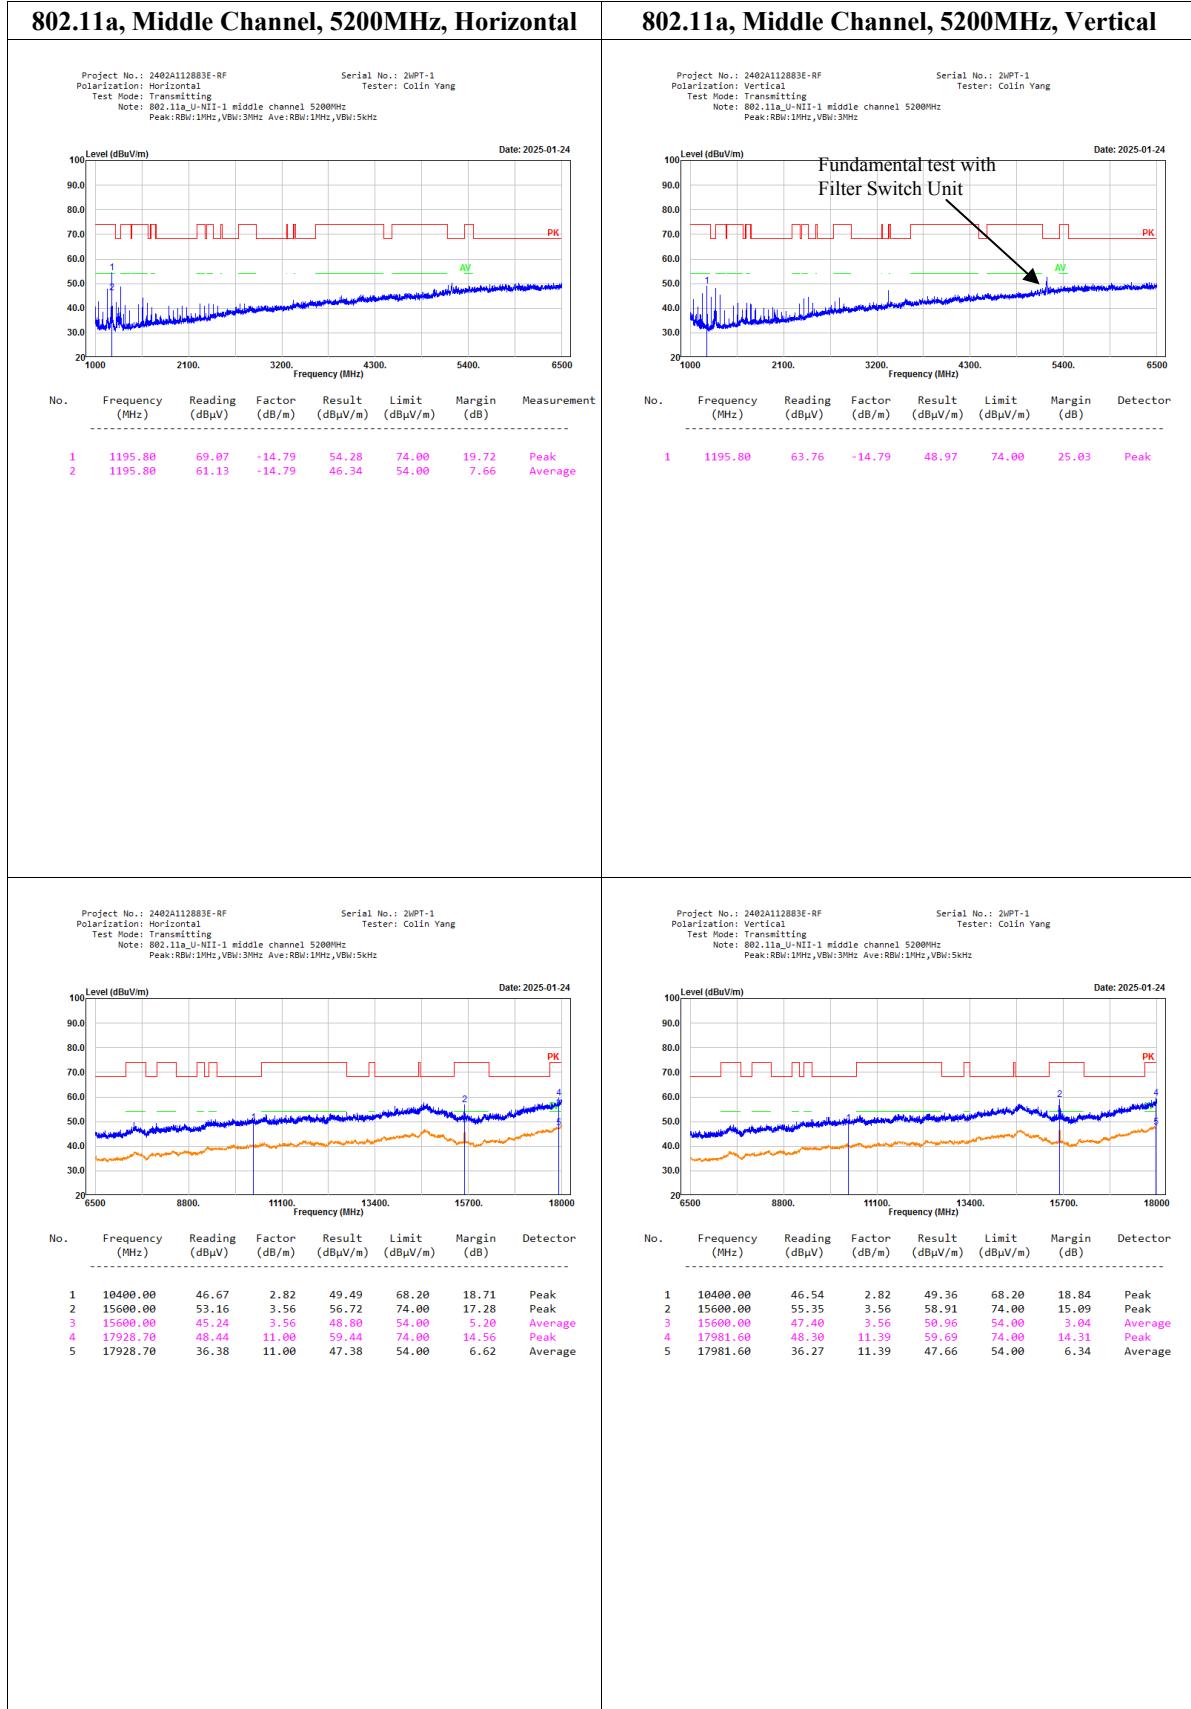


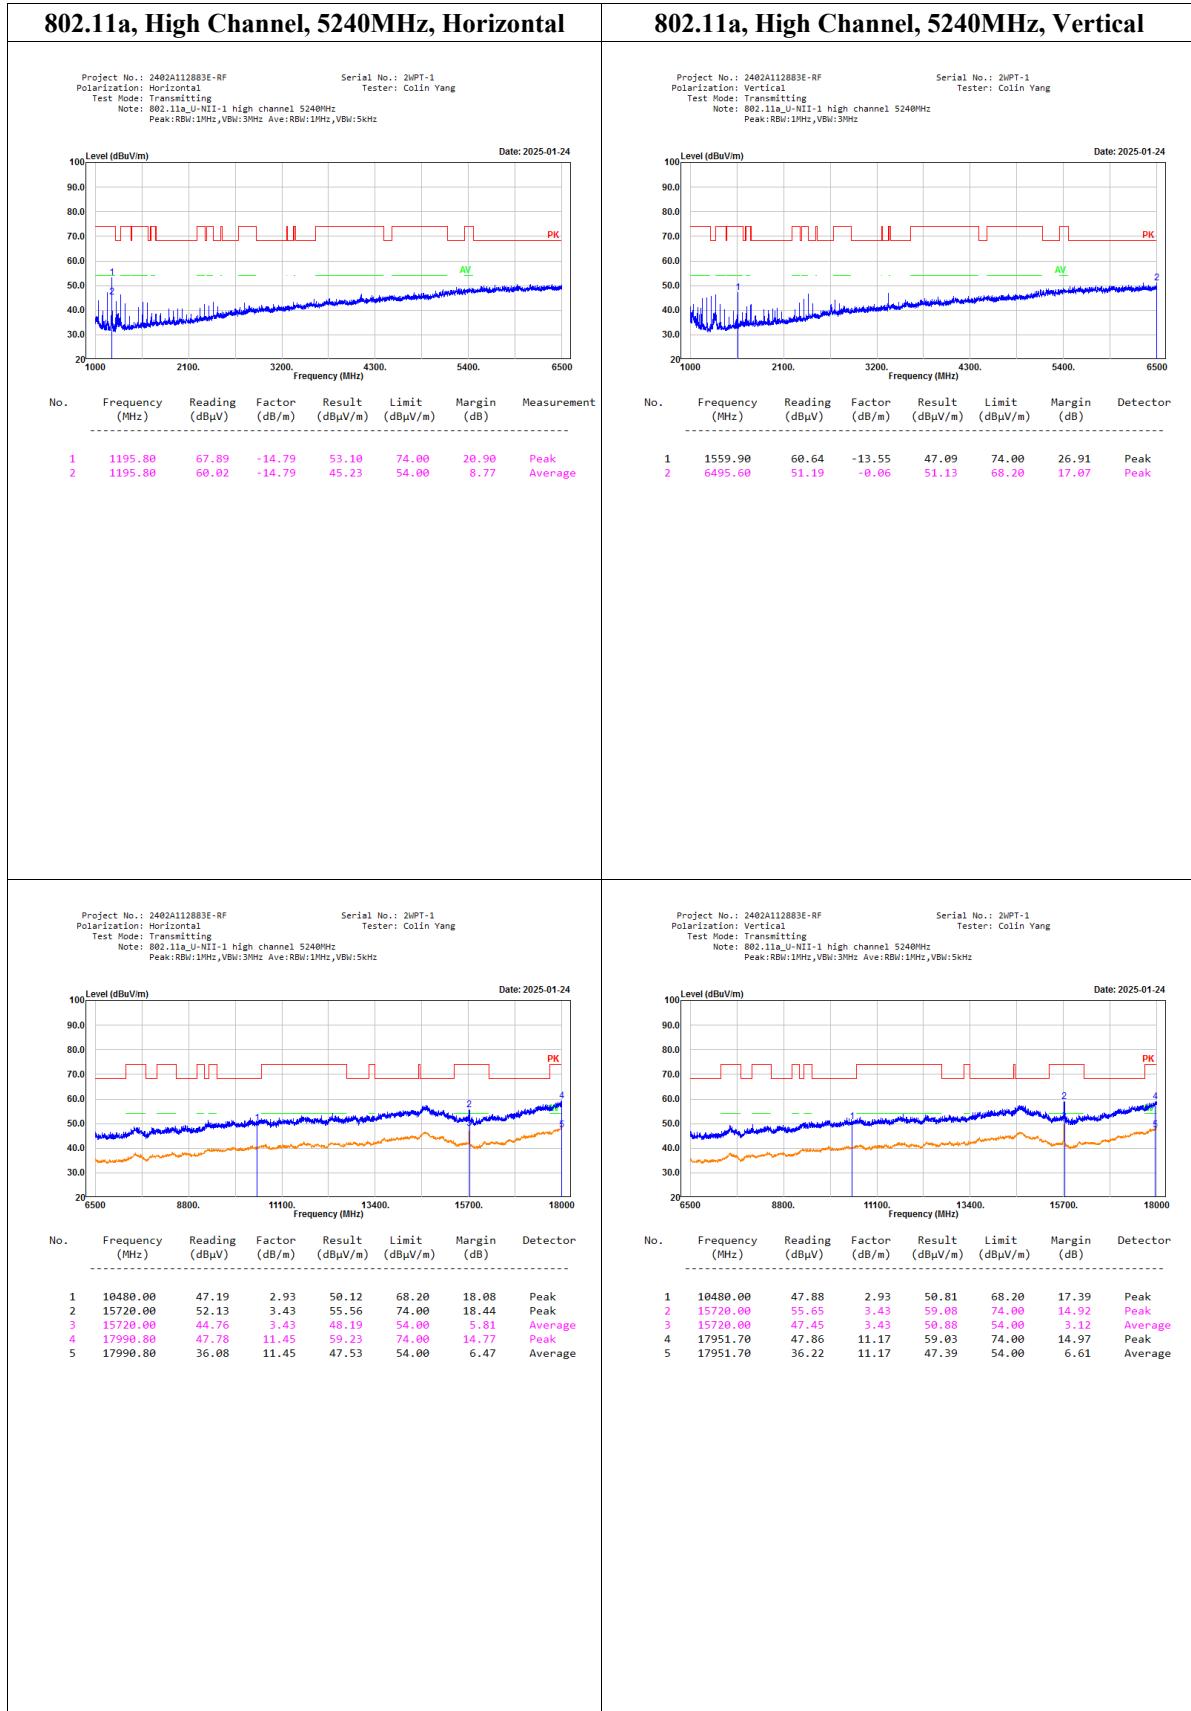


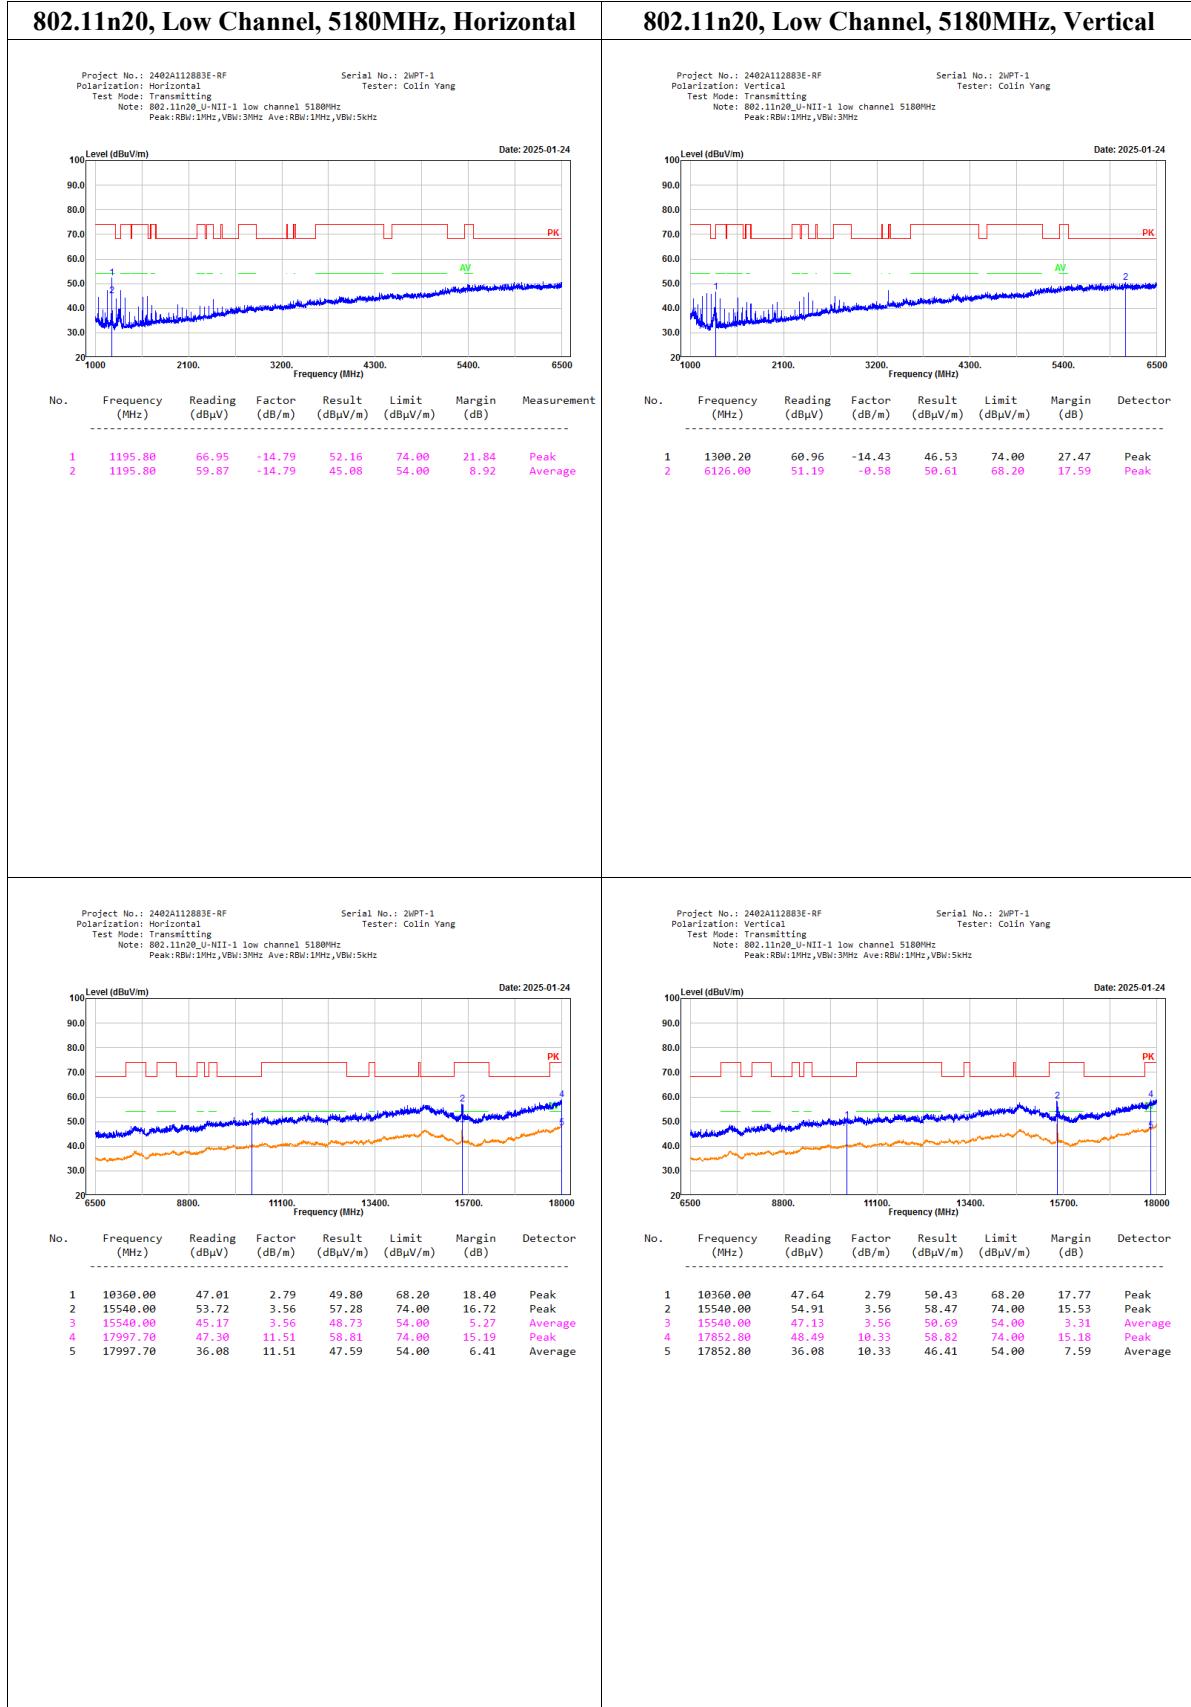

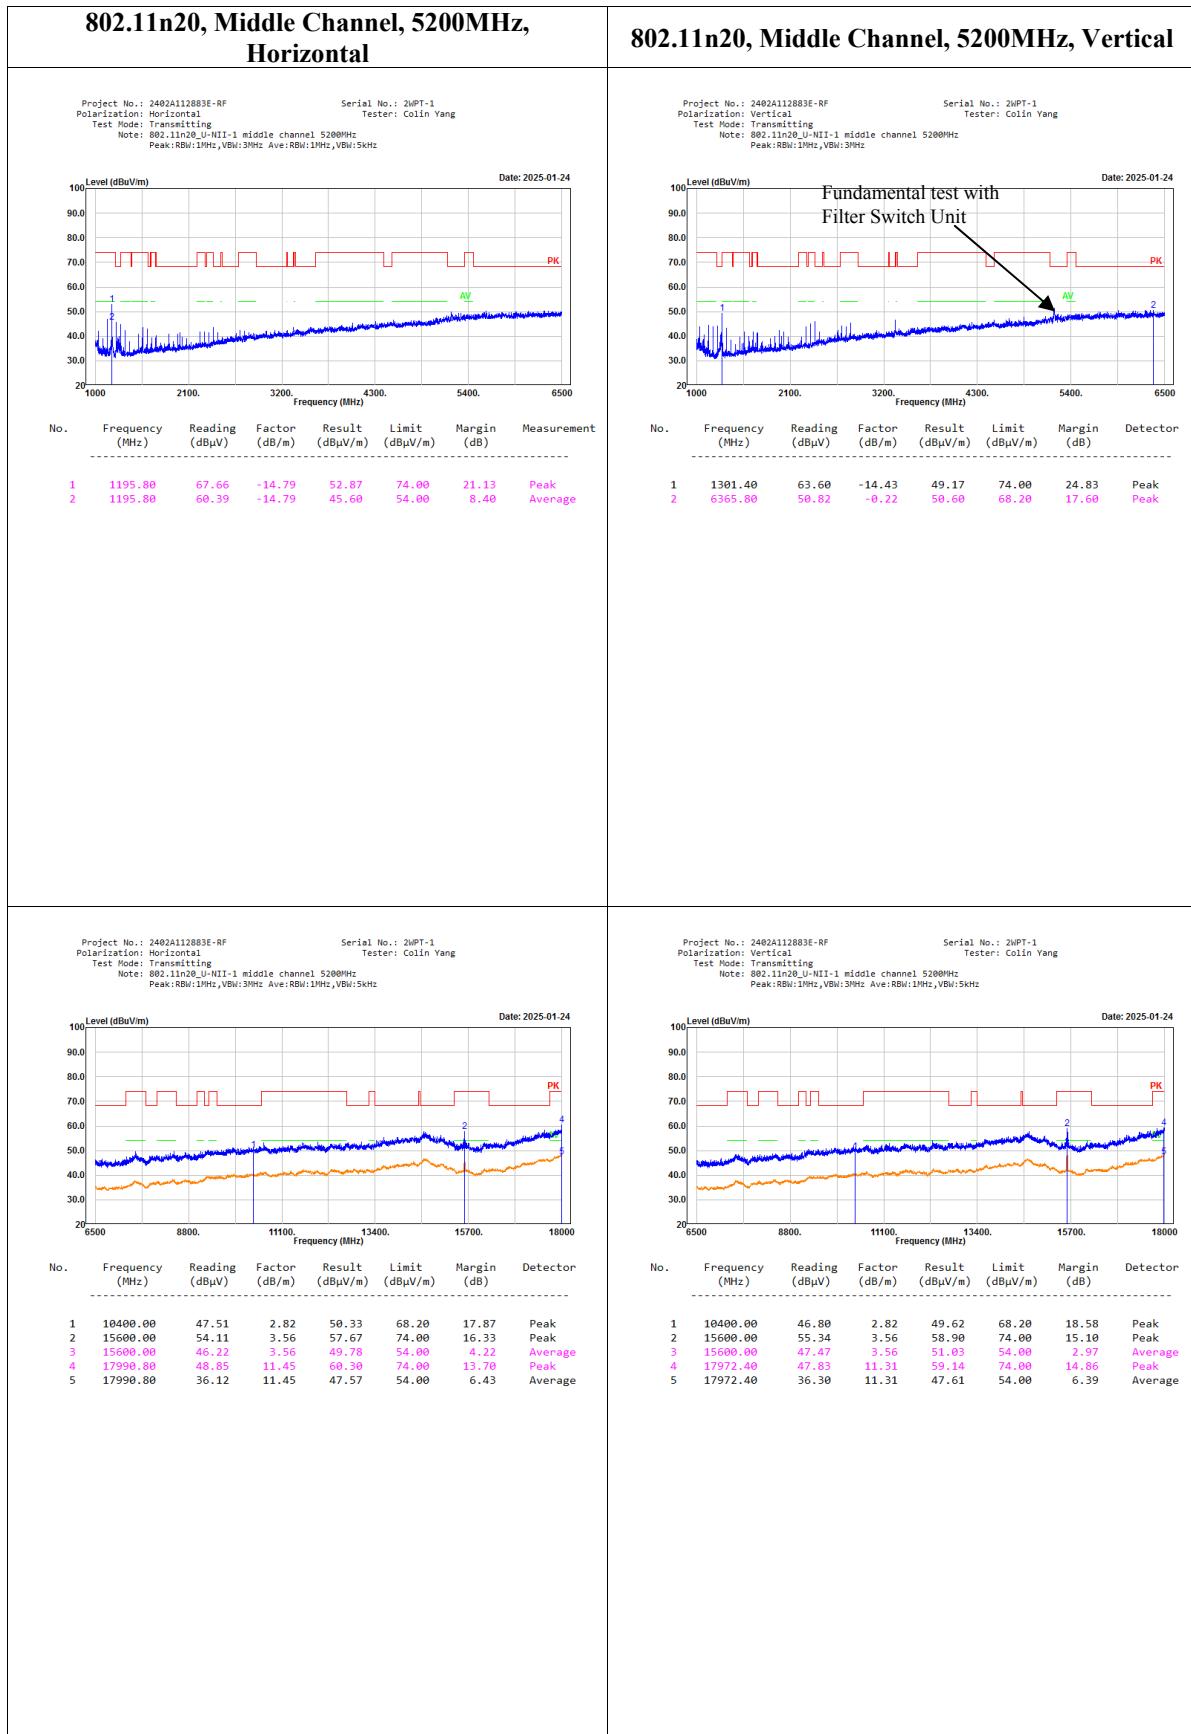

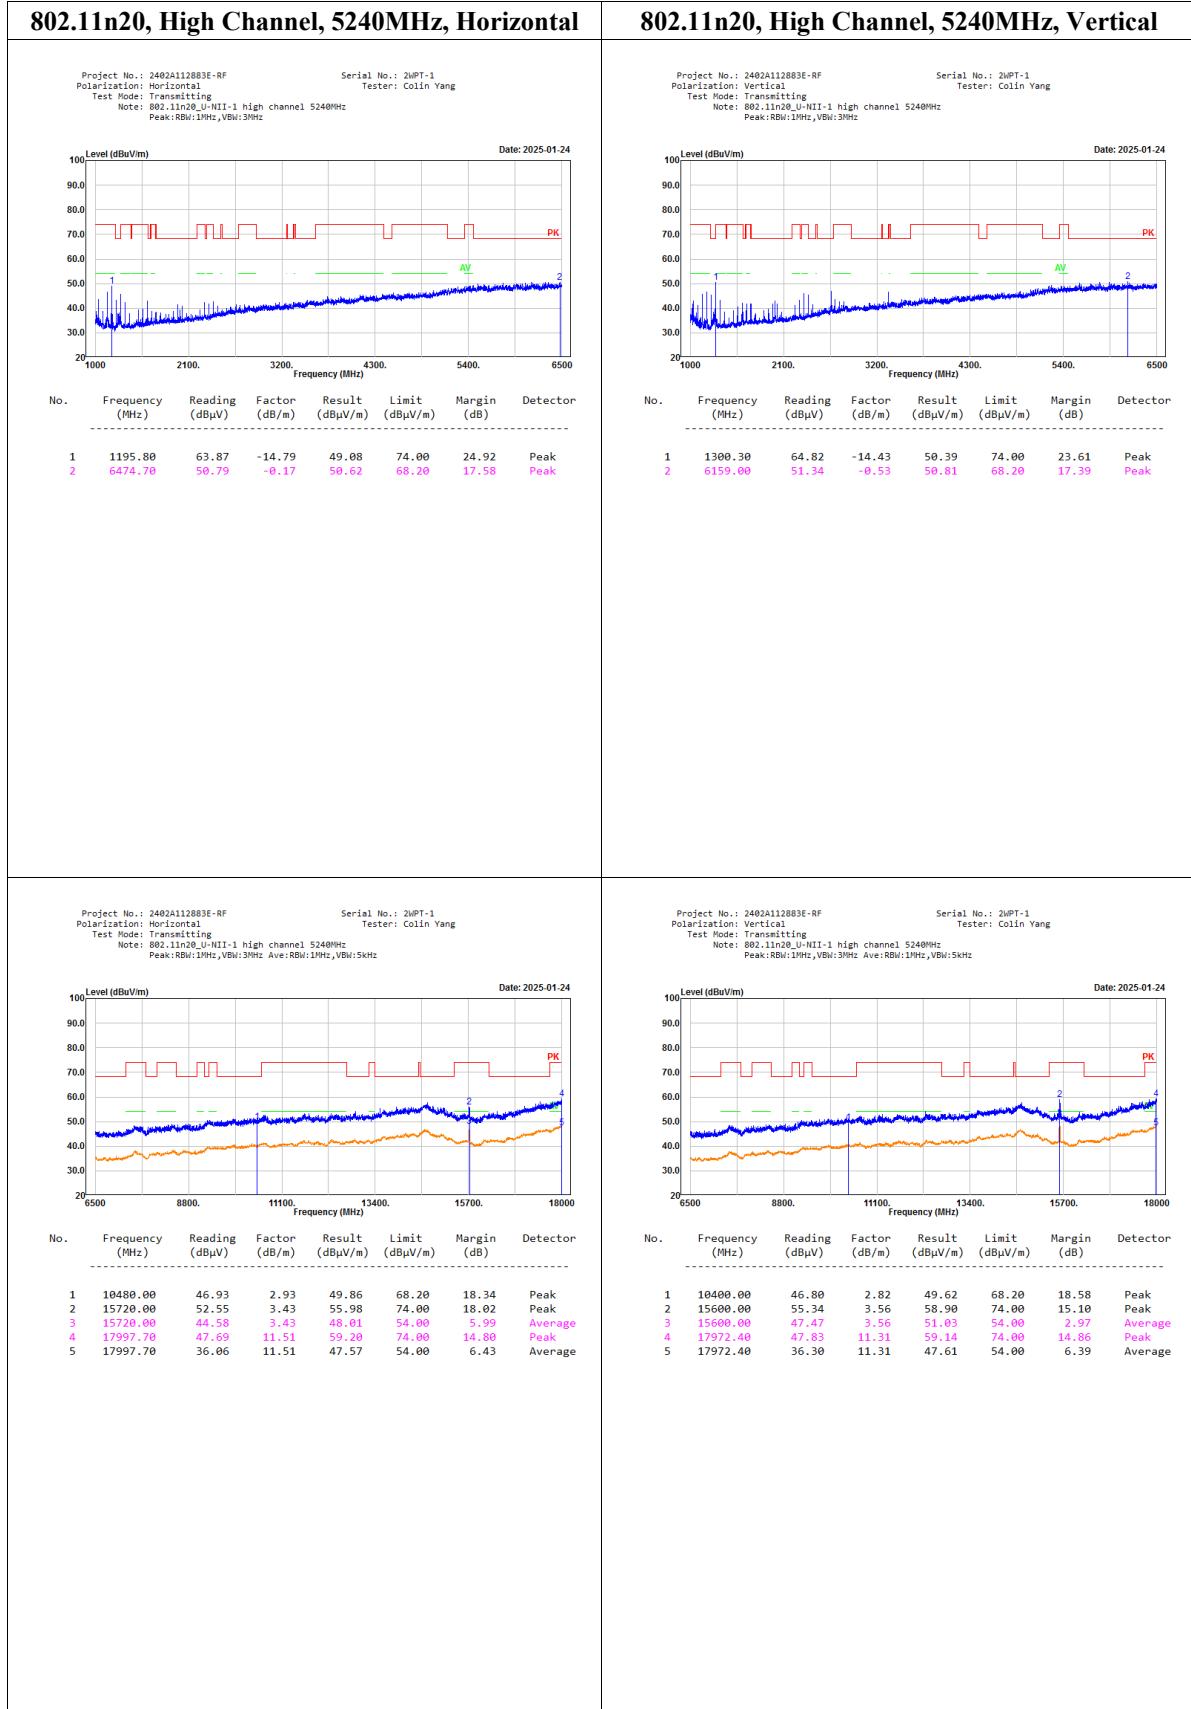


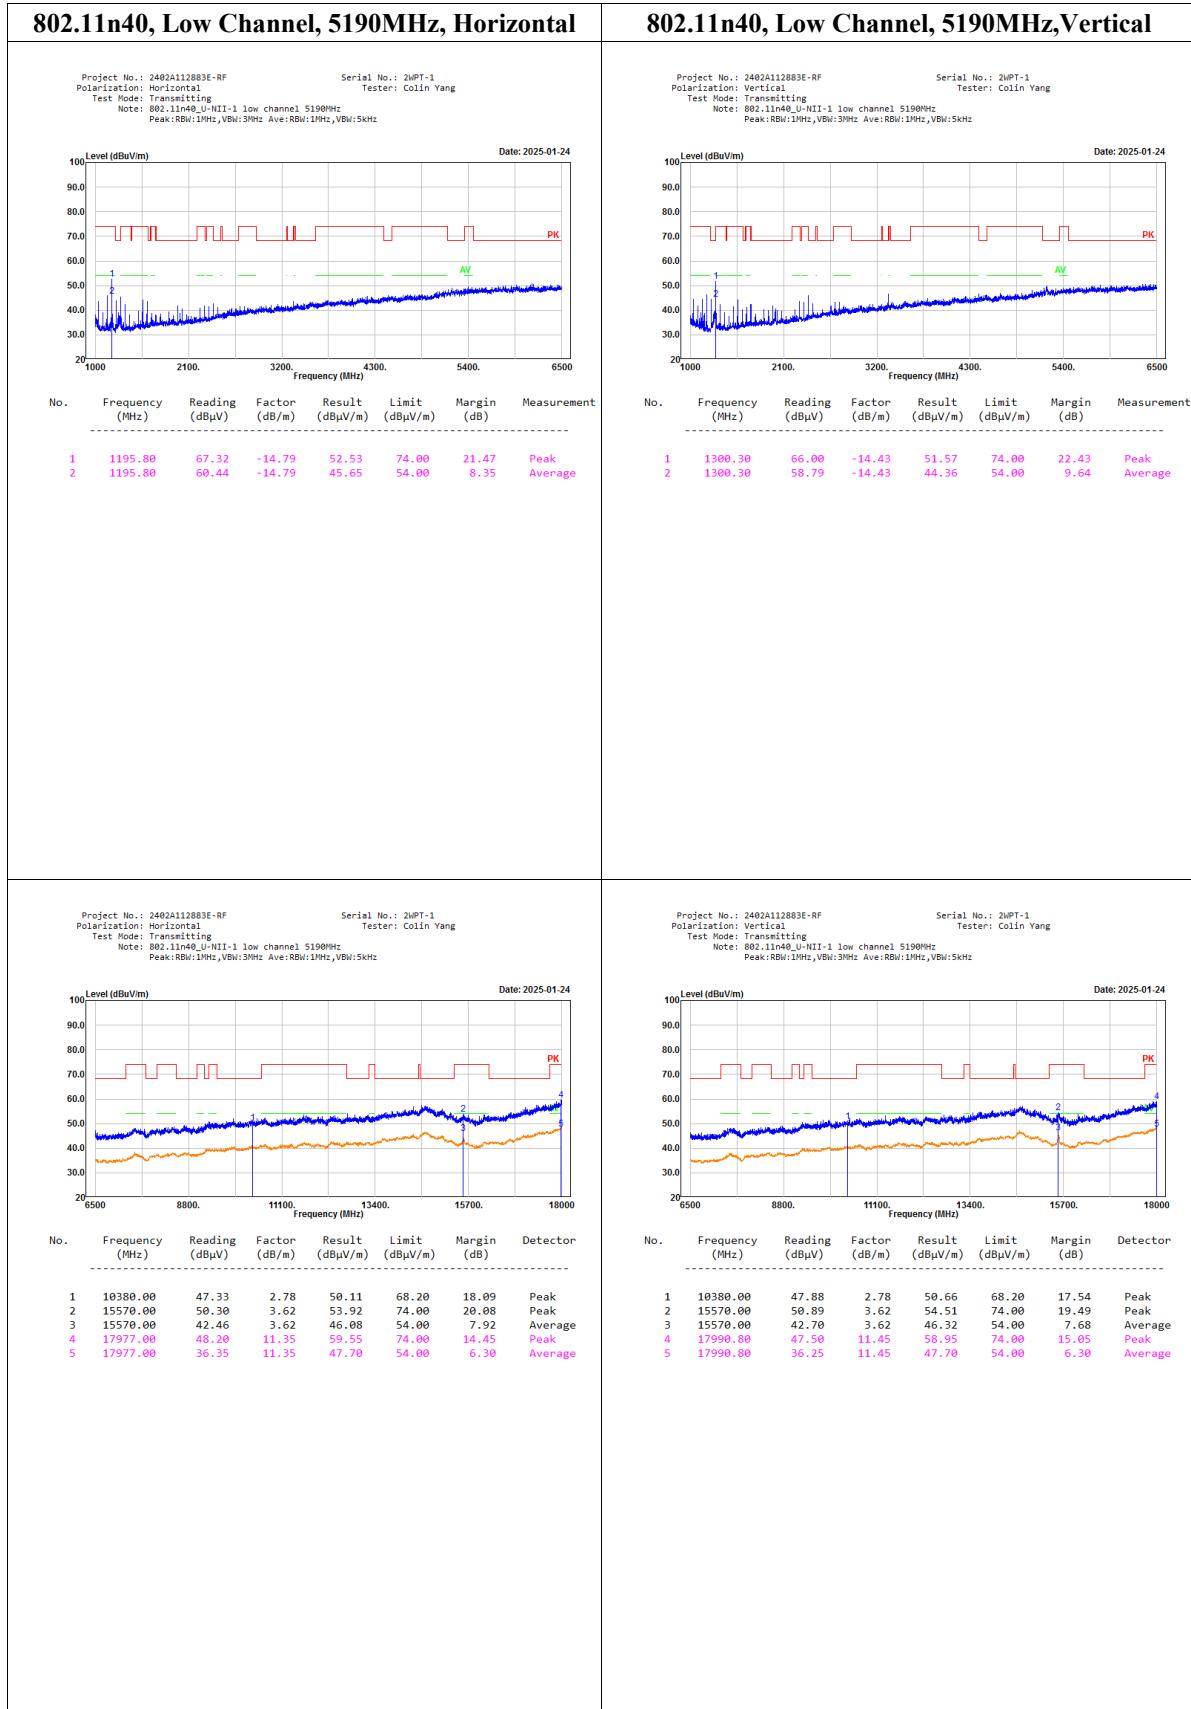

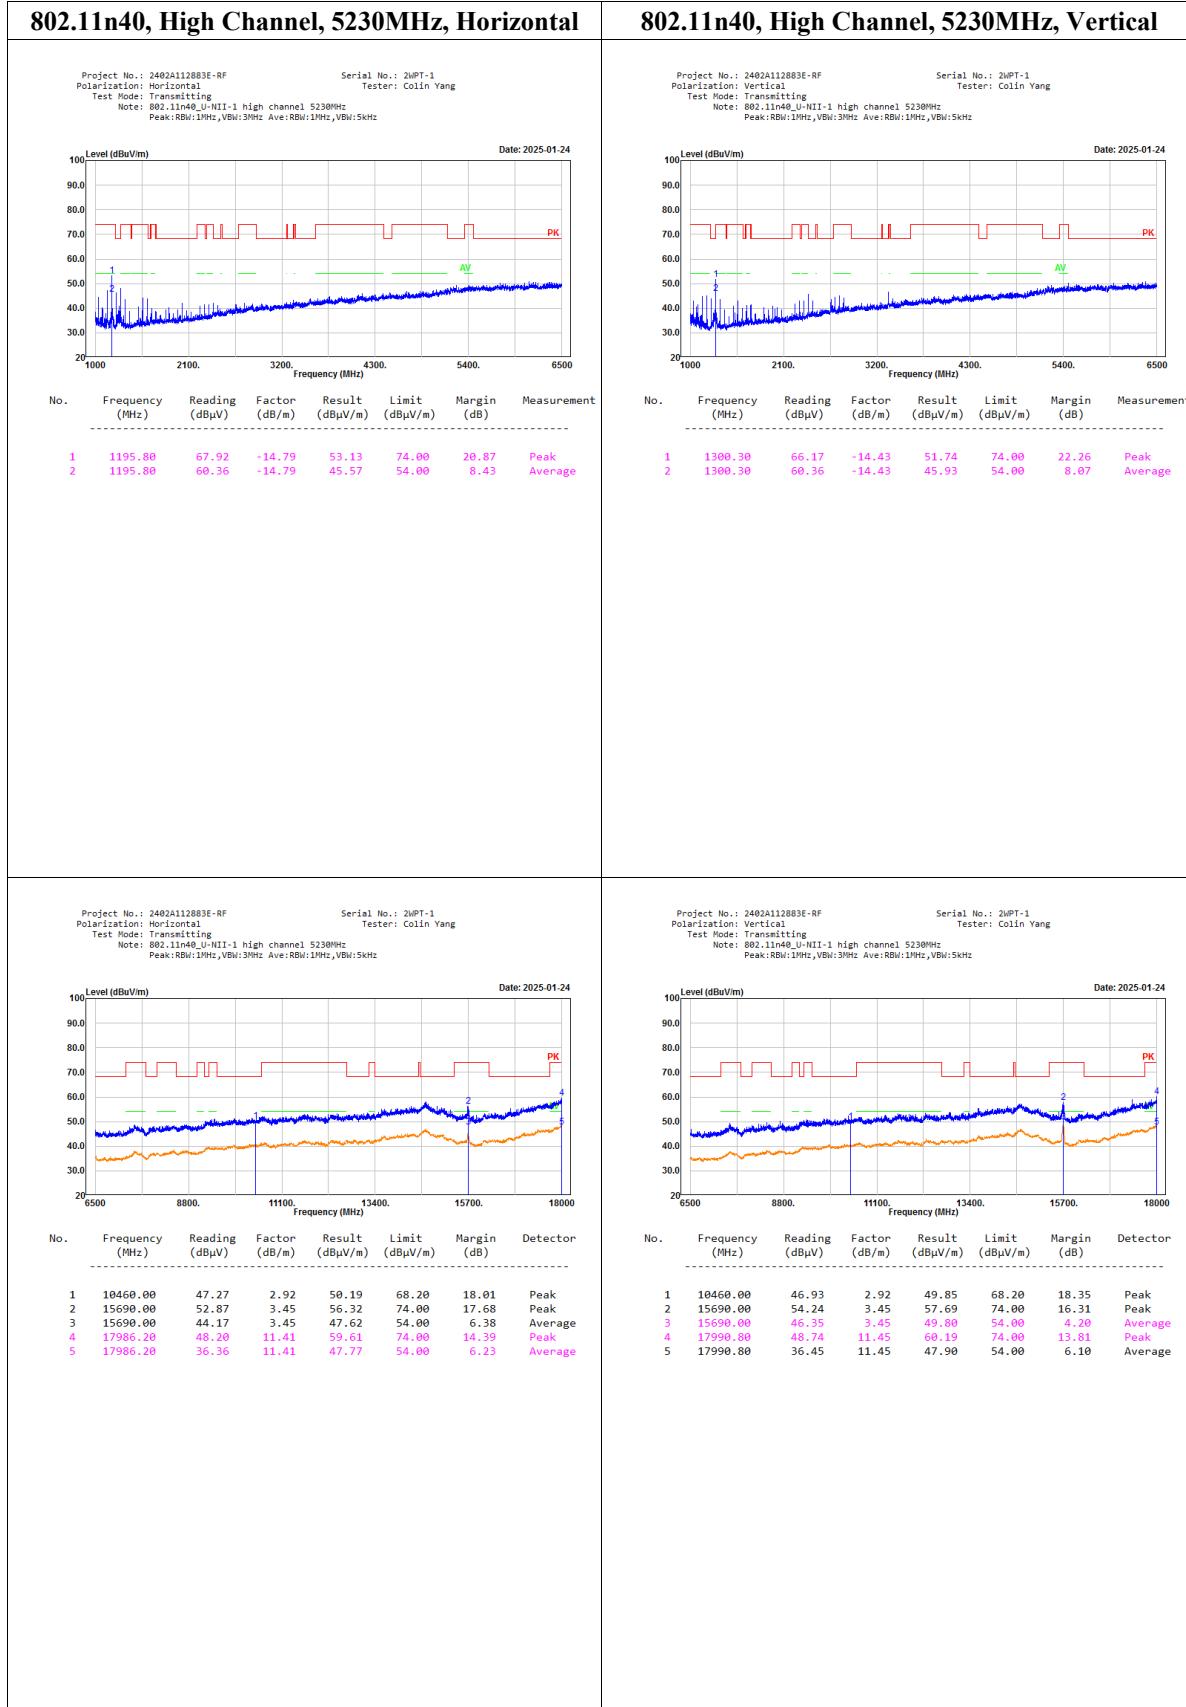





18GHz-40GHz:

Note: No Emission was detected in the range 18GHz-40GHz, the maximum output power mode and channel: 802.11a lowest channel (5180MHz) was tested.

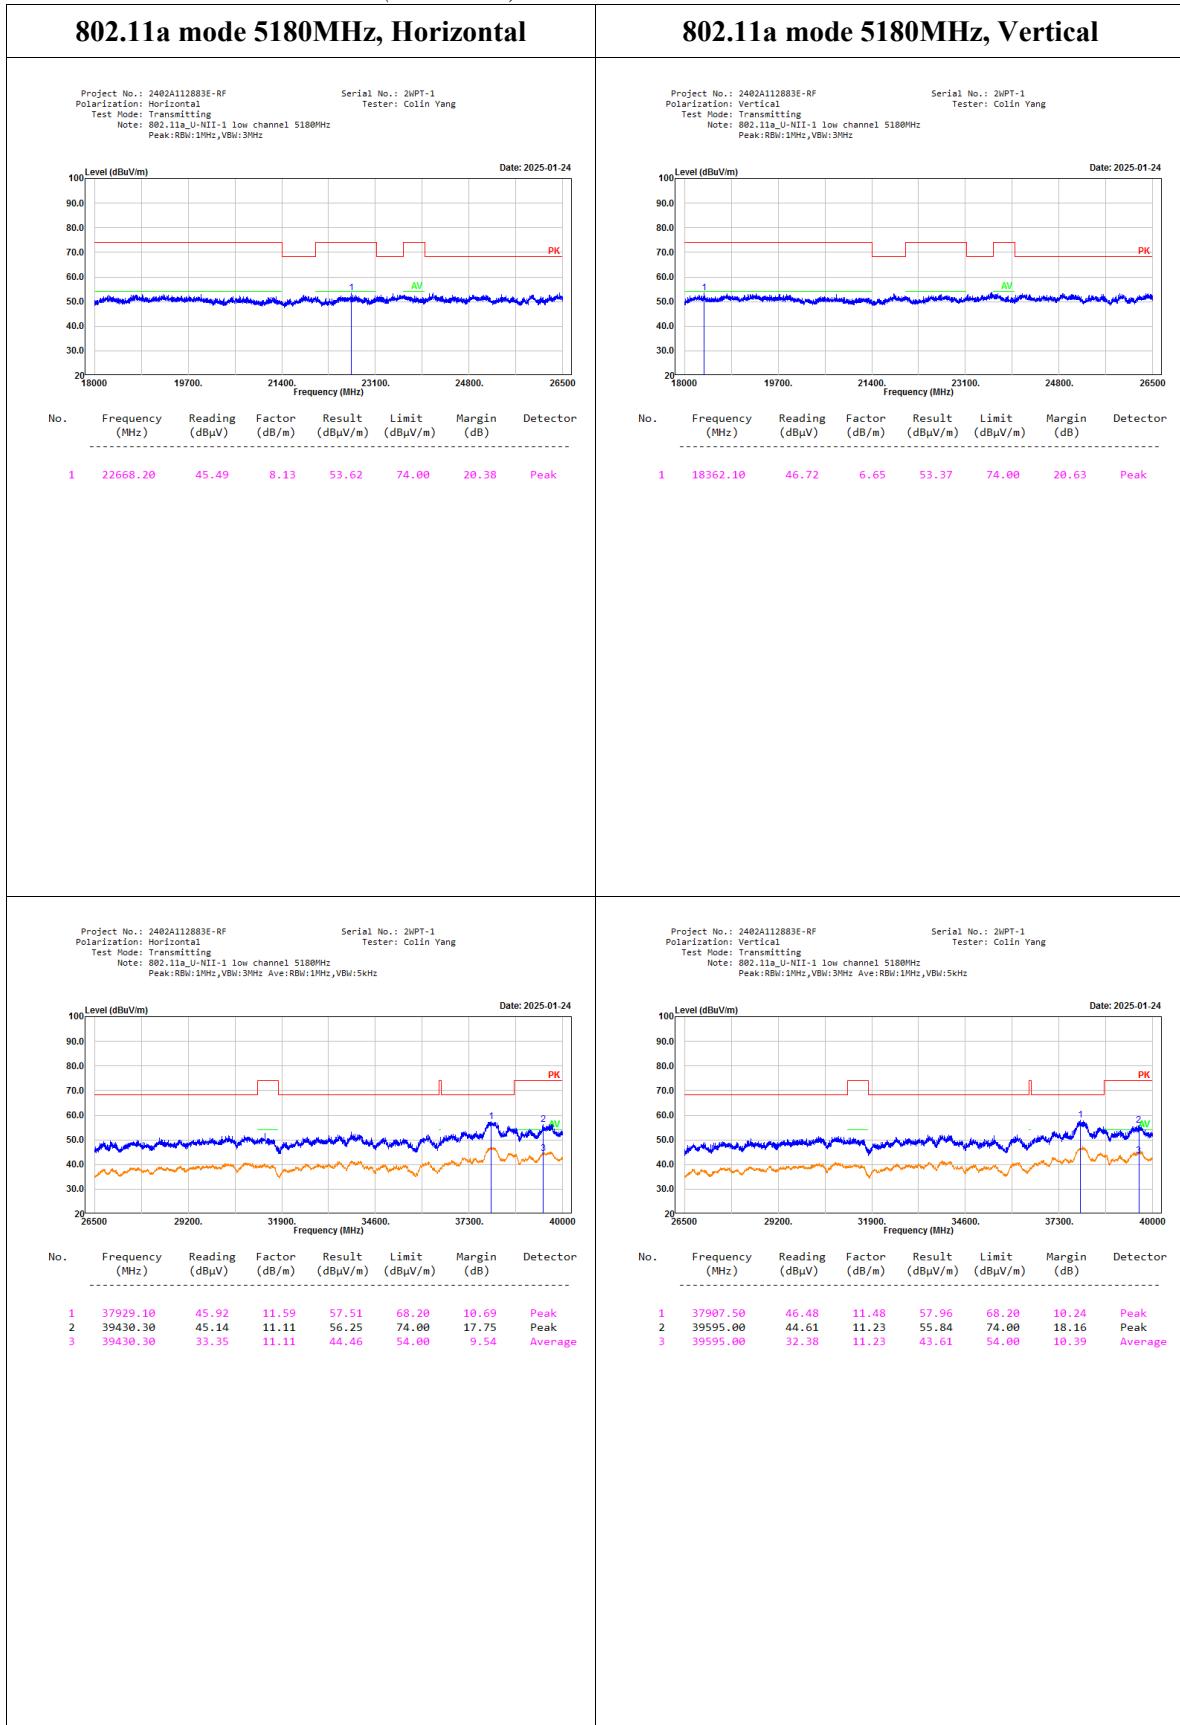

Bandedge:
5150-5250MHz:

802.11a, 5180MHz, Bandedge, Horizontal							802.11a, 5180MHz, Bandedge, Vertical																																																																						
<p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>							<p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>																																																																						
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>5150.00</td><td>51.93</td><td>6.53</td><td>58.46</td><td>74.00</td><td>15.54</td><td>Peak</td></tr> <tr> <td>2</td><td>5150.00</td><td>39.43</td><td>6.53</td><td>45.96</td><td>54.00</td><td>8.04</td><td>Average</td></tr> </tbody> </table>							No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5150.00	51.93	6.53	58.46	74.00	15.54	Peak	2	5150.00	39.43	6.53	45.96	54.00	8.04	Average	<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>5148.10</td><td>56.66</td><td>6.52</td><td>63.18</td><td>74.00</td><td>10.82</td><td>Peak</td></tr> <tr> <td>2</td><td>5148.10</td><td>39.53</td><td>6.52</td><td>46.05</td><td>54.00</td><td>7.95</td><td>Average</td></tr> <tr> <td>3</td><td>5150.00</td><td>54.41</td><td>6.53</td><td>60.94</td><td>74.00</td><td>13.86</td><td>Peak</td></tr> <tr> <td>4</td><td>5150.00</td><td>40.89</td><td>6.53</td><td>47.42</td><td>54.00</td><td>6.58</td><td>Average</td></tr> </tbody> </table>							No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5148.10	56.66	6.52	63.18	74.00	10.82	Peak	2	5148.10	39.53	6.52	46.05	54.00	7.95	Average	3	5150.00	54.41	6.53	60.94	74.00	13.86	Peak	4	5150.00	40.89	6.53	47.42	54.00	6.58	Average
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																																						
1	5150.00	51.93	6.53	58.46	74.00	15.54	Peak																																																																						
2	5150.00	39.43	6.53	45.96	54.00	8.04	Average																																																																						
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																																						
1	5148.10	56.66	6.52	63.18	74.00	10.82	Peak																																																																						
2	5148.10	39.53	6.52	46.05	54.00	7.95	Average																																																																						
3	5150.00	54.41	6.53	60.94	74.00	13.86	Peak																																																																						
4	5150.00	40.89	6.53	47.42	54.00	6.58	Average																																																																						
<p>802.11a, 5240MHz, Bandedge, Horizontal</p>							<p>802.11a, 5240MHz, Bandedge, Vertical</p>																																																																						
<p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>							<p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>																																																																						
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>5350.00</td><td>51.46</td><td>7.10</td><td>58.56</td><td>74.00</td><td>15.44</td><td>Peak</td></tr> <tr> <td>2</td><td>5350.00</td><td>39.30</td><td>7.10</td><td>46.40</td><td>54.00</td><td>7.60</td><td>Average</td></tr> </tbody> </table>							No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5350.00	51.46	7.10	58.56	74.00	15.44	Peak	2	5350.00	39.30	7.10	46.40	54.00	7.60	Average	<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBμV)</th><th>Factor (dB/m)</th><th>Result (dBμV/m)</th><th>Limit (dBμV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>5350.00</td><td>50.63</td><td>7.10</td><td>57.73</td><td>74.00</td><td>16.27</td><td>Peak</td></tr> <tr> <td>2</td><td>5350.00</td><td>38.98</td><td>7.10</td><td>46.08</td><td>54.00</td><td>7.92</td><td>Average</td></tr> </tbody> </table>							No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5350.00	50.63	7.10	57.73	74.00	16.27	Peak	2	5350.00	38.98	7.10	46.08	54.00	7.92	Average																
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																																						
1	5350.00	51.46	7.10	58.56	74.00	15.44	Peak																																																																						
2	5350.00	39.30	7.10	46.40	54.00	7.60	Average																																																																						
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																																						
1	5350.00	50.63	7.10	57.73	74.00	16.27	Peak																																																																						
2	5350.00	38.98	7.10	46.08	54.00	7.92	Average																																																																						
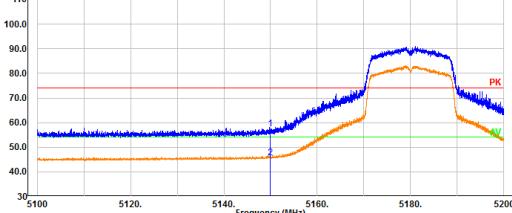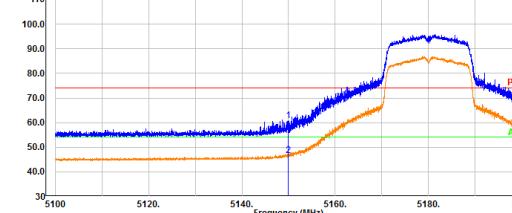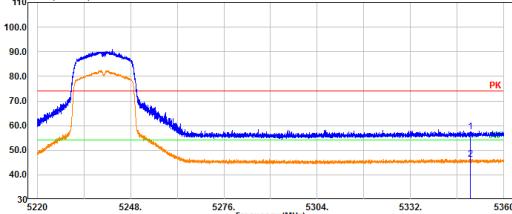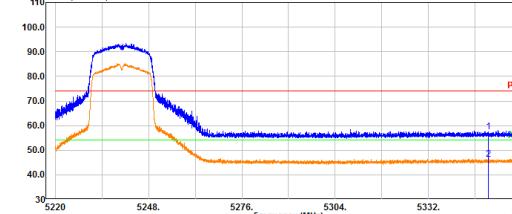
<p>802.11n20, 5180MHz, Bandedge, Horizontal</p> <p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11n20_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2MPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>  <p>No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector</p> <table border="1"> <tr> <td>1</td> <td>5150.00</td> <td>51.00</td> <td>6.53</td> <td>57.53</td> <td>74.00</td> <td>16.47</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>39.25</td> <td>6.53</td> <td>45.78</td> <td>54.00</td> <td>8.22</td> <td>Average</td> </tr> </table>	1	5150.00	51.00	6.53	57.53	74.00	16.47	Peak	2	5150.00	39.25	6.53	45.78	54.00	8.22	Average	<p>802.11n20, 5180MHz, Bandedge, Vertical</p> <p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11n20_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2MPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>  <p>No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector</p> <table border="1"> <tr> <td>1</td> <td>5150.00</td> <td>54.20</td> <td>6.53</td> <td>60.73</td> <td>74.00</td> <td>13.27</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>39.98</td> <td>6.53</td> <td>46.51</td> <td>54.00</td> <td>7.49</td> <td>Average</td> </tr> </table>	1	5150.00	54.20	6.53	60.73	74.00	13.27	Peak	2	5150.00	39.98	6.53	46.51	54.00	7.49	Average
1	5150.00	51.00	6.53	57.53	74.00	16.47	Peak																										
2	5150.00	39.25	6.53	45.78	54.00	8.22	Average																										
1	5150.00	54.20	6.53	60.73	74.00	13.27	Peak																										
2	5150.00	39.98	6.53	46.51	54.00	7.49	Average																										
<p>802.11n20, 5240MHz, Bandedge, Horizontal</p> <p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11n20_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2MPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>  <p>No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector</p> <table border="1"> <tr> <td>1</td> <td>5350.00</td> <td>50.24</td> <td>7.10</td> <td>57.34</td> <td>74.00</td> <td>16.66</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>39.14</td> <td>7.10</td> <td>46.24</td> <td>54.00</td> <td>7.76</td> <td>Average</td> </tr> </table>	1	5350.00	50.24	7.10	57.34	74.00	16.66	Peak	2	5350.00	39.14	7.10	46.24	54.00	7.76	Average	<p>802.11n20, 5240MHz, Bandedge, Vertical</p> <p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11n20_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2MPT-1 Tester: Colin Yang</p> <p>Date: 2025-01-24</p>  <p>No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector</p> <table border="1"> <tr> <td>1</td> <td>5350.00</td> <td>50.24</td> <td>7.10</td> <td>57.34</td> <td>74.00</td> <td>16.66</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>39.32</td> <td>7.10</td> <td>46.42</td> <td>54.00</td> <td>7.58</td> <td>Average</td> </tr> </table>	1	5350.00	50.24	7.10	57.34	74.00	16.66	Peak	2	5350.00	39.32	7.10	46.42	54.00	7.58	Average
1	5350.00	50.24	7.10	57.34	74.00	16.66	Peak																										
2	5350.00	39.14	7.10	46.24	54.00	7.76	Average																										
1	5350.00	50.24	7.10	57.34	74.00	16.66	Peak																										
2	5350.00	39.32	7.10	46.42	54.00	7.58	Average																										

802.11n40, 5190MHz, Bandedge, Horizontal								802.11n40, 5190MHz, Bandedge, Vertical																																																							
<p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11n40_U-NII-1 low channel 5190MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p>				<p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11n40_U-NII-1 low channel 5190MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p>																																																											
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>53.61</td> <td>6.53</td> <td>60.14</td> <td>74.00</td> <td>13.86</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>42.35</td> <td>6.53</td> <td>48.88</td> <td>54.00</td> <td>5.12</td> <td>Average</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5150.00	53.61	6.53	60.14	74.00	13.86	Peak	2	5150.00	42.35	6.53	48.88	54.00	5.12	Average	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>57.69</td> <td>6.53</td> <td>64.22</td> <td>74.00</td> <td>9.78</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>44.48</td> <td>6.53</td> <td>51.01</td> <td>54.00</td> <td>2.99</td> <td>Average</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5150.00	57.69	6.53	64.22	74.00	9.78	Peak	2	5150.00	44.48	6.53	51.01	54.00	2.99	Average
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																								
1	5150.00	53.61	6.53	60.14	74.00	13.86	Peak																																																								
2	5150.00	42.35	6.53	48.88	54.00	5.12	Average																																																								
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																								
1	5150.00	57.69	6.53	64.22	74.00	9.78	Peak																																																								
2	5150.00	44.48	6.53	51.01	54.00	2.99	Average																																																								
802.11n40, 5230MHz, Bandedge, Horizontal								802.11n40, 5230MHz, Bandedge, Vertical																																																							
<p>Project No.: 2402A112883E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11n40_U-NII-1 high channel 5230MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p>				<p>Project No.: 2402A112883E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11n40_U-NII-1 high channel 5230MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz</p> <p>Serial No.: 2WPT-1 Tester: Colin Yang</p>																																																											
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>50.96</td> <td>7.10</td> <td>58.06</td> <td>74.00</td> <td>15.94</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>39.15</td> <td>7.10</td> <td>46.25</td> <td>54.00</td> <td>7.75</td> <td>Average</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5350.00	50.96	7.10	58.06	74.00	15.94	Peak	2	5350.00	39.15	7.10	46.25	54.00	7.75	Average	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>50.40</td> <td>7.10</td> <td>57.50</td> <td>74.00</td> <td>16.50</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5350.00</td> <td>39.30</td> <td>7.10</td> <td>46.40</td> <td>54.00</td> <td>7.60</td> <td>Average</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	1	5350.00	50.40	7.10	57.50	74.00	16.50	Peak	2	5350.00	39.30	7.10	46.40	54.00	7.60	Average
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																								
1	5350.00	50.96	7.10	58.06	74.00	15.94	Peak																																																								
2	5350.00	39.15	7.10	46.25	54.00	7.75	Average																																																								
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector																																																								
1	5350.00	50.40	7.10	57.50	74.00	16.50	Peak																																																								
2	5350.00	39.30	7.10	46.40	54.00	7.60	Average																																																								

5.3 Emission Bandwidth

Test Information:

Serial No.:	2WPT-2	Test Date:	2025/1/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.2
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	100152	2024/4/1	2025/3/31
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


26dB Emission Bandwidth

5150-5250MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	36.923
	5200	35.946
	5240	36.795
802.11n20	5180	40.962
	5200	40.673
	5240	41.683
802.11n40	5190	73.029
	5230	73.846

5150-5250MHz


802.11a_5180MHz

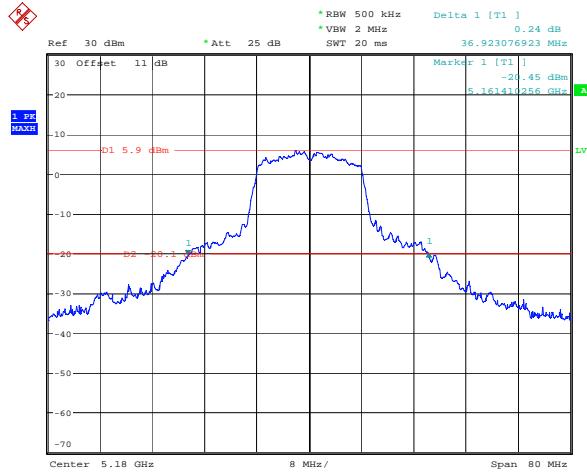


802.11a_5200MHz

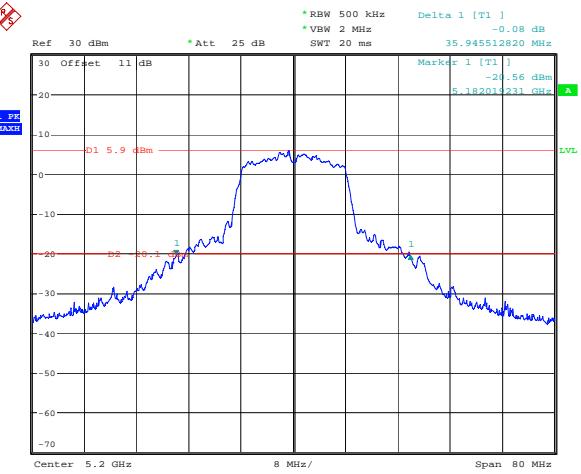


802.11a_5240MHz

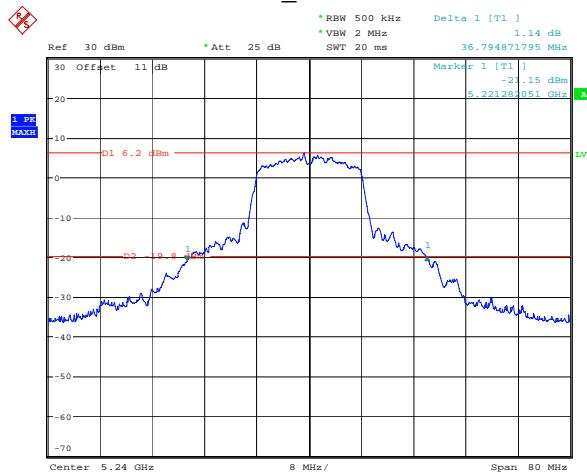


802.11n20_5180MHz

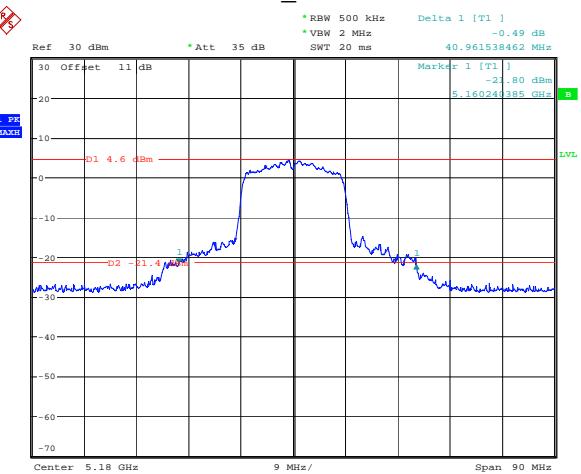


802.11n20_5200MHz

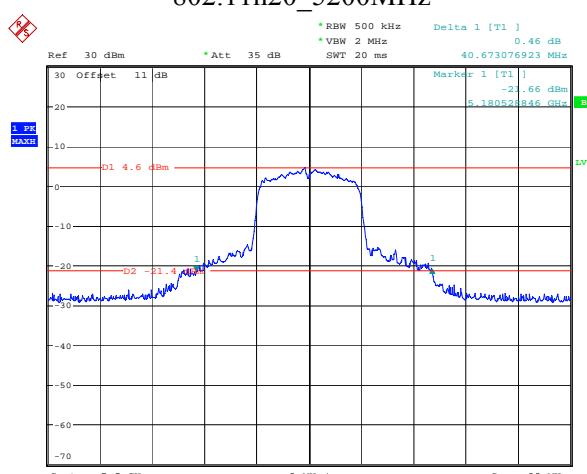

802.11n20_5240MHz

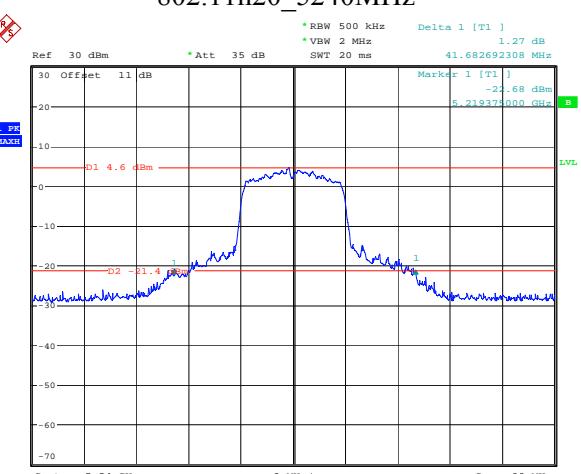


802.11n40_5190MHz

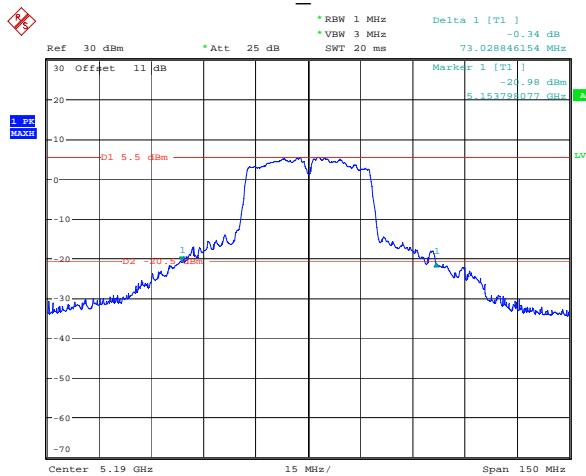

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:41:13

802.11n40_5230MHz

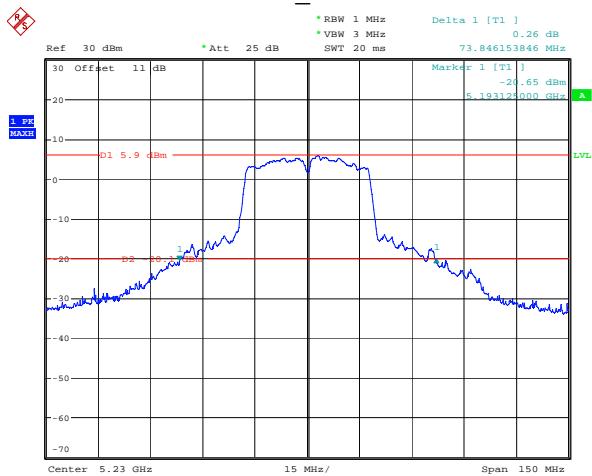

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:43:30

5.4 99% Occupied Bandwidth

Test Information:

Serial No.:	2WPT-2	Test Date:	2025/1/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.2
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	100152	2024/4/1	2025/3/31
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250MHz


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	18.718
	5200	18.654
	5240	18.910
802.11n20	5180	18.205
	5200	18.333
	5240	18.205
802.11n40	5190	37.821
	5230	37.692

Note:


The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5150-5250MHz


802.11a_5180MHz

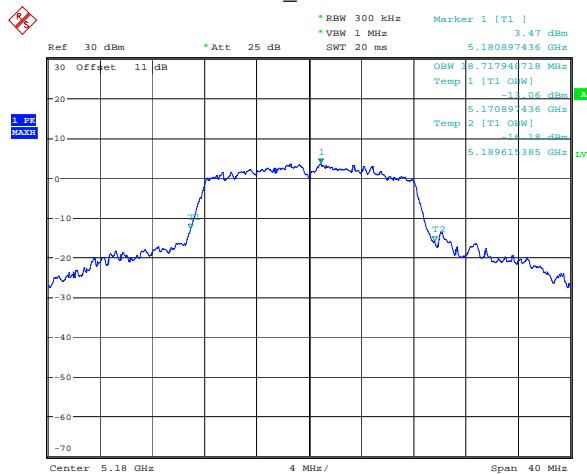


802.11a_5200MHz

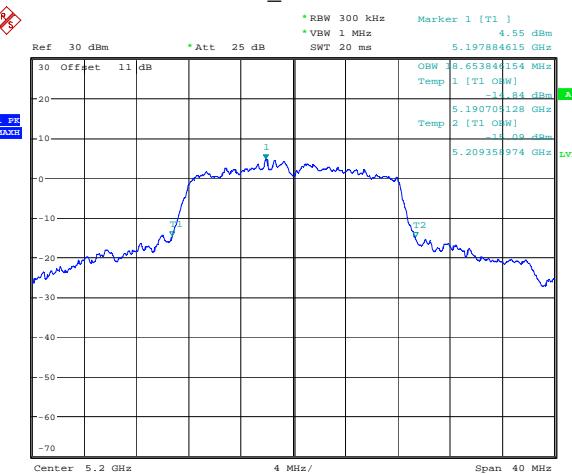


802.11a_5240MHz

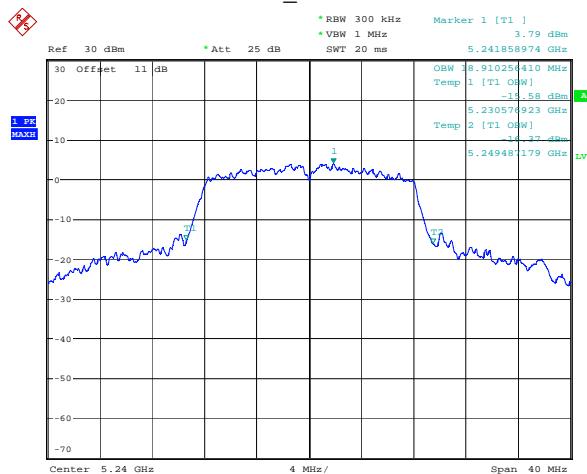


802.11n20_5180MHz

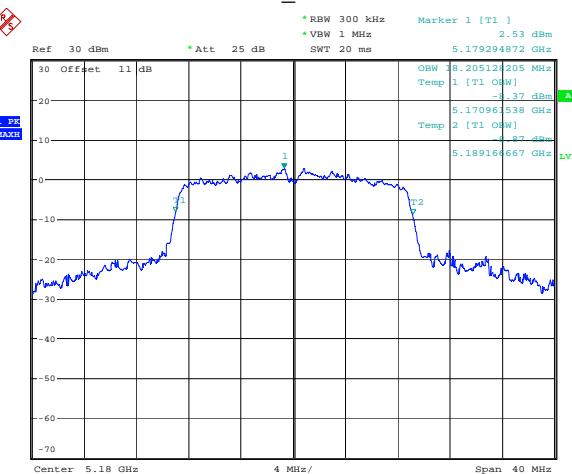


802.11n20_5200MHz

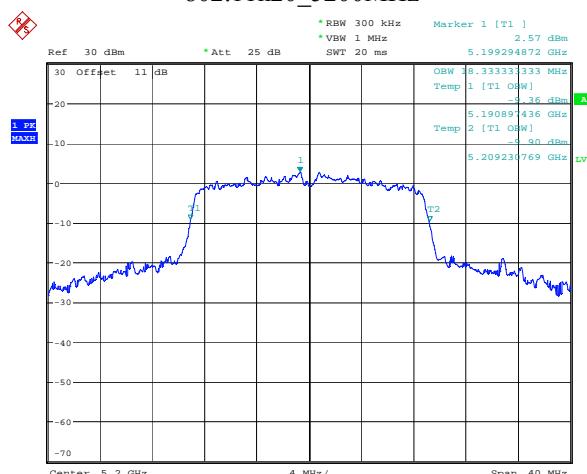

802.11n20_5240MHz

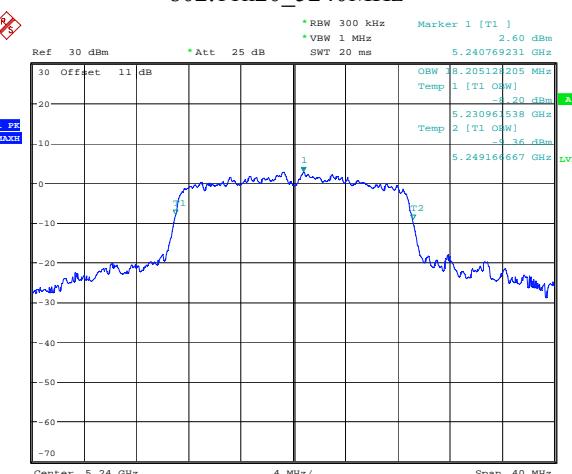


802.11n40_5190MHz

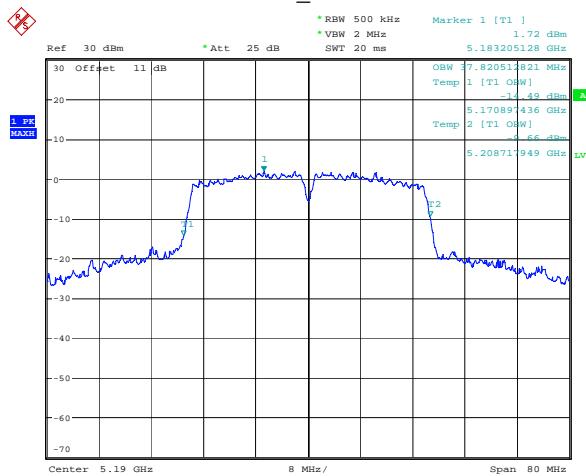

Comment: ProjectNo.:2402A112883E-RF Tester:Rini Yan
Date: 7.JAN.2025 13:46:59

802.11n40_5230MHz

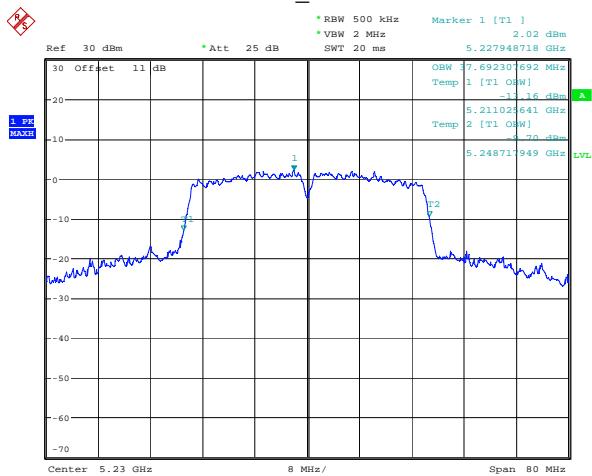

Comment: ProjectNo.:2402A112883E-RF Tester:Rini Yan
Date: 7.JAN.2025 13:47:27

5.5 Maximum Conducted Output Power

Test Information:

Serial No.:	2WPT-2	Test Date:	2025/1/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.2
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2024/9/4	2025/9/3
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Verdict
802.11a	5180	11.96	24	Pass
	5200	11.77	24	Pass
	5240	11.93	24	Pass
802.11n20	5180	9.74	24	Pass
	5200	9.72	24	Pass
	5240	9.97	24	Pass
802.11n40	5190	11.11	24	Pass
	5230	11.04	24	Pass

Note: The device is a client device.

5.6 Power Spectral Density

Test Information:

Serial No.:	2WPT-2	Test Date:	2025/1/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.2
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	100152	2024/4/1	2025/3/31
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

5150-5250MHz


Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5180	0.66	/	0.66	11	Pass
	5200	0.88	/	0.88	11	Pass
	5240	0.93	/	0.93	11	Pass
802.11n20	5180	-0.67	/	-0.67	11	Pass
	5200	-0.48	/	-0.48	11	Pass
	5240	-0.66	/	-0.66	11	Pass
802.11n40	5190	-3.52	/	-3.52	11	Pass
	5230	-3.20	/	-3.20	11	Pass

5150-5250MHz


802.11a_5180MHz

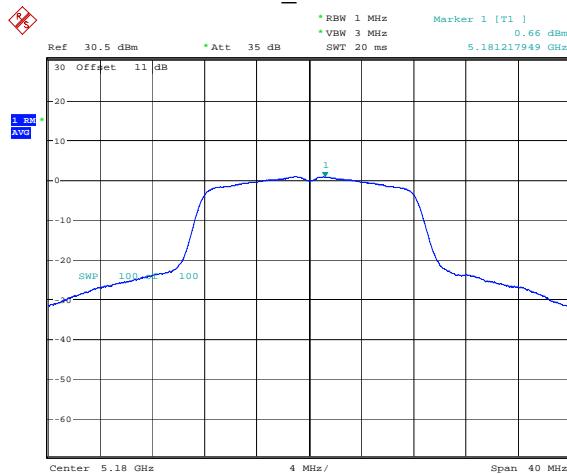


802.11a_5200MHz

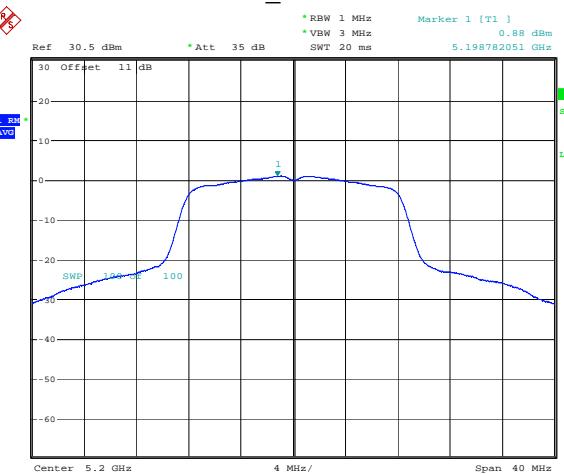


802.11a_5240MHz

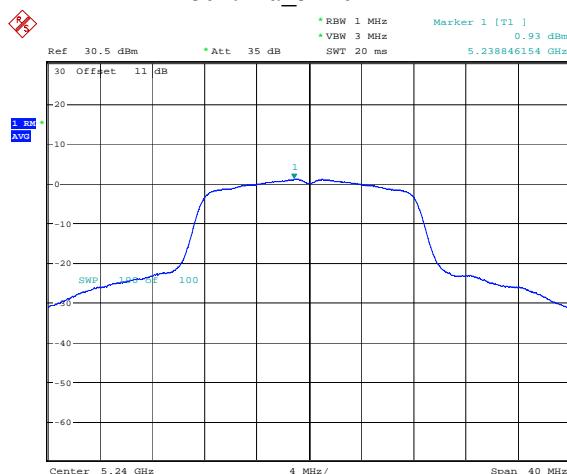


802.11n20_5180MHz

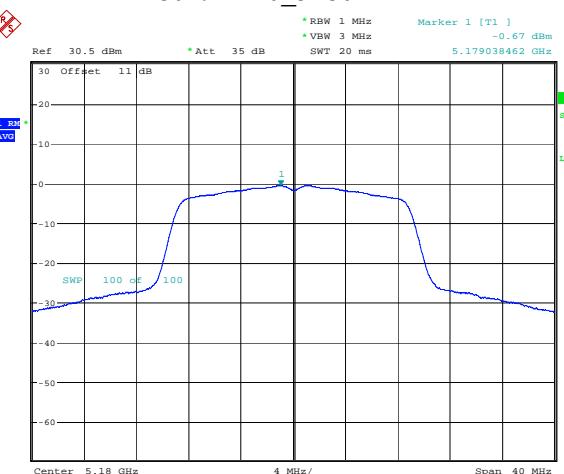


802.11n20_5200MHz

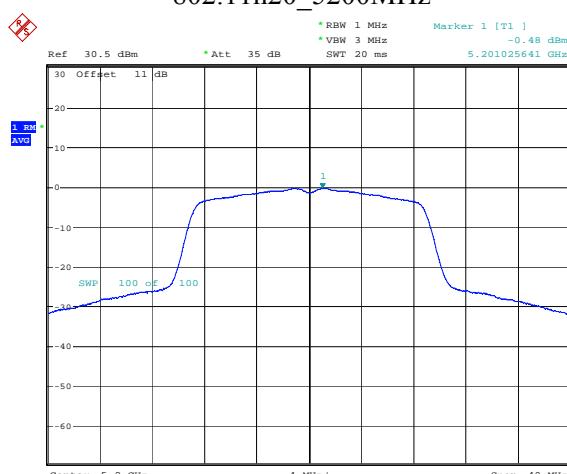

802.11n20_5240MHz

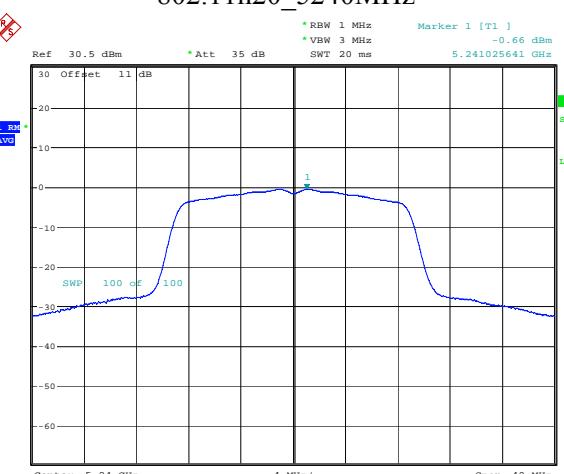


802.11n40_5190MHz

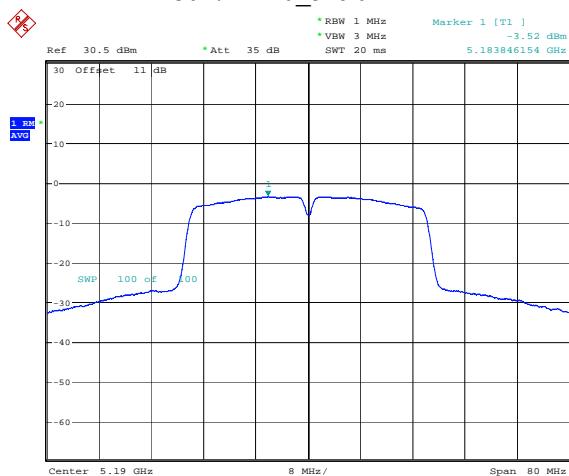

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:41:45

802.11n40_5230MHz

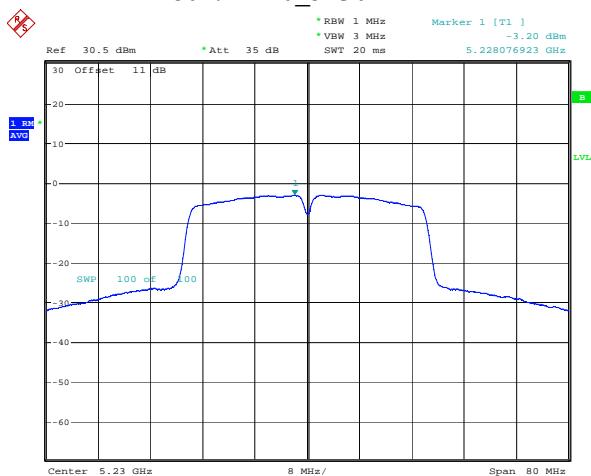

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:42:26

5.7 Duty Cycle

Test Information:

Serial No.:	2WPT-2	Test Date:	2025/1/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rini Yan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.2
-----------------------------	------	----------------------------------	----	-------------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	100152	2024/4/1	2025/3/31
Eastsheep	Coaxial Attenuator	2W-SMA-JK-6G-10dB	F-08-EM510	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

5150-5250MHz


Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (Hz)
802.11a	5200	100	100	100.00	/	/	10
802.11n20	5200	100	100	100.00	/	/	10
802.11n40	5190	100	100	100.00	/	/	10

5150-5250MHz

802.11a_5200MHz

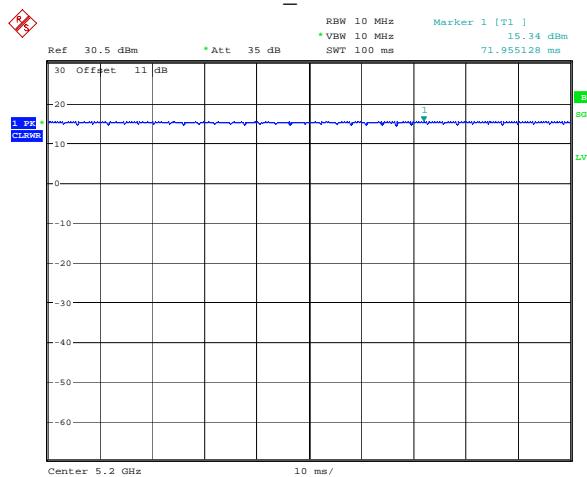

802.11n20_5200MHz

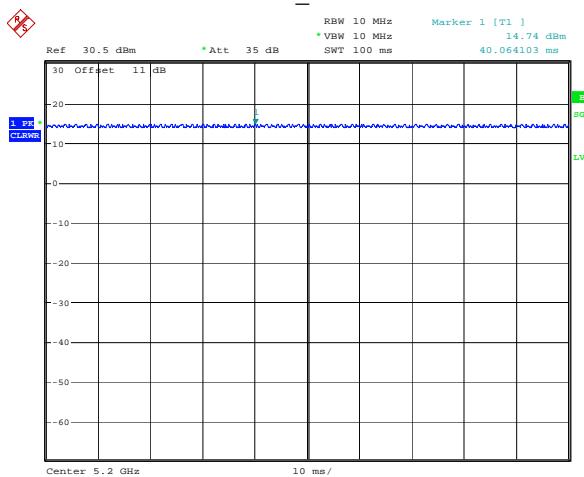

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:51:13

Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 14:00:39

802.11n40_5190MHz



Comment: ProjectNo.:2402A112883E-RFTester:Rini Yan
Date: 7.JAN.2025 13:56:15

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402A112883E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402A112883E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402A112883E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******