

Part acknowledgement

Full name of supplier: Dongguan Jerice Technology Co. , Ltd.

Address of supplier: 96 Long Wu Road, Tai Ling Shan, Dongguan (3F, building L, Kam Hung Tat Science and Technology Park)

Name of material: coil

Material specifications: E28-00026 coil \A11 6.3UH\ Single-share and single-tune
\20.5*43*0.08*105P 10TS\magnetic sheet Ø50*1.0MM\Kaikai \ texture of wood PC95
L=30MM\Adhesive tape \101.0159

Type and model: _____

Customer name: **Luoxin electronic**

Customer data: E28-00026

Sample delivery time: September 17, 2025

Notes: ☐ New materials: ☐ Alternative:

Acknowledge the results	☐ Qualified	☐ Disqualified
	Reasons for non-conformance:	
	Acceptance of non-conformance and sample handling: ☐ Return purchase ☐ Disposal	


DisposalSignature of supplier		
Applicant	Quality	Approved
Wang Liyang	Liang Meixiang	Lu Rusheng
Recognition Stamp		
Date: September 17, 2025		

Recognize the signature				
Applicant	Tester	Project	Quality	Approved
Recognition Star				
Date:				





一、 Table of contents :

1. Cover.....	1-1 页
2. Table of contents.....	2-2 页
3. Product drawings.....	3-3 页
4. A plan.....	4-4 页
5. Product parameters.....	5-5 页
6. Electrical parameters.....	5-5 页
7. Bill of materials.....	5-5 页
8. Packaging.....	6-6 页

二、Product drawing:

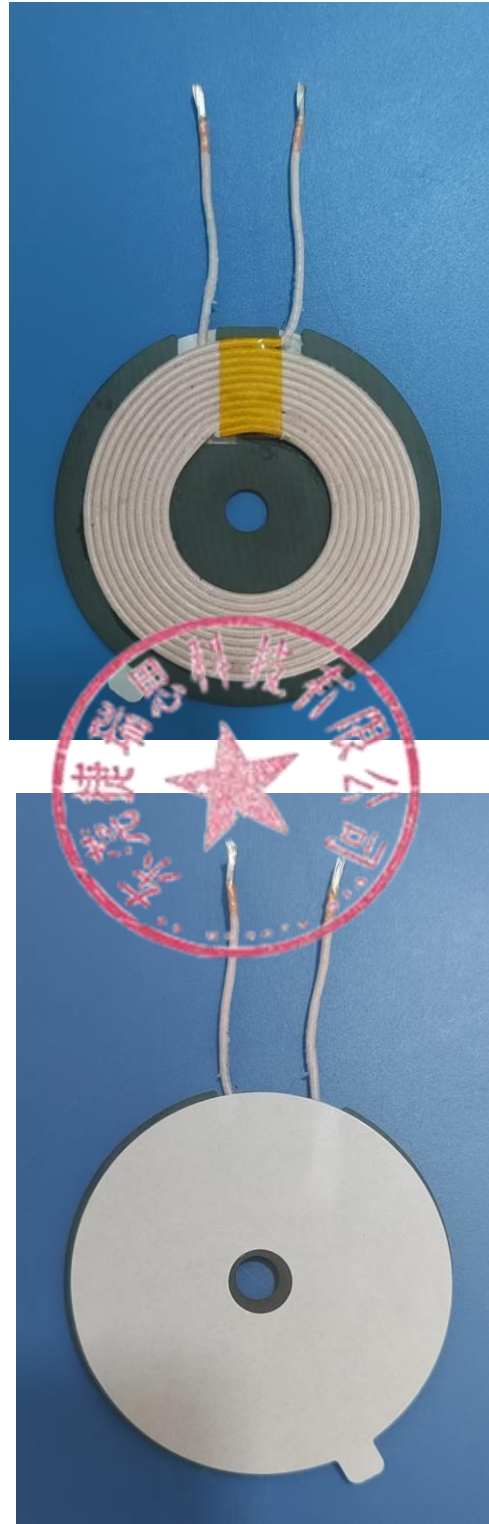

三、 Floor plan: unit: MM

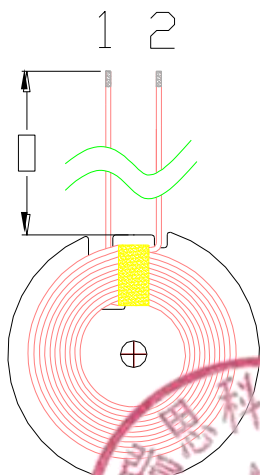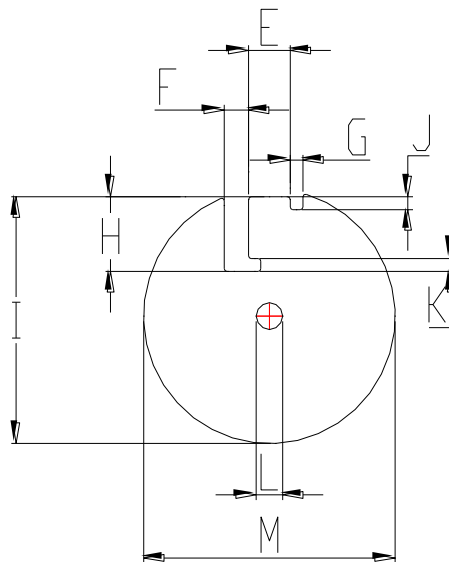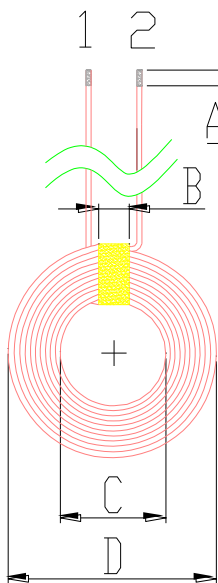

A	4.0±1
B	8
C	20.5±0.5
D	42.5±0.5
E	8.0±0.3
F	5.0±0.3
G	2.5±0.3
H	15±1
I	48±0.5
J	2.5±0.3
K	2.5±0.3
L	5.3±0.2
M	50±0.5
N	1.0±0.1
□	30±1



四. Product parameters:					
Number of turns	Diameter of the line	of winding is sparse/dense	Direction of winding	Intersection yes/No	Positive/negative coil
1-2 /10TS	0.08*105P Silk wrapped needle	Encircling	Counterclockwise	yes	Counter-post
All materials required to meet ROHS standards					
五. Electrical characteristics					
temperature: $25^{\circ} \pm 10C$ Shiguang: $65^{\circ} \pm 10\%$ Temperature: $250 \pm 10c$ humidity: $65o \pm 10\%$					
Serial number	Project	Terminal	Standards	conditions	equipment
1	IND	1-2	Pin plus magnetic disk: Dianbu: $6.3 \pm 10\mu H$ Q 值: ≥ 45 DCR 值: $0.05 \Omega \pm 5\%$	100kHz/ 1.0Vrms	LCZ METER 1062A
六. Bill of materials:					
Serial number	Name of material	Description of product name	Material Code	Vendor Code	
1	Wire	0.08*105P Silk wrapped needle	IR-80-0047	WH	
2	Ferrite	G50*5.3*1.0MM Hard magnetic sheet		TK	
3	Double-sided glue	48*8MM (Tear people with hands)	OT-17	HH	
4	Glue	transparent adhesive tap	BL-0001	BY	
5	Tin strips	Environmentally friendly lead-free solder rod	SC-001	QD	
6	High temperature adhesive tape	8MM	JD--0005	LK	

七、Packaging:

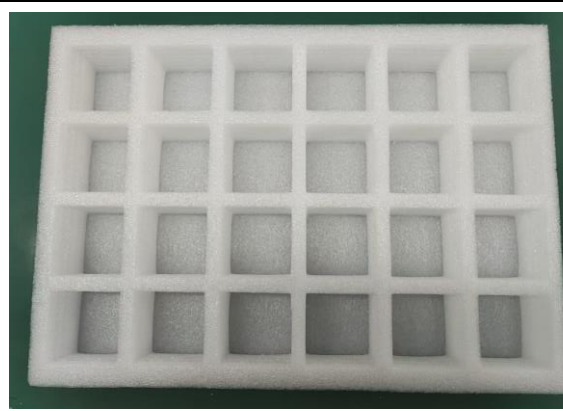


Figure 1: Single-layer foam tray, 1 box packing 408pcs



Figure 2: Uniform Direction Line head up neatly into the disk

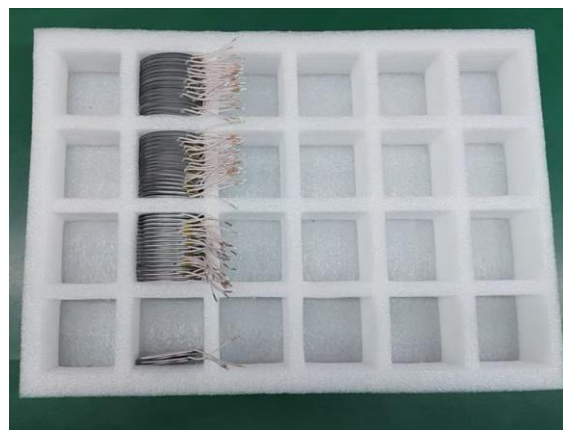


Figure 3: put into the packing box, each box put 5 layers



Figure 4: sealing the box with transparent glue

Dongguan Jerice Technology Co. , Ltd.			
Feed label			client: JX
supplier	LX1265		ROHS
Pindong	coil		
stock number	E28-00026		
specifications	E28-00026 coil \A11 6.3UH\ Single-share and single-tune \20.5*43*0.08*105P 10TS\magnetic sheet Ø50*1.0MM\Kaicai\texture of wood PC95 L=30MM\Adhesive tape\101.0159		
delivery date	September 17,2025		

Figure 5: Packing box labeling



Figure 6: materials stacked, neat, labels to facilitate the search for materials