

Prüfbericht-Nr.: Test report no.:	CN256J3E 002	Auftrags-Nr.: Order no.:	168541455	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-02-19	
Auftraggeber: Client:	Shanghai Zhiyuan New Innovation Technology Co., Ltd 8/F, Building 29, No.2555 Xiupu Road, Pudong New Area, 200120 Shanghai P.R. China			
Prüfgegenstand: Test item:	General-Purpose Robot			
Bezeichnung / Typ-Nr.: Identification / Type no.:	A2			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart E Section 15.407			
Wareneingangsdatum: Date of sample receipt:	2025-04-30	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no:	A003986907-001-007 A003997948-001-002			
Prüfzeitraum: Testing period:	2025-05-29 - 2025-06-15			
Ort der Prüfung: Place of testing:	Refer to section 2.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2025-06-17	Signed by: Bell Hu		Ausstellungsdatum: Issue date: 2025-06-17	Signed by: Jonathan Li
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2BP3W-TYA201 This report is for 5GHz Wi-Fi.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN256J3E 002
Test report no.:

Seite 2 von 25
Page 2 of 25

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfbedingungen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: Pass

5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.6 6dB BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 DYNAMIC FREQUENCY SELECTION (DFS)

RESULT: N/A

5.1.9 CONDUCTED EMISSION ON AC MAINS

RESULT: N/A

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	8
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	11
3.5	SUBMITTED DOCUMENTS.....	11
4	TEST SET-UP AND OPERATION MODES	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1	<i>Antenna Requirement</i>	<i>15</i>
5.1.2	<i>Maximum Conducted Output Power</i>	<i>16</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>18</i>
5.1.4	<i>Frequency Stability.....</i>	<i>19</i>
5.1.5	<i>26dB Bandwidth and 99% Bandwidth</i>	<i>20</i>
5.1.6	<i>6dB Bandwidth</i>	<i>21</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>22</i>
5.1.8	<i>Dynamic Frequency Selection (DFS)</i>	<i>23</i>
5.1.9	<i>Conducted Emission on AC Mains.....</i>	<i>24</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	25
7	LIST OF TABLES.....	25

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5GHz Wi-Fi

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street,
Longhua District, Shenzhen 518000, People's Republic of China

A2LA Cert. No.: 5162.01

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2024-09-26	2025-09-25
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2024-09-26	2025-09-25
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2024-09-26	2025-09-25
DC power supply	Keysight	E3642A	MY61276100	2024-09-26	2025-09-25
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2024-09-26	2025-09-25
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2024-09-26	2025-09-25
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-09-29	2025-09-28
Signal Analyzer	R&S	FSV 40	101439	2024-09-29	2025-09-28
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2024-09-29	2025-09-28
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-09-29	2025-09-28
Amplifier	R&S	SCU-18F	180070	2024-09-29	2025-09-28
Amplifier	R&S	SCU40A	100475	2024-09-29	2025-09-28
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2025-09-27
Double-Ridged Antenna	ETS-LINDGREN	3117	00218717	2024-09-28	2025-09-27

(1 -18 GHz)					
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-09-28	2025-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2025-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2025-07-22
LISN ENV216-Receiver cable in SR3	Calibration frequency range: 9 kHz~30 MHz			2025-12-20
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. File for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is General-Purpose Robot , which supports Wi-Fi, SRD (915MHz Band), Lora, LTE and Bluetooth wireless functions.

This report is for 5GHz Wi-Fi operation for the Robot.

Note: The wireless functions SRD (915MHz Band), Lora and LTE are covered by the certificated single modules below.

Modules	FCC ID	Remarks
LTE Module (Single module)	FCC ID: XMR2022RM520NGL, Approval date: 8/01/2022	Except for the antenna, there is no other changes on the module when integrated into the host (Robot). And adherence to the grant conditions for RF exposure compliance and applicable maximum ERP/EIRP rules were observed, no authorization request is needed.
Lora Module (Single module)	FCC ID: 2ASEO-RFM6601 Approval date: 10/11/2022	It verified with the client, there is no changes on the module, it assembled with an equivalent antenna when integrated into the host (Robot), no authorization request is needed.
SRD (915MHz Band) (Single module)	FCC ID: 2AXPI-R900 Approval date: 2/26/2021	
Note: As per KDB 996369 D01 section 7 and KDB 996369 D02 (Question 12), the EMC testing of the Module in simultaneous transmission operations were performed while integrated into the host. It is unnecessary to file the result of these simultaneous transmission test data since there is no emissions with increased amplitude and/or on different frequencies are detected compared to what is reported in the modular grant (that refers to single-transmitter operations testing).		

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	General-Purpose Robot
Type Designation	A2
Trademark	2BP3W-TYA201
FCC ID	48V DC Battery Powered
Operating Voltage	48V DC Battery Powered
Technical Specification of 5GHz Wi-Fi	
Operating Frequency:	5180-5240MHz, 5745-5825MHz
Type of Modulation:	OFDM
Protocol:	802.11 a/n/ac
Data Rate:	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0 ~ MCS7 for 802.11 n MCS0 ~ MCS9 for 802.11 ac (All data rates considered, only the Worst-cases reported)
Channel Number	4 channels for 802.11a/n20/ac20 2 channels for 802.11n40/ac40

	1 channel for 802.11ac80
Antenna Type:	Integral Antenna
Number of Antenna:	1TX1RX
Antenna Gain:	1.8dBi (Provided by the Client)

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Table 4: RF Channel and Frequency of 5GHz Wi-Fi

U-NII-1					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

U-NII-3					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3.3 Independent Operation Modes

The basic operation modes are:

A. On, 5G Wi-Fi wireless transmitting mode

1. Low channel
2. Middle channel
3. High channel

B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|------------------------------|
| - Application Form | - User Manual |
| - Operation Description | - Block Diagram |
| - PCB Layout | - ID Label and Location Info |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model A2 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

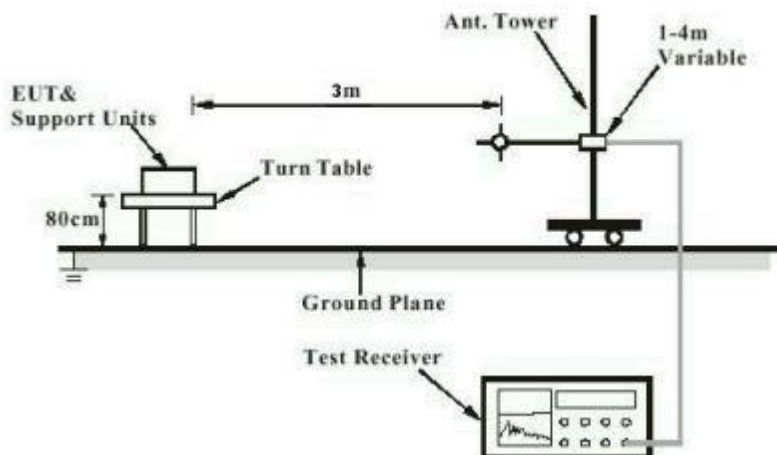


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


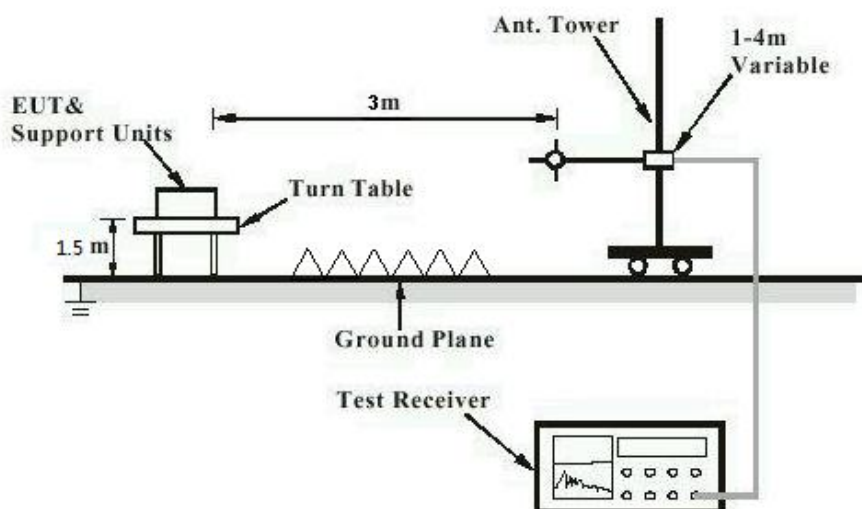


Diagram of Measurement Configuration for Conducted Transmitter Measurement

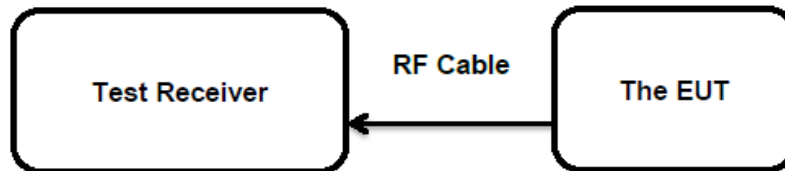

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.203

According to the manufacturer declared, the EUT have Integral antenna, permanent attachment and no consideration of replacement, refer to section 3.2 for details.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Conducted Output Power

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(a)(1)&(2)&(4)
Basic standard	: ANSI C63.10: 2013
Limits	: FCC: <250mW (24dBm) (5150-5250MHz) *<250mW (24dBm) (5250-5350MHz, 5470-5725MHz) *250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser. <1W (30dBm) (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-05-29 to 2025-06-15
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

Table 6: Test Result of Maximum Conducted Output Power

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	16.62	≤23.98	PASS
11A	Ant1	5200	16.53	≤23.98	PASS
11A	Ant1	5240	16.78	≤23.98	PASS
11A	Ant1	5745	18.37	≤30.00	PASS
11A	Ant1	5785	18.73	≤30.00	PASS
11A	Ant1	5825	17.84	≤30.00	PASS
11N20SISO	Ant1	5180	16.99	≤23.98	PASS
11N20SISO	Ant1	5200	16.92	≤23.98	PASS
11N20SISO	Ant1	5240	16.57	≤23.98	PASS
11N20SISO	Ant1	5745	18.65	≤30.00	PASS
11N20SISO	Ant1	5785	18.67	≤30.00	PASS
11N20SISO	Ant1	5825	17.96	≤30.00	PASS
11N40SISO	Ant1	5190	17.28	≤23.98	PASS
11N40SISO	Ant1	5230	16.82	≤23.98	PASS
11N40SISO	Ant1	5755	18.82	≤30.00	PASS
11N40SISO	Ant1	5795	18.79	≤30.00	PASS
11AC20SISO	Ant1	5180	17.25	≤23.98	PASS
11AC20SISO	Ant1	5200	17.09	≤23.98	PASS
11AC20SISO	Ant1	5240	16.83	≤23.98	PASS
11AC20SISO	Ant1	5745	18.66	≤30.00	PASS
11AC20SISO	Ant1	5785	18.74	≤30.00	PASS
11AC20SISO	Ant1	5825	18.06	≤30.00	PASS
11AC40SISO	Ant1	5190	17.32	≤23.98	PASS
11AC40SISO	Ant1	5230	16.96	≤23.98	PASS
11AC40SISO	Ant1	5755	19.07	≤30.00	PASS
11AC40SISO	Ant1	5795	18.83	≤30.00	PASS
11AC80SISO	Ant1	5210	17.41	≤23.98	PASS
11AC80SISO	Ant1	5775	19.31	≤30.00	PASS

Note:

- 1) The cable loss is taken into account in results

Prüfbericht - Nr.: **CN256J3E 002**
Test Report No.:Seite 18 von 25
Page 18 of 25

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard : FCC part 15.407(a)
Basic standard : ANSI C63.10: 2013
KDB 789033 D02 v01r03
Limits : FCC:
<11dBm/MHz (5150-5250MHz, 5250-5350MHz and
5470-5725MHz)
<30dBm/500kHz (5725-5850MHz)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-05-29 to 2025-06-15
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

5.1.4 Frequency Stability

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407(g)
Basic standard : ANSI C63.10: 2013
Limits : Within assigned bands
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-05-29 to 2025-06-15
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN256J3E 002
Test Report No.:

Seite 20 von 25
Page 20 of 25

5.1.5 26dB Bandwidth and 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407(e)
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-05-29 to 2025-06-15
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN256J3E 002
Test Report No.:

Seite 21 von 25
Page 21 of 25

5.1.6 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407(e)
Basic standard : ANSI C63.10: 2013
Limits : At least 500kHz (5725-5850MHz)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-05-29 to 2025-06-15
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: • For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. • For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. • Restricted Bands meet the requirement of 15.209 limit
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-05-29 to 2025-06-15
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN256J3E 002
Test Report No.:

Seite 23 von 25
Page 23 of 25

5.1.8 Dynamic Frequency Selection (DFS)

RESULT:

N/A

Test Specification

Test standard	: FCC Part 15.407(h)
Basic standard	: ANSI C63.10: 2013
Limits	: 5250-5350MHz, 5470-5725MHz Channel Move Time: Within 10 seconds. Channel Closing Transmission Time: 200ms+aggregate of 60ms over remaining 10s period; Non-Occupancy Period: at least 30 minutes.
Kind of test site	: Shielded Room

This device not supports DFS bands.

Prüfbericht - Nr.: CN256J3E 002
Test Report No.:

Seite 24 von 25
Page 24 of 25

5.1.9 Conducted Emission on AC Mains

RESULT:

N/A

Test Specification

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Note: The wireless functions will be disabled when product is in charging.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT	9
Table 4: RF Channel and Frequency of 5GHz Wi-Fi.....	10
Table 5: List of Accessories and Auxiliary Equipment.....	12
Table 6: Test Result of Maximum Conducted Output Power.....	17