

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Customer Name: _____

Product Name: _____ G7S DIV Antenna

Part NO. : _____ GS7. DIV. C113. 70B. 4

Write By: _____ zhangchanghua

Issued Date: _____ 2025-09-09

Customer

R&D Dept	Business Dept	Approved By

SKYLink

R&D Dept	Engineer Dept	Approval

● Specification Summary

A. Electrical Characteristics	
Frequency	MHz、 1700MHz~2700MHz、 3400MHz~3800MHz
VSWR	<5
Efficiency	>25%
Peak Gain	2.98dbi
Impedance	50 Ohm
Polarization	Line
B. Material & Mechanical Characteristics	
Material of Radiator	FPC
Cable Type	1.13mm Black
Connector Type	IPEX 4
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions

R & D Center: Room D 5th Floor Building L,Block E ,71 Baocheng District ,Baoan District ,Shenzhen
Factory: 6 Floor,GangHuaXing Industrial Park,Rongshu Road 2nd ,Fuyong,Baoan ,shenzhen
Email:damoncui@tllskylink.com





1. Network Analyzers :

Agilent 8753D 5071B


Communications Test Set:

Agilent E5515C CMW500


2. 3D Chamber Test System

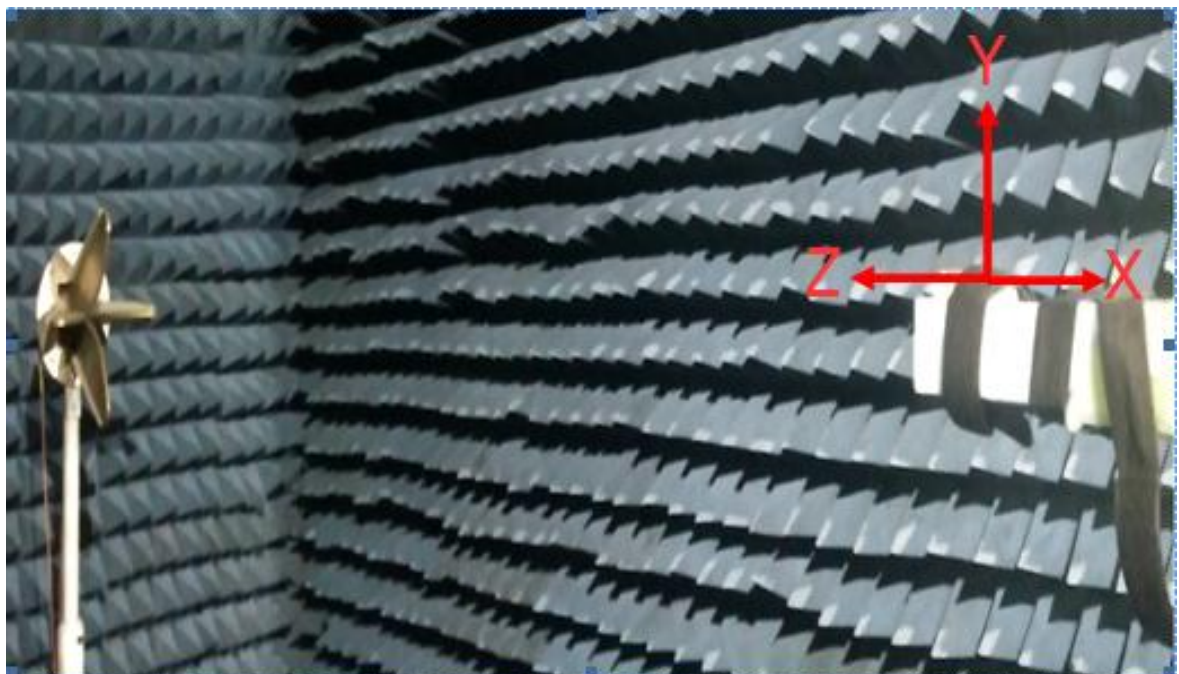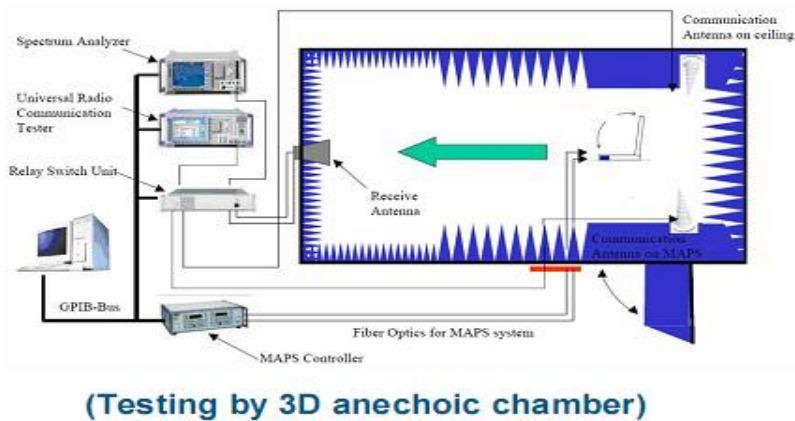



◆ Return Loss

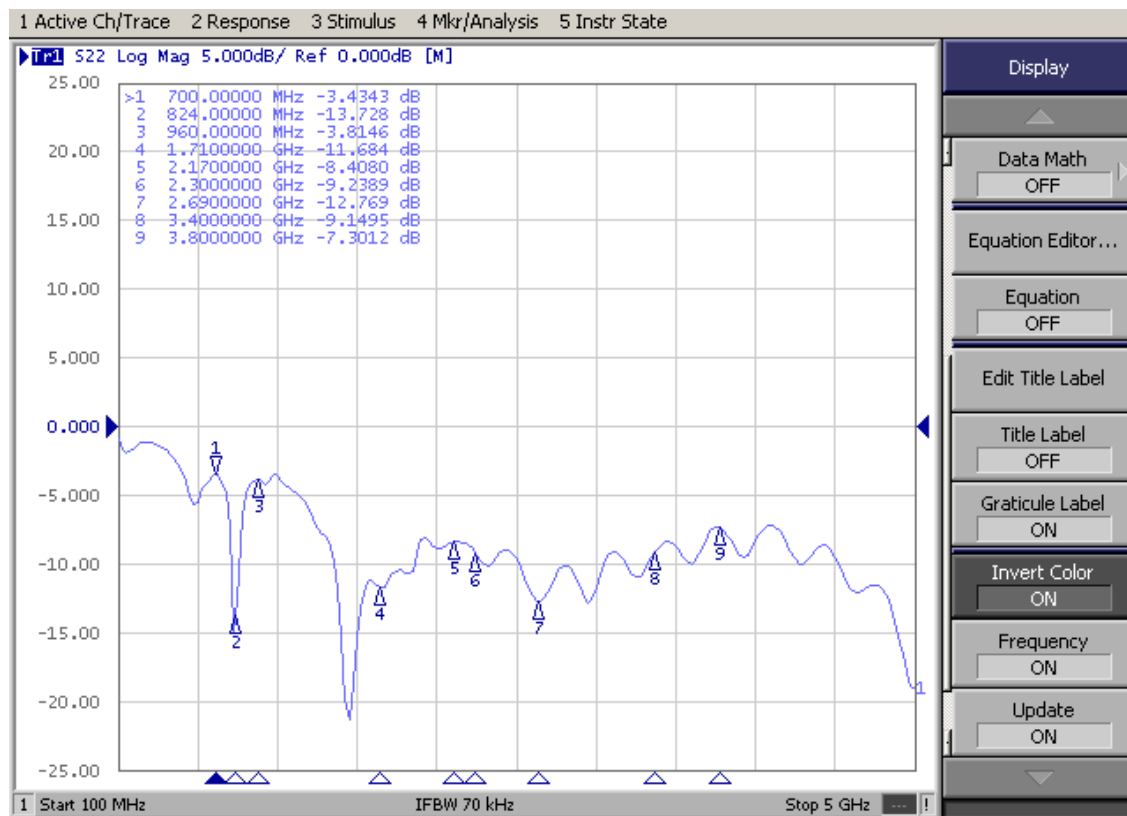


◆ VSWR

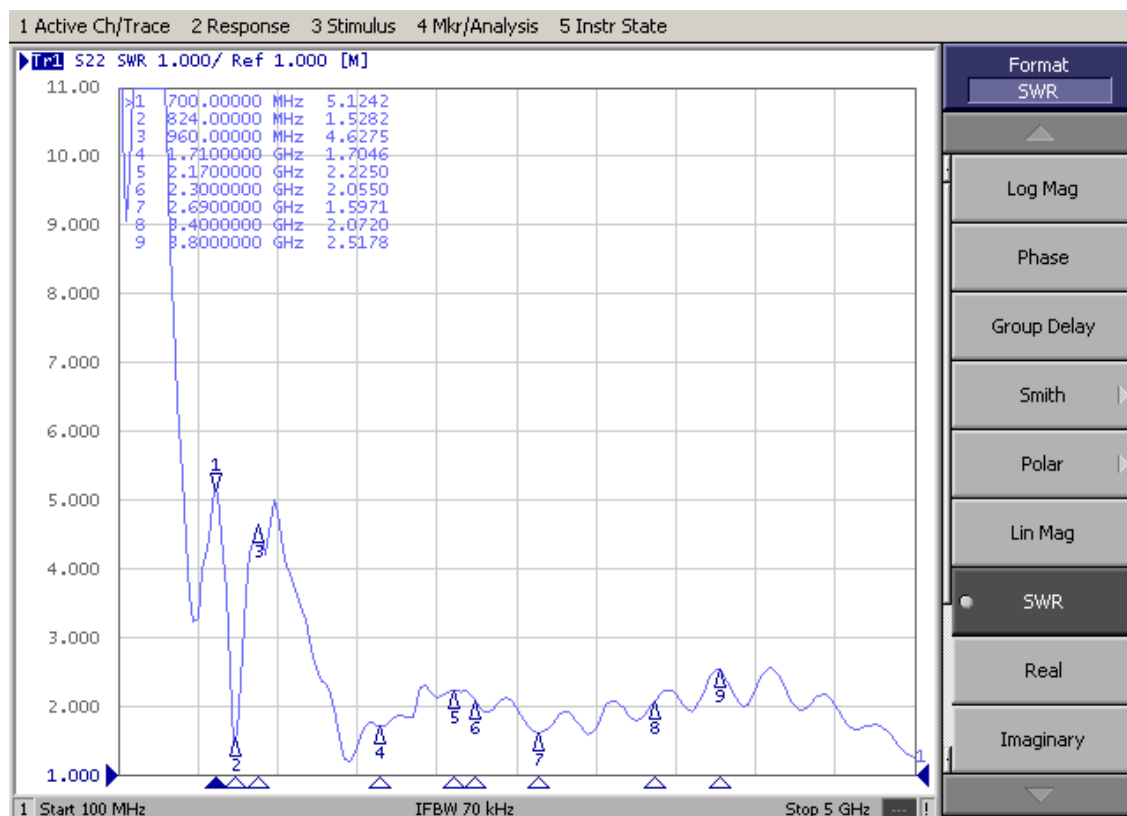

◆ Antenna size

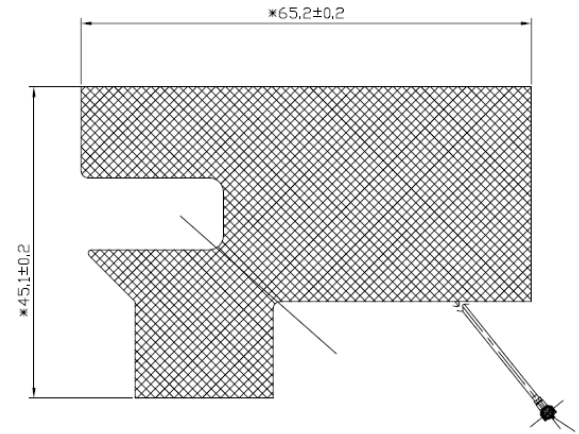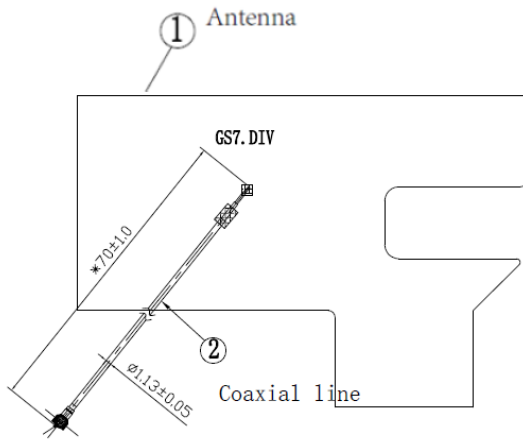

◆ Radiation Pattern

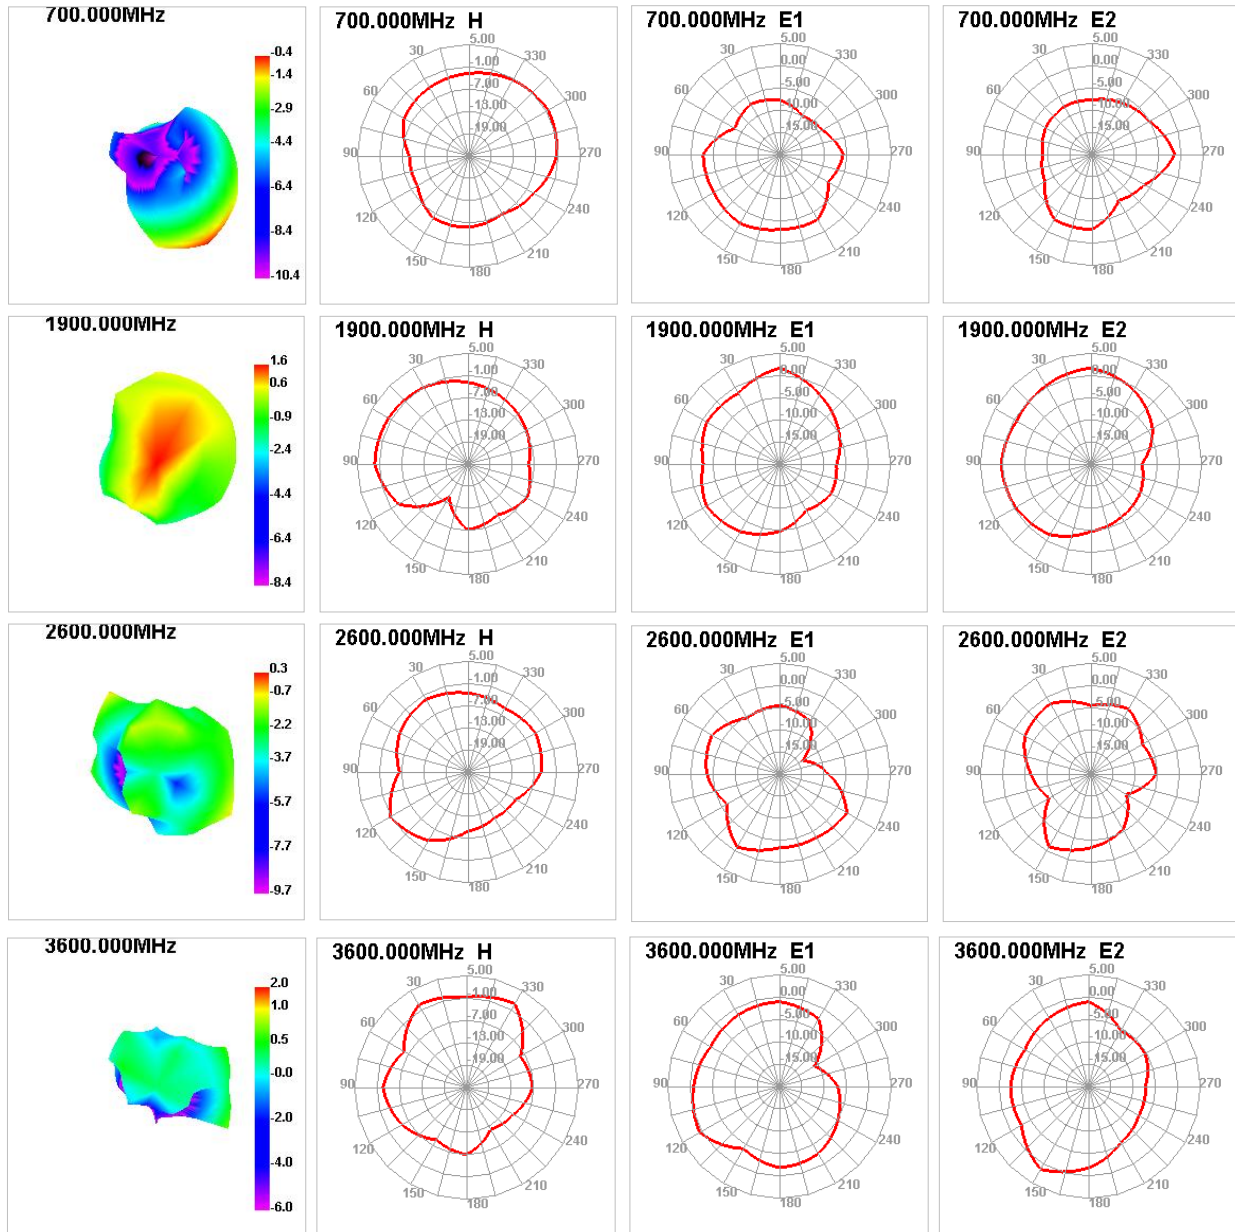

◆ Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃ , Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: $35 \pm 2^{\circ}\text{C}$ Humidity: 85% NaCl salt spray :5 ± 1 %.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS

