



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No......: GRCTR250602004-01

FCC ID.....: 2BP5U-TP56QV

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Jun. 23, 2025

Testing Laboratory Name.....: **Shenzhen GUOREN Certification Technology Service Co., Ltd.**

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang
Community, Fenghuang Street, Guangming District, Shenzhen,
China

Applicant's name.....: **Nisong (Shenzhen) Information Technology Co., Ltd.**

Address.....: Room 1332, Guoxin Investment Building, No. 07, Gaoxin South 7th
Road, Gaoxin District Community, Yuehai Street, Nanshan District,
Shenzhen

Test specification.....:

Standard.....: **FCC Part 15.247**

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Tablet Photo Booth

Trade Mark.....: /

Manufacturer.....: Nisong (Shenzhen) Information Technology Co., Ltd.

Model/Type reference.....: TP-56-Q1V

Listed Models: TP-56-P1V,TP-56-P2V,TP-56-Z1V,TP-56-B1V,TP-56-A1V,TP-56-A2V,TP-48-Q1V,TP-56-Q1V-Z,TP-56-P1V-H,TP-56-P2V-H,TP-56-Z1V-H,TP-56-B1V-H,TP-56-A1V-H,TP-56-A2V-H,TP-48-Q1V-H,TP-56-A1D5,TP-60-A1D5,TP-60-A1,TP-60-Q1,TP-56-*****,TP-48-*****,TP-60-*****,TP-** *****,V560DPL-A1-H,V560DPL-P1V-H,V560DPL-A2-H,V560DPL-P2-H,V560DZL-A1-H,V560DZL-Z1-H,V560DBL-B1-H,V480DQ-Q1-Z,V560DQ-Q1-Z,V***D** ****,TP***A****,TP***B****,TP***C****,TP***D****,TP***E****,TP***F****,TP***G****,TP***H****,TP***I****,TP***J****,TP***K****,TP***L****,TP***M****,TP***N****,TP***O****,TP***P****,TP***Q****,*TP***R****,TP***S****,TP***T****,TP***U****,TP***V****,TP***W****,TP***X****,TP***Y****,TP***Z****(The "*" in the model can be 0-9, A-Z or blank, blank or vacancy - Said that different models are only different in appearance color, software version, customer code and sales region.)

Firmware Version.....:	V1.0
Hardware Version.....:	V1.0
Modulation	GFSK
Frequency.....	From 2402MHz to 2480MHz
Ratings.....:	DC 12V From External Circuit
Result.....:	PASS

TEST REPORT

Equipment under Test : Tablet Photo Booth

Model /Type : TP-56-Q1V

Listed Models : TP-56-P1V,TP-56-P2V,TP-56-Z1V,TP-56-B1V,TP-56-A1V,TP-56-A2V,TP-48-Q1V,TP-56-Q1V-Z,TP-56-P1V-H,TP-56-P2V-H,TP-56-Z1V-H,TP-56-B1V-H,TP-56-A1V-H,TP-56-A2V-H,TP-48-Q1V-H,TP-56-A1D5,TP-60-A1D5,TP-60-A1,TP-60-Q1,TP-56-****,TP-48-****,TP-60-****,TP-**-****,V560DPL-A1-H,V560DPL-P1V-H,V560DPL-A2-H,V560DPL-P2-H,V560DZL-A1-H,V560DZL-Z1-H,V560DBL-B1-H,V480DQ-Q1-Z,V560DQ-Q1-Z,V****D** ****,TP****A****,TP****B****,TP****C****,TP****D****,TP****E****,TP****F****,TP****G****,TP****H****,TP****I****,TP****J****,TP****K****,TP****L****,TP****M****,TP****N****,TP****O****,TP****P****,TP****Q****,TP****R****,TP****S****,TP****T****,TP****U****,TP****V****,TP****W****,TP****X****,TP****Y****,TP****Z****(The "*" in the model can be 0-9, A-Z or blank, blank or vacancy - Said that different models are only different in appearance color, software version, customer code and sales region.)

Applicant : Nisong (Shenzhen) Information Technology Co., Ltd.

Address : Room 1332, Guoxin Investment Building, No. 07, Gaoxin South 7th Road, Gaoxin District Community, Yuehai Street, Nanshan District, Shenzhen

Manufacturer : Nisong (Shenzhen) Information Technology Co., Ltd.

Address : Room 1332, Guoxin Investment Building, No. 07, Gaoxin South 7th Road, Gaoxin District Community, Yuehai Street, Nanshan District, Shenzhen

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	5
2 SUMMARY	6
2.1 General Remarks	6
2.2 Product Description	6
2.3 Equipment Under Test	7
2.4 Short description of the Equipment under Test (EUT)	7
2.5 EUT operation mode	7
2.6 Block Diagram of Test Setup	7
2.7 Related Submittal(s) / Grant (s)	7
2.8 Modifications	7
3 TEST ENVIRONMENT	8
3.1 Address of the test laboratory	8
3.2 Test Facility	8
3.3 Environmental conditions	8
3.4 Summary of measurement results	9
3.5 Statement of the measurement uncertainty	9
3.6 Equipments Used during the Test	10
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission	11
4.2 Radiated Emissions and Band Edge	16
4.3 Maximum Peak Output Power	24
4.4 Power Spectral Density	25
4.5 6dB Bandwidth	27
4.6 Out-of-band Emissions	29
4.7 Antenna Requirement	33
5 TEST SETUP PHOTOS OF THE EUT	34
6 EXTERNAL PHOTOS OF THE EUT	36
7 INTERNAL PHOTOS OF THE EUT	36

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jun. 03, 2025
Testing commenced on	:	Jun. 03, 2025
Testing concluded on	:	Jun. 23, 2025

2.2 Product Description

Product Name:	Tablet Photo Booth
Model/Type reference:	TP-56-Q1V
Listed Models:	TP-56-P1V,TP-56-P2V,TP-56-Z1V,TP-56-B1V,TP-56-A1V,TP-56-A2V,TP-48-Q1V,TP-56-Q1V-Z,TP-56-P1V-H,TP-56-P2V-H,TP-56-Z1V-H,TP-56-B1V-H,TP-56-A1V-H,TP-56-A2V-H,TP-48-Q1V-H,TP-56-A1D5,TP-60-A1D5,TP-60-A1,TP-60-Q1,TP-56-****,TP-48-****,TP-60-****,TP-**-****,V560DPL-A1-H,V560DPL-P1V-H,V560DPL-A2-H,V560DPL-P2-H,V560DZL-A1-H,V560DZL-Z1-H,V560DBL-B1-H,V480DQ-Q1-Z,V560DQ-Q1-Z,V***D**_****,TP****A****,TP****B****,TP****C****,TP****D****,TP****E****,TP****F****,TP****G****,TP****H****,TP****I****,TP****J****,TP****K****,TP****L****,TP****M****,TP****N****,TP****O****,TP****P****,TP****Q****,TP****R****,TP****S****,TP****T****,TP****U****,TP****V****,TP****W****,TP****X****,TP****Y****,TP****Z****(The "*" in the model can be 0-9, A-Z or blank, blank or vacancy - Said that different models are only different in appearance color, software version, customer code and sales region.)
Power supply:	DC 12V From External Circuit
Adapter Information:	Model:SMPS-E1208 Input:100-120VAC 200-240VAC 50/60Hz Output:DC12V---8A
Testing sample ID:	GRCTR250602004-1# (Engineer sample), GRCTR250602004-2# (Normal sample)
Bluetooth	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	PCB antenna
Antenna gain*(Supplied by the customer):	0.0 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.	
The products are the same except for model names, bracket base and lamp panel.The product has two kinds of lamp panel for each model. Square lamp panel had been tested all items, circular lamp panel had been tested Conducted Emission and Radiated Emissions below 1GHz.	

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 12V From External Circuit

2.4 Short description of the Equipment under Test (EUT)

This is a Tablet Photo Booth.

For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The Applicant provides communication tools software(SecureCRT) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 40 channels provided to the EUT and Channel 00/19/39 were selected to test.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
:	:
19	2440
:	:
37	2476
38	2478
39	2480

2.6 Block Diagram of Test Setup

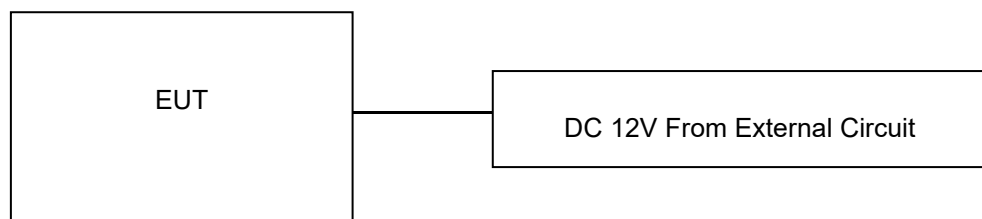

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(e)	Power spectral density	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(a)(2)	Spectrum bandwidth – 6 dB bandwidth	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(b)(3)	Maximum output Peak power	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(d)	Band edge compliance conducted	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	complies
§15.205	Band edge compliance radiated	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	complies
§15.247(d)	TX spurious emissions conducted	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	complies
§15.247(d)	TX spurious emissions radiated	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	complies
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK	-/-	GFSK	-/-	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report.
3. N/A means “not applicable”.

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01” Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2024/09/19	2025/09/18
LISN	R&S	ENV216	GRCTEE010	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESPI	GRCTEE017	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESCI	GRCTEE008	2024/09/19	2025/09/18
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2024/09/19	2025/09/18
Spectrum Analyzer	R&S	FSP	GRCTEE003	2024/09/19	2025/09/18
Vector Signal generator	Agilent	N5181A	GRCTEE007	2024/09/19	2025/09/18
Analog Signal Generator	R&S	SML03	GRCTEE006	2024/09/19	2025/09/18
Climate Chamber	QIYA	LCD-9530	GRCTES016	2024/09/19	2025/09/18
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2024/09/19	2025/09/18
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2024/09/19	2025/09/18
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2024/09/19	2025/09/18
Directional coupler	NARDA	4226-10	GRCTEE004	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2024/09/19	2025/09/18
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2024/09/19	2025/09/18
Power Sensor	Agilent	U2021XA	GRCTEE070	2024/09/19	2025/09/18
Cable	Times	Cable-CE	GRCTEE086	2024/09/19	2025/09/18
Cable	Times	Cable-RE-1	GRCTEE087	2024/09/19	2025/09/18
Cable	Times	Cable-RE-2	GRCTEE088	2024/09/19	2025/09/18
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

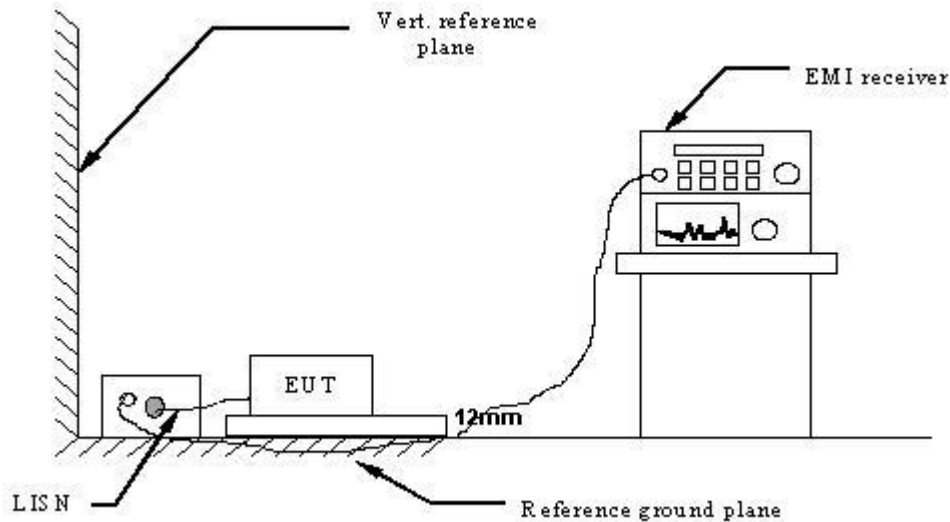

TEST PROCEDURE

1 Where floor-standing equipment is not typically installed with its base in direct electrical contact with, or connected to, a metal floor or grid, the EUT shall not be placed in direct electrical contact with the test site (or turntable) reference ground plane. If necessary to prevent direct metallic contact of the EUT and the reference ground plane, insulating material (up to 12mm thick) shall be placed under the EUT.

2 Support equipment, if needed, was placed as per ANSI C63.10-2020

3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020

4 The EUT received power from variable frequency power supply, the AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

5 All support equipments received AC power from a second LISN, if any.

6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

Remark:

1. GFSK was tested at Low, Middle, and High channel and recorded worst mode at middle channel:

2. 120 VAC, 50/60 Hz power supply has been tested, the worst result of 120 VAC, 60 Hz was reported as below:

Square lamp panel

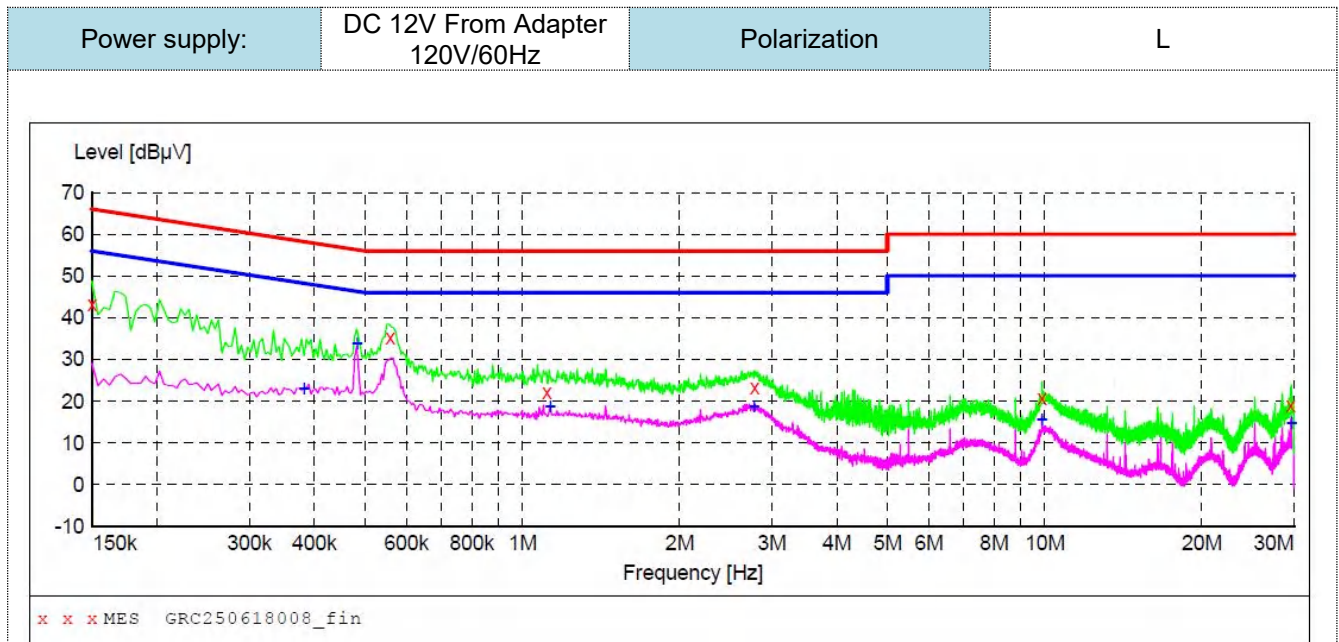

MEASUREMENT RESULT: "GRC250618008_fin"

6/18/2025 10:07AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	43.20	10.1	66	22.8	QP	L1	GND
0.558000	35.30	10.4	56	20.7	QP	L1	GND
1.114000	22.10	10.4	56	33.9	QP	L1	GND
2.782000	23.30	10.5	56	32.7	QP	L1	GND
9.882000	20.60	10.8	60	39.4	QP	L1	GND
29.614000	19.10	10.8	60	40.9	QP	L1	GND

MEASUREMENT RESULT: "GRC250618008_fin2"

6/18/2025 10:07AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.382000	22.90	10.4	48	25.3	AV	L1	GND
0.482000	33.70	10.2	46	12.6	AV	L1	GND
1.130000	18.80	10.4	46	27.2	AV	L1	GND
2.778000	18.70	10.5	46	27.3	AV	L1	GND
9.882000	15.50	10.8	50	34.5	AV	L1	GND
29.678000	14.80	10.8	50	35.2	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 12V From Adapter
120V/60Hz

Polarization

N

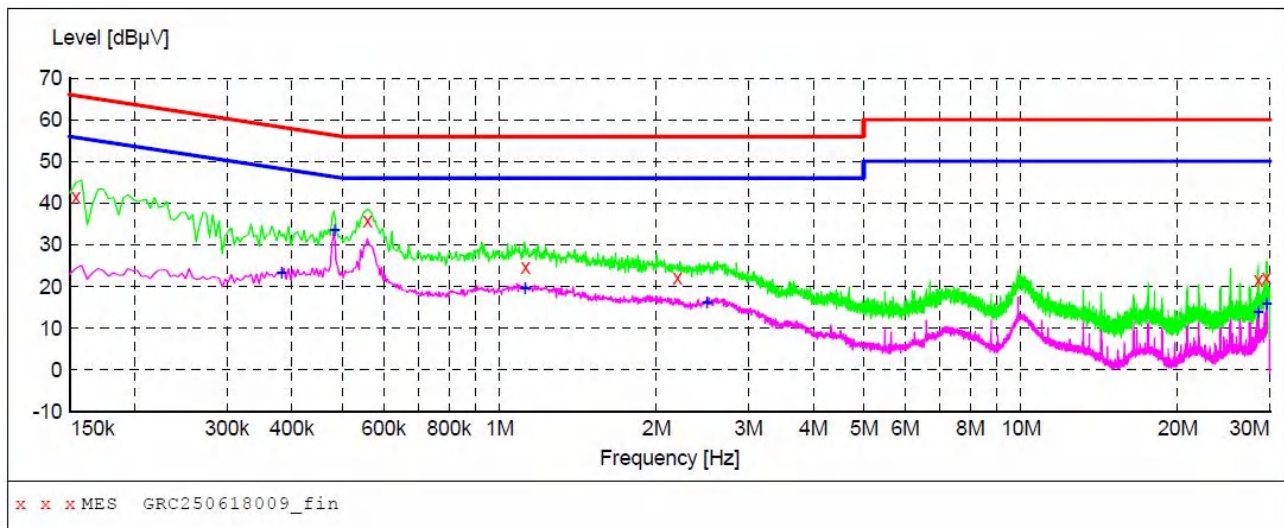**MEASUREMENT RESULT: "GRC250618009_fin"**

6/18/2025 10:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	41.60	10.1	66	24.2	QP	N	GND
0.558000	35.70	10.4	56	20.3	QP	N	GND
1.122000	24.80	10.4	56	31.2	QP	N	GND
2.194000	22.20	10.6	56	33.8	QP	N	GND
28.570000	21.60	10.8	60	38.4	QP	N	GND
29.610000	22.10	10.8	60	37.9	QP	N	GND

MEASUREMENT RESULT: "GRC250618009_fin2"

6/18/2025 10:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.382000	23.40	10.4	48	24.8	AV	N	GND
0.482000	33.60	10.2	46	12.7	AV	N	GND
1.118000	19.60	10.4	46	26.4	AV	N	GND
2.498000	16.10	10.6	46	29.9	AV	N	GND
28.554000	13.90	10.8	50	36.1	AV	N	GND
29.594000	15.90	10.8	50	34.1	AV	N	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)


circular lamp panel

Power supply:

DC 12V From Adapter
120V/60Hz

Polarization

L

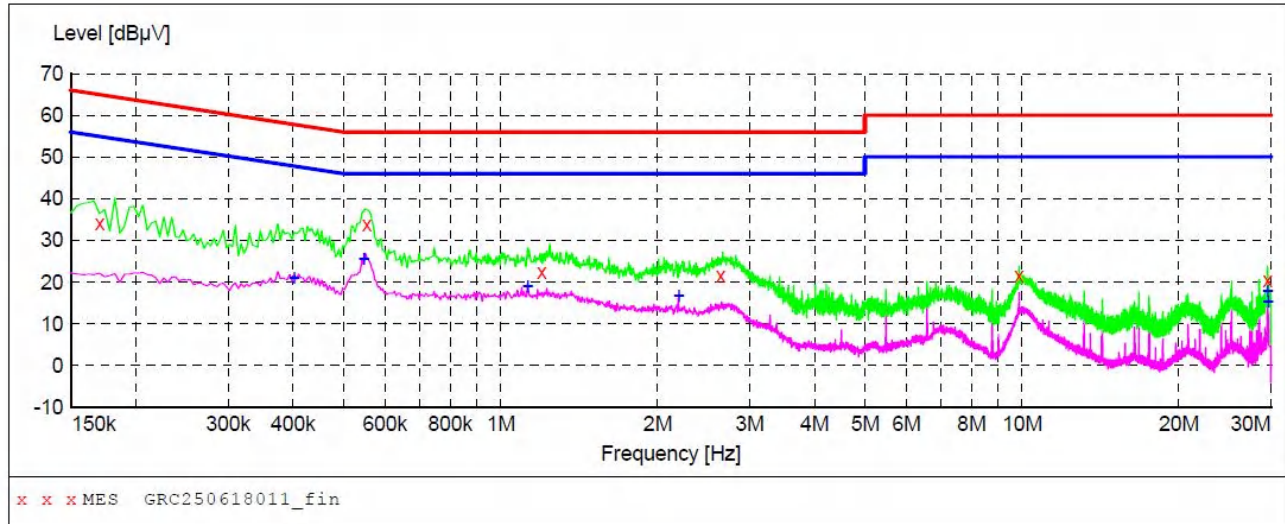**MEASUREMENT RESULT: "GRC250618011_fin"**

6/18/2025 10:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.170000	34.10	10.1	65	30.9	QP	L1	GND
0.554000	33.90	10.4	56	22.1	QP	L1	GND
1.198000	22.40	10.5	56	33.6	QP	L1	GND
2.642000	21.60	10.6	56	34.4	QP	L1	GND
9.866000	21.60	10.8	60	38.4	QP	L1	GND
29.570000	20.40	10.8	60	39.6	QP	L1	GND

MEASUREMENT RESULT: "GRC250618011_fin2"


6/18/2025 10:18AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.402000	21.10	10.3	48	26.7	AV	L1	GND
0.546000	25.60	10.3	46	20.4	AV	L1	GND
1.126000	19.00	10.4	46	27.0	AV	L1	GND
2.194000	16.70	10.6	46	29.3	AV	L1	GND
29.566000	17.80	10.8	50	32.2	AV	L1	GND
29.626000	15.20	10.8	50	34.8	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

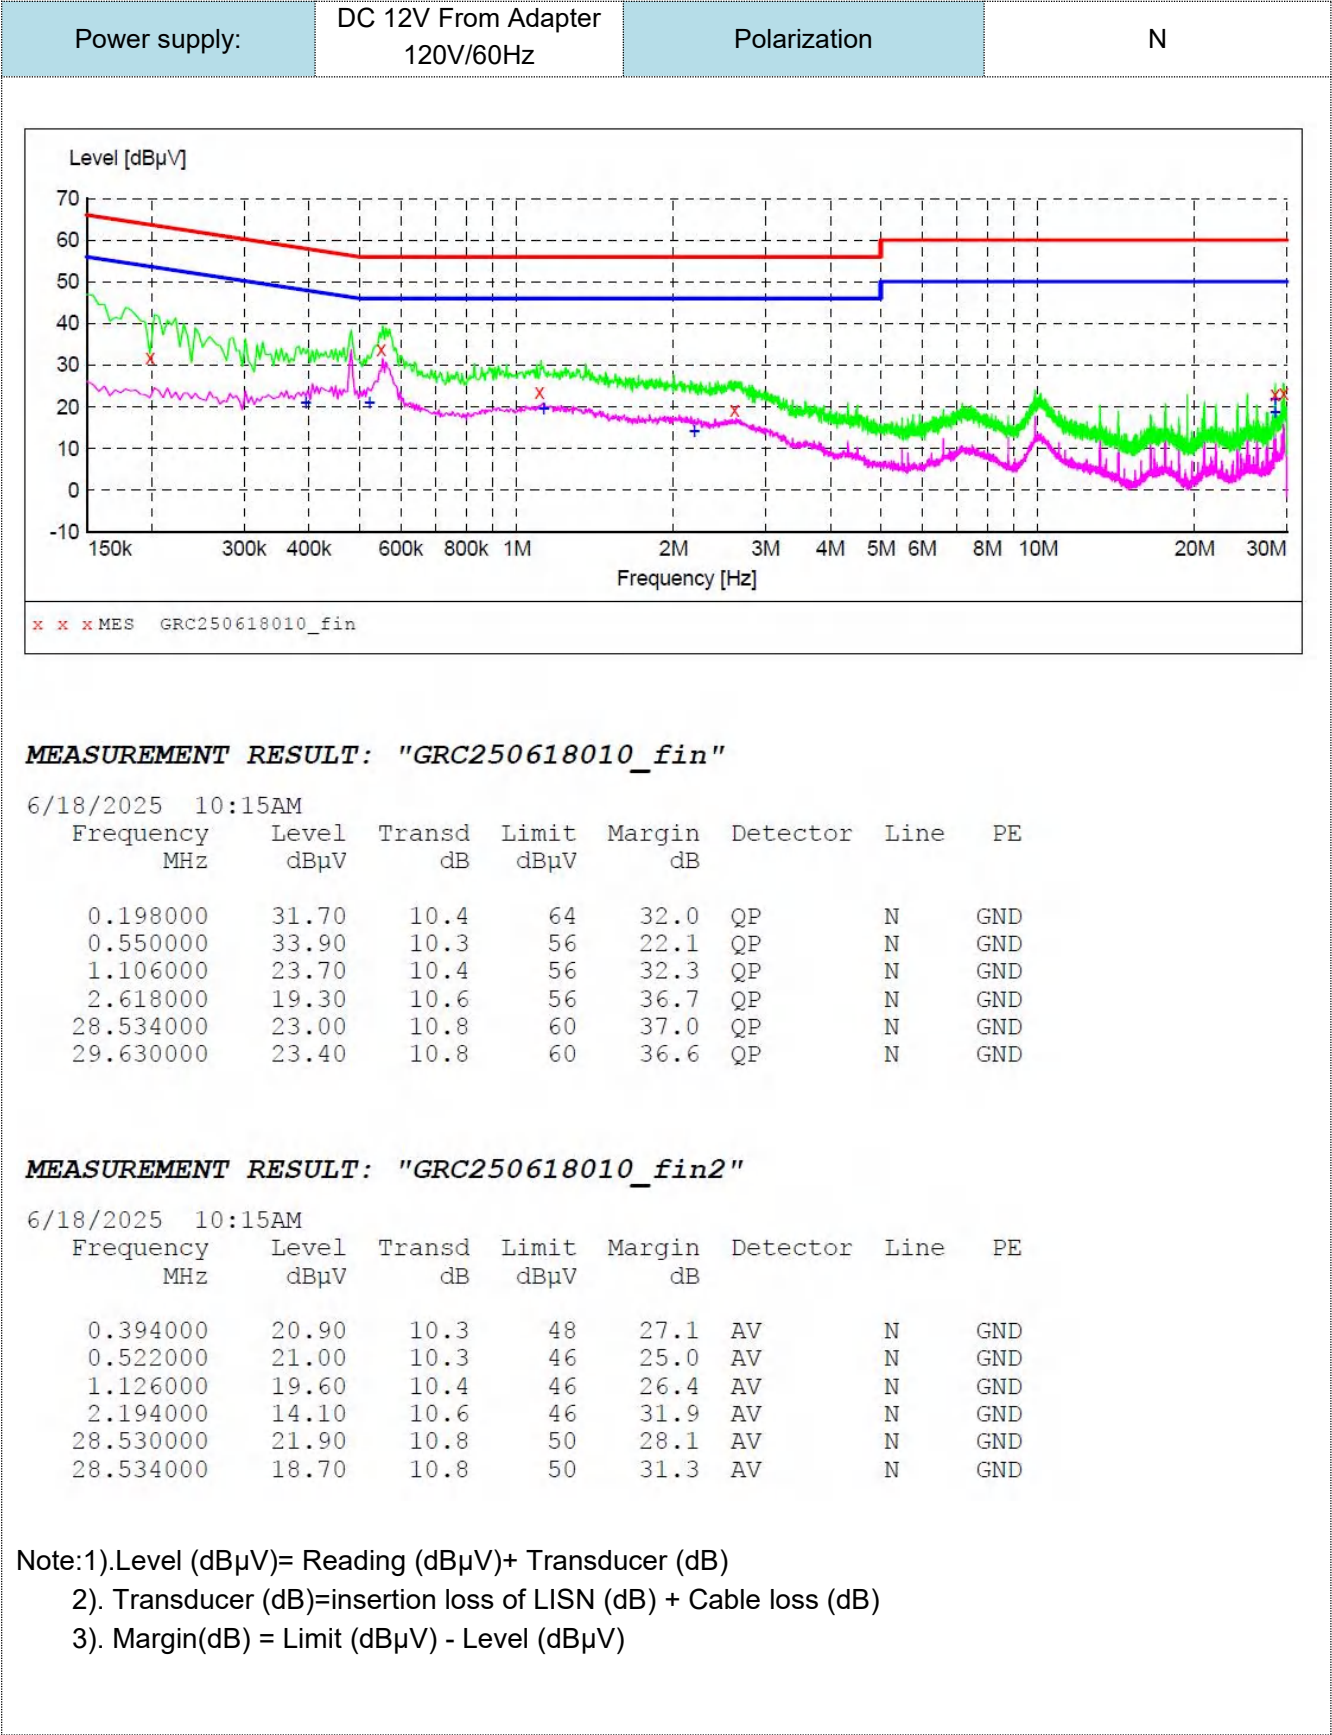


4.2 Radiated Emissions and Band Edge

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

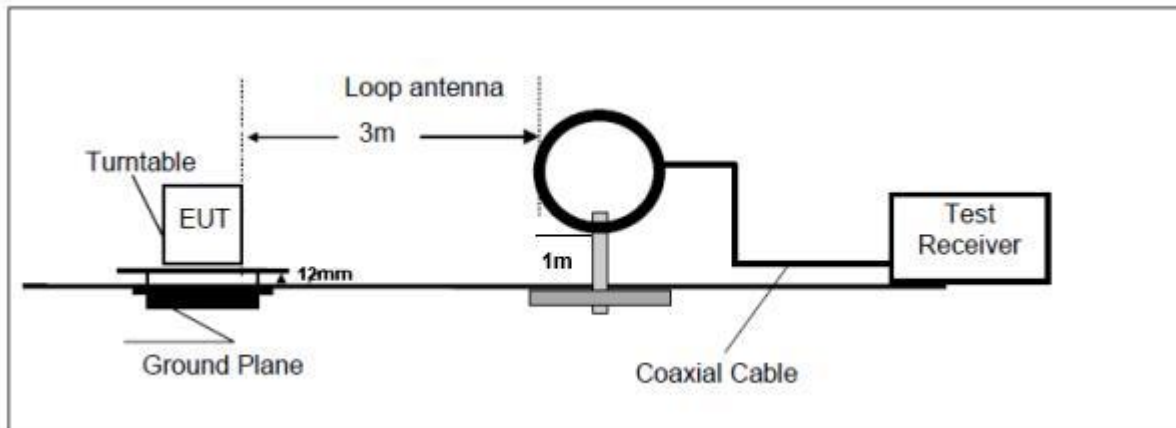

Frequency range 30MHz – 1000MHz

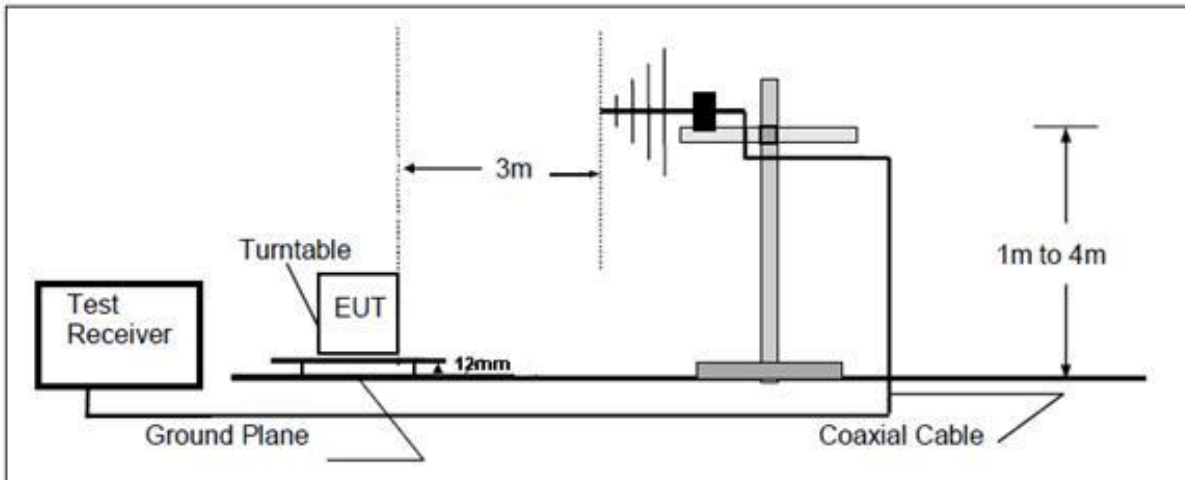

Frequency range above 1GHz-25GHz

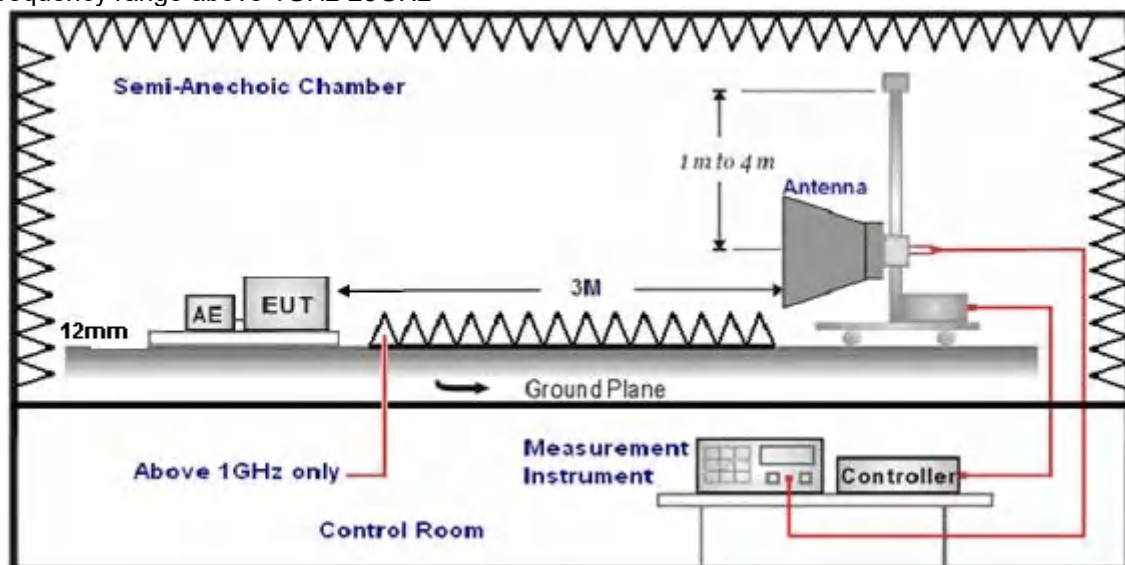

TEST PROCEDURE

1. The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-40GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS**Remark:**

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. GFSK was tested at Low, Middle, and High channel and recorded worst mode at middle channel below 1GHz. GFSK was tested and recorded worst mode above 1GHz.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

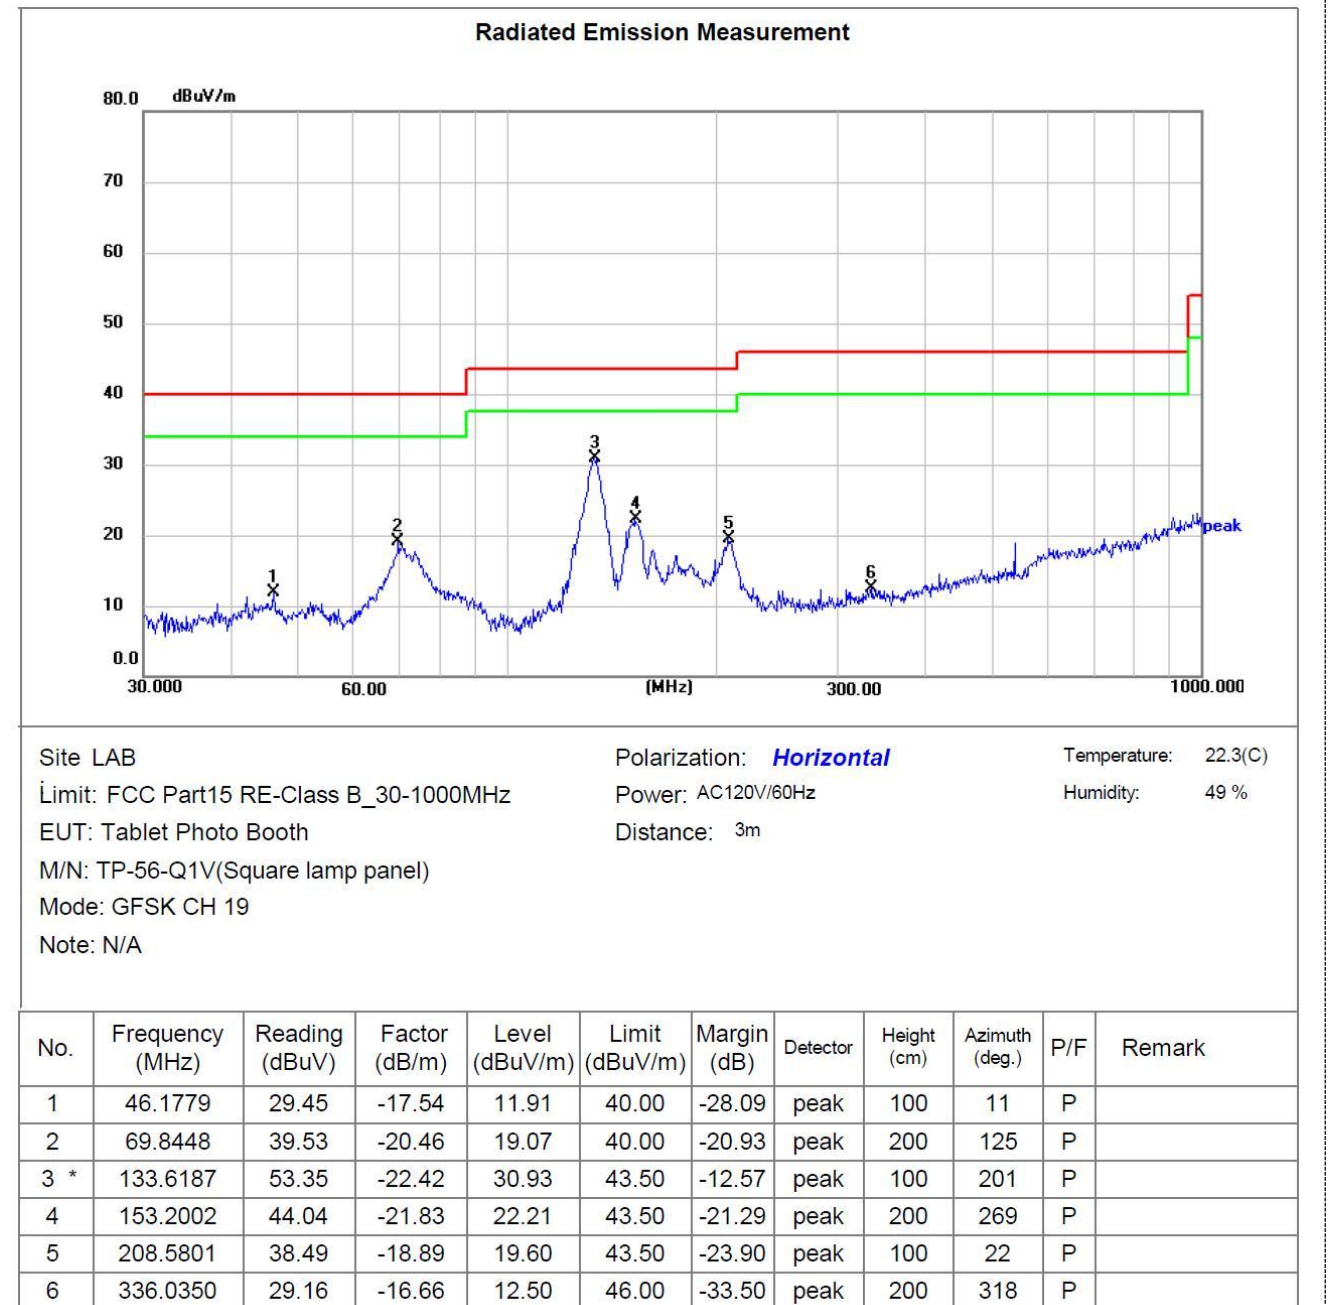For 30MHz-1GHz**Square lamp panel****Horizontal**

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement



Site: LAB

Polarization: **Vertical**

Temperature: 22.3(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 49 %

EUT: Tablet Photo Booth

Distance: 3m

M/N: TP-56-Q1V(Square lamp panel)

Mode: GFSK CH 19

Note: N/A

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.0949	45.30	-19.70	25.60	40.00	-14.40	peak	100	221	P	
2	46.5030	41.38	-17.53	23.85	40.00	-16.15	peak	100	154	P	
3 *	72.3375	47.06	-21.14	25.92	40.00	-14.08	peak	100	136	P	
4	135.9821	47.42	-22.26	25.16	43.50	-18.34	peak	100	10	P	
5	153.2003	46.21	-21.83	24.38	43.50	-19.12	peak	100	214	P	
6	207.8501	33.15	-18.91	14.24	43.50	-29.26	peak	100	301	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

circular lamp panel

Horizontal

Radiated Emission Measurement



Site LAB

Polarization: **Horizontal**

Temperature: 22.3(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 49 %

EUT: Tablet Photo Booth

Distance: 3m

M/N: TP-56-Q1V(circular lamp panel)

Mode: GFSK CH 19

Note: N/A

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	46.1779	31.45	-17.54	13.91	40.00	-26.09	peak	100	168	P	
2	69.8448	41.03	-20.46	20.57	40.00	-19.43	peak	100	157	P	
3 *	133.6184	54.35	-22.42	31.93	43.50	-11.57	peak	100	99	P	
4	153.2000	44.54	-21.83	22.71	43.50	-20.79	peak	200	220	P	
5	208.5800	38.49	-18.89	19.60	43.50	-23.90	peak	200	26	P	
6	389.3548	28.51	-15.88	12.63	46.00	-33.37	peak	200	310	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement



Site LAB

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT: Tablet Photo Booth

M/N: TP-56-Q1V(circular lamp panel)

Mode: GFSK CH 19

Note: N/A

Polarization: **Vertical**

Power: AC120V/60Hz

Distance: 3m

Temperature: 22.3(C)

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.0949	46.30	-19.70	26.60	40.00	-13.40	peak	100	199	P	
2	46.5030	40.38	-17.53	22.85	40.00	-17.15	peak	100	158	P	
3 *	72.3375	49.56	-21.14	28.42	40.00	-11.58	peak	100	235	P	
4	135.9821	50.42	-22.26	28.16	43.50	-15.34	peak	100	220	P	
5	155.9100	47.89	-21.91	25.98	43.50	-17.52	peak	100	264	P	
6	207.8500	34.65	-18.91	15.74	43.50	-27.76	peak	100	10	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

For 1GHz to 25GHz

GFSK 1Mbps(above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	53.51	PK	74	20.49	74.67	28.42	5.14	54.72	-21.16
4804.00	41.66	AV	54	12.34	62.82	28.42	5.14	54.72	-21.16
7206.00	51.02	PK	74	22.98	65.44	34.15	6.46	55.03	-14.42
7206.00	38.30	AV	54	15.70	52.72	34.15	6.46	55.03	-14.42

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	52.04	PK	74	21.96	73.20	28.42	5.14	54.72	-21.16
4804.00	41.23	AV	54	12.77	62.39	28.42	5.14	54.72	-21.16
7206.00	50.35	PK	74	23.65	64.77	34.15	6.46	55.03	-14.42
7206.00	38.59	AV	54	15.41	53.01	34.15	6.46	55.03	-14.42

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	53.28	PK	74	20.72	73.59	28.73	5.32	54.36	-20.31
4880.00	40.86	AV	54	13.14	61.17	28.73	5.32	54.36	-20.31
7320.00	49.22	PK	74	24.78	62.88	34.38	6.81	54.85	-13.66
7320.00	39.98	AV	54	14.02	53.64	34.38	6.81	54.85	-13.66

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	52.96	PK	74	21.04	73.27	28.73	5.32	54.36	-20.31
4880.00	40.42	AV	54	13.58	60.73	28.73	5.32	54.36	-20.31
7320.00	50.07	PK	74	23.93	63.73	34.38	6.81	54.85	-13.66
7320.00	38.26	AV	54	15.74	51.92	34.38	6.81	54.85	-13.66

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	53.48	PK	74	20.52	73.01	29.52	5.63	54.68	-19.53
4960.00	41.63	AV	54	12.37	61.16	29.52	5.63	54.68	-19.53
7440.00	51.31	PK	74	22.69	64.51	34.49	7.23	54.92	-13.2
7440.00	40.68	AV	54	13.32	53.88	34.49	7.23	54.92	-13.2

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	53.05	PK	74	20.95	72.58	29.52	5.63	54.68	-19.53
4960.00	42.19	AV	54	11.81	61.72	29.52	5.63	54.68	-19.53
7440.00	51.82	PK	74	22.18	65.02	34.49	7.23	54.92	-13.2
7440.00	39.17	AV	54	14.83	52.37	34.49	7.23	54.92	-13.2

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Results of Band Edges Test (Radiated)**GFSK 1Mbps**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	56.47	PK	74	17.53	81.19	25.72	4.32	54.76	-24.72
2390.00	40.79	AV	54	13.21	65.51	25.72	4.32	54.76	-24.72
2400.00	56.32	PK	74	17.68	80.58	25.73	4.33	54.75	-24.26
2400.00	41.27	AV	54	12.73	65.53	25.73	4.33	54.75	-24.26
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	56.55	PK	74	17.45	81.27	25.72	4.32	54.76	-24.72
2390.00	41.83	AV	54	12.17	66.55	25.72	4.32	54.76	-24.72
2400.00	57.97	PK	74	16.03	82.23	25.73	4.33	54.75	-24.26
2400.00	41.87	AV	54	12.13	66.13	25.73	4.33	54.75	-24.26
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	57.22	PK	74	16.78	81.79	25.78	4.48	54.83	-24.57
2483.50	40.13	AV	54	13.87	64.70	25.78	4.48	54.83	-24.57
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	56.35	PK	74	17.65	80.92	25.78	4.48	54.83	-24.57
2483.50	42.08	AV	54	11.92	66.65	25.78	4.48	54.83	-24.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3 Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.36	30.00	Pass
	19	2.17		
	39	2.67		

Note: 1.The test results including the cable loss.

4.4 Power Spectral Density

Limit

The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Configuration



Test Results

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
GFSK	00	-16.06	8.00	Pass
	19	-14.13		
	39	-13.72		

Test plot as follows:

GFSK



CH00



CH19



CH39

4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
GFSK	00	0.664	≥500	Pass
	19	0.656		
	39	0.692		

Test plot as follows:

GFSK



CH00



CH19



CH39

4.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test plot as follows:

GFSK (CH00)





GFSK (CH19)





reference

reference

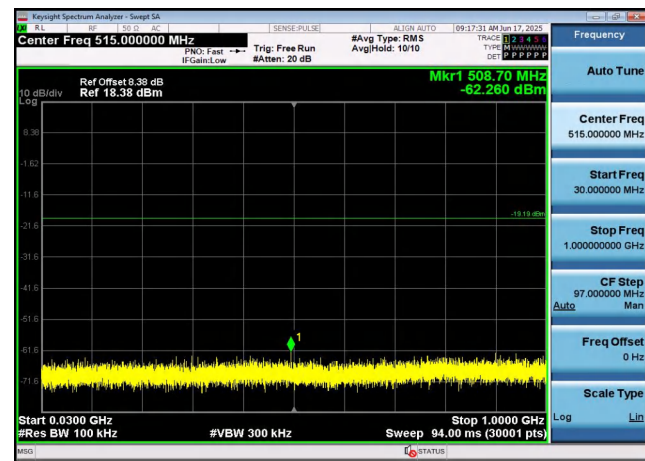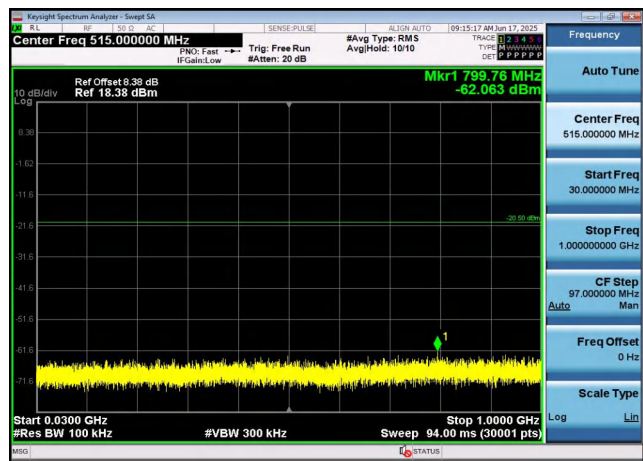

30MHz-1G

30MHz-1G

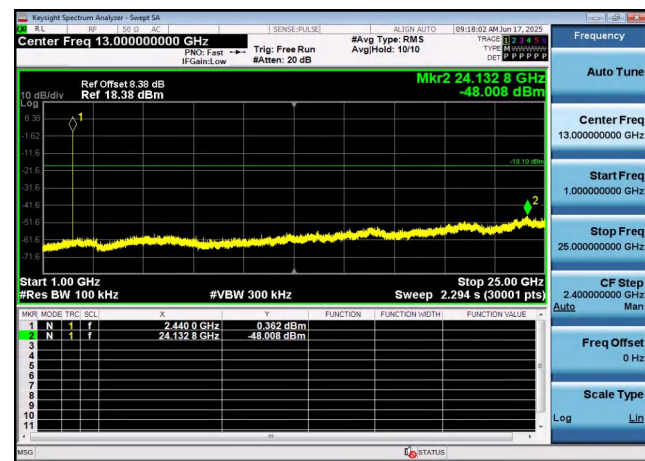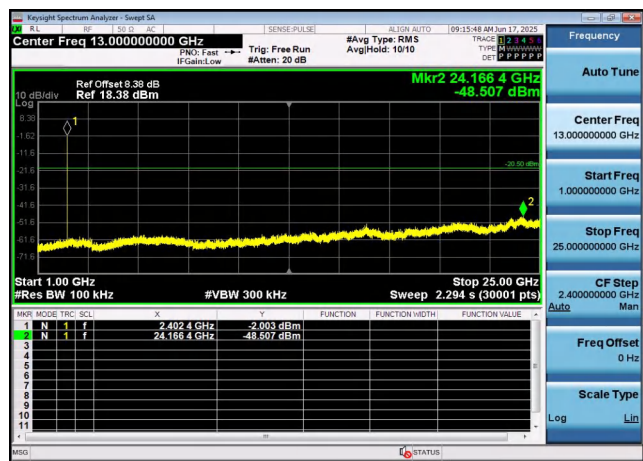


1G-25G

1G-25G


GFSK (CH39)



reference

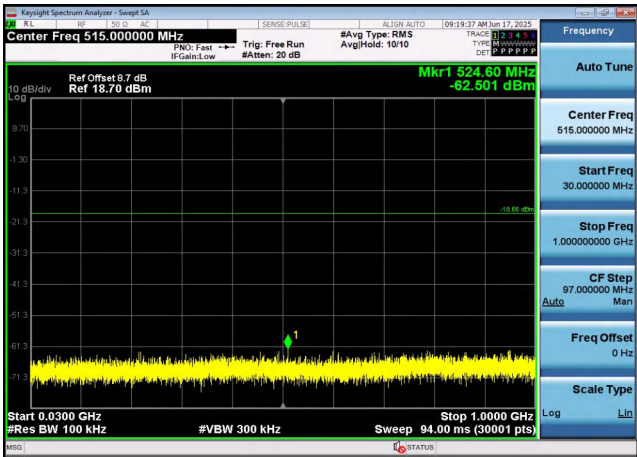

30MHz-1G

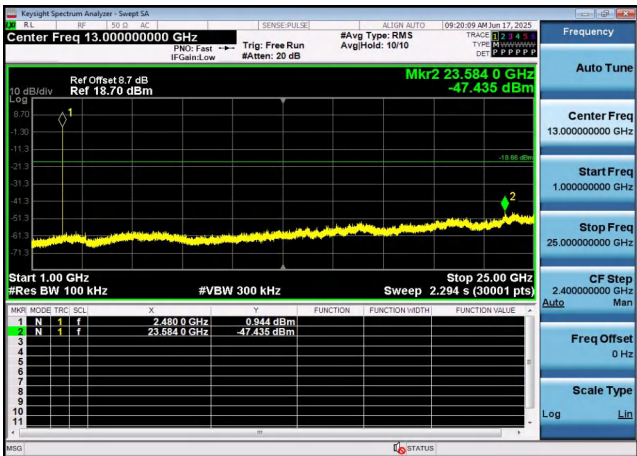


1G-25G


1G-25G

Band-edge Measurements for RF Conducted Emissions:

GFSK

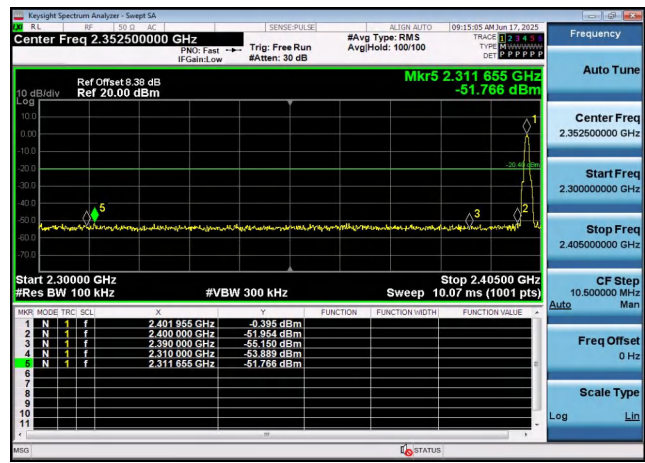

Left bandedge

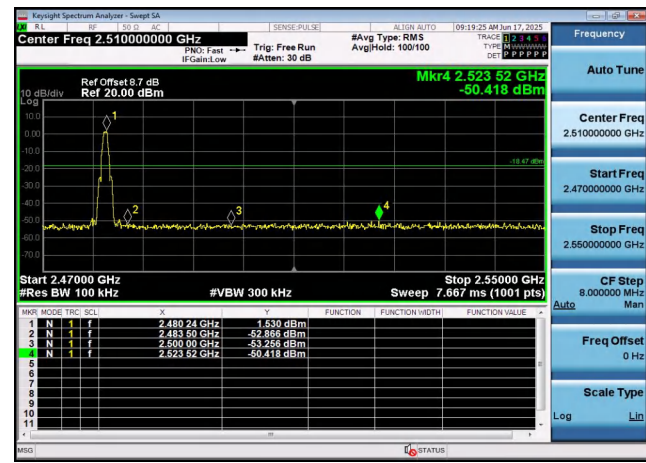

Right bandedge

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.



Antenna Connected Construction

The maximum gain of antenna was 0.0 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.



5 Test Setup Photos of the EUT

Square lamp panel

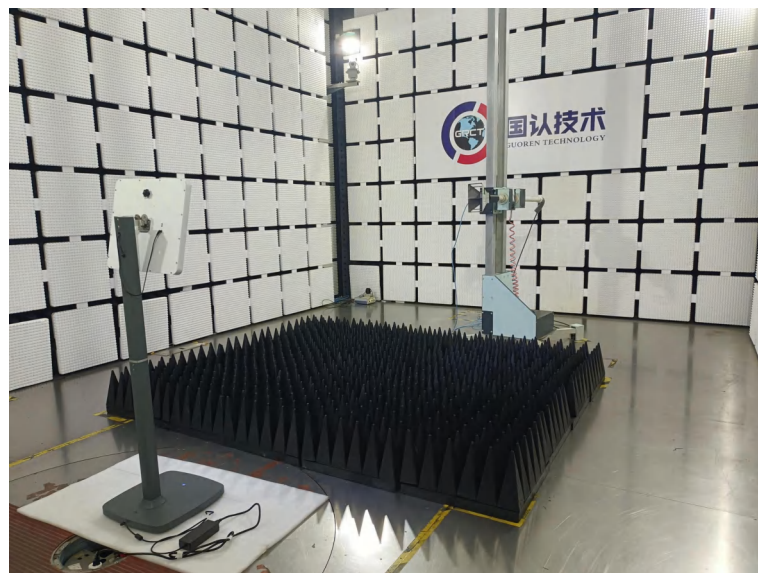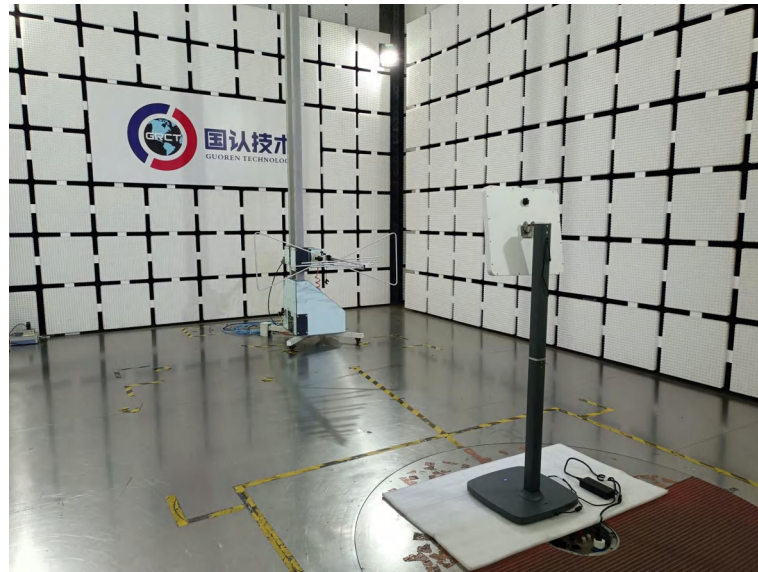



circular lamp panel

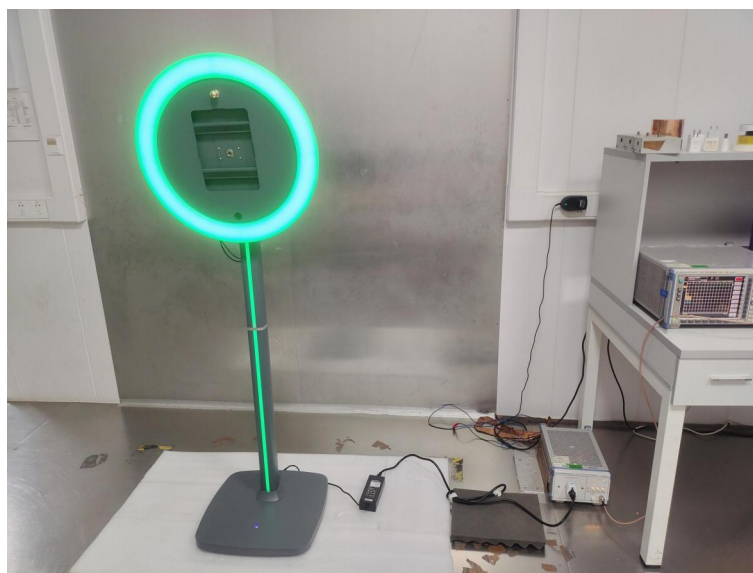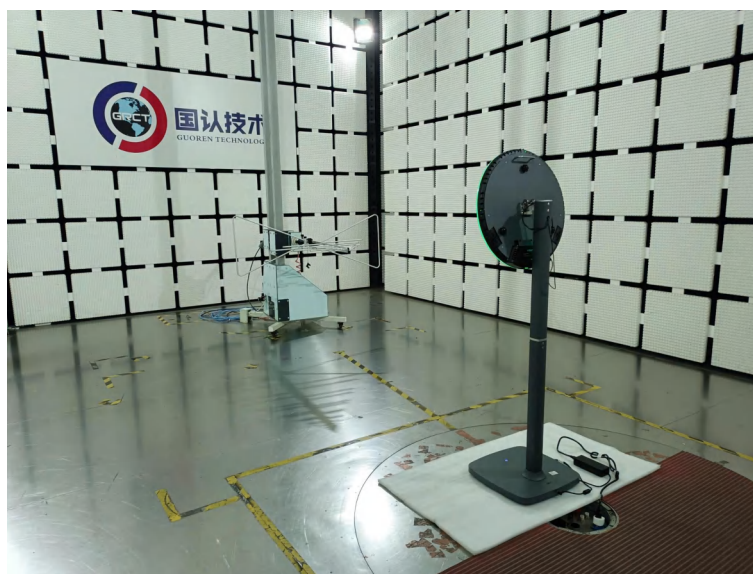

6 EXTERNAL Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

***** End of Report *****