

承 认 书

SPECIFICATION FOR APPROVAL

客 户:

CUSTOMER:

客 户 料 号:

CUST P/N:

淘 软 料 号:

BESOFTP/N:

产 品 型 号:

DESC:

日 期:

DATE:

版 本:

Version:

Φ13.9x39-12Ts-0.08x80-8mm-CLB

2025/05/26

A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
冯伯群	苏燕平	钱立谋	

Shenzhen Taosou Electronics Co., Ltd.

Factory Address: No. 702, Factory Building 1, Upper Shijia Village, Jiaoshi Community, Ma Tian Sub-district, Guangming District, Shenzhen City

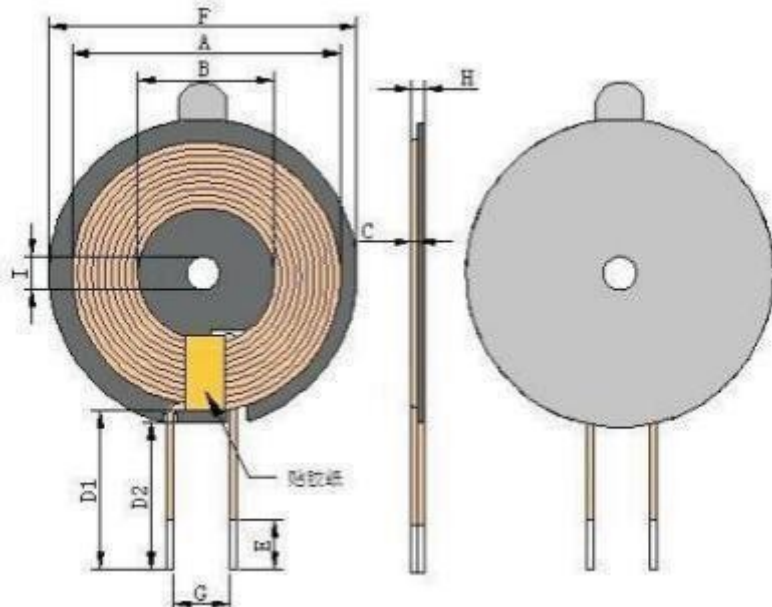
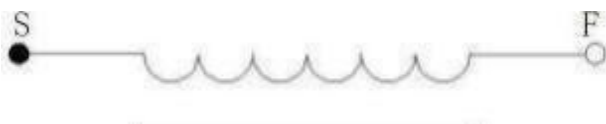
TEL: 138 2488 3512



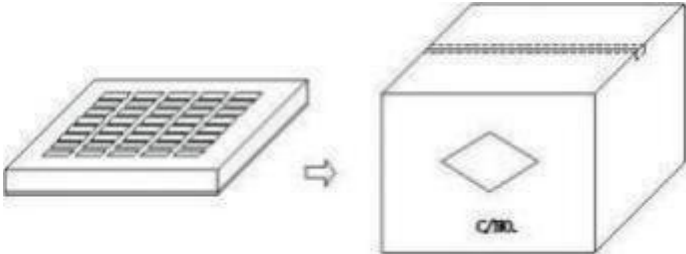
Version Change History

FY-GZ001

规格说明

产 品 型 号: DESC		Φ13.9x39-12Ts-0.08x80-8mm-CLB		版本 Rev: A 0		客 户 CUST:			
						淘软料号 Fine P/N:			
						客 户 料号 CUST P/N:			
一、尺寸 DIMENSION: (mm) 							A	39.0±0.5	
							B	13.9±0.5	
							C	1.0±0.05	
							D1	9±2	
							D2	8±2	
							E	3-5mm	
							F	40±0.5	
							G	9.0 ref	
							H	2.2±0.2 Max	
							I	5.0 ref	
Note:									
1. Coil is attached to the disk. Disk size: 40 ± 0.5 mm, inner hole 5.0 mm, thickness 0.8 ± 0.1 mm, with an L-shaped slot.									
2. Width of the coil outlet position winding: 6 mm ± 0.5, with hot glue tape.									
3. Circular diameter of the adhesive strip on the back of the disk for easy removal: 38 mm (ref), inner hole 7.0 mm (ref), ordinary double-sided adhesive tape.									
二、原理图 SCHEMATIC DIAGRAM: 									
三、绕线参数 Winding Specification:									
序号 NO		端子 TERMINAL		线径 WIRE		圈数 Turns		绕线方向 Winding Direction	
1		S	F	絲包線 0.08*80P		12Ts		CCW	
四、电气特性 ELECTRICAL CHARACTERISTICS:									
温度 TEMPERATURE : 25 ± 10 ° C , 湿 度 RELATIVE HUMIDITY : 65 ± 20 %									
序号 NO		项目 ITEM	端子 TERMINAL	标准 SPECIFICATION		测试条件 TEST FREQUENCY		测试仪器 TEST EQUIPMENTS	
1		IND.	S-F	3.8 uH ±20% 单独线圈		100KHz/ 1.0V		LCZ METER 1062B	
2		IND.	S-F	65 uH ± 10%加磁盘		100KHz/ 1.0V		LCZ METER 1062B	
3		Q 值	S-F	80.0(ref) 加磁盘		100KHz/ 1.0V		LCZ METER 1062B	
4		DCR	S-F	≤90m Ω				LCZ METER 502 B	
拟制/日期 PREPARED BY/DATE					审核/日期 CHECKED BY/DATE				
冯伯群 2025/05/26					苏燕平 2025/05/26				

规格说明

产 品 型 号: DESC	Φ13.9x39-12Ts-0.08x80-8mm-CLB	版本 Rev: A 0	客 户 CUST:	
			淘软料号 Fine P/N:	
			客 户 料 号 CUST P/N:	
五、包装 PACKONG:				
5. 1 包装图片 Packing pictures:				
				
5.2 包装数量及规格 Packing Quantity:				
项 目 Item	数 量 Quantity	材 料 规 格 Material		
盒 Box	350 Pcs	370*265*55mm		
箱 Big Carton	1400 Pcs	390*270*245mm		
5.3 包装以现有包装盘为参照标准，以实际出货包装为准, 如有特要求可以定制。 The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.				
六、材料清单 Material list:				
序号 numbe r	材 料 名 称 Material name	品 名 描 述 Description	制 造 商 Manufacturer	
1	Silk braided wire, 0.08 mm in diameter, 80 strands	Acetone silk braided wire, 0.08 inches in diameter, 80 strands	Dongguan Jinjieren Electronic Materials Co., Ltd.	
2	Lead-free tin rod	Lead-free tin rod	Shenzhen Daqin Xiyi Co., Ltd.	
3	disk	Φ40*5.0*0.8mm Manganese-Zinc Hard Disk	Guangzhou Ruijing New Materials Technology Co., Ltd.	
4	glue	201 glue	Dongguan Feiqu Electronic Materials Co., Ltd.	
5	high-temperature adhesive tape	6mm high-temperature adhesive tape	Dongguan Zhixing Tape New Materials Co., Ltd.	
6	Hole-covered double-sided adhesive tape	With tearable circular shape, diameter 38 mm (ref) self-adhesive backing	Shenzhen Hongweida Technology Co., Ltd.	
拟制/日期 PREPARED BY/DATE		审核/日期 CHECKED BY/DATE		
冯伯群 2025/05/26		苏燕平 2025/05/26		