

# 承 认 书

## SPECIFICATION FOR APPROVAL

客 户 名 称 : 深圳市铭景天电子有限公司

CUSTOMER`S NAME

客 户 料 号 : G185

CUSTOMER`S P/N

产 品 规 格 : Y.A11.373

PRODUCT SPEC

制 作 日 期 : 2024年5月16日

ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
李蓓	程杰	李博文	



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 东莞市大朗镇富民中路533号

TEL: 0769-82866410

FAX: 0769-82866409

\*本承认书请在首批下单生产此机种前回签, 否则视为贵方默认此承认书内所有内容\*

# SPECIFICATION FOR APPROVAL

[illegible]



**SPECIFICATION FOR APPROVAL**

## 1. MATERIAL:

[illegible]

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD  
SPECIFICATION FOR APPROVAL

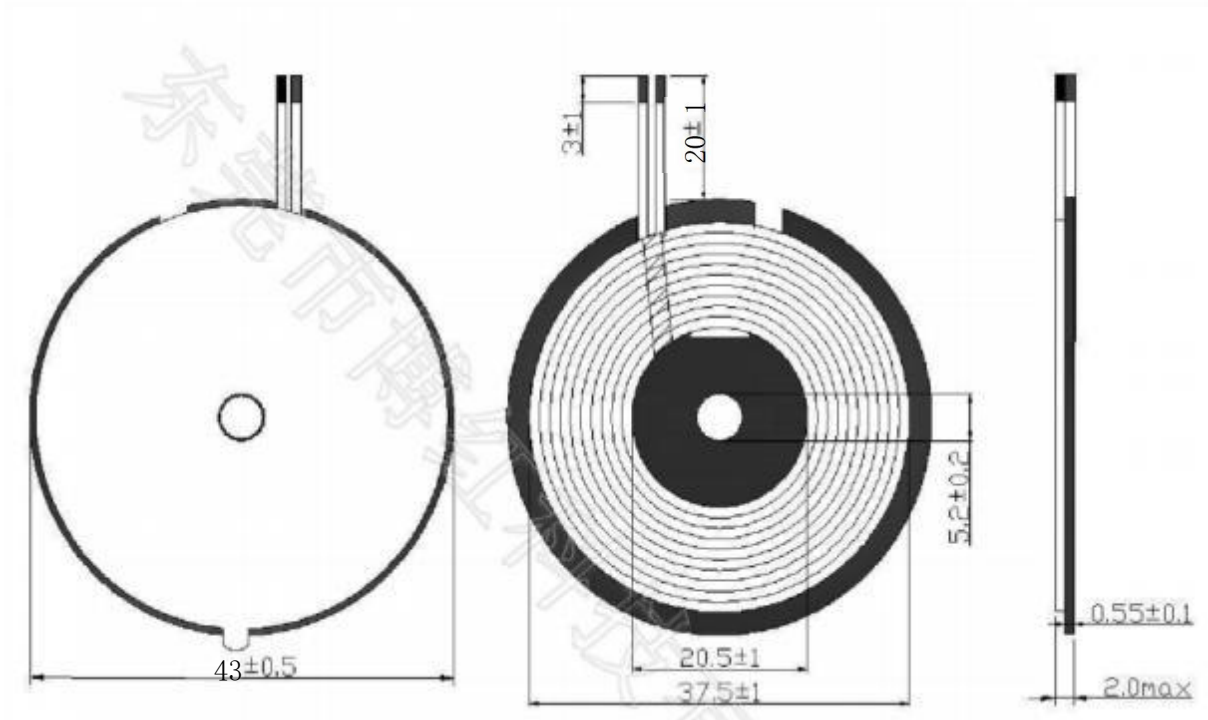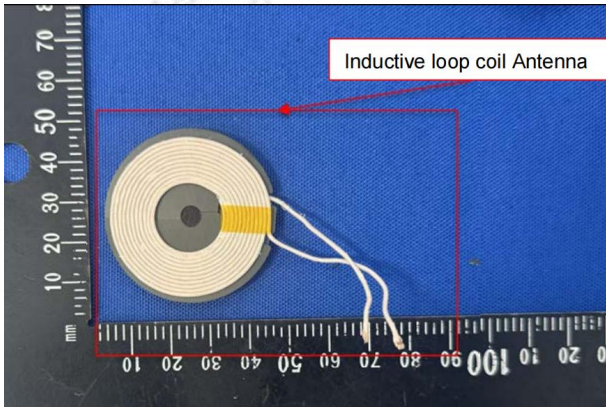CUSTOMER	铭景天	CUSTOMER S/PN	C150		
ISSUE DATE	2024年5月16日	PRODUCT SPEC	Y A11:373		
2.DIMENSION:					
<div><div><p>Technical drawing of the inductive loop coil antenna showing three views: top, side, and front. Dimensions are provided for each view.</p><ul style="list-style-type: none"><li>Top view: Diameter <math>43\pm0.5</math></li><li>Side view: Coil diameter <math>20.5\pm1</math>, total diameter <math>37.5\pm1</math>, coil thickness <math>5.2\pm0.2</math>, lead wire diameter <math>3\pm1</math>, and lead wire length <math>20\pm1</math>.</li><li>Front view: Coil diameter <math>20.5\pm1</math>, total diameter <math>37.5\pm1</math>, coil thickness <math>5.2\pm0.2</math>, lead wire diameter <math>3\pm1</math>, and lead wire length <math>20\pm1</math>.</li></ul></div></div> <div><p>注：</p><ul style="list-style-type: none"><li>1.线圈贴紧磁片，不可翘起；</li><li>2.线圈表面整洁，无脏污；</li><li>3.背贴白色双面胶，带拉手；</li><li>4.2根出线进左边大槽；</li></ul><p>Photograph of the inductive loop coil antenna with a ruler for scale. A red box highlights the antenna and its label "Inductive loop coil Antenna".</p></div>					
ISSUE BY	李蓓	CHECK BY	程杰	APPROVAL BY	李博文


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	铭景天	CUSTOMER S P/N	C150
ISSUE DATE	2024年5月16日	PRODUCT SPEC	Y.A11.373

4. CIRCUIT DIAGRAM

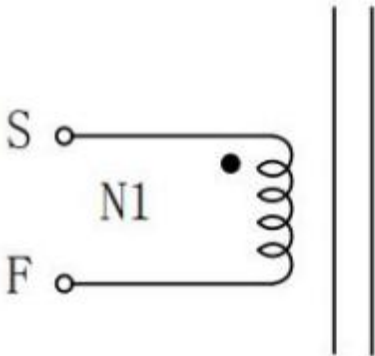

“ • ”: POLARITY/极性

5. WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø48*2P	10	/	CCW

6. CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.4uH±5%	LCR1062 100KHz/1V AT 25℃±2℃


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD


SPECIFICATION FOR APPROVAL

CUSTOMER	铭景天	CUSTOMER S. P/N	C150
ISSUE DATE	2024年5月16日	PRODUCT SPEC	Y. A11. 373

7. THE PACKING WAY

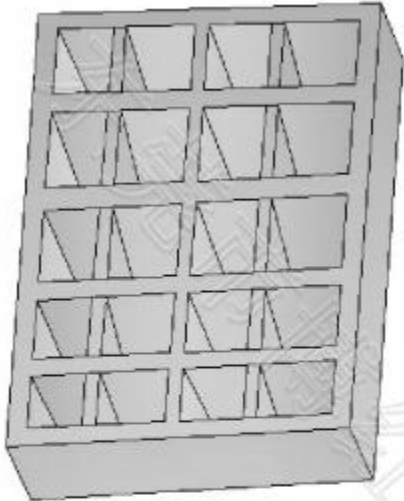

- 1. 珍珠棉规格: 355\*235\*65mm\*2(格);
- 2. 每格装16pcs, 每盘320pcs;
- 3. 每箱装5盘;
- 4. 每箱合计: 1600pcs;

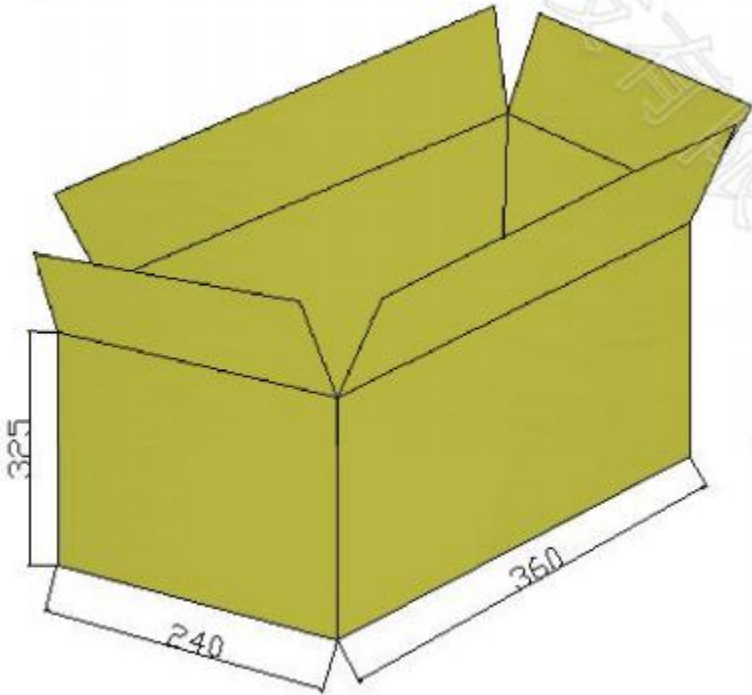

东莞市博红科技有限公司  
DONGGUAN BOHONG TECHNOLOGY CO., LTD  
SPECIFICATION FOR APPROVAL

CUSTOMER	铭景天	CUSTOMER S P/N	C150
ISSUE DATE	2024年5月16日	PRODUCT SPEC	Y. A11. 373

备 忘 录

序号	内 容	处理方法	签 名	日 期
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				