

# FCC Part 15C

## Measurement and Test Report

For

**Xi'an Purui Qianda Trading Co., Ltd**

**FCC ID: 2BP9E-6IN50FT**

**FCC Rule(s):** FCC Part 15.231(a)

**Product Description:** PROPART 6 Inch Inground Pool Light

**Tested Model:** 6IN50FT

**Report No.:** MAX250623901602RF

**Tested Date:** JUN.8~20, 2025

**Issued Date:** JUN. 21, 2025

**Tested By:** Lris. Yao / Engineer

**Reviewed By:** Livi. Xiao / EMC Manager

**Approved & Authorized By:** Salon.ouyang/ PSQ Manager

**Prepared By:**

*Lris Yao*

*Levi Xiao*

*Salon ouyang*

**MAXLAB TESTING CO., LTD.**

1/F, Building B, Xinshidai GR Park, Shiyan Street,  
Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

---

**TABLE OF CONTENTS**

---

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3         |
| 1.2 TEST STANDARDS.....                                     | 4         |
| 1.3 TEST METHODOLOGY.....                                   | 4         |
| 1.4 TEST FACILITY.....                                      | 4         |
| 1.5 EUT SETUP AND TEST MODE.....                            | 4         |
| 1.5 EUT SETUP AND TEST MODE.....                            | 5         |
| 1.6 MEASUREMENT UNCERTAINTY.....                            | 5         |
| 1.7 TEST EQUIPMENT LIST AND DETAILS.....                    | 6         |
| <b>2. SUMMARY OF TEST RESULTS.....</b>                      | <b>7</b>  |
| <b>3. ANTENNA REQUIREMENT.....</b>                          | <b>8</b>  |
| 3.1 STANDARD APPLICABLE.....                                | 8         |
| 3.2 TEST RESULT.....                                        | 8         |
| <b>4. CONDUCTED EMISSIONS.....</b>                          | <b>9</b>  |
| 4.1 TEST PROCEDURE.....                                     | 9         |
| 4.2 BASIC TEST SETUP BLOCK DIAGRAM.....                     | 9         |
| 4.3 ENVIRONMENTAL CONDITIONS.....                           | 9         |
| 4.4 TEST RECEIVER SETUP.....                                | 9         |
| 4.6 CONDUCTED EMISSIONS TEST DATA.....                      | 10        |
| <b>5. RADIATED EMISSIONS.....</b>                           | <b>11</b> |
| 5.1 STANDARD APPLICABLE.....                                | 11        |
| 5.2 TEST PROCEDURE.....                                     | 12        |
| 5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....           | 14        |
| 5.4 ENVIRONMENTAL CONDITIONS.....                           | 14        |
| 5.5 SUMMARY OF TEST RESULTS/PLOTS.....                      | 14        |
| <b>6. 20DB BANDWIDTH.....</b>                               | <b>18</b> |
| 6.1 STANDARD APPLICABLE.....                                | 18        |
| 6.1 TEST PROCEDURE.....                                     | 18        |
| 6.2 ENVIRONMENTAL CONDITIONS.....                           | 18        |
| 6.3 SUMMARY OF TEST RESULTS/PLOTS.....                      | 18        |
| <b>7. TRANSMISSION TIME.....</b>                            | <b>19</b> |
| 7.1 STANDARD APPLICABLE.....                                | 19        |
| 7.2 TEST PROCEDURE.....                                     | 19        |
| 7.3 ENVIRONMENTAL CONDITIONS.....                           | 19        |
| 7.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 19        |
| <b>8. DUTY CYCLE.....</b>                                   | <b>20</b> |
| 8.1 STANDARD APPLICABLE.....                                | 20        |
| 8.2 TEST PROCEDURE.....                                     | 20        |
| 8.3 ENVIRONMENTAL CONDITIONS.....                           | 20        |
| 8.4 SUMMARY OF TEST RESULTS.....                            | 20        |

---

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

**Applicant:** Xi'an Purui Qianda Trading Co., Ltd  
**Address of applicant:** F2-053, 6/F, Block A2, Guorun City, Xixian Avenue, Fengdong New City, Xi'an, Shaanxi, China  
**Manufacturer:** Xi'an Purui Qianda Trading Co., Ltd  
**Address of manufacturer:** F2-053, 6/F, Block A2, Guorun City, Xixian Avenue, Fengdong New City, Xi'an, Shaanxi, China

| General Description of EUT |                                                                              |
|----------------------------|------------------------------------------------------------------------------|
| Product Name:              | PROPART 6 Inch Inground Pool Light                                           |
| Trade Name:                | /                                                                            |
| Model No.:                 | 6IN50FT                                                                      |
| Adding Model(s):           | 6IN100FT,PP10-120-50,PP10-120-100,PP10-C-50,PP10-C-10012Volt50FT,12Volt100FT |
| Rated Voltage:             | 12.0V by battery                                                             |
| Power Adapter Model:       | N/A                                                                          |
|                            |                                                                              |
|                            |                                                                              |

| Technical Characteristics of EUT |                  |
|----------------------------------|------------------|
| Frequency Range:                 | 315.02 MHz       |
| Max. Field Strength:             | 70.95dBuV/m      |
| Data Rate:                       | N/A              |
| Modulation:                      | ASK              |
| Antenna Type:                    | 5273 Rod antenna |

## 1.2 Test Standards

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

MAXLAB TESTING CO., LTD.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China


Tel: 400-882-9628

Fax: 86-755-26508703

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

### TX Mode

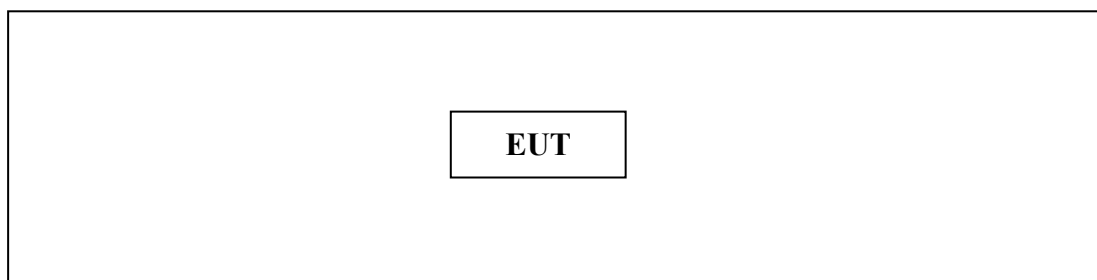

## 1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List |              |            |
|----------------|--------------|------------|
| Test Mode      | Description  | Remark     |
| TM1            | Transmitting | Modulation |
| TM2            |              |            |
| TM3            |              |            |

| Special Cable List and Details |            |                     |                        |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description              | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                              | /          | /                   | /                      |

| Auxiliary Equipment List and Details |              |       |               |
|--------------------------------------|--------------|-------|---------------|
| Description                          | Manufacturer | Model | Serial Number |
| /                                    | /            | /     | /             |

## 1.6 Measurement Uncertainty

| Measurement uncertainty        |            |                     |
|--------------------------------|------------|---------------------|
| Parameter                      | Conditions | Uncertainty         |
| Occupied Bandwidth             | Conducted  | $\pm 1.5\%$         |
| Conducted Spurious Emission    | Conducted  | $\pm 2.17\text{dB}$ |
| Transmission Time              | Conducted  | $\pm 5\%$           |
| Conducted Emissions            | Conducted  | $\pm 2.88\text{dB}$ |
| Transmitter Spurious Emissions | Radiated   | $\pm 5.1\text{dB}$  |

## 1.7 Test Equipment List and Details

| Description                         | Manufacturer     | Model                 | Serial No. | Cal Date   | Due. Date  |
|-------------------------------------|------------------|-----------------------|------------|------------|------------|
| Communication Tester                | Rohde & Schwarz  | CMW500                | 100358     | 2024-10-26 | 2025-10-25 |
| Spectrum Analyzer                   | R&S              | FSP40                 | 100550     | 2024-10-26 | 2025-10-25 |
| Test Receiver                       | R&S              | ESCI7                 | US47140102 | 2024-10-26 | 2025-10-25 |
| Signal Generator                    | HP               | 83630B                | 3844A01028 | 2024-10-26 | 2025-10-25 |
| Test Receiver                       | R&S              | ESPI-3                | 100180     | 2024-10-26 | 2025-10-25 |
| Amplifier                           | Agilent          | 8449B                 | 4035A00116 | 2024-10-26 | 2025-10-25 |
| Amplifier                           | HP               | 8447E                 | 2945A02770 | 2024-10-26 | 2025-10-25 |
| Signal Generator                    | IFR              | 2023A                 | 202307/242 | 2024-10-26 | 2025-10-25 |
| Broadband Antenna                   | SCHAFFNER        | 2774                  | 2774       | 2024-10-26 | 2025-10-25 |
| Biconical and log periodic antennas | ELECTRO-METRIC   | EM-6917B-1            | 171        | 2024-10-26 | 2025-10-25 |
| Horn Antenna                        | R&S              | HF906                 | 100253     | 2024-10-26 | 2025-10-25 |
| Horn Antenna                        | EM               | EM-6961               | 60.8762    | 2024-10-26 | 2025-10-25 |
| LISN                                | R&S              | ESH3-Z5               | 100196     | 2024-10-26 | 2025-10-25 |
| LISN                                | COM-POWER        | LI-115                | 02027      | 2024-10-26 | 2025-10-25 |
| 3m Semi-Anechoic Chamber            | Chengyu Electron | 9 (L)*6 (W)*<br>6 (H) | BSL086     | 2024-10-26 | 2025-10-25 |
| Horn Antenna                        | A-INFOMW         | LB-180400KF           | BSL088     | 2024-10-26 | 2025-10-25 |
| 20dB Attenuator                     | ICPROBING        | IATS1                 | BSL1003    | 2024-10-26 | 2025-10-25 |
| POWER DIVIDER                       | Mini-circuits    | PD-2SF-0010           | N/A        | 2024-10-26 | 2025-10-25 |
| POWER DIVIDER                       | Mini-circuits    | PD-2SF-0010           | N/A        | 2024-10-26 | 2025-10-25 |
| Loop Antenna                        | Schwarz beck     | FMZB 1516             | 9773       | 2024-10-26 | 2025-10-25 |

2. SUMMARY OF TEST RESULTS

| FCC Rules   | Description of Test Item | Result    |
|-------------|--------------------------|-----------|
| § 15.203    | Antenna Requirement      | Compliant |
| § 15.207(e) | Conducted Emission       | N/A       |
| §15.231(a)  | Release Time             | Compliant |
|             | Radiation Emission       | Compliant |
|             | 20 dB Bandwidth          | Compliant |
|             | Duty Cycle               | Compliant |

Note: PASS: applicable, N/A: not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a 5273 Rod antenna, Welded on PCB board, fulfill the requirement of this section.

4. Conducted Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

4.2 Basic Test Setup Block Diagram

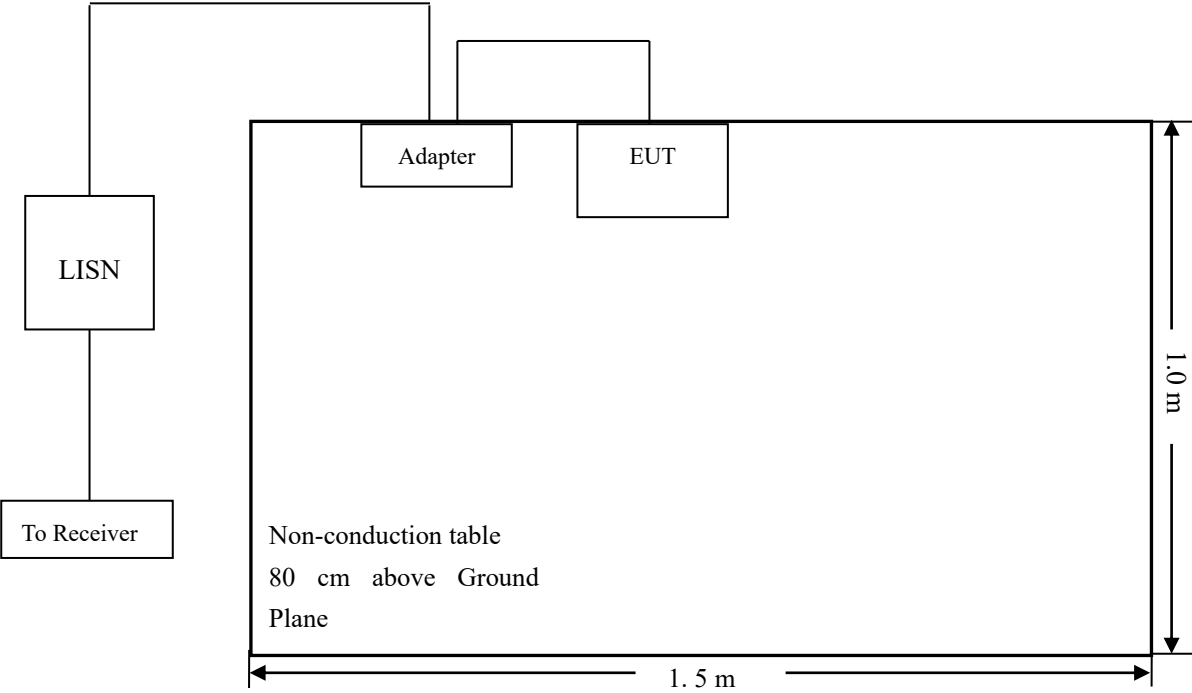

4.3 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1012 mbar |

4.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz

Stop Frequency ..... 30 MHz

Sweep Speed ..... Auto

IF Bandwidth..... 10 kHz

Quasi-Peak Adapter Bandwidth ..... 9 kHz

---

Quasi-Peak Adapter Mode ..... Normal

**4.6 Conducted Emissions Test Data**

The test not applicable.

## 5. Radiated Emissions

---

### 5.1 Standard Applicable

According to §15.231(a), In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

| Fundamental frequency (MHz) | Field strength of fundamental (microvolts/meter) | Field strength of spurious emissions (microvolts/meter) |
|-----------------------------|--------------------------------------------------|---------------------------------------------------------|
| 40.66–40.70                 | 2,250                                            | 225                                                     |
| 70–130                      | 1,250                                            | 125                                                     |
| 130–174                     | <sup>1</sup> 1,250 to 3,750                      | <sup>1</sup> 125 to 375                                 |
| 174–260                     | 3,750                                            | 375                                                     |
| 260–470                     | <sup>1</sup> 3,750 to 12,500                     | <sup>1</sup> 375 to 1,250                               |
| Above 470                   | 12,500                                           | 1,250                                                   |

(1) Linear interpolations.

(2) Emission level (dB)uV = 20 log Emission level uV/m

(3) The smaller limit shall apply at the cross point between two frequency bands.


The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

## 5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(e) and FCC Part 15.209 Limit.

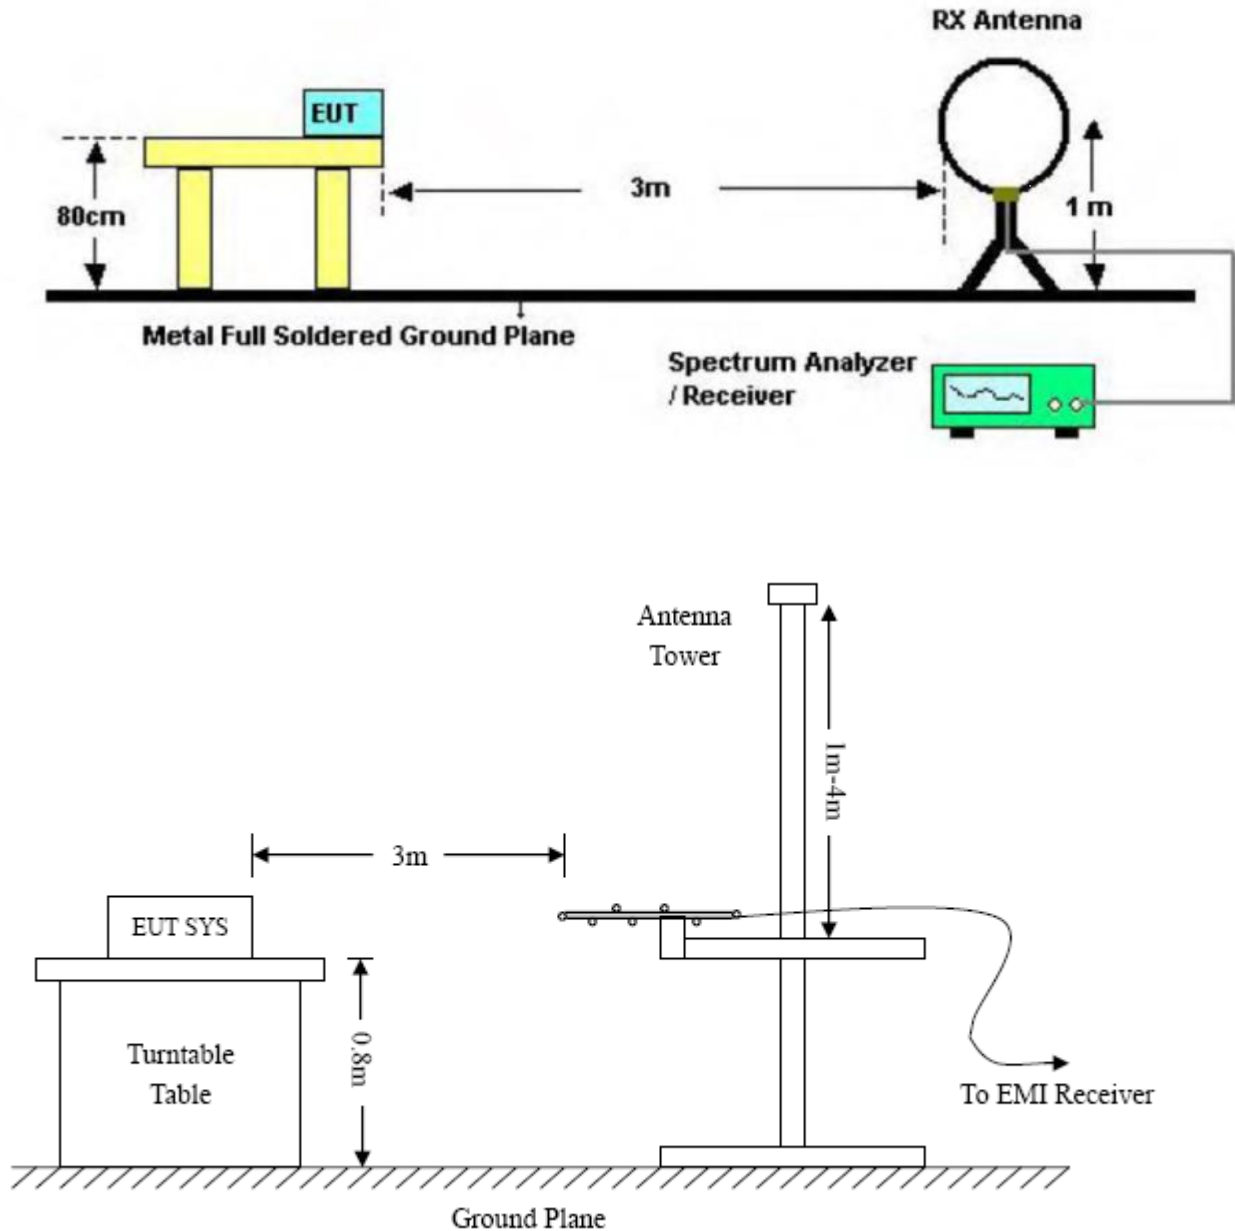

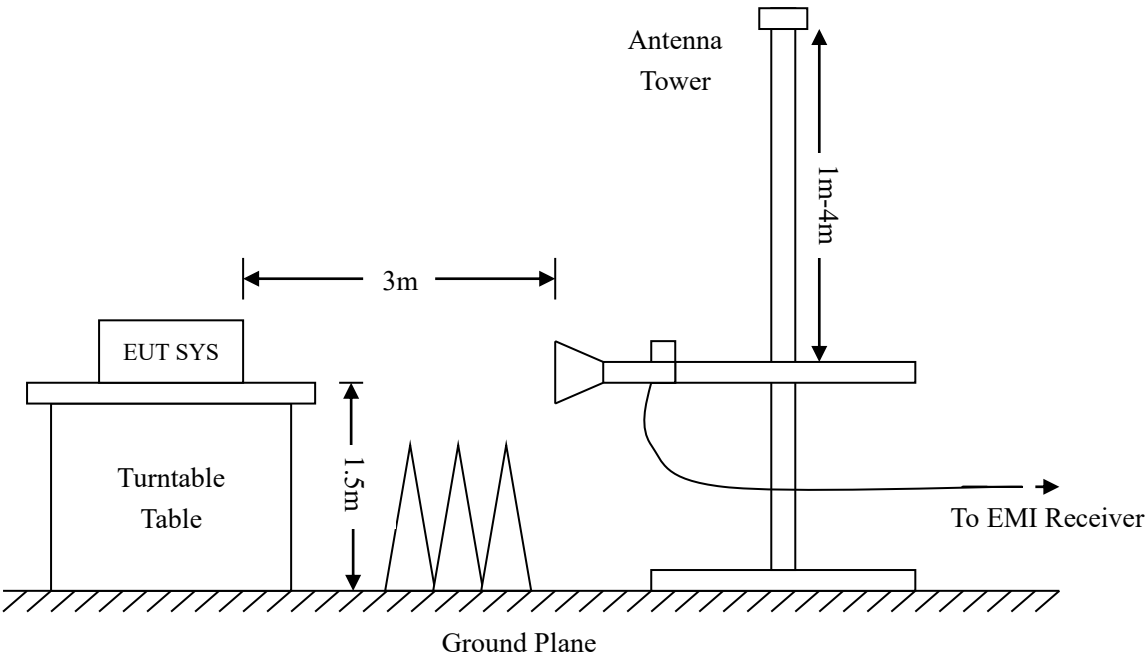

### 5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 5.4 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 21° C     |
| Relative Humidity: | 50%       |
| ATM Pressure:      | 1011 mbar |

### 5.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:


**-12.75dB at 315.02MHz** in the Horizontal polarization, **Ave Detector, 9 kHz to 6 GHz, 3 Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

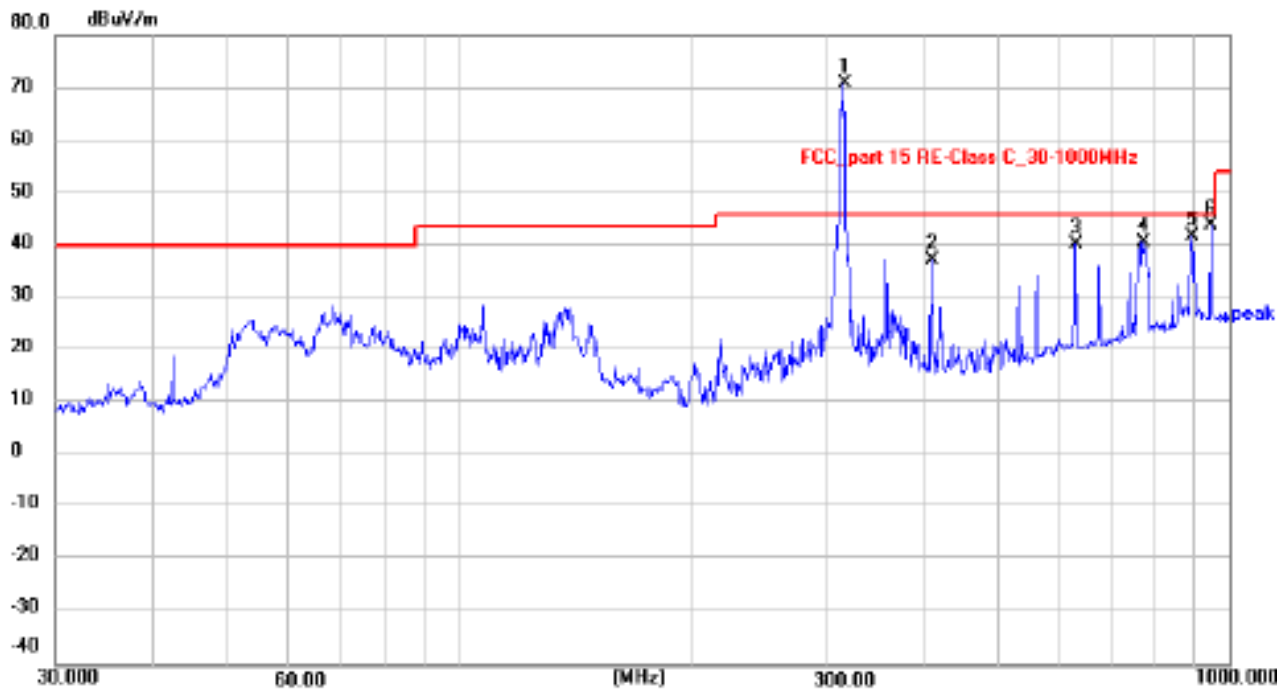*Horizontal*

| Below 1GHz |         |            |            |        |        |        |       |        |        |
|------------|---------|------------|------------|--------|--------|--------|-------|--------|--------|
| Frequency  | Reading | Corr.      | Duty cycle | Result | Limit  | Margin | Deg.  | Height | Remark |
| MHz        | dBuV/m  | Factor(dB) | Factor(dB) | dBuV/m | dBuV/m | (dB)   | ( ° ) | (cm)   |        |
| 315.02     | 86.13   | -15.18     | N/A        | 70.95  | 95.64  | -24.69 | 12    | 150    | peak   |
| 315.02     | /       | /          | -8.06      | 62.89  | 75.64  | -12.75 | 12    | 150    | Ave    |
| 410.38     | 50.16   | -12.80     | N/A        | 37.36  | 46.00  | -8.64  | 156   | 150    | peak   |
| 630.04     | 47.73   | -7.35      | N/A        | 40.38  | 75.64  | -35.26 | 62    | 150    | peak   |
| 630.04     | /       | /          | -8.06      | 32.32  | 55.64  | -23.32 | 62    | 150    | Ave    |
| 771.45     | 45.69   | -5.00      | N/A        | 40.69  | 46.00  | -5.31  | 128   | 150    | peak   |
| 890.73     | 45.75   | -3.86      | N/A        | 41.89  | 46.00  | -4.11  | 59    | 150    | peak   |
| 945.06     | 46.91   | -3.08      | N/A        | 43.83  | 75.64  | -31.81 | 62    | 150    | peak   |
| 945.06     | /       | /          | -8.06      | 35.77  | 55.64  | -19.87 | 62    | 150    | Ave    |
| Above 1GHz |         |            |            |        |        |        |       |        |        |
| 1260.08    | 50.62   | -13.64     | N/A        | 36.98  | 75.64  | -38.66 | 28    | 150    | Peak   |
| 1260.08    | /       | /          | -8.06      | 28.92  | 55.64  | -26.72 | 28    | 150    | Ave    |
| 1575.10    | 43.33   | -15.20     | N/A        | 28.13  | 74.00  | -45.87 | 23    | 150    | Peak   |
| 1575.10    | /       | /          | -8.06      | 20.07  | 54.00  | -33.93 | 23    | 150    | Ave    |

Vertical

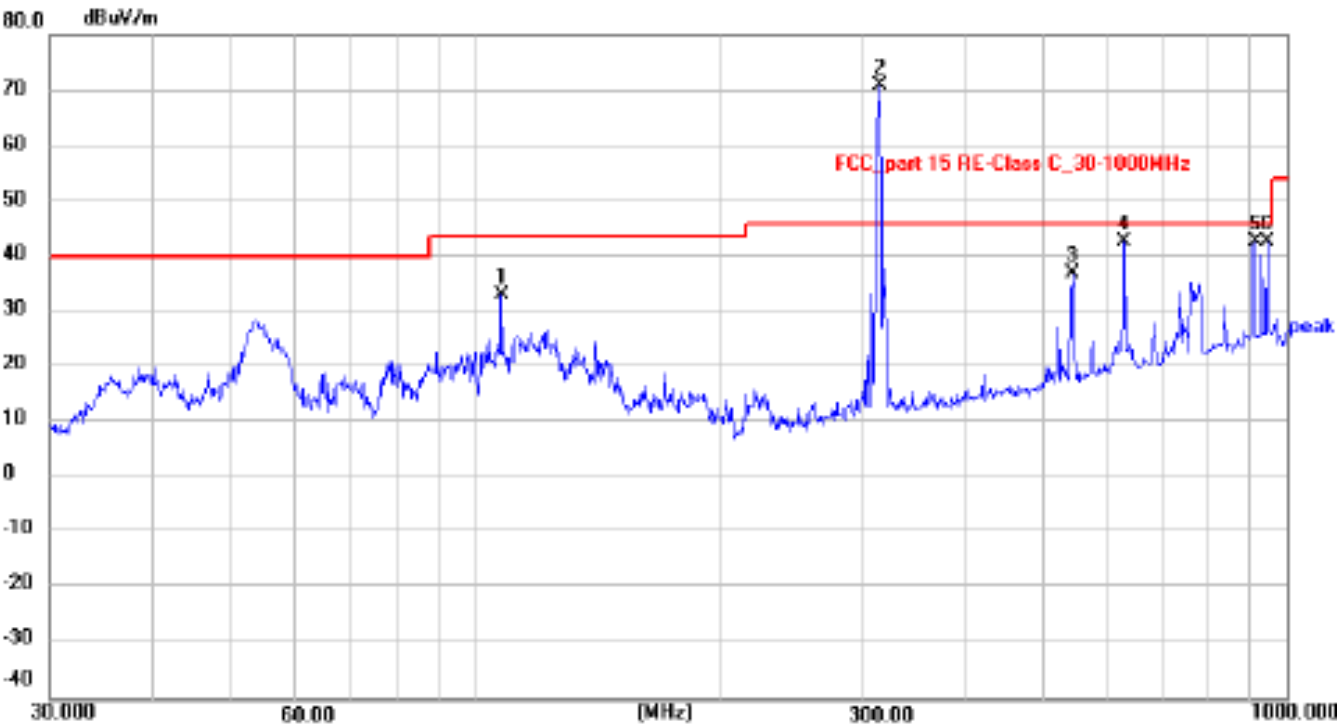

| Below 1GHz |         |            |             |        |        |        |       |        |        |
|------------|---------|------------|-------------|--------|--------|--------|-------|--------|--------|
| Frequency  | Reading | Corr.      | Duty cycle  | Result | Limit  | Margin | Deg.  | Height | Remark |
| MHz        | dBuV/m  | Factor(dB) | Factor (dB) | dBuV/m | dBuV/m | (dB)   | ( ° ) | (cm)   |        |
| 107.89     | 52.16   | -19.15     | N/A         | 33.01  | 43.50  | -10.49 | 48    | 100    | peak   |
| 315.02     | 85.99   | -15.18     | N/A         | 70.81  | 95.64  | -24.83 | 102   | 100    | peak   |
| 315.02     | /       | /          | -8.06       | 62.75  | 75.64  | -12.89 | 102   | 100    | Ave    |
| 545.18     | 46.53   | -9.43      | N/A         | 37.10  | 46.00  | -8.90  | 89    | 100    | peak   |
| 630.04     | 49.98   | -7.35      | N/A         | 42.63  | 75.64  | -33.01 | 76    | 100    | peak   |
| 630.04     | /       | /          | -8.06       | 34.57  | 55.64  | -21.07 | 76    | 100    | Ave    |
| 912.86     | 46.17   | -3.59      | N/A         | 42.58  | 46.00  | -3.42  | 213   | 100    | peak   |
| 945.06     | 45.67   | -3.08      | N/A         | 42.59  | 75.64  | -33.05 | 99    | 100    | peak   |
| 945.06     | /       | /          | -8.06       | 34.53  | 55.64  | -21.11 | 99    | 100    | Ave    |
| Above 1GHz |         |            |             |        |        |        |       |        |        |
| 1260.08    | 51.37   | -13.64     | N/A         | 37.73  | 75.64  | -37.91 | 54    | 100    | Peak   |
| 1260.08    | /       | /          | -8.06       | 29.67  | 55.64  | -25.97 | 54    | 100    | Ave    |
| 1575.10    | 49.25   | -15.20     | N/A         | 34.05  | 74.00  | -39.95 | 76    | 100    | Peak   |
| 1575.10    | /       | /          | -8.06       | 25.99  | 54.00  | -28.01 | 76    | 100    | Ave    |

Note:

---

*Margin = Receiver Read level + Factor( Antenna Factor + Cable Loss – Preamplifier Factor)*

*Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz.*

*The fundamental frequency is 315.02MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 315.02MHz.*

## 6. 20dB Bandwidth

### 6.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 6.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dBc Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

### 6.2 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 21° C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1011 mbar |


### 6.3 Summary of Test Results/Plots

| Test Frequency<br>MHz | 20dBc Bandwidth<br>kHz | Limit<br>kHz | Result |
|-----------------------|------------------------|--------------|--------|
| 315.02                | 94.56                  | 787.55       | Pass   |

Limit = Fundamental Frequency X 0.25% = 315.02 MHz X 0.25% = 787.55 kHz

Please refer to the attached plots.

20dBc Bandwidth Test Plot

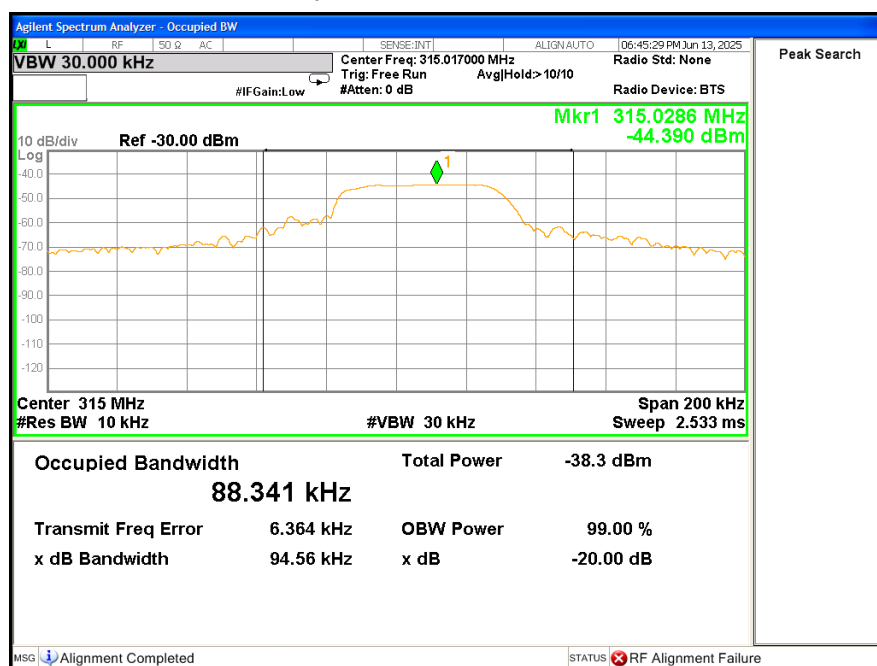

## 7. Transmission Time

### 7.1 Standard Applicable

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

### 7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 315.02, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 7.3 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 20° C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1011 mbar |

### 7.4 Summary of Test Results/Plots

| Dwell Time(seconds) | Limit(s) | Result |
|---------------------|----------|--------|
| 250ms               | 5s       | PASS   |

Please refer to the attached plots.

Transmission Time:

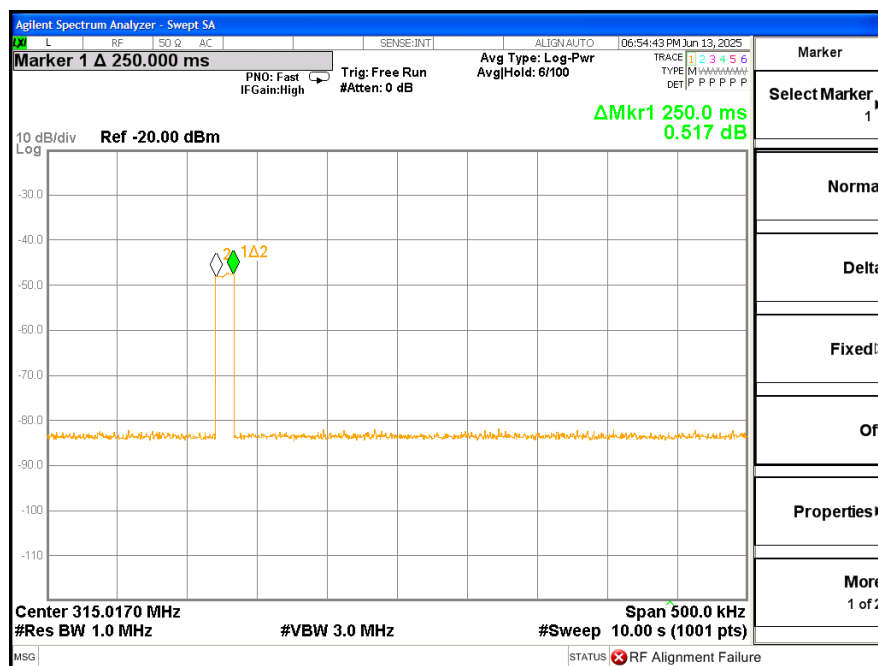

## 8. Duty Cycle

### 8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

### 8.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 315.02, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 8.3 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 20° C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1011 mbar |

### 8.4 Summary of Test Results



The duty cycle is simply the on-time divided the duration of one cycle


$$\text{Duty Cycle} = (0.4\text{ms} \times 14 + 1.2\text{ms} \times 12) / 50.6 = 39.52\%$$

| Test Period (T <sub>p</sub> )<br>ms | Total Time (T <sub>on</sub> )<br>ms | Duty Cycle<br>% | Duty Cycle Factor<br>dB |
|-------------------------------------|-------------------------------------|-----------------|-------------------------|
| 50.6                                | 20                                  | 39.52           | -8.06                   |

$$\text{Duty Cycle Factor} = 20 \log(\text{Duty Cycle}) = -8.06$$

*Please refer to the attached test plots*

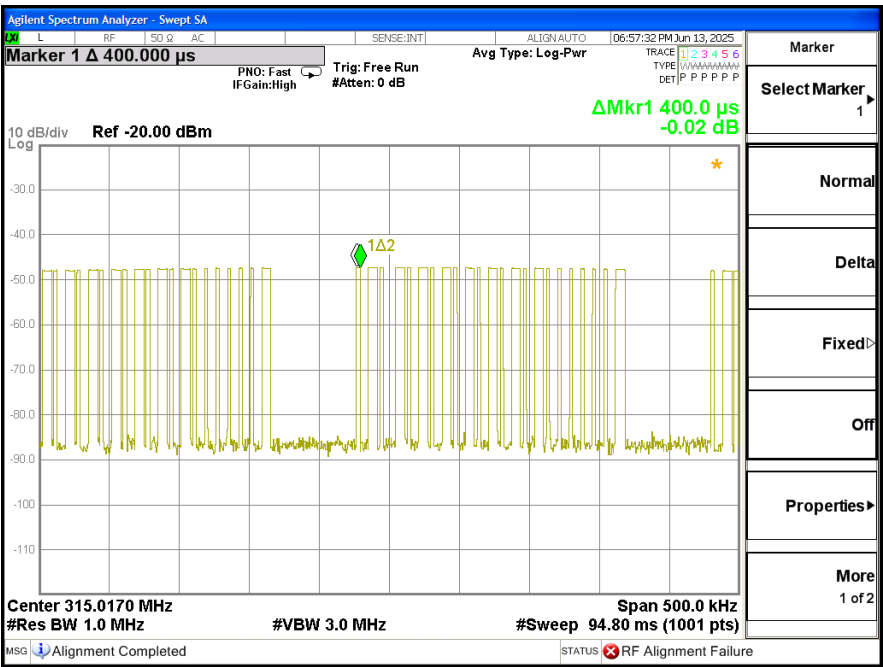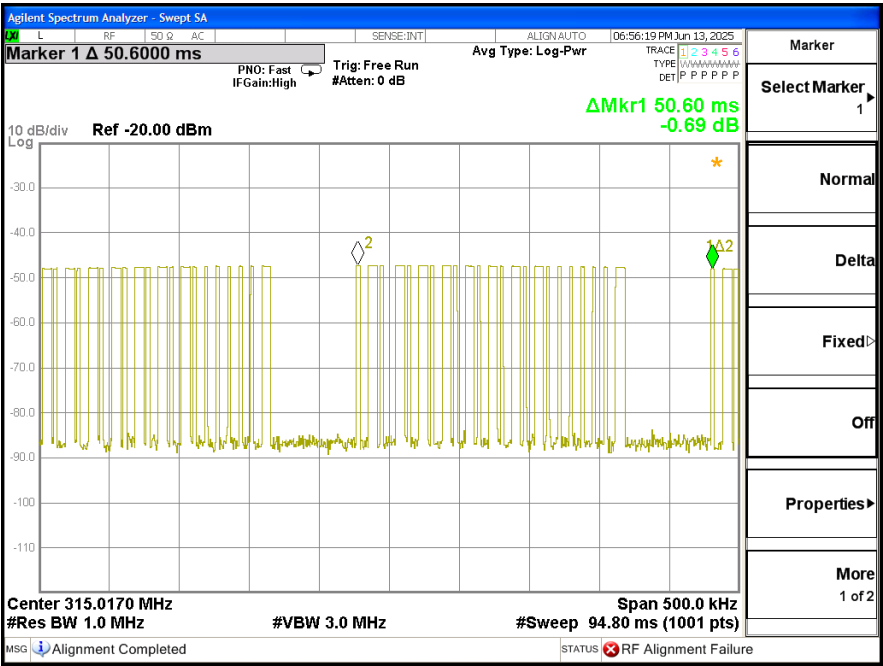

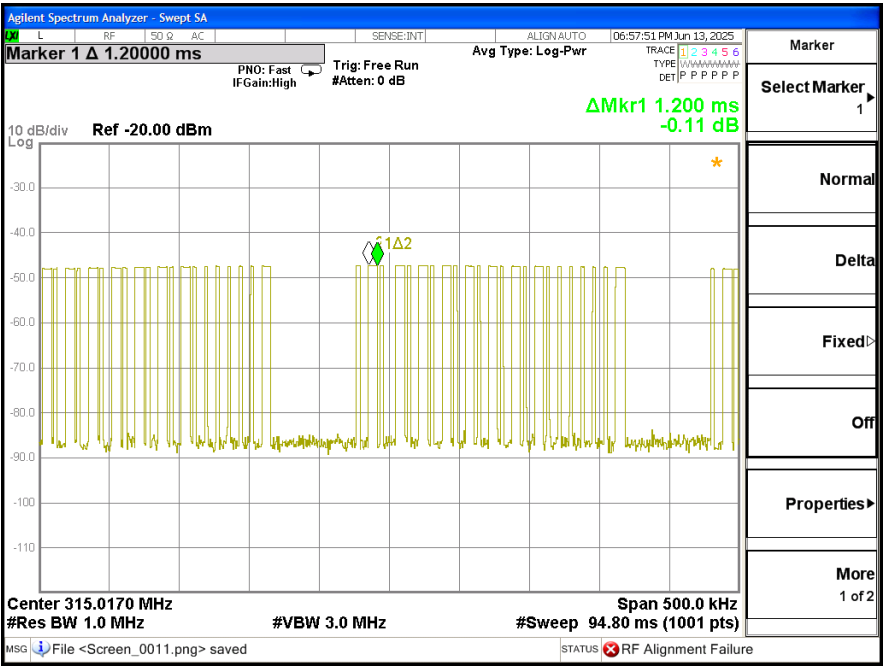

\*\*\*END REPORT\*\*\*