

TEST REPORT

Product Name : Car navigation with large screen
Model/Type reference : BD-9CP232-NL-1, BD-10CP232-NL-1
Report Number : HTC20250509001
Date of Issue : May 09, 2025
Test Standards : GB/T 9410-2008
ANSI/IEEE Std149-1979

Compiled by: Eason Reviewed by: Acron
Approved by: Jason Date: May 09, 2025



Prepared by:
Shenzhen XinHua Technology co.,Ltd
E-mail: jason.chen@htc-cert.com

Version

Version No.	Date	Description
00	May 09, 2025	Original

Contents

1. General Information	3rd
1.1 General information of testing institutions	3rd
1.2 Applicant and Manufacturer	3rd
1.3 Testing principle	3rd
1.4 Test equipment	4th
1.5 Test environment	4th
1.6 Statement	4th
2. Sample Information	5th
2.1 Description of EUT(S)	5th
2.2 EUT appearance	5th
Antenna Dimensions	6th
2.3 EUT setup photo of free space OTA testing	7th
3. Test Results	8th
3.1 Test uncertainty	8th
3.2 Test data	9th
3.2.1 VSWR parameters	9th
3.2.2 VSWR data	9th
3.2.3 Typical free space efficiency and gain	9th
3.2.4 Radiation pattern	10th

1.4 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
OTA Test System	RayZone-5000	A0011	GTS	2023.8.14	2025.8.13
Network Analyzer	E5071C	C0017	KEYSIGHT	2025.4.28	2026.4.27

1.5 Test environment

Temperature	24.8℃
Humidity	83%RH
Pressure	100.06kPa

1.6 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen XinHua Technology co.,Ltd have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

2.Sample Information

2.1 Description of EUT(S)

Test Item	VSWR;Antenna gain; Efficiency; Radiation pattern
Frequency Range	2400-2500MHz、 5150-5850MHz
Received Date	April 29, 2025
Test Date	May 08, 2025


2.2 EUT appearance



View Of Product-01




View Of Product-02

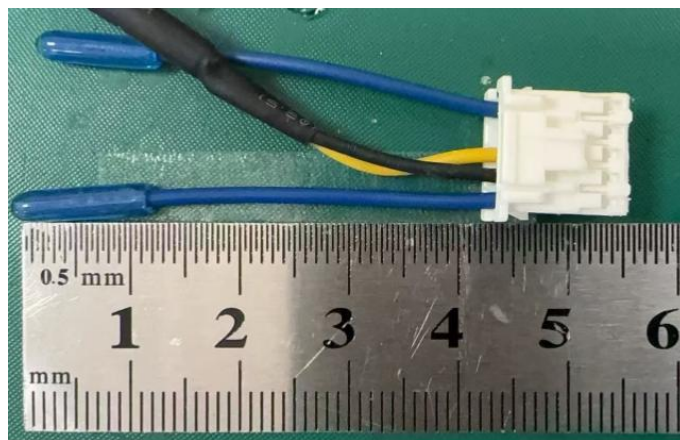

Antenna Dimensions

2.3 EUT setup photo of free space OTA testing

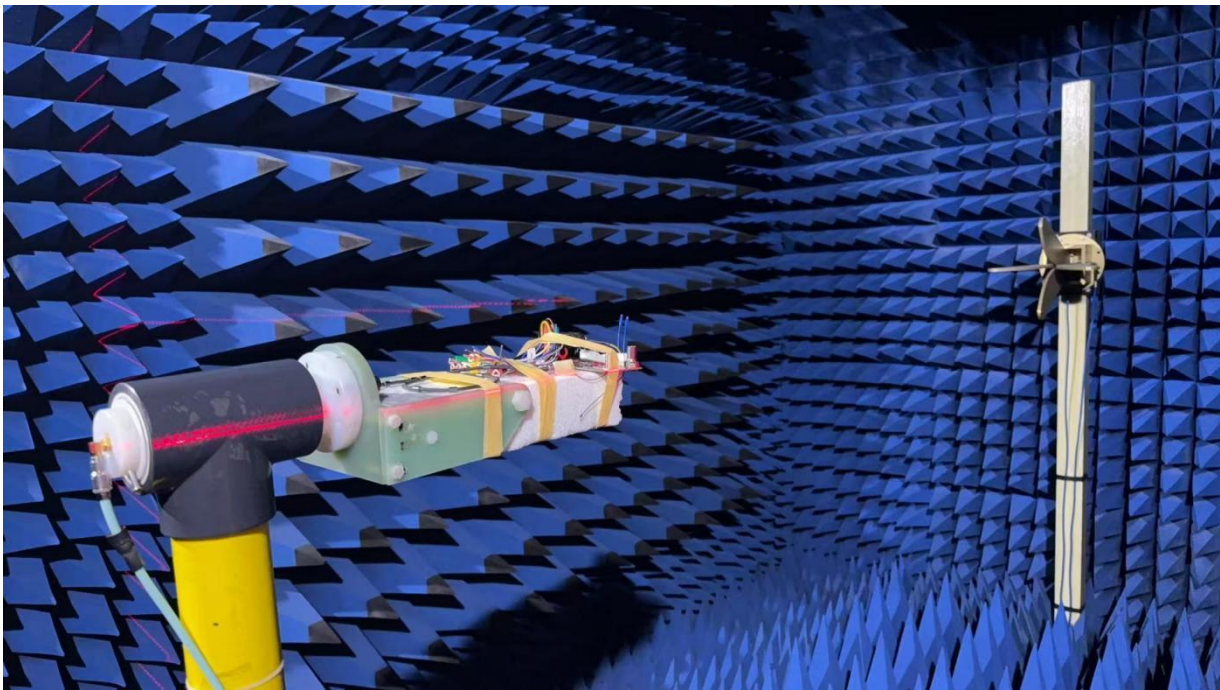

3. Test Results

3.1 Test uncertainty


The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of $K=2$ and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
VSWR	± 0.3
Antenna gain	$\pm 0.72\text{dB}$
Radiation efficiency	$\pm 0.72\text{dB}$


3.2 Test data

3.2.1 VSWR parameters

BT Antenna

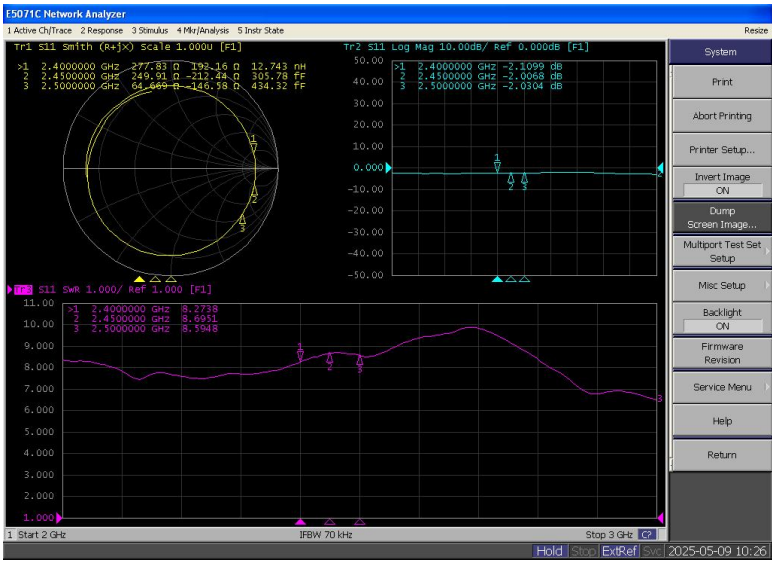

WIFI Antenna

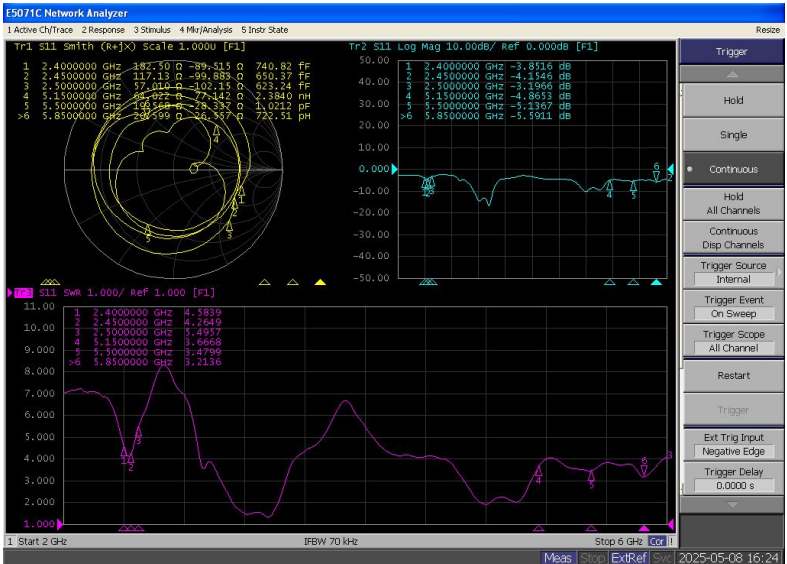

3.2.2 VSWR data

BT Antenna	Frequency/MHz	2400	2450	2500
	VSWR	8.27	8.69	8.59

WIFI Antenna	Frequency/MHz	2400	2450	2500	5150	5550	5850
	VSWR	4.58	4.26	5.49	3.66	3.47	3.21

3.2.3 Typical free space efficiency and gain

BT Antenna

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Gain (dBi)	-10.73	-10.32	-10.27	-9.96	-9.28	-9.59	-9.52	-9.19	-9.33	-8.22	-8.94
Efficiency (%)	3.09	3.13	3.49	3.55	3.54	3.69	3.57	3.48	3.52	3.65	3.42


WIFI Antenna

Frequency ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0	5150.0	5250.0	5350.0	5450.0	5550.0	5650.0	5750.0	5850.0
Gain (dBi)	-10.37	-10.65	-8.91	-8.69	-8.42	-7.74	-6.92	-7.45	-6.99	-7.39	-7.20	-0.97	-2.09	-2.49	-1.74	-0.19	1.63	2.68	0.98
Efficiency (%)	3.10	3.44	4.35	4.76	5.27	5.72	5.78	5.49	5.50	5.56	5.26	17.50	17.15	17.61	18.85	23.62	31.50	35.93	29.29


3.2.4 Radiation pattern

BT Antenna:


(1) 2400.0MHz Total(E1-XZ), Max= -11.25dBi:




(2) 2450.0MHz Total(E1-XZ), Max= -9.91dBi:

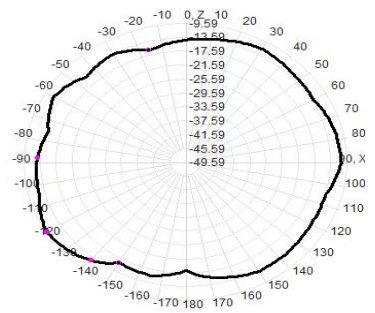


(3) 2500.0MHz Total(E1-XZ), Max= -9.31dBi:

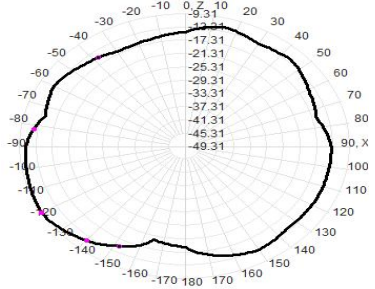


(4) Typicall Free Space 3D Radiation Pattern at 2400MHz(unit:dBi)

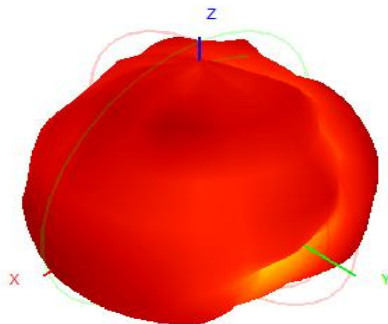

(5) Typicall Free Space 3D Radiation Pattern at 2450MHz(unit:dBi)

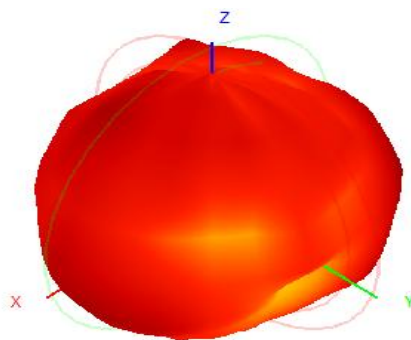


(6) Typical Free Space 3D Radiation Pattern at 2500MHz(unit:dBi)




WIFI Antenna


(1) 2400.0MHz Total(E1-XZ), Max= -10.37dBi:

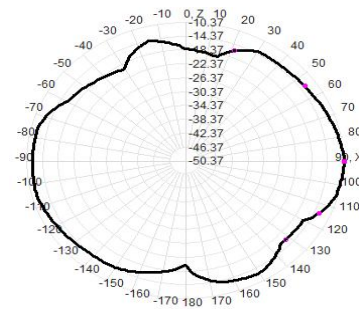


(2) 2450.0MHz Total(E1-XZ), Max= -8.32dBi:




(3) 2500.0MHz Total(E1-XZ), Max= -8.55dBi:




(4) 5150.0MHz Total(E1-XZ), Max= -5.34dBi




(5) 5550.0MHz Total(E1-XZ), Max= -2.82dBi




(6) 5850.0MHz Total(E1-XZ), Max= -2.35dBi




(7) Typicall Free Space 3D Radiation Pattern at 2400MHz(unit:dBi)




(8) Typicall Free Space 3D Radiation Pattern at 2450MHz(unit:dBi)




(9) Typical Free Space 3D Radiation Pattern at 2500MHz(unit:dBi)




(10) Typical Free Space 3D Radiation Pattern at 5150MHz(unit:dBi)



(11) Typical Free Space 3D Radiation Pattern at 5550MHz(unit:dBi)



(12) Typical Free Space 3D Radiation Pattern at 5850MHz(unit:dBi)



-----End-----