

Antenna Specification Sheet

Content

SECTION	Page
1 Basic Specifications	3
2 Gain Specifications	4
3 Detailed Radiation Pattern	5
4 Structure drawing	9

1 Basic Specifications

Antenna Name: RC Ant 0, and RC Ant 1

Operation Frequency: 2.4~2.483GHz, 5.15~5.25GHz, and 5.725~5.875GHz

Gain: 3dBi (2.4~2.483GHz), 1.5dBi (5.15~5.25GHz), 4dBi (5.725~5.875GHz)

Antenna type: Integral Antenna

Connector Type: Ipex-1

Impedance: 50ohm

Efficiency: $\geq 45\%$

VSWR: ≤ 2

Polarization type: Linear

3dB Beamwidth: Omnidirectional horizon

Manufacturer: Shenzhen ZTX Communication Technology Co., LTD.

Address: No.34 Shilong Road, Bao'an District, Shenzhen, Guangdong Province

2 Gain Specifications


Antenna efficiency/Return Loss/VSWR

Frequency	gain(dBi)R	efficiency(%)R	Gain(dBi)L	efficiency(%)L
2400MHz	2.05	65%	2.05	65%
2420MHz	3.00	67%	3.00	67%
2440MHz	2.46	68%	2.46	68%
2450MHz	2.25	68%	2.25	68%
2460MHz	2.12	68%	2.12	68%
2480MHz	2.00	66%	2.00	66%
5150MHz	1.22	49%	1.22	49%
5200MHz	1.50	54%	1.50	54%
5700MHz	3.52	59%	3.52	59%
5750MHz	3.47	59%	3.47	59%
5800MHz	3.78	61%	3.78	61%
5850MHz	4.00	63%	4.00	63%


3 Detailed Radiation Pattern

Test lab	Satimo SG24
Test date	2025/3/18


2.4G radiation pattern_Phi=0

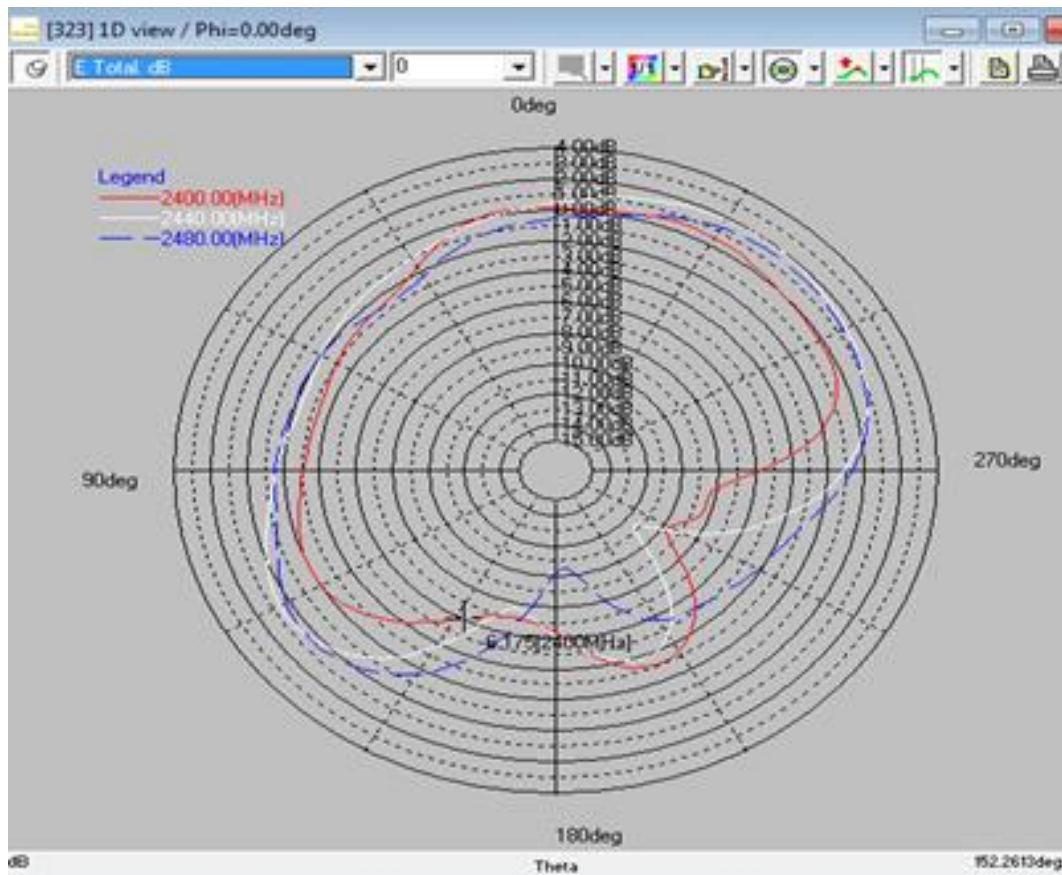


2.4G radiation pattern_Phi=90

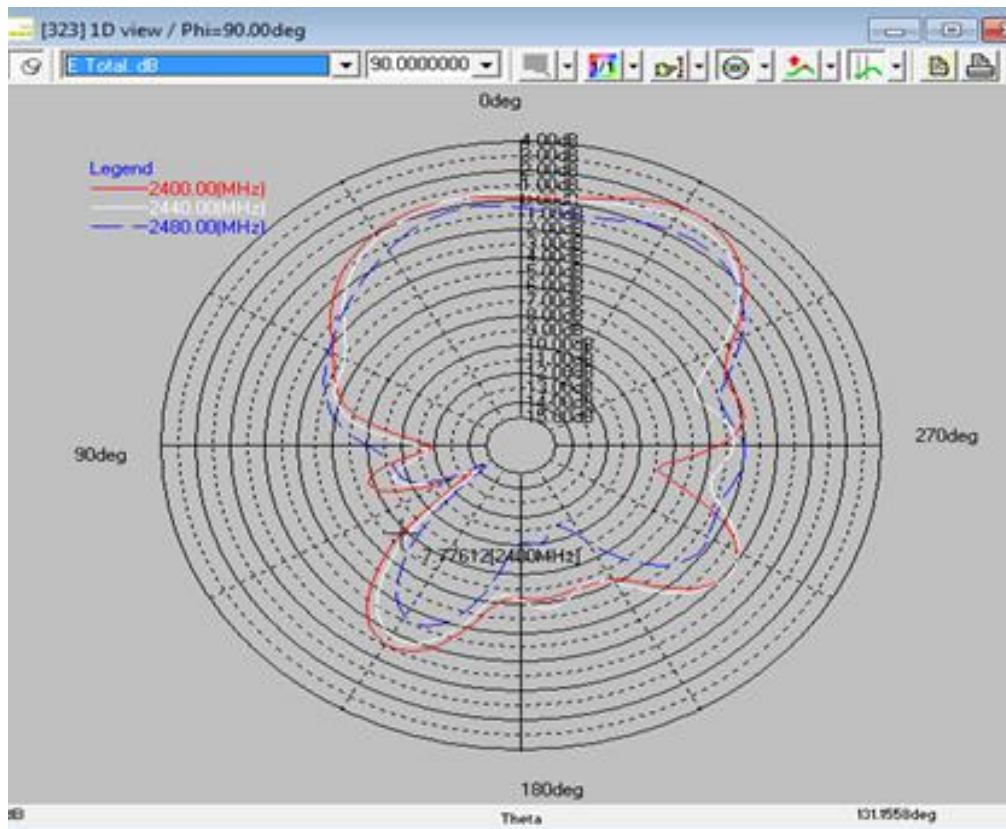


5.2G radiation pattern_Phi=0

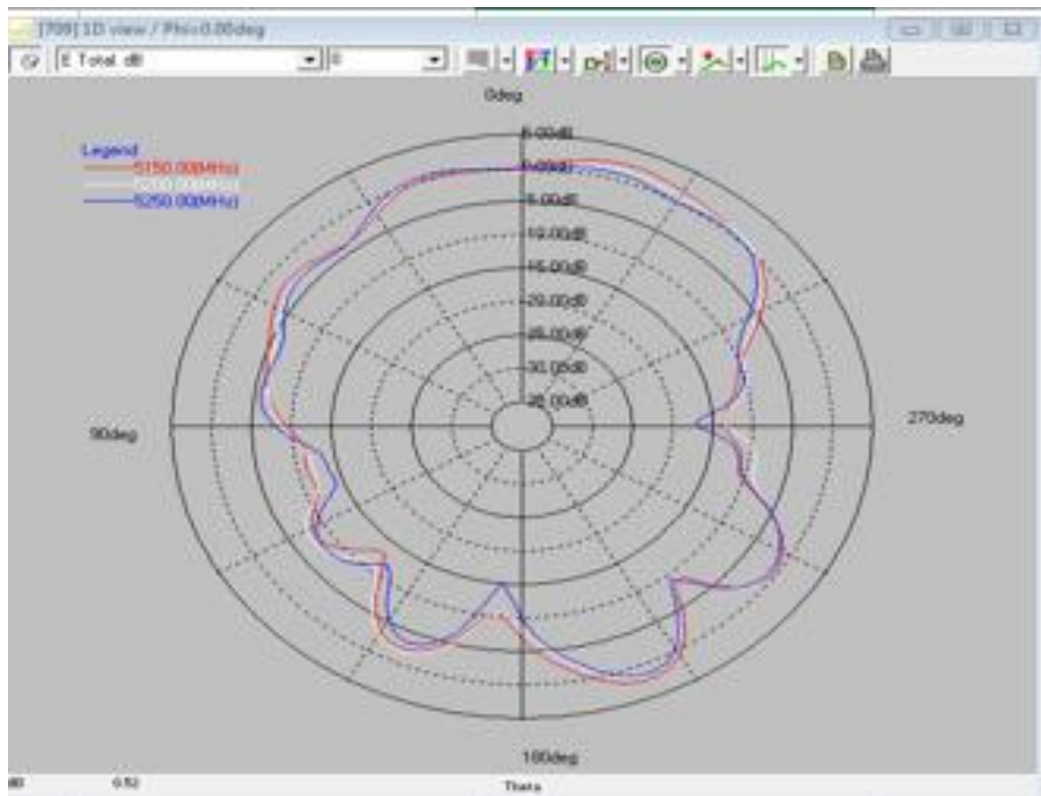


5.2G radiation pattern_Phi=90

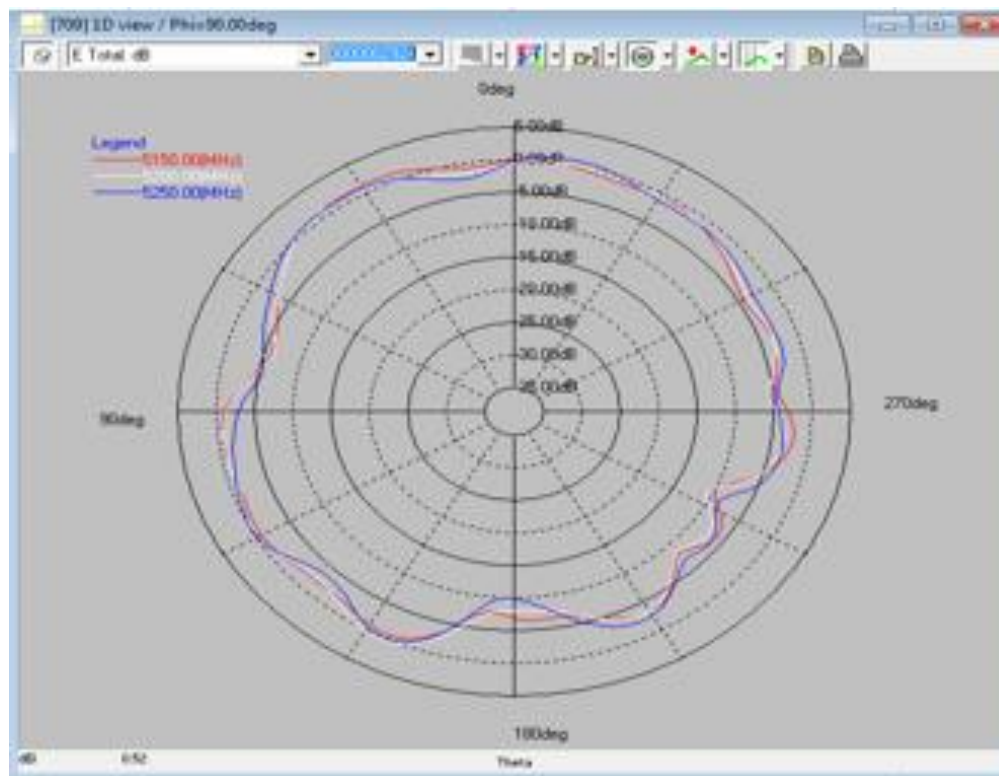

5.8G radiation pattern_Phi=0

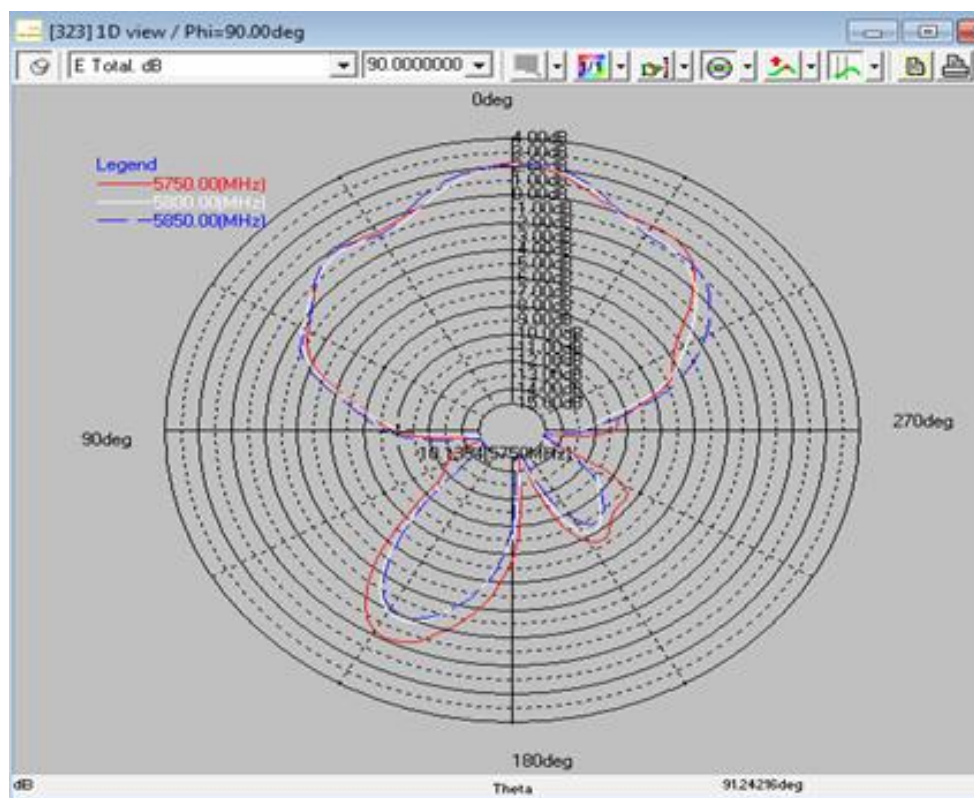

5.8G radiation pattern_Phi=90

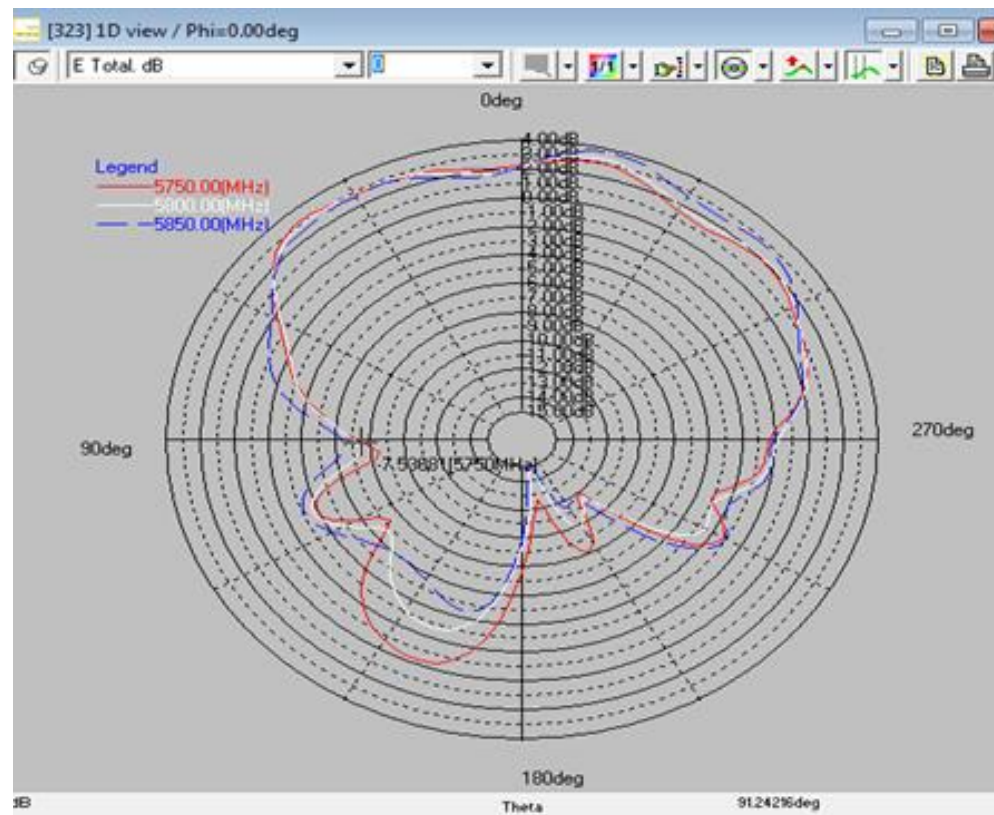

4 Structure drawing

antenna 2D

