



# FCC Test Report

Report No: FCS202504530W01

Issued for

|                                                                                                                                                                                                                                                                          |                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Applicant:                                                                                                                                                                                                                                                               | Shenzhen Utour Innov Tech Co., Ltd.                                                                         |
| Address:                                                                                                                                                                                                                                                                 | Room 303, Unit 1, No. 3000054 Xinhua Road, Niuhe Community, Guanlan Street, Longhua District, Shenzhen City |
| Product Name:                                                                                                                                                                                                                                                            | AI Streaming Rearview Mirror                                                                                |
| Brand Name:                                                                                                                                                                                                                                                              | N/A                                                                                                         |
| Model Name:                                                                                                                                                                                                                                                              | T600                                                                                                        |
| Series Model:                                                                                                                                                                                                                                                            | T600S, C3, C3 Pro, C3M, C3M Pro                                                                             |
| FCC ID:                                                                                                                                                                                                                                                                  | 2BPII-T600                                                                                                  |
| Issued By: Flux Compliance Service Laboratory<br>Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan<br>Tel: 769-27280901 Fax:769-27280901 <a href="http://www.FCS-lab.com">http://www.FCS-lab.com</a> |                                                                                                             |

**TEST RESULT CERTIFICATION**

Applicant's Name .....: Shenzhen Utour Innov Tech Co., Ltd.  
Address.....: Room 303, Unit 1, No. 3000054 Xinhua Road, Niuhe Community,  
Guanlan Street, Longhua District, Shenzhen City  
Manufacture's Name .....: Shenzhen Utour Innov Tech Co., Ltd.  
Address.....: Room 303, Unit 1, No. 3000054 Xinhua Road, Niuhe Community,  
Guanlan Street, Longhua District, Shenzhen City

**Product Description**

Product Name .....: AI Streaming Rearview Mirror  
Brand Name.....: N/A  
Model Name.....: T600  
Series Model .....: T600S, C3, C3 Pro, C3M, C3M Pro  
Test Standards .....: FCC Rules and Regulations Part 15 Subpart C, Section 247  
Test Procedure .....: ANSI C63.10:2020  
KDB558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document.

**Date of Test.....:**

Date (s) of performance of tests.: April 21, 2025 ~ April 25, 2025

Date of Issue .....: April 25, 2025

Test Result .....: Pass

Tested by : Scott Shen  
(Scott Shen)

Reviewed by : Duke Qian  
(Duke Qian)

Approved by : Jack Wang  
(Jack Wang)



## Table of Contents

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b>                          | <b>6</b>  |
| 1.1 TEST FACTORY                                           | 7         |
| 1.2 MEASUREMENT UNCERTAINTY                                | 7         |
| <b>2. GENERAL INFORMATION</b>                              | <b>8</b>  |
| 2.1 GENERAL DESCRIPTION OF THE EUT                         | 8         |
| 2.2 DESCRIPTION OF THE TEST MODES                          | 10        |
| 2.3 TEST SOFTWARE AND POWER LEVEL                          | 10        |
| 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS | 10        |
| 2.5 EQUIPMENTS LIST                                        | 12        |
| <b>3. EMC EMISSION TEST</b>                                | <b>13</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                         | 13        |
| 3.2 TEST PROCEDURE                                         | 14        |
| 3.3 TEST SETUP                                             | 14        |
| 3.4 EUT OPERATING CONDITIONS                               | 14        |
| 3.5 TEST RESULTS                                           | 14        |
| <b>4. RADIATED EMISSION MEASUREMENT</b>                    | <b>15</b> |
| 4.1 RADIATED EMISSION LIMITS                               | 15        |
| 4.2 TEST PROCEDURE                                         | 17        |
| 4.3 TEST SETUP                                             | 18        |
| 4.4 EUT OPERATING CONDITIONS                               | 18        |
| 4.5 FIELD STRENGTH CALCULATION                             | 19        |
| 4.6 TEST RESULTS                                           | 20        |
| <b>5. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>      | <b>25</b> |
| 5.1 LIMIT                                                  | 25        |
| 5.2 TEST PROCEDURE                                         | 25        |
| 5.3 TEST SETUP                                             | 25        |
| 5.4 EUT OPERATION CONDITIONS                               | 25        |
| 5.5 TEST RESULTS                                           | 26        |
| <b>6. POWER SPECTRAL DENSITY TEST</b>                      | <b>27</b> |
| 6.1 LIMIT                                                  | 27        |
| 6.2 TEST PROCEDURE                                         | 27        |

## Table of Contents

|                                             |           |
|---------------------------------------------|-----------|
| 6.3 TEST SETUP                              | 27        |
| 6.4 EUT OPERATION CONDITIONS                | 27        |
| 6.5 TEST RESULTS                            | 27        |
| <b>7. BANDWIDTH TEST</b>                    | <b>28</b> |
| 7.1 LIMIT                                   | 28        |
| 7.2 TEST PROCEDURE                          | 28        |
| 7.3 TEST SETUP                              | 28        |
| 7.4 EUT OPERATION CONDITIONS                | 28        |
| 7.5 TEST RESULTS                            | 28        |
| <b>8. PEAK OUTPUT POWER TEST</b>            | <b>29</b> |
| 8.1 LIMIT                                   | 29        |
| 8.2 TEST PROCEDURE                          | 29        |
| 8.3 TEST SETUP                              | 29        |
| 8.4 EUT OPERATION CONDITIONS                | 29        |
| 8.5 TEST RESULTS                            | 30        |
| <b>9. ANTENNA REQUIREMENT</b>               | <b>31</b> |
| 9.1 STANDARD REQUIREMENT                    | 31        |
| 9.2 EUT ANTENNA                             | 31        |
| <b>APPENDIX I:TEST RESULTS</b>              | <b>32</b> |
| <b>DUTY CYCLE</b>                           | <b>32</b> |
| <b>MAXIMUM PEAK CONDUCTED OUTPUT POWER</b>  | <b>38</b> |
| <b>-6DB BANDWIDTH</b>                       | <b>39</b> |
| <b>MAXIMUM POWER SPECTRAL DENSITY LEVEL</b> | <b>45</b> |
| <b>BAND EDGE</b>                            | <b>51</b> |
| <b>CONDUCTED RF SPURIOUS EMISSION</b>       | <b>58</b> |

**Revision History**

| Rev. | Issue Date     | Contents      |
|------|----------------|---------------|
| 00   | April 25, 2025 | Initial Issue |
|      |                |               |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 15.247 Meas Guidance v05r02.

| FCC Part 15.247, Subpart C        |                                         |          |        |
|-----------------------------------|-----------------------------------------|----------|--------|
| Standard Section                  | Test Item                               | Judgment | Remark |
| 15.207                            | Conducted Emission                      | N/A      | --     |
| 15.247 (a)(2)                     | 6dB Bandwidth                           | PASS     | --     |
| 15.247 (b)(3)                     | Output Power                            | PASS     | --     |
| 15.209                            | Radiated Spurious Emission              | PASS     | --     |
| 15.247 (d)                        | Conducted Spurious & Band Edge Emission | PASS     | --     |
| 15.247 (e)                        | Power Spectral Density                  | PASS     | --     |
| 15.205                            | Restricted Band Edge Emission           | PASS     | --     |
| Part 15.247(d)/<br>Part 15.209(a) | Band Edge Emission                      | PASS     | --     |
| 15.203                            | Antenna Requirement                     | PASS     | --     |

### NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2020.

## 1.1 TEST FACTORY

|                                                                                                                                                        |                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Company Name:                                                                                                                                          | Flux Compliance Service Laboratory                                                                               |
| Address:                                                                                                                                               | Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan |
| Telephone:                                                                                                                                             | +86-769-27280901                                                                                                 |
| Fax:                                                                                                                                                   | +86-769-27280901                                                                                                 |
| FCC Test Firm Registration Number: 514908<br>Designation number: CN0127<br>A2LA accreditation number: 5545.01<br>ISED Number: 25801<br>CAB ID : CN0097 |                                                                                                                  |
|                                                                                                                                                        |                                                                                                                  |

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

| No. | Item                                      | Uncertainty           |
|-----|-------------------------------------------|-----------------------|
| 1   | RF output power, conducted                | $\pm 0.71\text{dB}$   |
| 2   | Unwanted Emissions, conducted             | $\pm 2.988\text{ dB}$ |
| 3   | Conducted Emission (9KHz-150KHz)          | $\pm 4.13\text{ dB}$  |
| 4   | All emissions radiated (9KHz -30MHz)      | $\pm 3.1\text{ dB}$   |
| 5   | Conducted Emission (150KHz-30MHz)         | $\pm 4.74\text{ dB}$  |
| 6   | All emissions,radiated(<1G) 30MHz-1000MHz | $\pm 5.2\text{ dB}$   |
| 7   | All emissions,radiated 1GHz -18GHz        | $\pm 4.66\text{ dB}$  |
| 8   | All emissions,radiated 18GHz -40GHz       | $\pm 4.31\text{ dB}$  |
| 9   | PSD                                       | $\pm 0.72\text{dB}$   |
| 10  | Bandwidth                                 | $\pm 2.5\%$           |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

|                         |                                 |                                                                                                                                  |
|-------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Product Name            | AI Streaming Rearview Mirror    |                                                                                                                                  |
| Trade Mark              | N/A                             |                                                                                                                                  |
| Model Name              | T600                            |                                                                                                                                  |
| Series Model            | T600S, C3, C3 Pro, C3M, C3M Pro |                                                                                                                                  |
| Model Difference        | Only different of model name.   |                                                                                                                                  |
| Product Description     | Operation Frequency:            | 802.11b/g/n20: 2412~2462 MHz                                                                                                     |
|                         | Modulation Type:                | 2.4G WiFi:<br>802.11b(DSSS): CCK,DQPSK,DBPSK<br>802.11g(OFDM): BPSK,QPSK,16-QAM,64-QAM<br>802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM |
|                         | Bit Rate of Transmitter:        | 802.11b:11/5.5/2/1 Mbps<br>802.11g:54/48/36/24/18/12/9/6Mbps<br>802.11n(20MHz):<br>65/58.5/52/39/26/19.5/13/6.5Mbps              |
|                         | Number of Channel:              | 802.11b/g/n20: 11CH                                                                                                              |
|                         | Antenna Designation:            | Please refer to the Note 3.                                                                                                      |
|                         | Antenna Gain (dBi)              | 2.7 dBi                                                                                                                          |
|                         |                                 |                                                                                                                                  |
| Channel List            | Please refer to the Note 2.     |                                                                                                                                  |
| Power Supply            | DC 5V/2.4A                      |                                                                                                                                  |
| Hardware version number | V1.0                            |                                                                                                                                  |
| Software version number | V1.0                            |                                                                                                                                  |
| Connecting I/O Port(s)  | Please refer to the Note 1.     |                                                                                                                                  |



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2. 

| 802.11b/g/n(20MHz) |           |
|--------------------|-----------|
| Channel            | Frequency |
| 01                 | 2412      |
| 02                 | 2417      |
| 03                 | 2422      |
| 04                 | 2427      |
| 05                 | 2432      |
| 06                 | 2437      |
| 07                 | 2442      |
| 08                 | 2447      |
| 09                 | 2452      |
| 10                 | 2457      |
| 11                 | 2462      |

3. Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE     |
|------|-------|------------|--------------|-----------|------------|----------|
| 1    | N/A   | N/A        | PIFA         | N/A       | 2.7        | WIFI ANT |

Note: 1. The antenna information refere the manufacturer provide report, applicable only to the tested sample identified in the report.

## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

| Worst Mode | Description               | Data Rate |
|------------|---------------------------|-----------|
| Mode 1     | TX IEEE 802.11b CH1       | 1 Mbps    |
| Mode 2     | TX IEEE 802.11b CH6       | 1 Mbps    |
| Mode 3     | TX IEEE 802.11 b CH11     | 1 Mbps    |
| Mode 4     | TX IEEE 802.11g CH1       | 6 Mbps    |
| Mode 5     | TX IEEE 802.11g CH6       | 6 Mbps    |
| Mode 6     | TX IEEE 802.11g CH11      | 6 Mbps    |
| Mode 7     | TX IEEE 802.11n HT20 CH1  | MCS 0     |
| Mode 8     | TX IEEE 802.11n HT20 CH6  | MCS 0     |
| Mode 9     | TX IEEE 802.11n HT20 CH11 | MCS 0     |

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

## AC Conducted Emission

| Test Case             |                         |
|-----------------------|-------------------------|
| AC Conducted Emission | Mode10: Keeping WIFI TX |

## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

| RF Function | Type      | Mode Or Modulation type | Power Class | Software For Testing |
|-------------|-----------|-------------------------|-------------|----------------------|
| 2.4G WiFi   | 802.11b   | L/M/H                   | 10          | mabaxterm            |
|             | 802.11g   | L/M/H                   | 10          |                      |
|             | 802.11n20 | L/M/H                   | 10          |                      |

## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

| Description | Manufacturer | Model | S/N | Rating |
|-------------|--------------|-------|-----|--------|
| DC source   | zhaoxin      | MG716 | N/A | N/A    |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

#### Auxiliary Equipment

| Description | Manufacturer | Model | S/N | Rating |
|-------------|--------------|-------|-----|--------|
| N/A         | N/A          | N/A   | N/A | N/A    |
|             |              |       |     |        |
|             |              |       |     |        |

#### Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.

## 2.5 EQUIPMENTS LIST

### Radiation Test equipment

| Kind of Equipment                | Manufacturer               | Type No.     | Company No. | Last calibration | Calibrated until |
|----------------------------------|----------------------------|--------------|-------------|------------------|------------------|
| EMI Test Receiver                | R&S                        | ESRP 3       | FCS-E001    | 2024.08.28       | 2025.08.27       |
| Signal Analyzer                  | R&S                        | FSV40-N      | FCS-E012    | 2024.08.28       | 2025.08.27       |
| Active loop Antenna              | ZHINAN                     | ZN30900C     | FCS-E013    | 2024.08.28       | 2025.08.27       |
| Bilog Antenna                    | SCHWARZBECK                | VULB 9168    | FCS-E002    | 2024.08.28       | 2025.08.27       |
| Horn Antenna                     | SCHWARZBECK                | BBHA 9120D   | FCS-E003    | 2024.08.28       | 2025.08.27       |
| SHF-EHF Horn Antenna (18G-40GHz) | A-INFO                     | LB-180400-KF | FCS-E018    | 2024.08.28       | 2025.08.27       |
| Pre-Amplifier(0.1M-3G Hz)        | EMCI                       | EM330N       | FCS-E004    | 2024.08.28       | 2025.08.27       |
| Pre-Amplifier (1G-18GHz)         | N/A                        | TSAMP-0518SE | FCS-E014    | 2024.08.28       | 2025.08.27       |
| Pre-Amplifier (18G-40GHz)        | TERA-MW                    | TRLA-0400    | FCS-E019    | 2024.08.28       | 2025.08.27       |
| Temperature & Humidity           | HTC-1                      | victor       | FCS-E005    | 2024.08.28       | 2025.08.27       |
| Low frequency cable (9k-1GHz)    | Gemma Technology           | R03          | FCS-E031    | 2024.08.28       | 2025.08.27       |
| Low frequency cable (1-18GHz)    | Gemma Technology           | R04          | FCS-E032    | 2024.08.28       | 2025.08.27       |
| Low frequency cable (18-40GHz)   | Gemma Technology           | R05          | FCS-E033    | 2024.08.28       | 2025.08.27       |
| Testing Software                 | EZ-EMC(Ver.STSLAB 03A1 RE) |              |             |                  |                  |

### Conduction Test equipment

| Kind of Equipment      | Manufacturer              | Type No. | Company No. | Last calibration | Calibrated until |
|------------------------|---------------------------|----------|-------------|------------------|------------------|
| EMI Test Receiver      | R&S                       | ESPI     | FCS-E020    | 2024.08.28       | 2025.08.27       |
| LISN                   | R&S                       | ENV216   | FCS-E007    | 2024.08.28       | 2025.08.27       |
| LISN                   | ETS                       | 3810/2NM | FCS-E009    | 2024.08.28       | 2025.08.27       |
| Temperature & Humidity | HTC-1                     | victor   | FCS-E008    | 2024.08.28       | 2025.08.27       |
| Testing Software       | EZ-EMC(Ver.EMC-CON 3A1.1) |          |             |                  |                  |

### RF Connected Test

| Kind of Equipment   | Manufacturer               | Type No. | Company No. | Last calibration | Calibrated until |
|---------------------|----------------------------|----------|-------------|------------------|------------------|
| MXA SIGNAL Analyzer | Keysight                   | N9020A   | FCS-E015    | 2024.08.28       | 2025.08.27       |
| Spectrum Analyzer   | Agilent                    | E4447A   | MY50180039  | 2024.08.28       | 2025.08.27       |
| Spectrum Analyzer   | R&S                        | FSV-40   | 101499      | 2024.08.28       | 2025.08.27       |
| Power Sensor        | Agilent                    | UX2021XA | FCS-E021    | 2024.08.28       | 2025.08.27       |
| Testing Software    | EZ-EMC(Ver.STSLAB 03A1 RE) |          |             |                  |                  |

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

| FREQUENCY (MHz) | Conducted Emission limit (dBuV) |           |
|-----------------|---------------------------------|-----------|
|                 | Quasi-peak                      | Average   |
| 0.15 -0.5       | 66 - 56 *                       | 56 - 46 * |
| 0.50 -5.0       | 56.00                           | 46.00     |
| 5.0 -30.0       | 60.00                           | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

### 3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

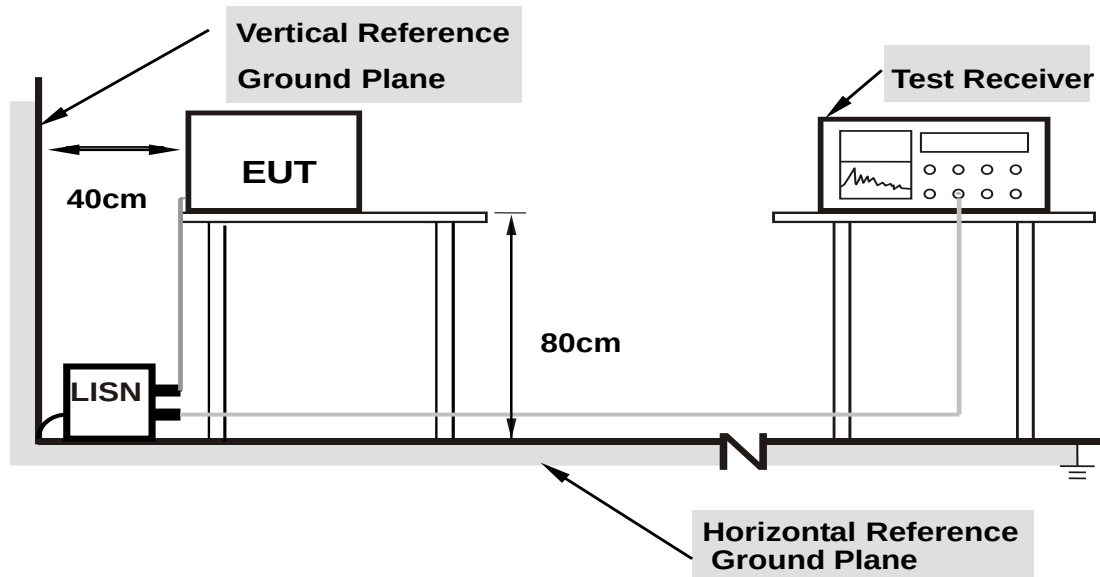

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.5 TEST RESULTS

Not applicable for DC input.

## 4. RADIATED EMISSION MEASUREMENT

### 4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) |         |
|-----------------|------------------|---------|
|                 | PEAK             | AVERAGE |
| Above 1000      | 74               | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### LIMITS OF RESTRICTED FREQUENCY BANDS

| FREQUENCY (MHz)   | FREQUENCY (MHz)     | FREQUENCY (MHz) | FREQUENCY (GHz) |
|-------------------|---------------------|-----------------|-----------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410       | 4.5-5.15        |
| 0.495-0.505       | 16.69475-16.69525   | 608-614         | 5.35-5.46       |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240        | 7.25-7.75       |
| 4.125-4.128       | 25.5-25.67          | 1300-1427       | 8.025-8.5       |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5     | 9.0-9.2         |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5   | 9.3-9.5         |
| 6.215-6.218       | 74.8-75.2           | 1660-1710       | 10.6-12.7       |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2   | 13.25-13.4      |
| 6.31175-6.31225   | 123-138             | 2200-2300       | 14.47-14.5      |
| 8.291-8.294       | 149.9-150.05        | 2310-2390       | 15.35-16.2      |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500     | 17.7-21.4       |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900       | 22.01-23.12     |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267       | 23.6-24.0       |
| 12.29-12.293      | 167.72-173.2        | 3332-3339       | 31.2-31.8       |
| 12.51975-12.52025 | 240-285             | 3345.8-3358     | 36.43-36.5      |
| 12.57675-12.57725 | 322-335.4           | 3600-4400       | Above 38.6      |
| 13.36-13.41       |                     |                 |                 |

## For Radiated Emission

| Spectrum Parameter                    | Setting                                                                                                                         |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Attenuation                           | Auto                                                                                                                            |
| Detector                              | Peak/QP/AV                                                                                                                      |
| Start Frequency                       | 9 KHz/150KHz(Peak/QP/AV)                                                                                                        |
| Stop Frequency                        | 150KHz/30MHz(Peak/QP/AV)                                                                                                        |
| RB / VB (emission in restricted band) | 200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz);<br>200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz) |

| Spectrum Parameter                    | Setting            |
|---------------------------------------|--------------------|
| Attenuation                           | Auto               |
| Detector                              | Peak/QP            |
| Start Frequency                       | 30 MHz(Peak/QP)    |
| Stop Frequency                        | 1000 MHz (Peak/QP) |
| RB / VB (emission in restricted band) | 120 KHz / 300 KHz  |

| Spectrum Parameter                    | Setting                                   |
|---------------------------------------|-------------------------------------------|
| Attenuation                           | Auto                                      |
| Detector                              | Peak/AV                                   |
| Start Frequency                       | 1000 MHz(Peak/AV)                         |
| Stop Frequency                        | 10th carrier hamonic(Peak/AV)             |
| RB / VB (emission in restricted band) | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG) |

## For Restricted band

| Spectrum Parameter   | Setting                                                                |
|----------------------|------------------------------------------------------------------------|
| Detector             | Peak/AV                                                                |
| Start/Stop Frequency | Lower Band Edge: 2310 to 2410 MHz<br>Upper Band Edge: 2475 to 2500 MHz |
| RB / VB              | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG)                              |



| Receiver Parameter     | Setting                              |
|------------------------|--------------------------------------|
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV    |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP       |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP        |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP     |

#### 4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

#### 4.3 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

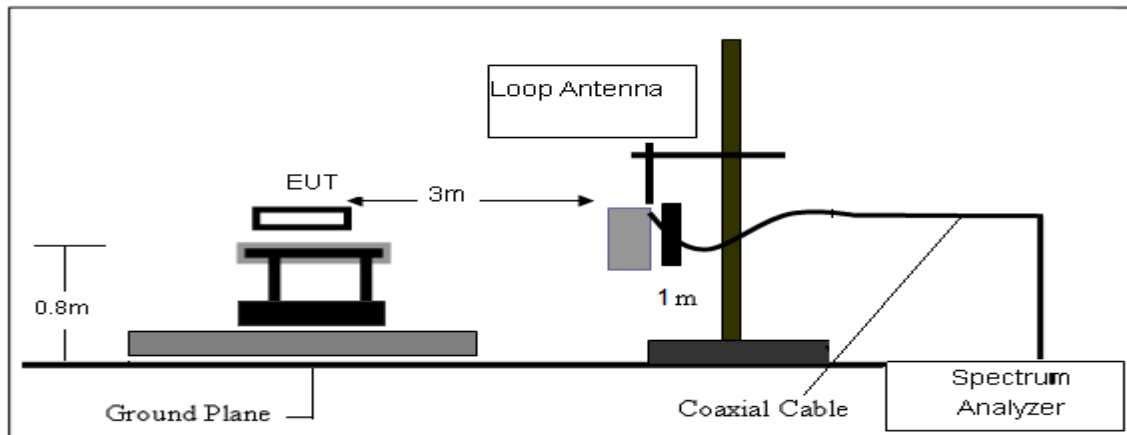

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

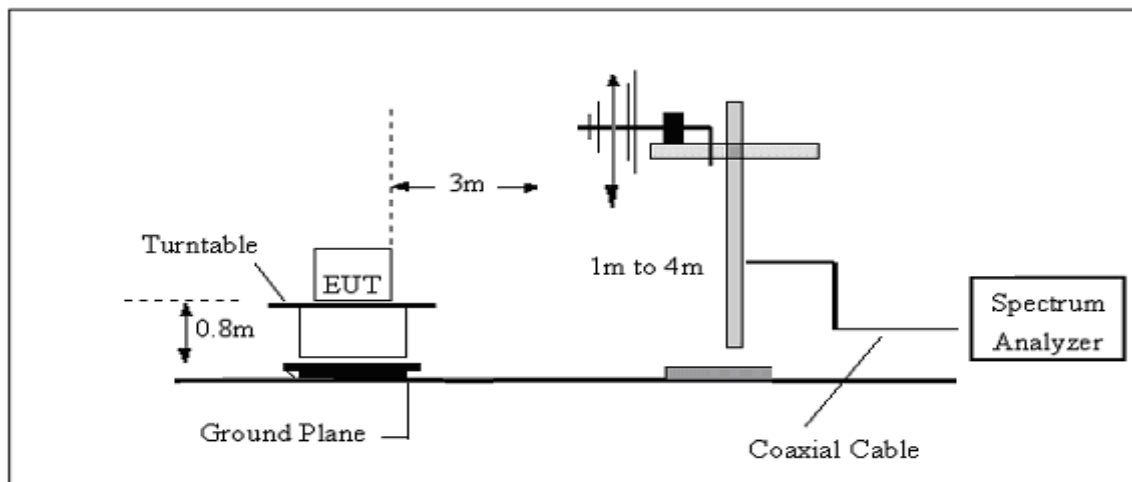

##### (C) Radiated Emission Test-Up Frequency Above 1GHz

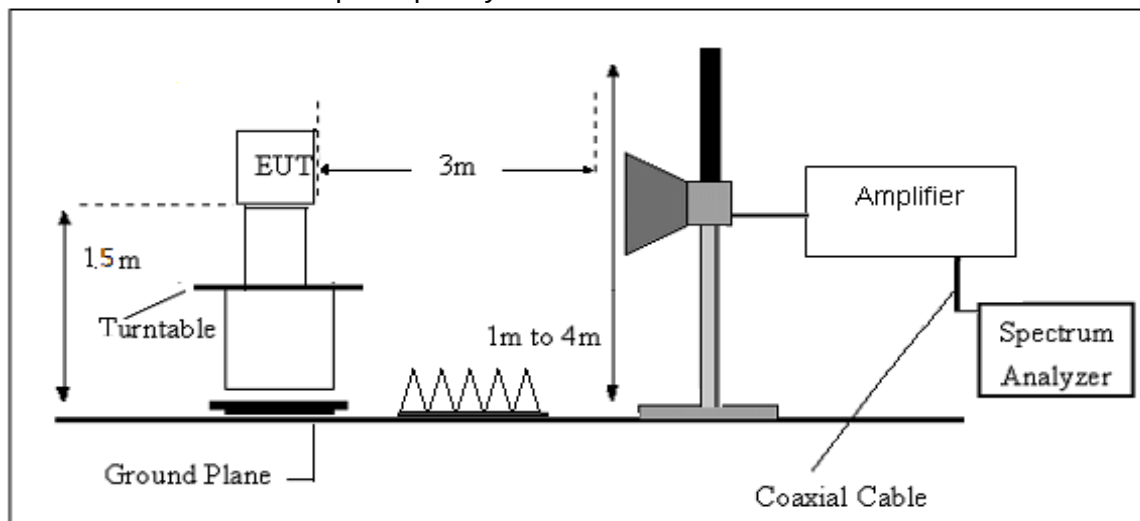

#### 4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.

#### 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor


For example

| Frequency | FS       | RA       | AF   | CL   | AG   | Factor |
|-----------|----------|----------|------|------|------|--------|
| (MHz)     | (dBμV/m) | (dBμV/m) | (dB) | (dB) | (dB) | (dB)   |
| 300       | 40       | 58.1     | 12.2 | 1.6  | 31.9 | -18.1  |

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$


## 4.6 TEST RESULTS

|               |                                                                     |                    |     |
|---------------|---------------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25C                                                                 | Relative Humidity: | 56% |
| Test Voltage: | DC 5V                                                               | Phase:             | H   |
| Test Mode:    | Mode 1/2/3/4/5/6/7/8/9 (Mode 4 is the worst case, only show mode 4) |                    |     |

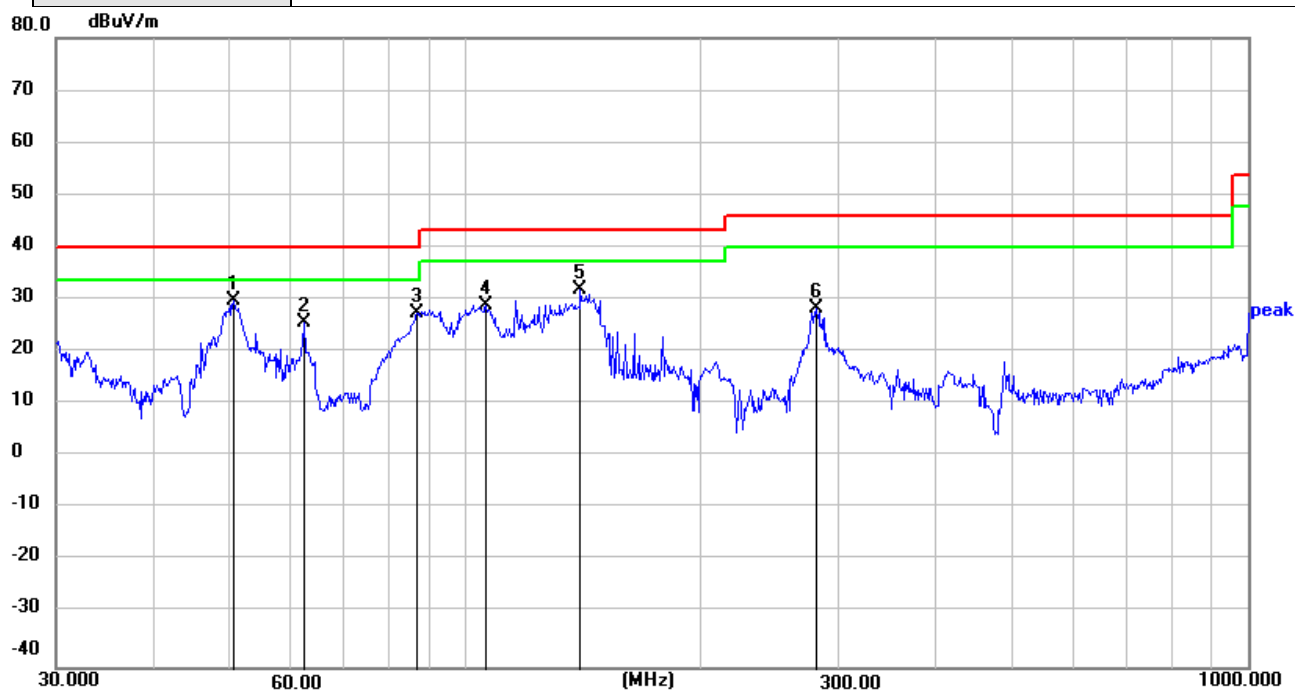

| No. | Frequency | Reading | Correct      | Result   | Limit    | Margin | Remark |
|-----|-----------|---------|--------------|----------|----------|--------|--------|
|     | (MHz)     | (dBuV)  | Factor(dB/m) | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1 * | 50.5860   | 46.77   | -16.64       | 30.13    | 40.00    | -9.87  | peak   |
| 2   | 62.2128   | 43.47   | -17.62       | 25.85    | 40.00    | -14.15 | peak   |
| 3   | 86.8067   | 48.51   | -20.97       | 27.54    | 40.00    | -12.46 | peak   |
| 4   | 106.3850  | 48.91   | -19.77       | 29.14    | 43.50    | -14.36 | peak   |
| 5   | 140.3420  | 49.46   | -17.29       | 32.17    | 43.50    | -11.33 | peak   |
| 6   | 281.0074  | 45.95   | -17.48       | 28.47    | 46.00    | -17.53 | peak   |

|               |                                                                     |                    |     |
|---------------|---------------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25C                                                                 | Relative Humidity: | 56% |
| Test Voltage: | DC 5V                                                               | Phase:             | H   |
| Test Mode:    | Mode 1/2/3/4/5/6/7/8/9 (Mode 4 is the worst case, only show mode 4) |                    |     |

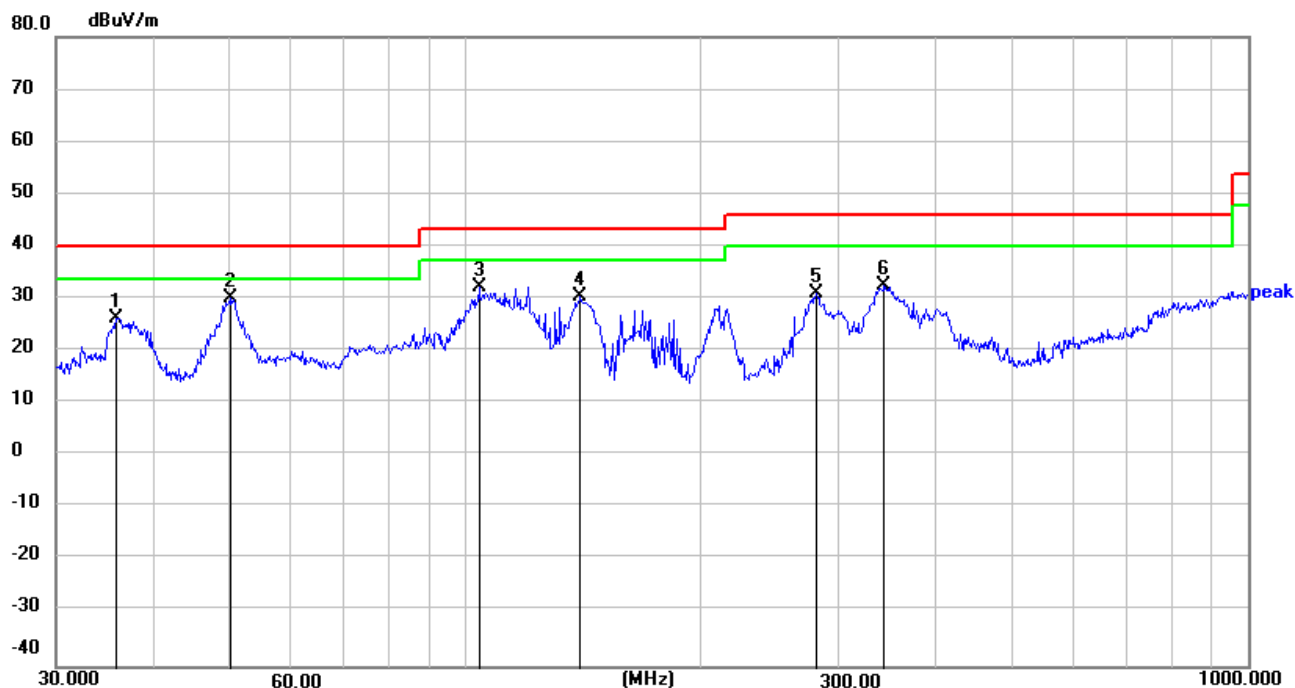

| No. | Frequency | Reading | Correct      | Result   | Limit    | Margin | Remark |
|-----|-----------|---------|--------------|----------|----------|--------|--------|
|     | (MHz)     | (dBuV)  | Factor(dB/m) | (dBuV/m) | (dBuV/m) | (dB)   |        |
| 1   | 35.7490   | 43.47   | -17.11       | 26.36    | 40.00    | -13.64 | peak   |
| 2 * | 50.0566   | 46.89   | -16.60       | 30.29    | 40.00    | -9.71  | peak   |
| 3   | 104.1701  | 52.46   | -19.97       | 32.49    | 43.50    | -11.01 | peak   |
| 4   | 140.3420  | 47.97   | -17.29       | 30.68    | 43.50    | -12.82 | peak   |
| 5   | 281.0074  | 48.70   | -17.48       | 31.22    | 46.00    | -14.78 | peak   |
| 6   | 343.1800  | 48.48   | -15.88       | 32.60    | 46.00    | -13.40 | peak   |

## (1GHz-25GHz) Spurious emission Requirements

| Frequency                          | Meter Reading | Amplifier | Loss  | Antenna Factor | Corrected Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|------------------------------------|---------------|-----------|-------|----------------|------------------|----------------|----------|--------|----------|------------|
| (MHz)                              | (dBμV)        | (dB)      | (dB)  | (dB/m)         | (dB)             | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| Low Channel (802.11g/2412 MHz)     |               |           |       |                |                  |                |          |        |          |            |
| 3264.79                            | 61.39         | 44.70     | 6.70  | 28.20          | -9.80            | 51.59          | 74.00    | -22.41 | PK       | Vertical   |
| 3264.79                            | 50.89         | 44.70     | 6.70  | 28.20          | -9.80            | 41.09          | 54.00    | -12.91 | AV       | Vertical   |
| 3264.72                            | 62.20         | 44.70     | 6.70  | 28.20          | -9.80            | 52.40          | 74.00    | -21.60 | PK       | Horizontal |
| 3264.72                            | 50.71         | 44.70     | 6.70  | 28.20          | -9.80            | 40.91          | 54.00    | -13.09 | AV       | Horizontal |
| 4804.41                            | 58.82         | 44.20     | 9.04  | 31.60          | -3.56            | 55.26          | 74.00    | -18.74 | PK       | Vertical   |
| 4804.41                            | 49.87         | 44.20     | 9.04  | 31.60          | -3.56            | 46.31          | 54.00    | -7.69  | AV       | Vertical   |
| 4804.39                            | 59.53         | 44.20     | 9.04  | 31.60          | -3.56            | 55.97          | 74.00    | -18.03 | PK       | Horizontal |
| 4804.39                            | 49.53         | 44.20     | 9.04  | 31.60          | -3.56            | 45.97          | 54.00    | -8.03  | AV       | Horizontal |
| 5359.76                            | 49.18         | 44.20     | 9.86  | 32.00          | -2.34            | 46.84          | 74.00    | -27.16 | PK       | Vertical   |
| 5359.76                            | 39.48         | 44.20     | 9.86  | 32.00          | -2.34            | 37.14          | 54.00    | -16.86 | AV       | Vertical   |
| 5359.57                            | 47.97         | 44.20     | 9.86  | 32.00          | -2.34            | 45.63          | 74.00    | -28.37 | PK       | Horizontal |
| 5359.57                            | 38.22         | 44.20     | 9.86  | 32.00          | -2.34            | 35.88          | 54.00    | -18.12 | AV       | Horizontal |
| 7205.76                            | 53.62         | 43.50     | 11.40 | 35.50          | 3.40             | 57.02          | 74.00    | -16.98 | PK       | Vertical   |
| 7205.76                            | 43.81         | 43.50     | 11.40 | 35.50          | 3.40             | 47.21          | 54.00    | -6.79  | AV       | Vertical   |
| 7205.77                            | 53.81         | 43.50     | 11.40 | 35.50          | 3.40             | 57.21          | 74.00    | -16.79 | PK       | Horizontal |
| 7205.77                            | 44.91         | 43.50     | 11.40 | 35.50          | 3.40             | 48.31          | 54.00    | -5.69  | AV       | Horizontal |
| Middle Channel ((802.11g/2437 MHz) |               |           |       |                |                  |                |          |        |          |            |
| 3264.73                            | 61.65         | 44.70     | 6.70  | 28.20          | -9.80            | 51.85          | 74.00    | -22.15 | PK       | Vertical   |
| 3264.73                            | 51.15         | 44.70     | 6.70  | 28.20          | -9.80            | 41.35          | 54.00    | -12.65 | AV       | Vertical   |
| 3264.82                            | 61.89         | 44.70     | 6.70  | 28.20          | -9.80            | 52.09          | 74.00    | -21.91 | PK       | Horizontal |
| 3264.82                            | 50.22         | 44.70     | 6.70  | 28.20          | -9.80            | 40.42          | 54.00    | -13.58 | AV       | Horizontal |
| 4882.49                            | 58.85         | 44.20     | 9.04  | 31.60          | -3.56            | 55.29          | 74.00    | -18.71 | PK       | Vertical   |
| 4882.49                            | 49.98         | 44.20     | 9.04  | 31.60          | -3.56            | 46.42          | 54.00    | -7.58  | AV       | Vertical   |
| 4882.34                            | 58.24         | 44.20     | 9.04  | 31.60          | -3.56            | 54.68          | 74.00    | -19.32 | PK       | Horizontal |
| 4882.34                            | 50.13         | 44.20     | 9.04  | 31.60          | -3.56            | 46.57          | 54.00    | -7.43  | AV       | Horizontal |
| 5359.79                            | 48.42         | 44.20     | 9.86  | 32.00          | -2.34            | 46.08          | 74.00    | -27.92 | PK       | Vertical   |
| 5359.79                            | 39.17         | 44.20     | 9.86  | 32.00          | -2.34            | 36.83          | 54.00    | -17.17 | AV       | Vertical   |
| 5359.67                            | 47.94         | 44.20     | 9.86  | 32.00          | -2.34            | 45.60          | 74.00    | -28.40 | PK       | Horizontal |
| 5359.67                            | 38.17         | 44.20     | 9.86  | 32.00          | -2.34            | 35.83          | 54.00    | -18.17 | AV       | Horizontal |
| 7323.74                            | 54.94         | 43.50     | 11.40 | 35.50          | 3.40             | 58.34          | 74.00    | -15.66 | PK       | Vertical   |
| 7323.74                            | 44.32         | 43.50     | 11.40 | 35.50          | 3.40             | 47.72          | 54.00    | -6.28  | AV       | Vertical   |
| 7323.71                            | 54.76         | 43.50     | 11.40 | 35.50          | 3.40             | 58.16          | 74.00    | -15.84 | PK       | Horizontal |
| 7323.71                            | 44.42         | 43.50     | 11.40 | 35.50          | 3.40             | 47.82          | 54.00    | -6.18  | AV       | Horizontal |

| High Channel ((802.11g/2462 MHz) |       |       |       |       |       |       |       |        |    |            |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|----|------------|
| 3264.84                          | 62.12 | 44.70 | 6.70  | 28.20 | -9.80 | 52.32 | 74.00 | -21.68 | PK | Vertical   |
| 3264.84                          | 50.46 | 44.70 | 6.70  | 28.20 | -9.80 | 40.66 | 54.00 | -13.34 | AV | Vertical   |
| 3264.76                          | 61.07 | 44.70 | 6.70  | 28.20 | -9.80 | 51.27 | 74.00 | -22.73 | PK | Horizontal |
| 3264.76                          | 50.66 | 44.70 | 6.70  | 28.20 | -9.80 | 40.86 | 54.00 | -13.14 | AV | Horizontal |
| 4960.41                          | 58.74 | 44.20 | 9.04  | 31.60 | -3.56 | 55.18 | 74.00 | -18.82 | PK | Vertical   |
| 4960.41                          | 50.46 | 44.20 | 9.04  | 31.60 | -3.56 | 46.90 | 54.00 | -7.10  | AV | Vertical   |
| 4960.34                          | 58.47 | 44.20 | 9.04  | 31.60 | -3.56 | 54.91 | 74.00 | -19.09 | PK | Horizontal |
| 4960.34                          | 49.55 | 44.20 | 9.04  | 31.60 | -3.56 | 45.99 | 54.00 | -8.01  | AV | Horizontal |
| 5359.78                          | 49.22 | 44.20 | 9.86  | 32.00 | -2.34 | 46.88 | 74.00 | -27.12 | PK | Vertical   |
| 5359.78                          | 40.10 | 44.20 | 9.86  | 32.00 | -2.34 | 37.76 | 54.00 | -16.24 | AV | Vertical   |
| 5359.75                          | 47.16 | 44.20 | 9.86  | 32.00 | -2.34 | 44.82 | 74.00 | -29.18 | PK | Horizontal |
| 5359.75                          | 39.44 | 44.20 | 9.86  | 32.00 | -2.34 | 37.10 | 54.00 | -16.90 | AV | Horizontal |
| 7439.86                          | 53.88 | 43.50 | 11.40 | 35.50 | 3.40  | 57.28 | 74.00 | -16.72 | PK | Vertical   |
| 7439.86                          | 43.81 | 43.50 | 11.40 | 35.50 | 3.40  | 47.21 | 54.00 | -6.79  | AV | Vertical   |
| 7439.94                          | 54.26 | 43.50 | 11.40 | 35.50 | 3.40  | 57.66 | 74.00 | -16.34 | PK | Horizontal |
| 7439.94                          | 44.70 | 43.50 | 11.40 | 35.50 | 3.40  | 48.10 | 54.00 | -5.90  | AV | Horizontal |

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.

3) All modes has been test, only show the worst case, the worst case is 802.11g.

## Restricted Bands Requirements

802.11 g 2412MHz

H

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 2387.33         | 42.93          | -6.46         | 36.47          | 74             | -37.53      | peak | 100         | 360           |
| 2   | 2390            | 40.09          | -5.72         | 34.37          | 74             | -39.63      | peak | 100         | 360           |
| 3   | 2400            | 42.34          | -5.61         | 36.73          | 74             | -37.27      | peak | 100         | 360           |

V

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 2387.16         | 42.45          | -5.01         | 37.44          | 74             | -36.56      | peak | 100         | 360           |
| 2   | 2390            | 40.91          | -5.72         | 35.19          | 74             | -38.81      | peak | 100         | 360           |
| 3   | 2400            | 39.4           | -5.61         | 33.79          | 74             | -40.21      | peak | 100         | 360           |

802.11 g 2462MHz

H

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 2483.5          | 35.38          | -5.09         | 30.29          | 74             | -43.71      | peak | 100         | 360           |
| 2   | 2485.12         | 36.17          | -5.37         | 30.8           | 74             | -43.2       | peak | 100         | 360           |

V

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|
| 1   | 2483.5          | 36.1           | -5.09         | 31.01          | 74             | -42.99      | peak | 100         | 360           |
| 2   | 2487.33         | 38.01          | -4.37         | 33.64          | 74             | -40.36      | peak | 100         | 360           |

Note:

1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

2) All modes has been test, only show the worst case, the worst case is 802.11g.

3) The peak volue is less than AV limit, so AV measure is not need.



## 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.2 TEST PROCEDURE

| Spectrum Parameter                    | Setting                         |
|---------------------------------------|---------------------------------|
| Detector                              | Peak                            |
| Start/Stop Frequency                  | 30 MHz to 10th carrier harmonic |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                 |
| Trace-Mode:                           | Max hold                        |

For Band edge

| Spectrum Parameter                    | Setting                                                              |
|---------------------------------------|----------------------------------------------------------------------|
| Detector                              | Peak                                                                 |
| Start/Stop Frequency                  | Lower Band Edge: 2300 – 2407 MHz<br>Upper Band Edge: 2475 – 2500 MHz |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                                                      |
| Trace-Mode:                           | Max hold                                                             |

### 5.3 TEST SETUP



The EUT which is powered by the DC 5V, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

## 5.5 TEST RESULTS

For the measurement records, refer to the appendix I.

## 6. POWER SPECTRAL DENSITY TEST

### 6.1 LIMIT

| FCC Part 15.247, Subpart C |                        |                                    |                       |        |
|----------------------------|------------------------|------------------------------------|-----------------------|--------|
| Section                    | Test Item              | Limit                              | Frequency Range (MHz) | Result |
| 15.247(e)                  | Power Spectral Density | $\leq 8$ dBm<br>(RBW $\geq 3$ KHz) | 2400-2483.5           | PASS   |

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 6.5 TEST RESULTS

For the measurement records · refer to the appendix I.

## 7. BANDWIDTH TEST

### 7.1 LIMIT

| FCC Part 15.247, Subpart C |           |                                         |                       |        |
|----------------------------|-----------|-----------------------------------------|-----------------------|--------|
| Section                    | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)               | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

### 7.2 TEST PROCEDURE

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 7.5 TEST RESULTS

For the measurement records · refer to the appendix I.

## 8. PEAK OUTPUT POWER TEST

### 8.1 LIMIT

| FCC Part 15.247, Subpart C |              |                 |                       |        |
|----------------------------|--------------|-----------------|-----------------------|--------|
| Section                    | Test Item    | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)               | Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

### 8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW  $\geq$  DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq [3 \times \text{RBW}]$ .
- Set span  $\geq [3 \times \text{RBW}]$ .
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

## 8.5 TEST RESULTS

For the measurement records , refer to the appendix I.

## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.

## APPENDIX I:TEST RESULTS


### Duty Cycle

| Condition | Mode | Frequency (MHz) | On Time (ms) | Period (ms) | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|--------------|-------------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | 8.35         | 8.395       | 99.46          | 0.02                   | 0.12      |
| NVNT      | b    | 2437            | 8.35         | 8.395       | 99.46          | 0.02                   | 0.12      |
| NVNT      | b    | 2462            | 8.355        | 8.4         | 99.46          | 0.02                   | 0.12      |
| NVNT      | g    | 2412            | 0.789        | 0.837       | 94.27          | 0.26                   | 1.27      |
| NVNT      | g    | 2437            | 0.788        | 0.836       | 94.26          | 0.26                   | 1.27      |
| NVNT      | g    | 2462            | 0.789        | 0.836       | 94.38          | 0.25                   | 1.27      |
| NVNT      | n20  | 2412            | 0.805        | 0.852       | 94.48          | 0.25                   | 1.24      |
| NVNT      | n20  | 2437            | 0.805        | 0.853       | 94.37          | 0.25                   | 1.24      |
| NVNT      | n20  | 2462            | 0.804        | 0.853       | 94.26          | 0.26                   | 1.24      |




# Test Graphs


## Duty Cycle NVNT b 2412MHz

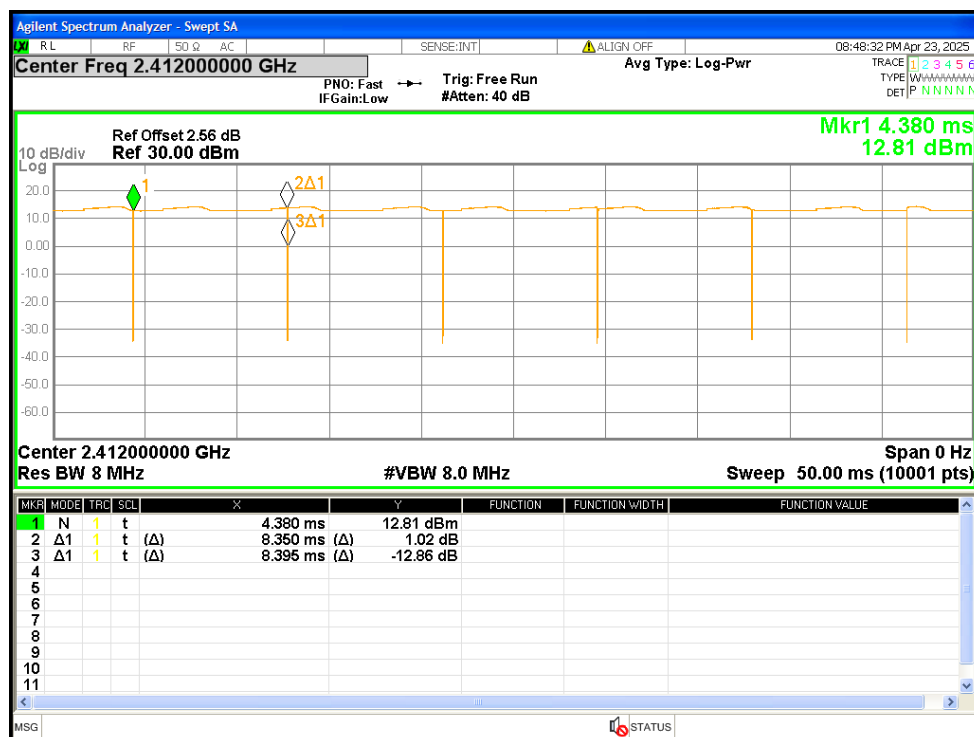


## Duty Cycle NVNT b 2437MHz

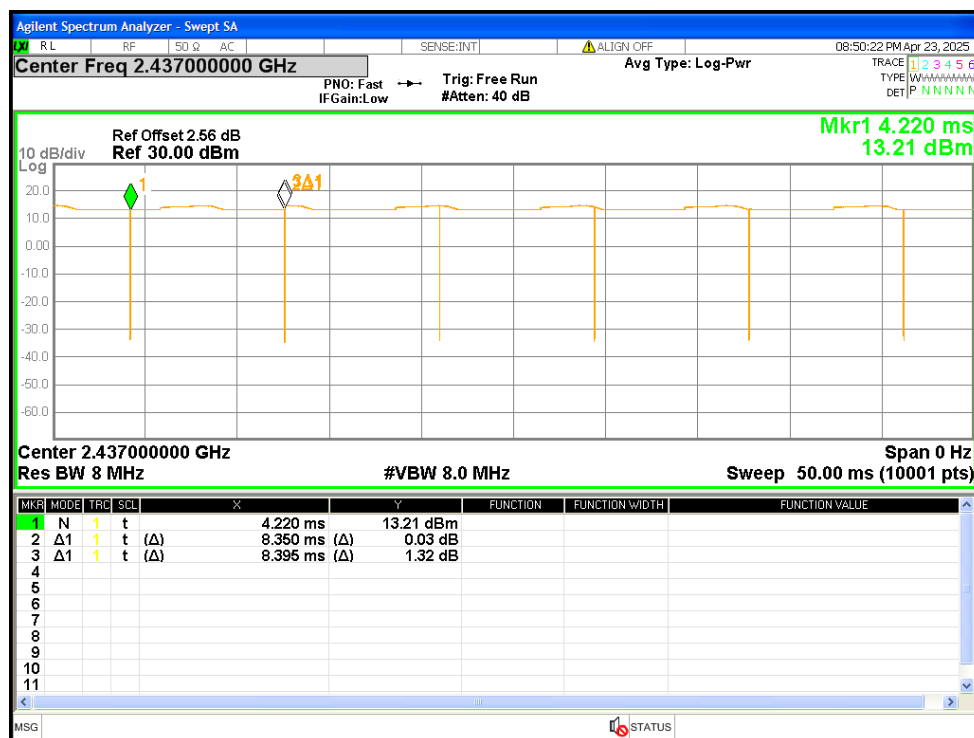


### Duty Cycle NVNT b 2462MHz

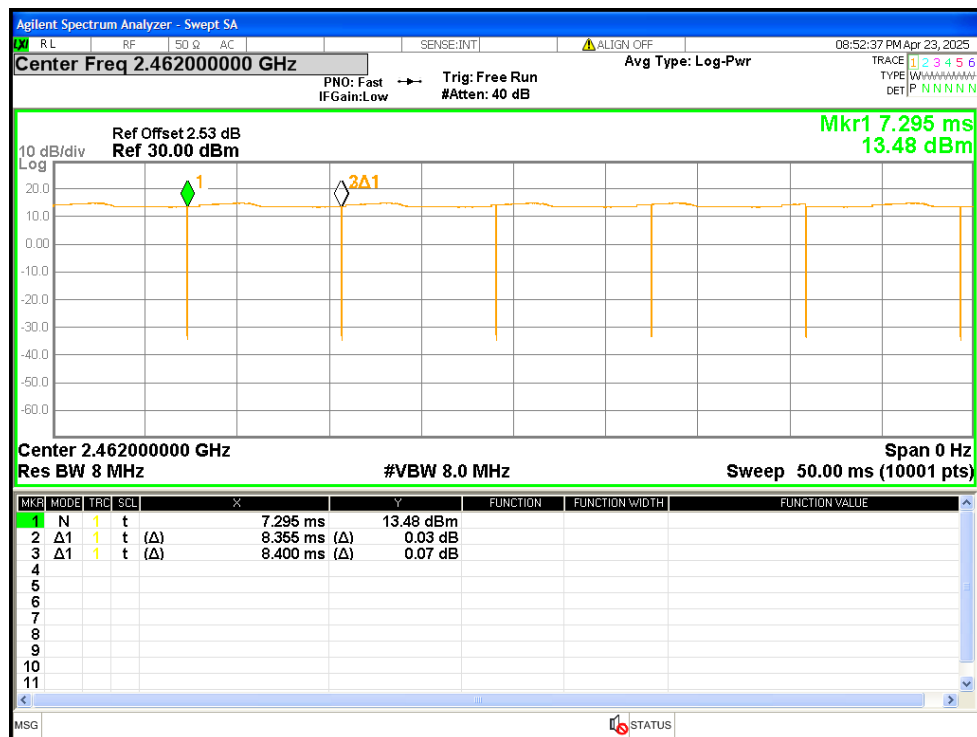


### Duty Cycle NVNT g 2412MHz

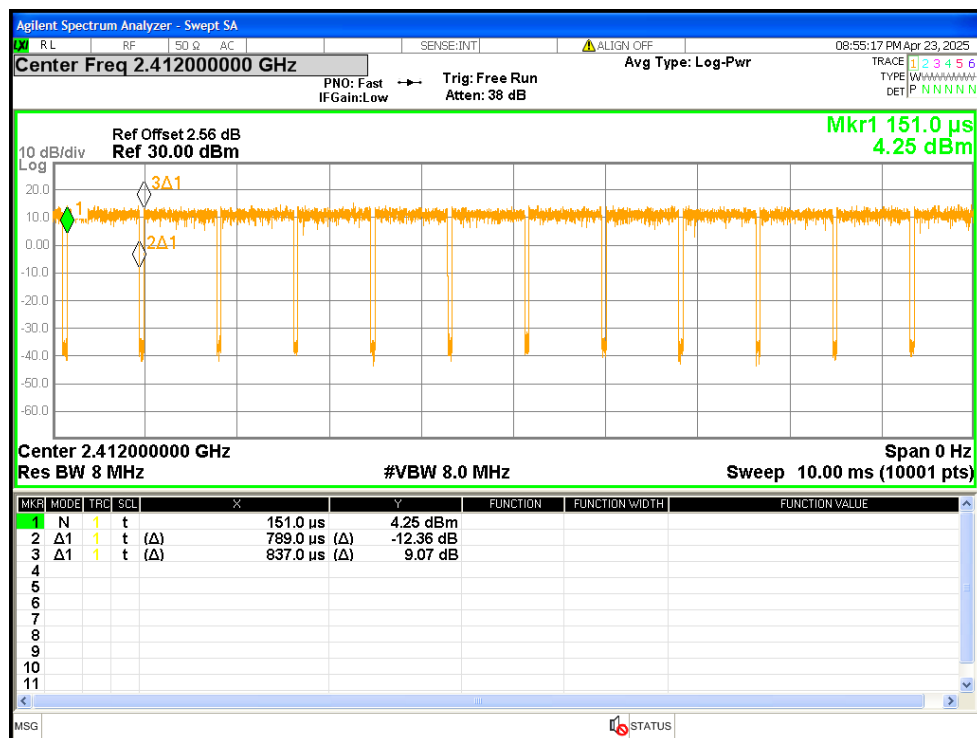


### Duty Cycle NVNT g 2437MHz

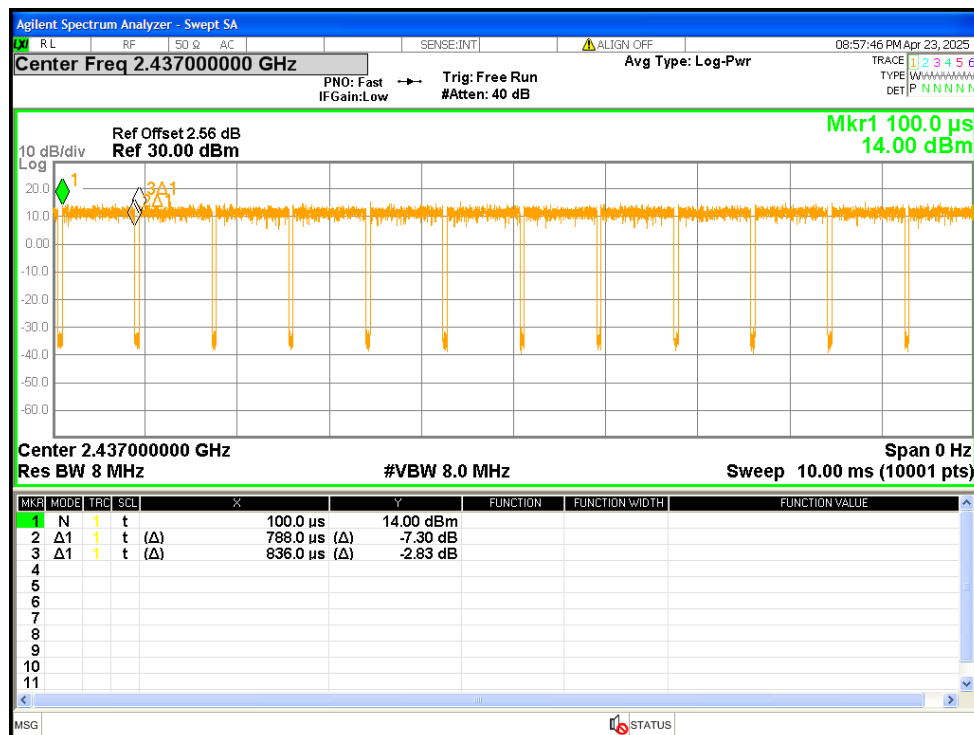


### Duty Cycle NVNT g 2462MHz

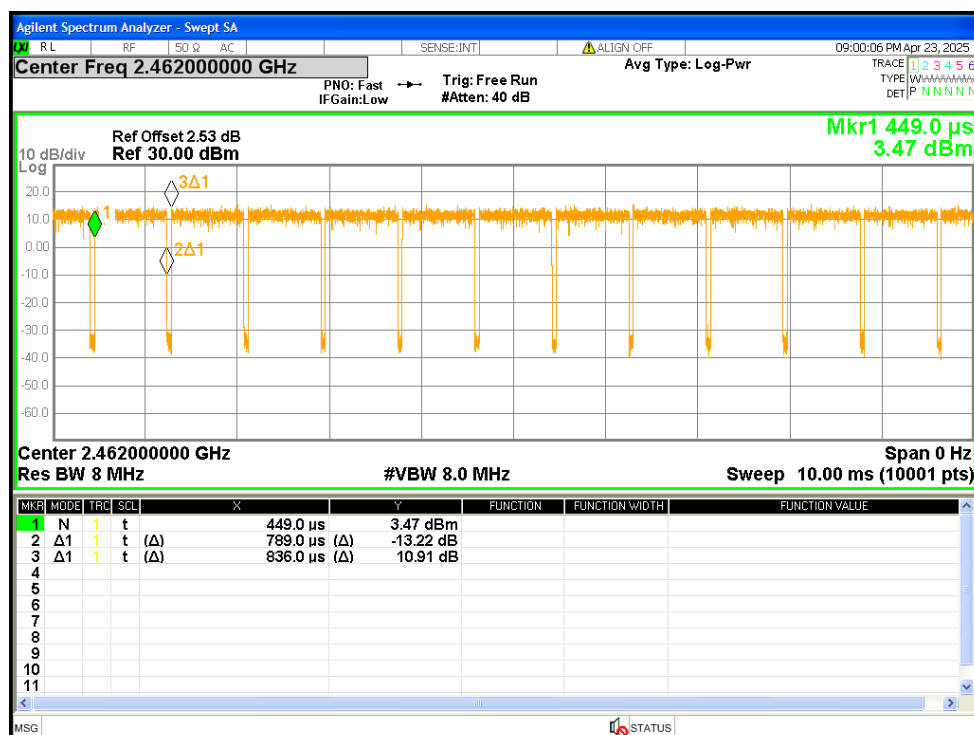


### Duty Cycle NVNT n20 2412MHz

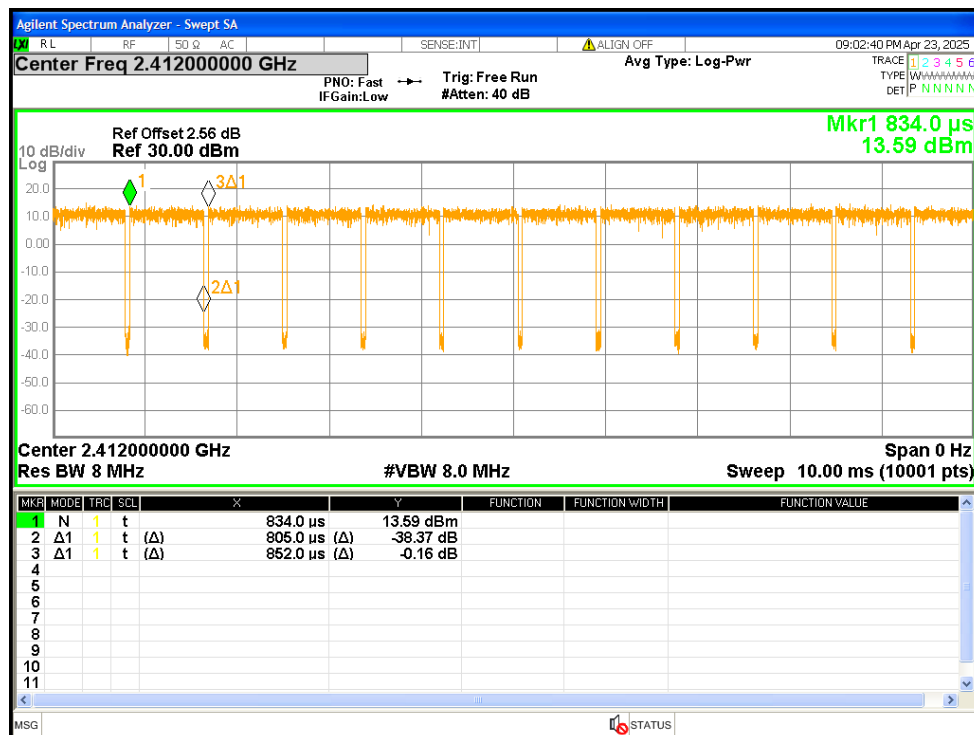

### Duty Cycle NVNT n20 2437MHz

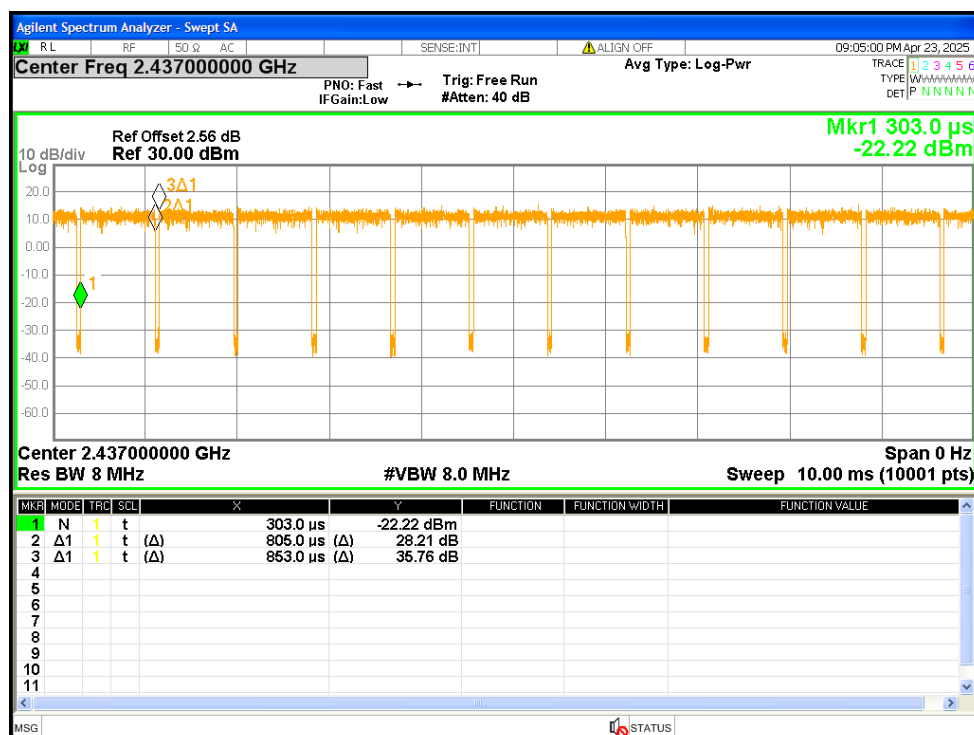

# Duty Cycle NVNT n20 2462MHz

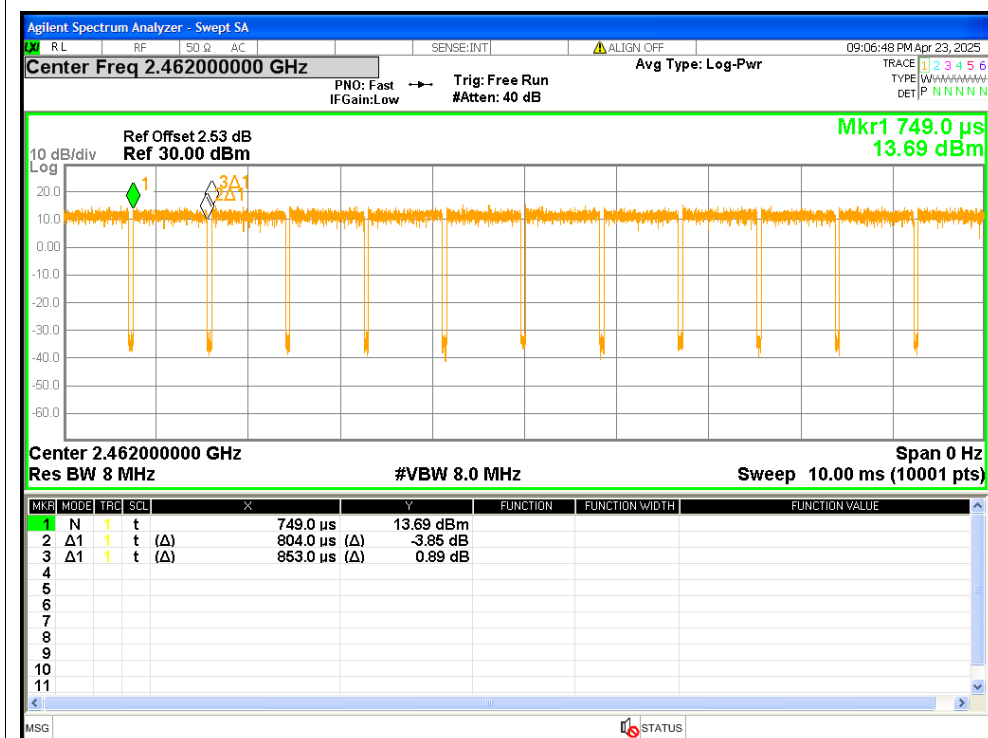

## Maximum Peak Conducted Output Power


| Condition | Mode | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | 12.86                 | $\leq 30$   | Pass    |
| NVNT      | b    | 2437            | 13.26                 | $\leq 30$   | Pass    |
| NVNT      | b    | 2462            | 13.56                 | $\leq 30$   | Pass    |
| NVNT      | g    | 2412            | 16.6                  | $\leq 30$   | Pass    |
| NVNT      | g    | 2437            | 17.09                 | $\leq 30$   | Pass    |
| NVNT      | g    | 2462            | 17.25                 | $\leq 30$   | Pass    |
| NVNT      | n20  | 2412            | 16.56                 | $\leq 30$   | Pass    |
| NVNT      | n20  | 2437            | 17.02                 | $\leq 30$   | Pass    |
| NVNT      | n20  | 2462            | 17.25                 | $\leq 30$   | Pass    |

## -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | 10.1812               | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | 10.18                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | 10.1829               | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | 15.8546               | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | 15.7513               | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | 15.8985               | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | 17.0808               | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | 15.2141               | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | 16.0533               | $\geq 0.5$                  | Pass    |

# Test Graphs

## -6dB Bandwidth NVNT b 2412MHz

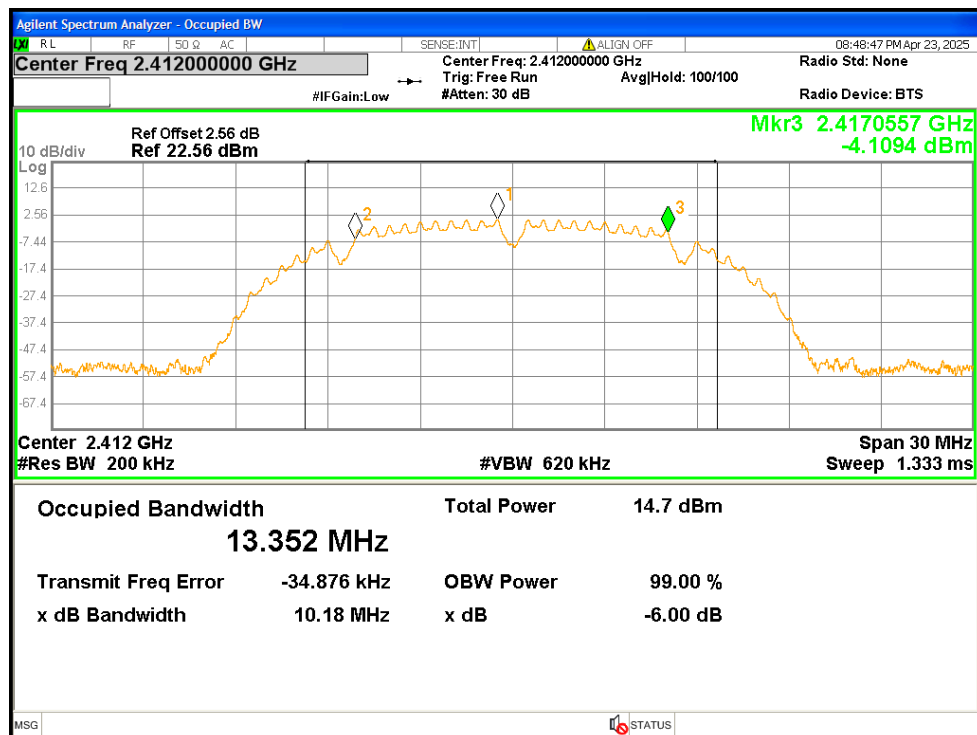


## -6dB Bandwidth NVNT b 2437MHz

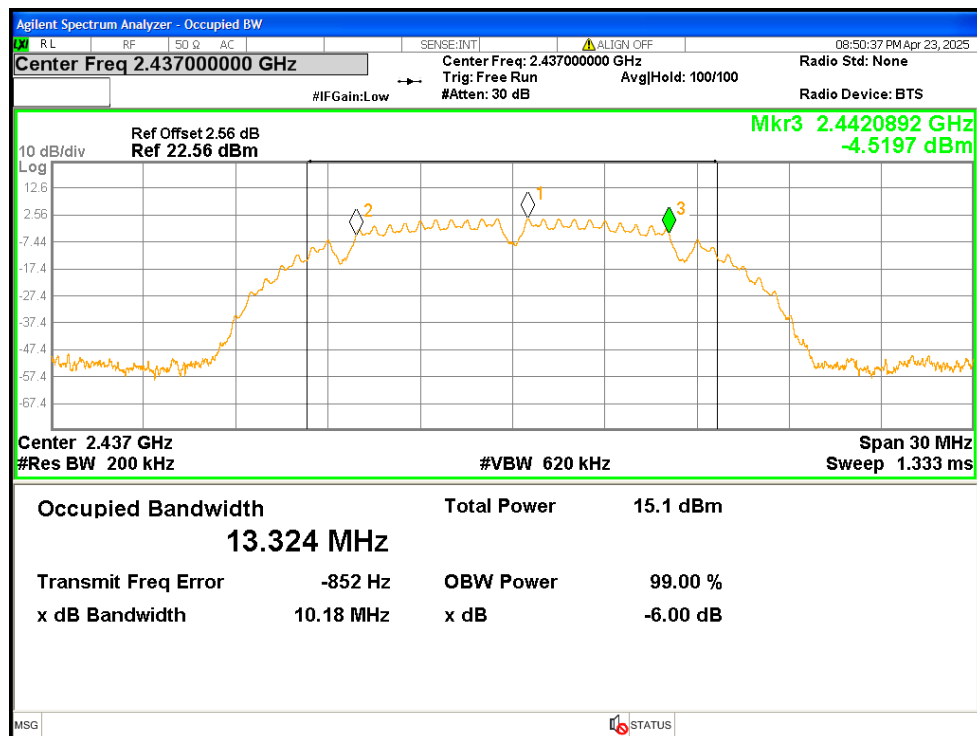





### -6dB Bandwidth NVNT b 2462MHz

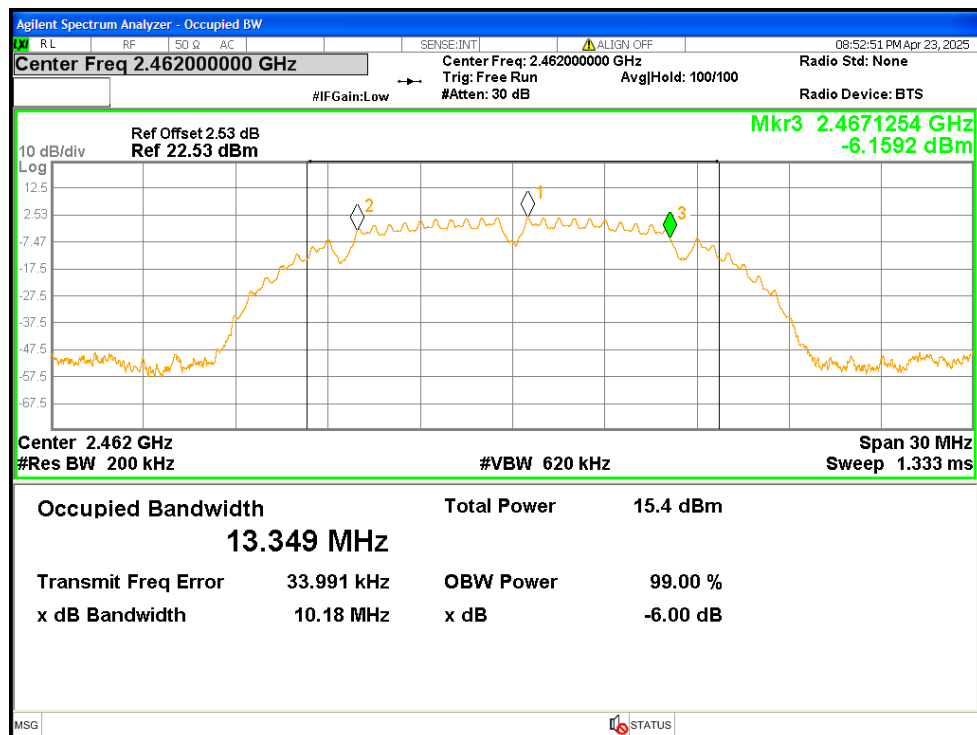


### -6dB Bandwidth NVNT g 2412MHz

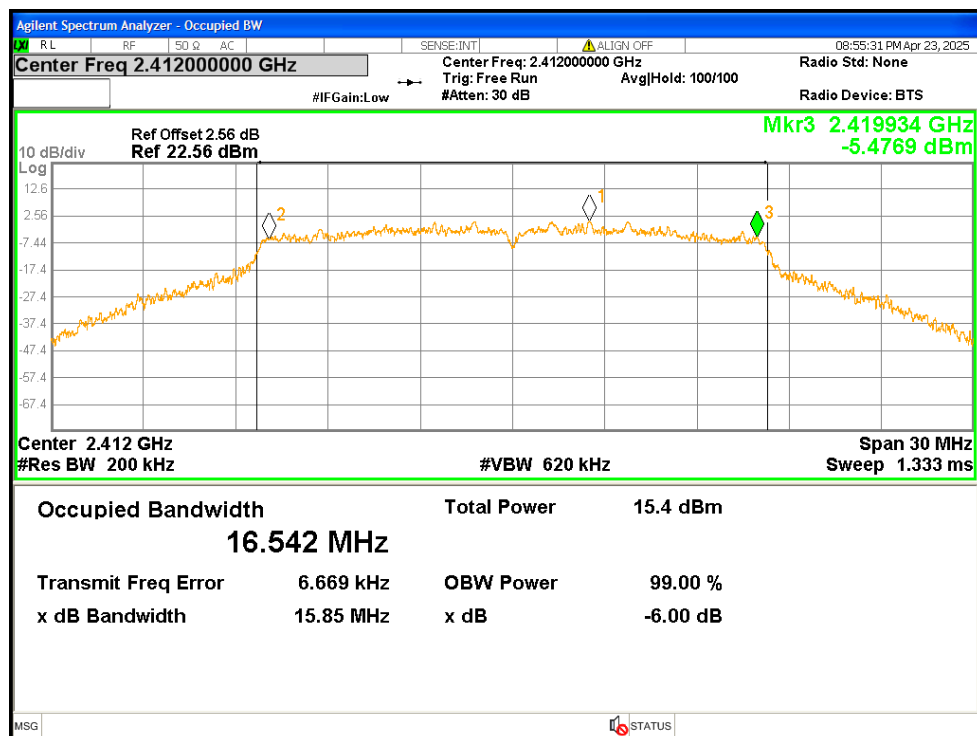


### -6dB Bandwidth NVNT g 2437MHz

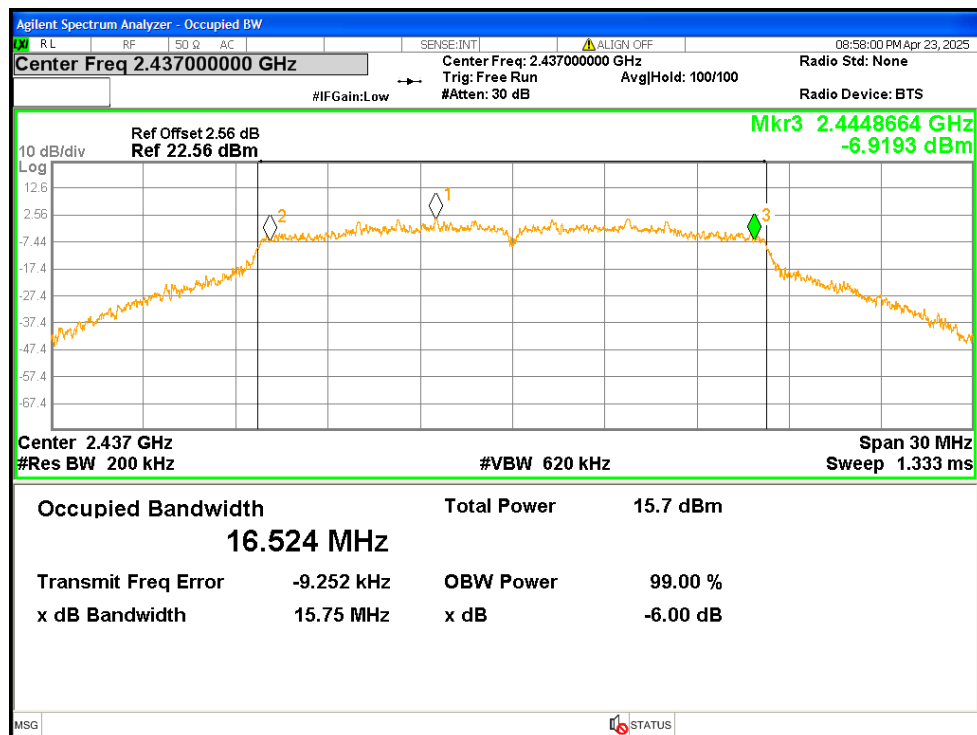


### -6dB Bandwidth NVNT g 2462MHz

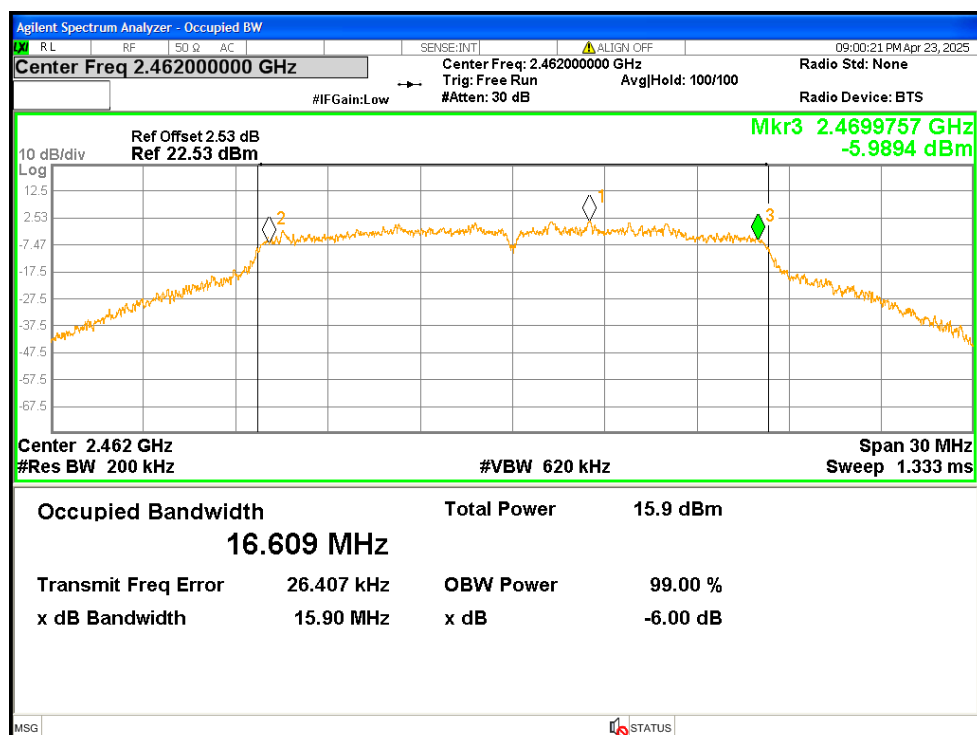


### -6dB Bandwidth NVNT n20 2412MHz

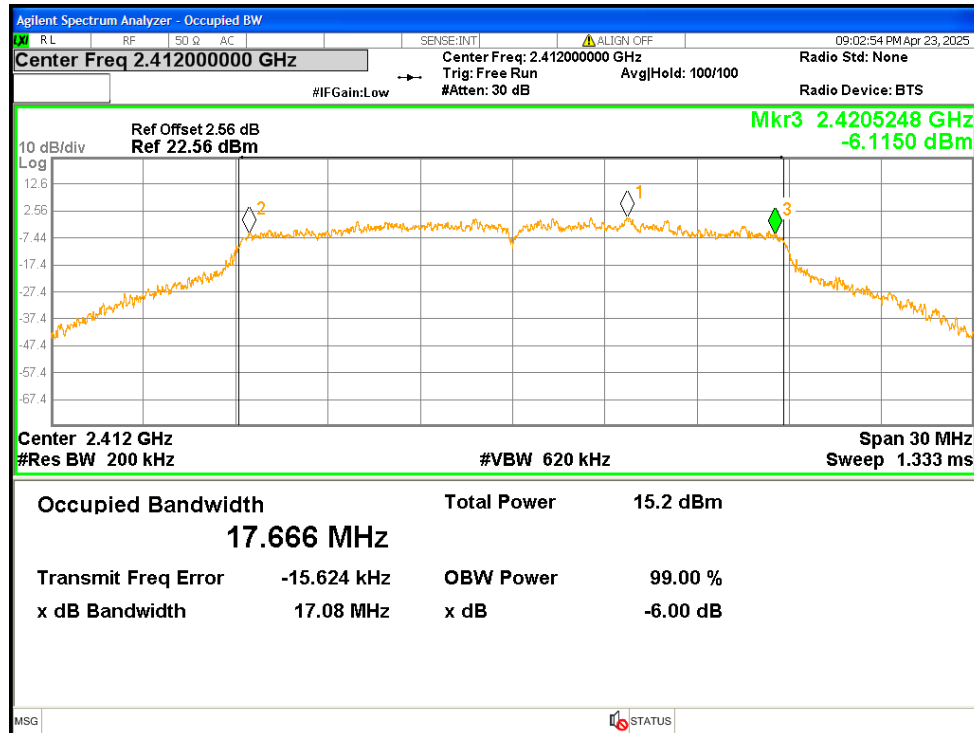

### -6dB Bandwidth NVNT n20 2437MHz

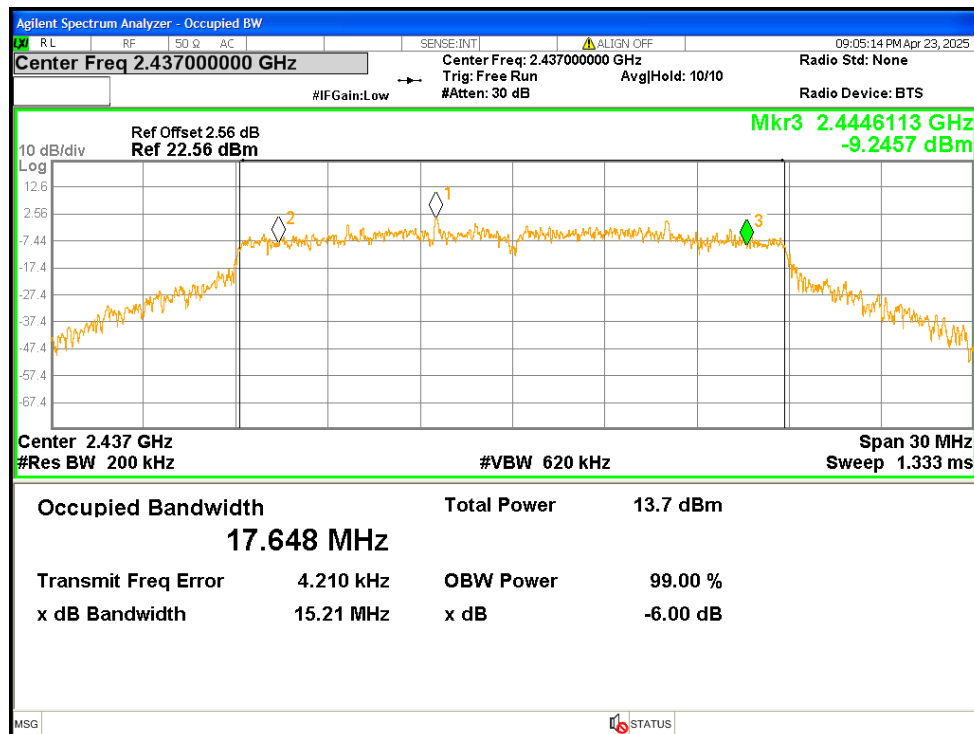

# -6dB Bandwidth NVNT n20 2462MHz

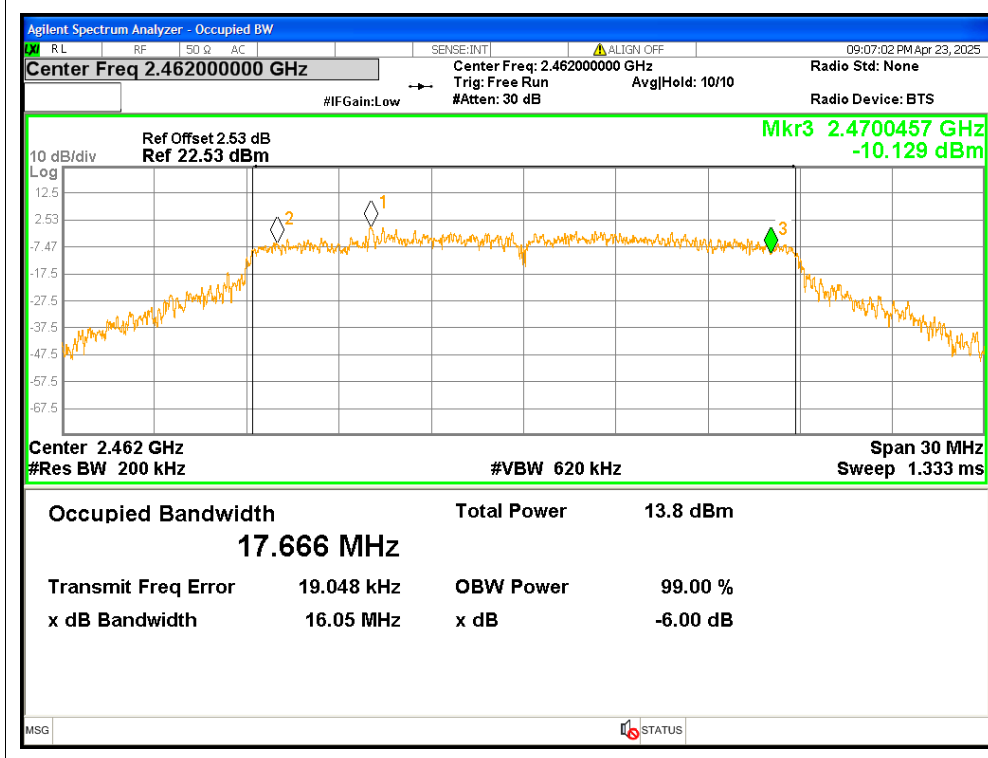


## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|----------------|------------------|---------|
| NVNT      | b    | 2412            | -13.2          | $\leq 8$         | Pass    |
| NVNT      | b    | 2437            | -13.13         | $\leq 8$         | Pass    |
| NVNT      | b    | 2462            | -12.85         | $\leq 8$         | Pass    |
| NVNT      | g    | 2412            | -12.98         | $\leq 8$         | Pass    |
| NVNT      | g    | 2437            | -14.91         | $\leq 8$         | Pass    |
| NVNT      | g    | 2462            | -13.85         | $\leq 8$         | Pass    |
| NVNT      | n20  | 2412            | -15.4          | $\leq 8$         | Pass    |
| NVNT      | n20  | 2437            | -14.2          | $\leq 8$         | Pass    |
| NVNT      | n20  | 2462            | -15.1          | $\leq 8$         | Pass    |

# Test Graphs


## PSD NVNT b 2412MHz

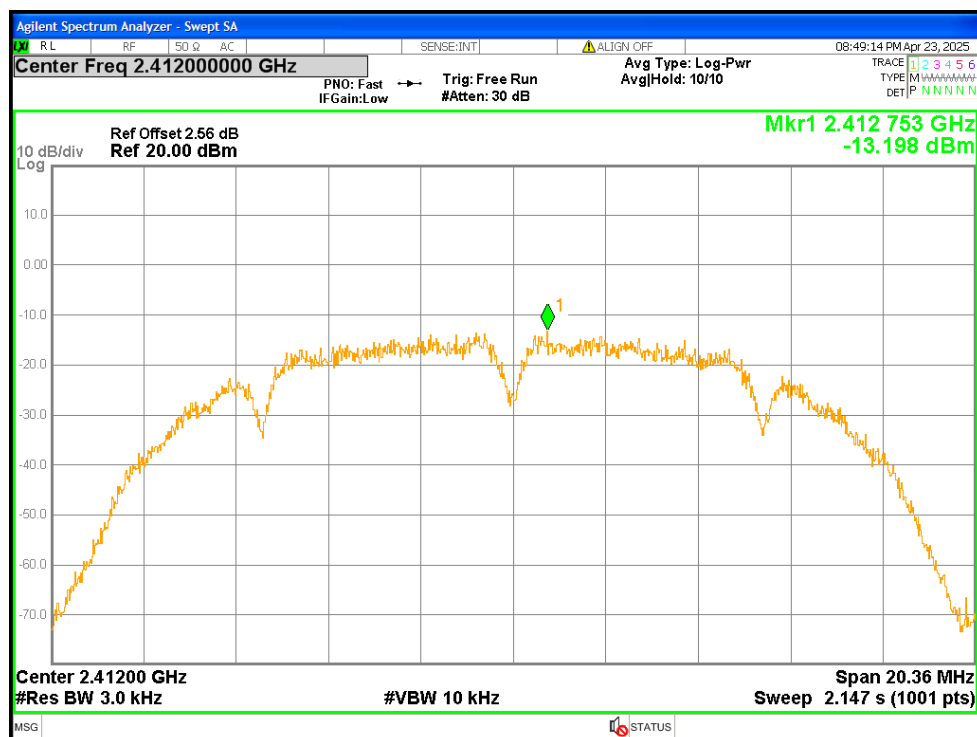


## PSD NVNT b 2437MHz

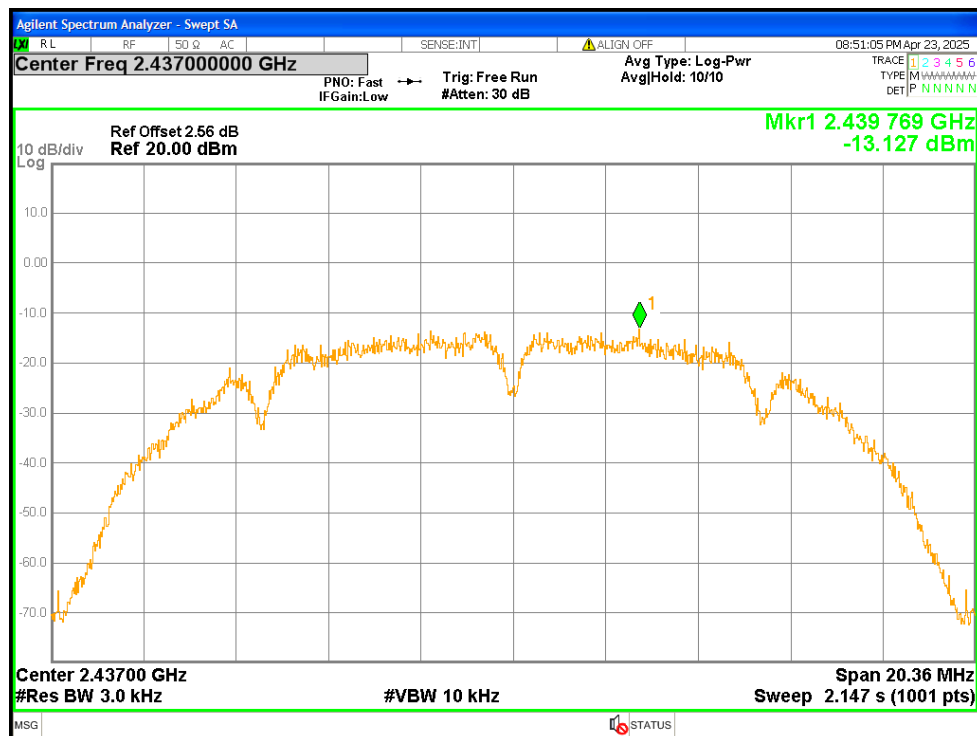


### PSD NVNT b 2462MHz

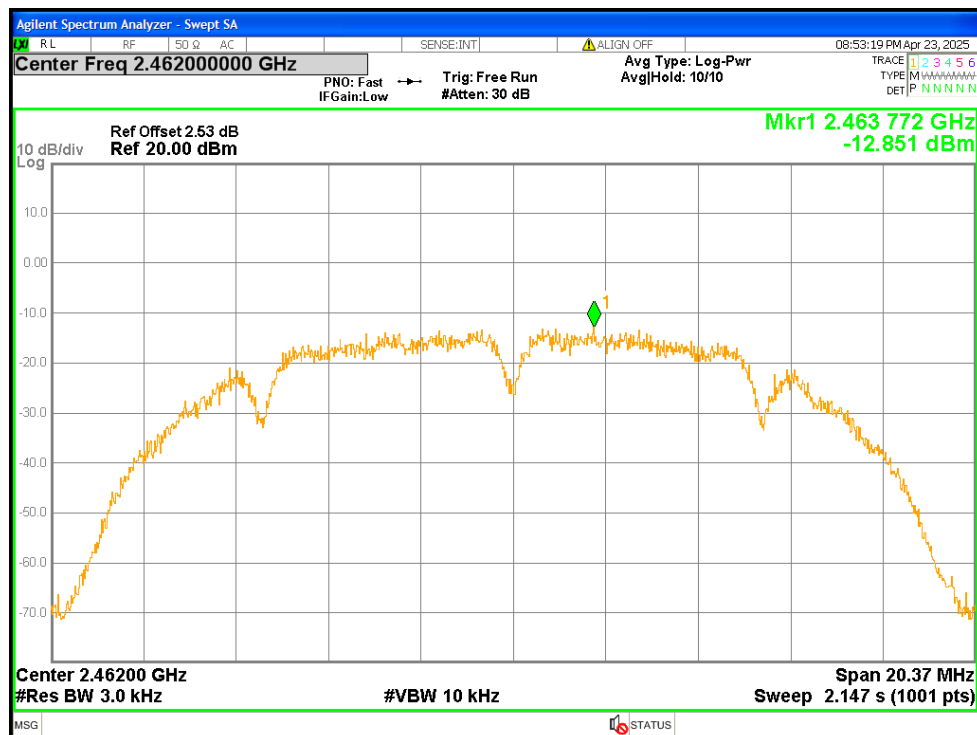


### PSD NVNT g 2412MHz

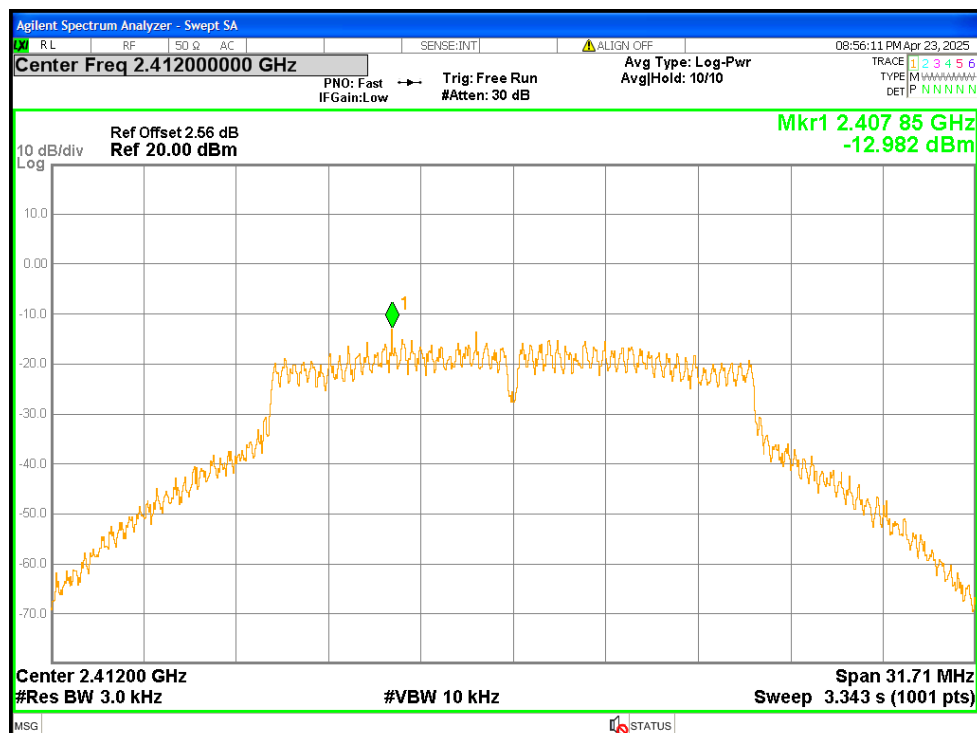

### PSD NVNT g 2437MHz

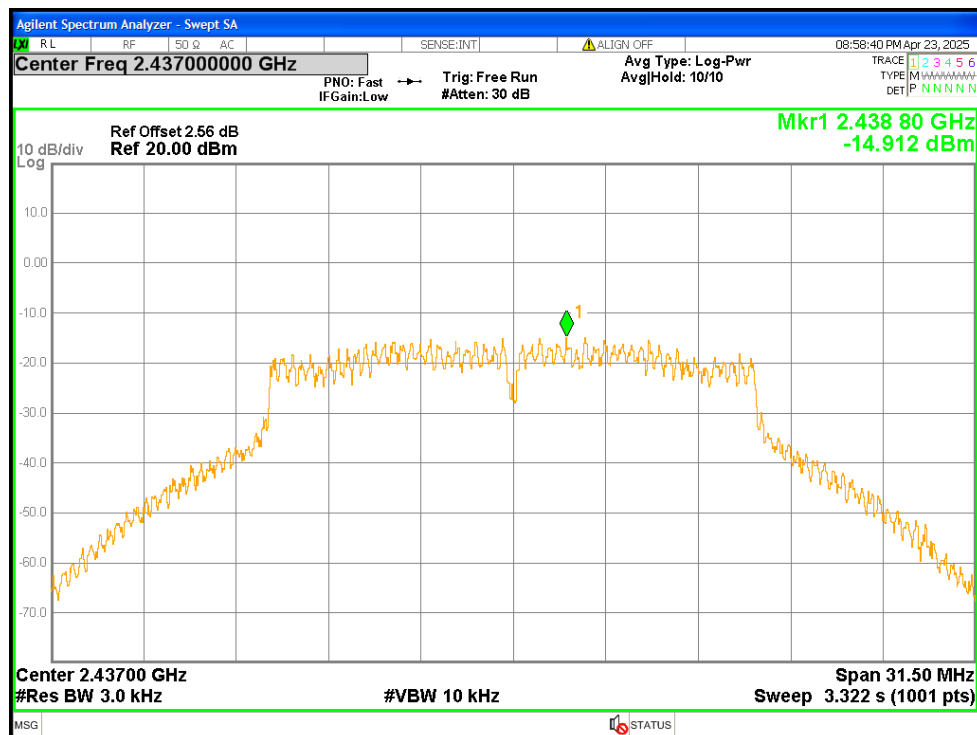


### PSD NVNT g 2462MHz

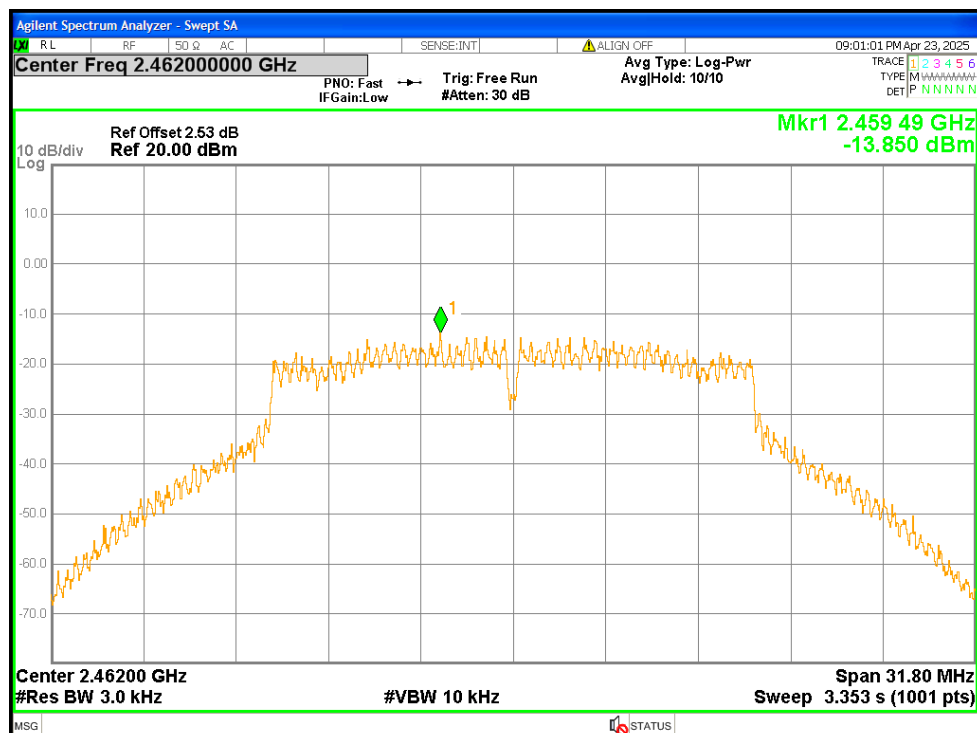




## PSD NVNT n20 2412MHz

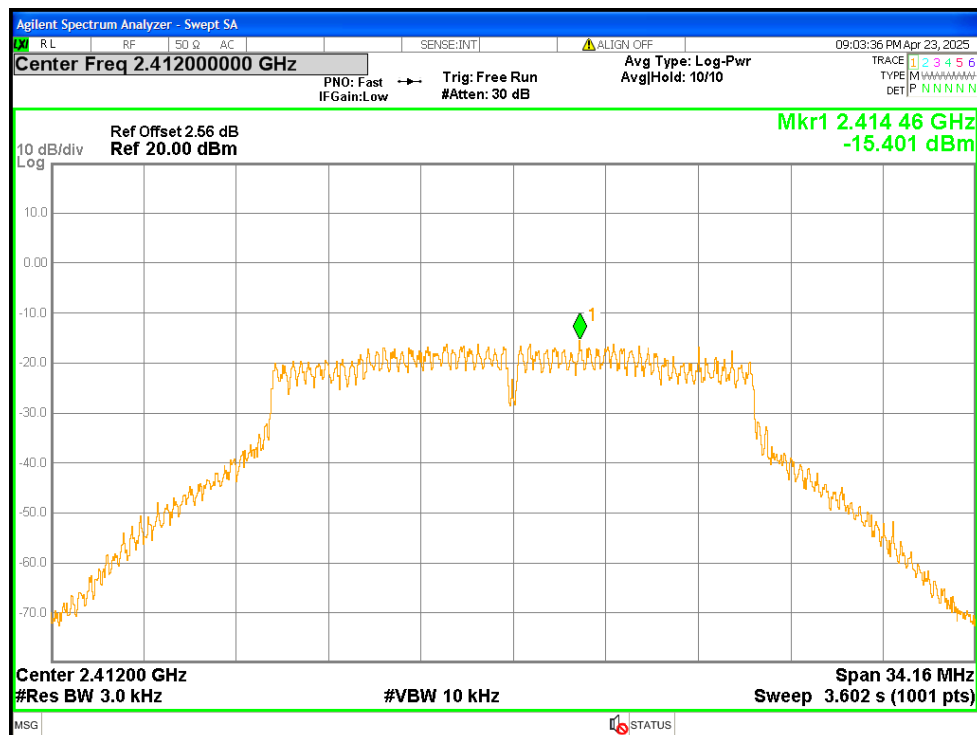

## PSD NVNT n20 2437MHz

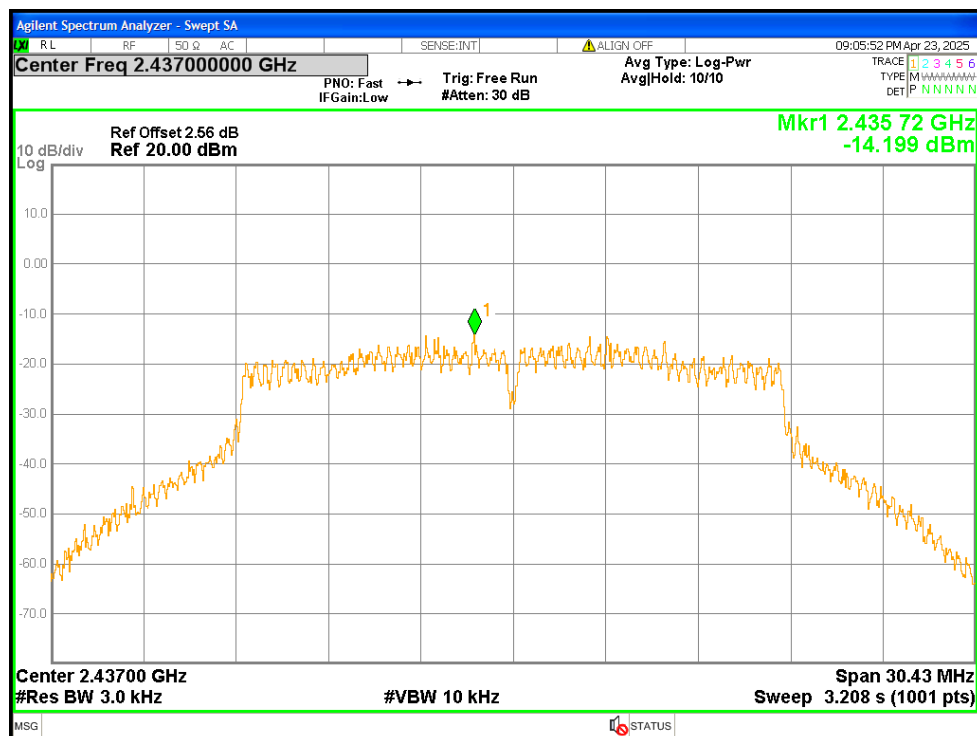




## Band Edge


| Condition | Mode | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | -54.29          | $\leq -20$  | Pass    |
| NVNT      | b    | 2462            | -56.01          | $\leq -20$  | Pass    |
| NVNT      | g    | 2412            | -30.66          | $\leq -20$  | Pass    |
| NVNT      | g    | 2462            | -52.39          | $\leq -20$  | Pass    |
| NVNT      | n20  | 2412            | -29.42          | $\leq -20$  | Pass    |
| NVNT      | n20  | 2462            | -55.25          | $\leq -20$  | Pass    |

# Test Graphs


## Band Edge NVNT b 2412MHz Ref

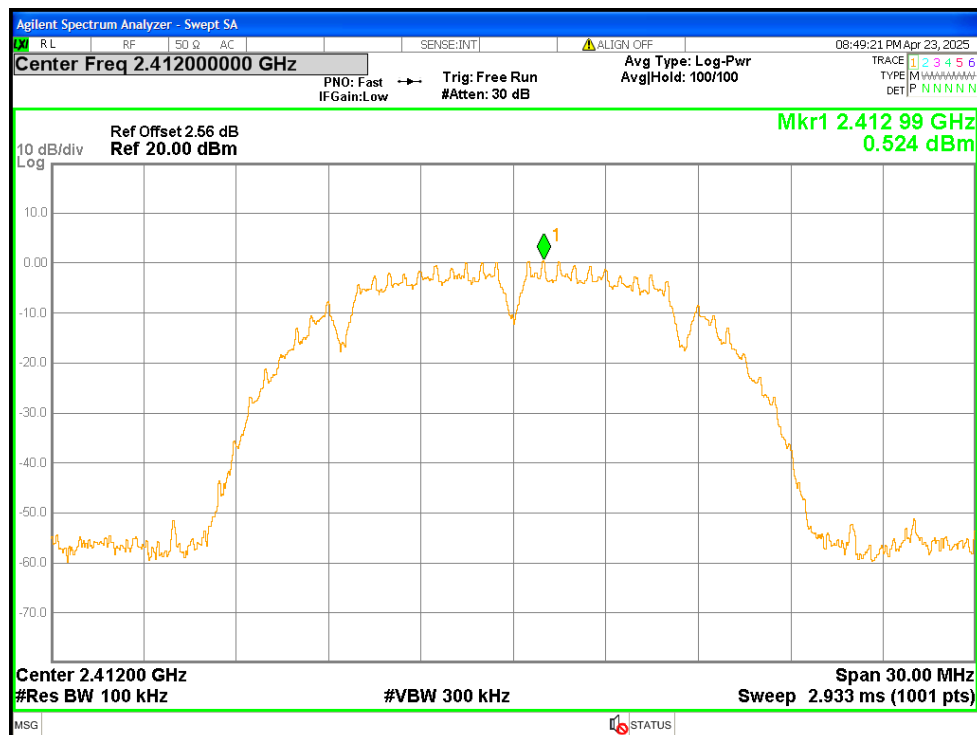


## Band Edge NVNT b 2412MHz Emission

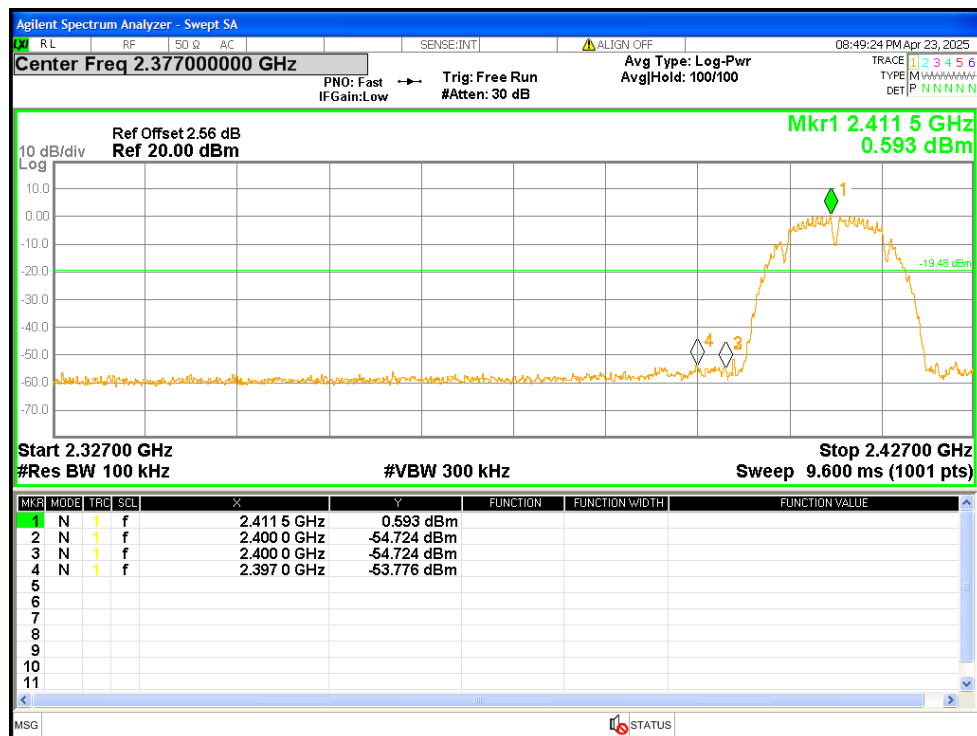


### Band Edge NVNT b 2462MHz Ref

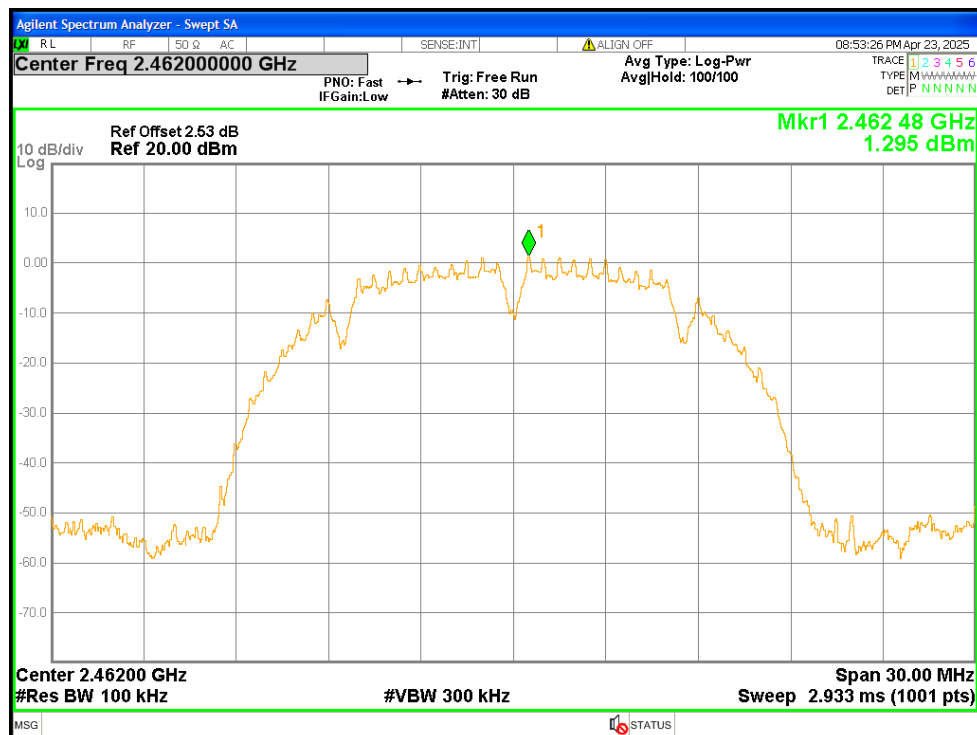


### Band Edge NVNT b 2462MHz Emission

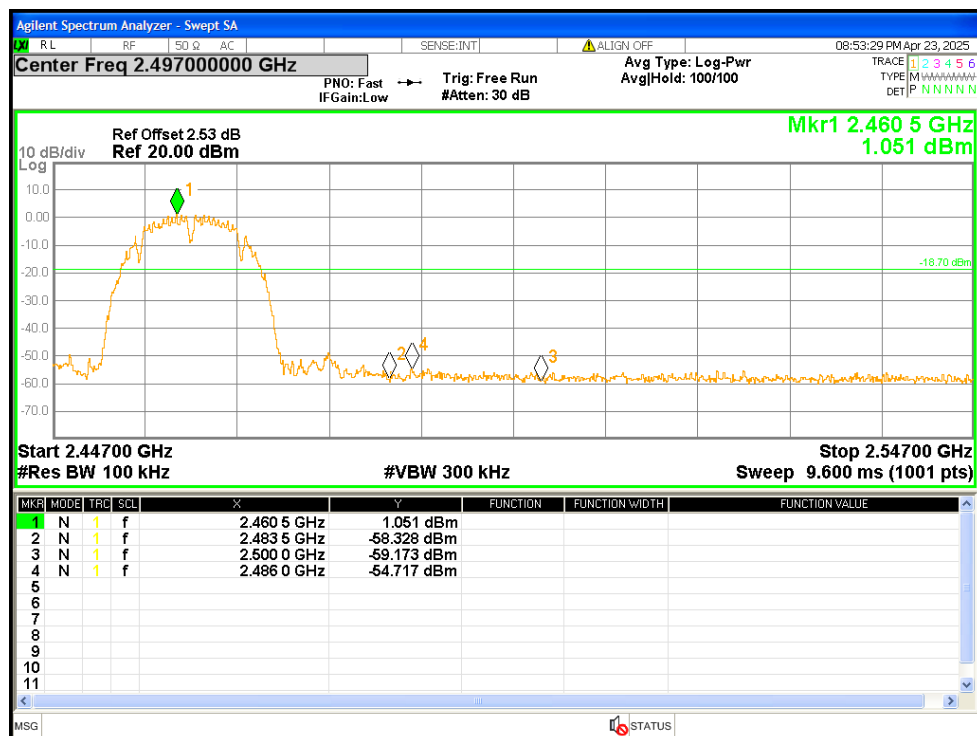


### Band Edge NVNT g 2412MHz Ref

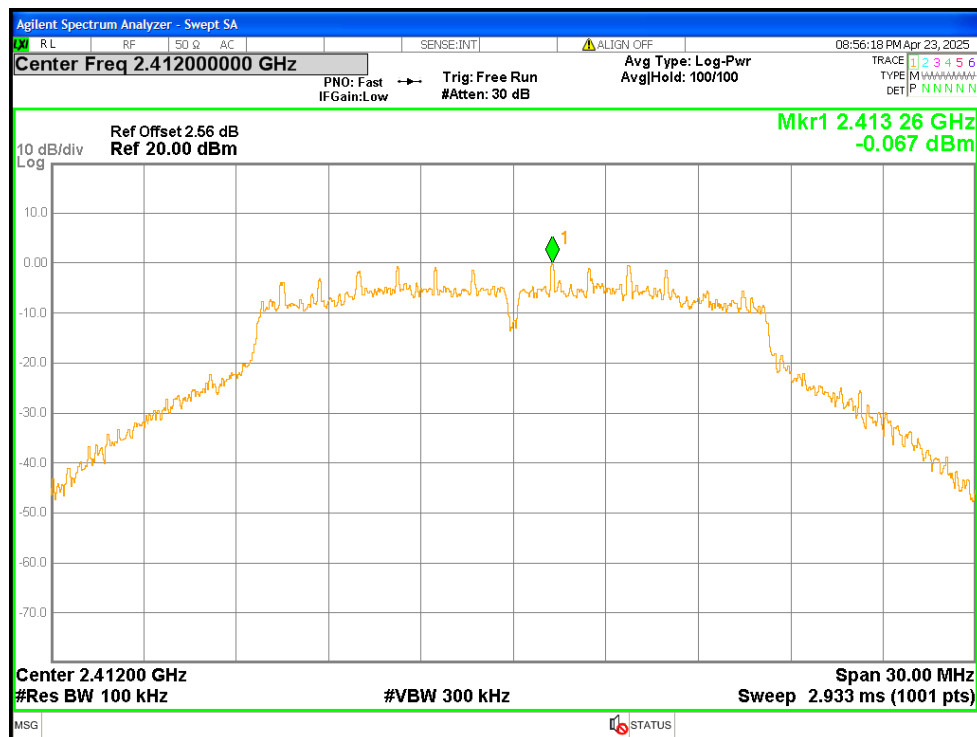


### Band Edge NVNT g 2412MHz Emission

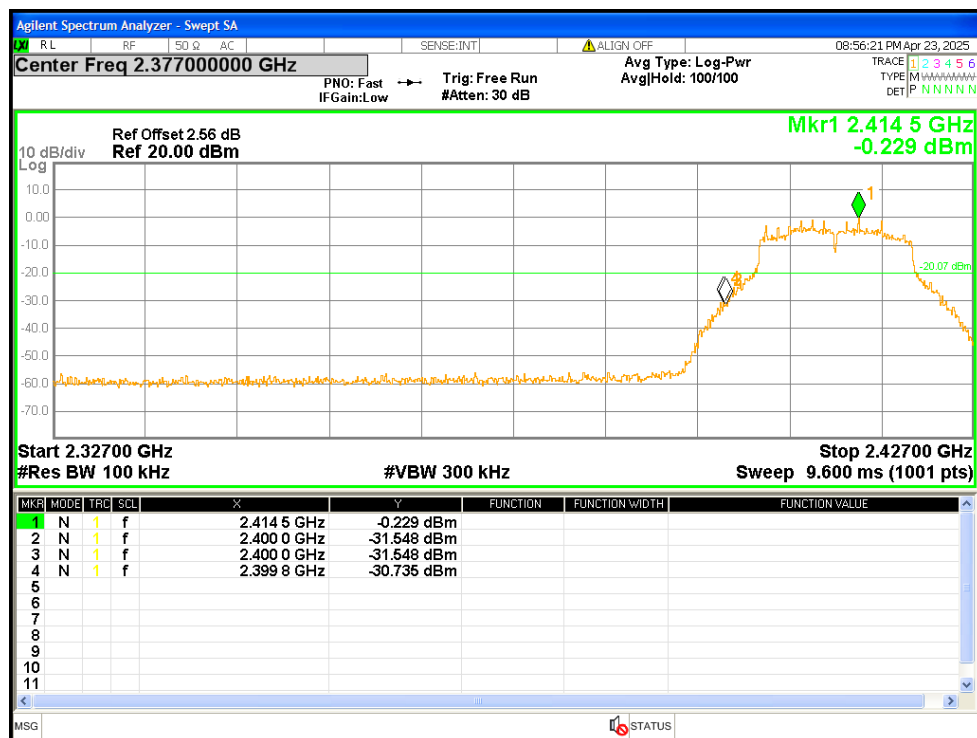


### Band Edge NVNT g 2462MHz Ref

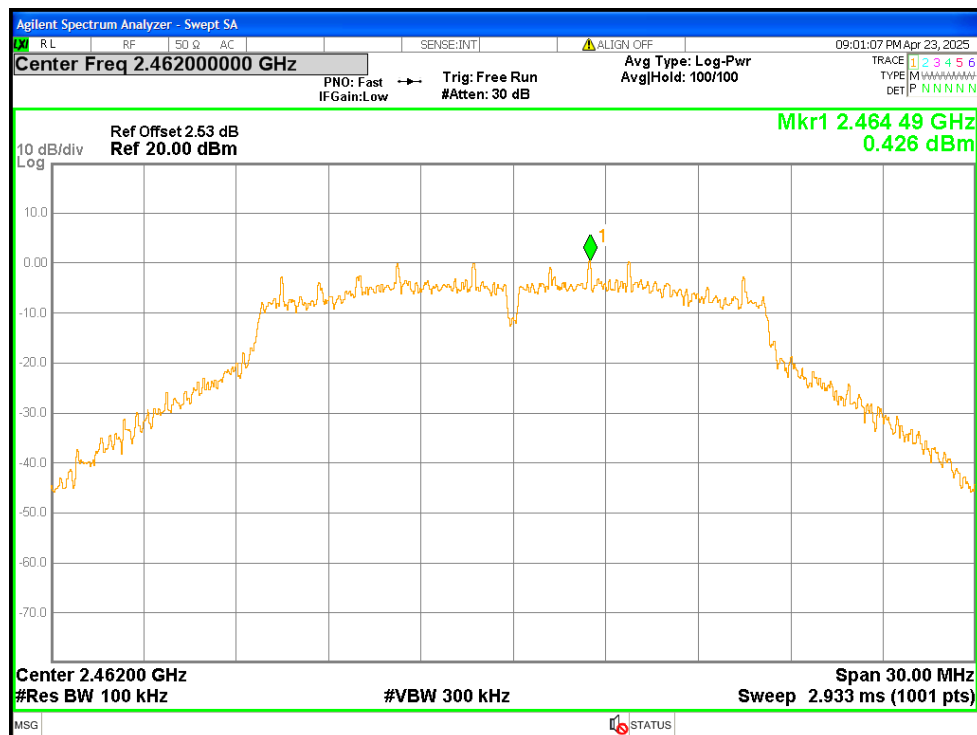


### Band Edge NVNT g 2462MHz Emission

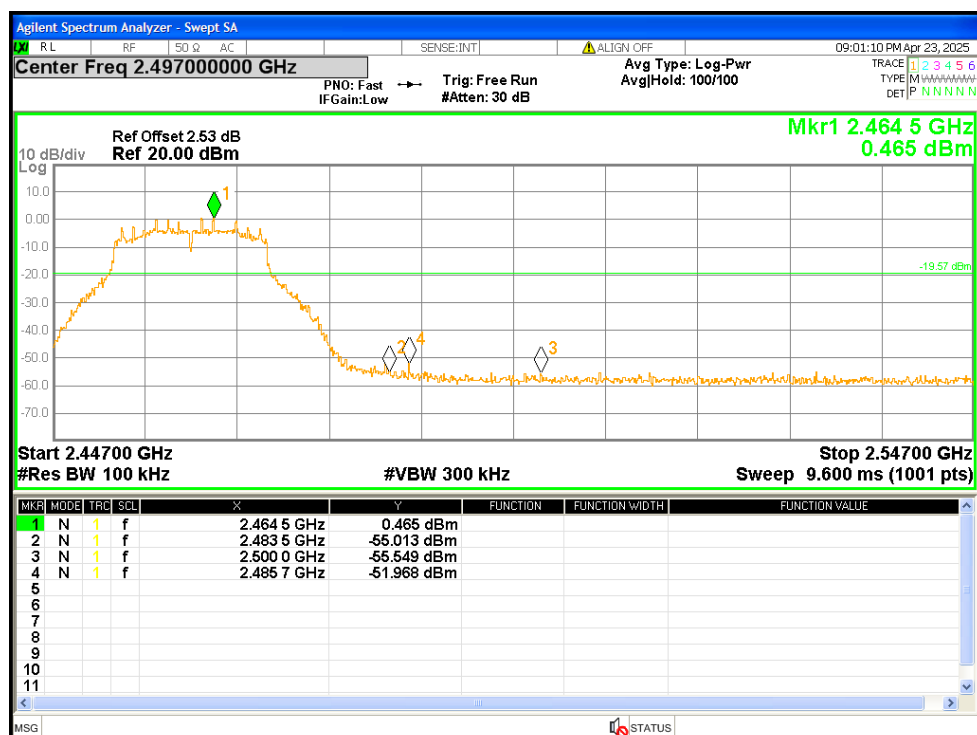

### Band Edge NVNT n20 2412MHz Ref

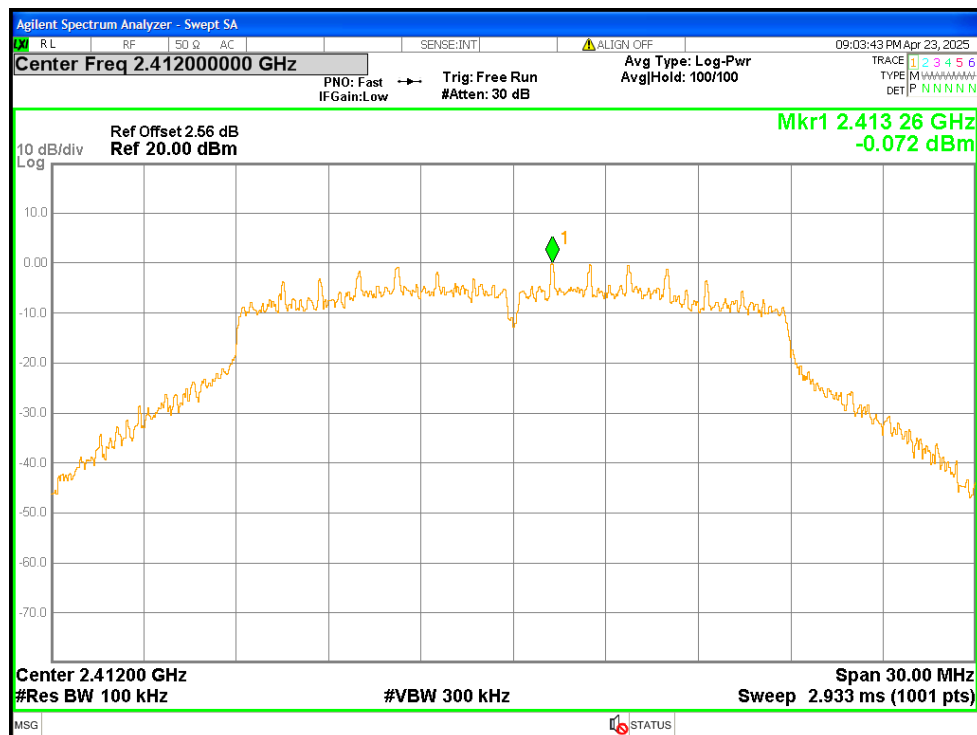


### Band Edge NVNT n20 2412MHz Emission

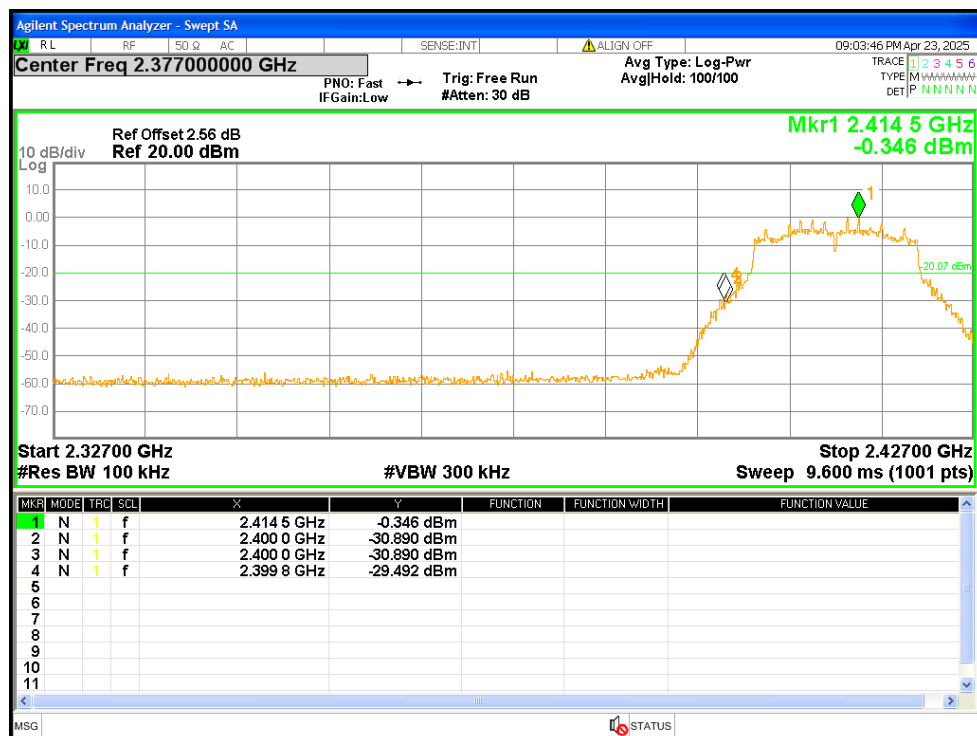




### Band Edge NVNT n20 2462MHz Ref

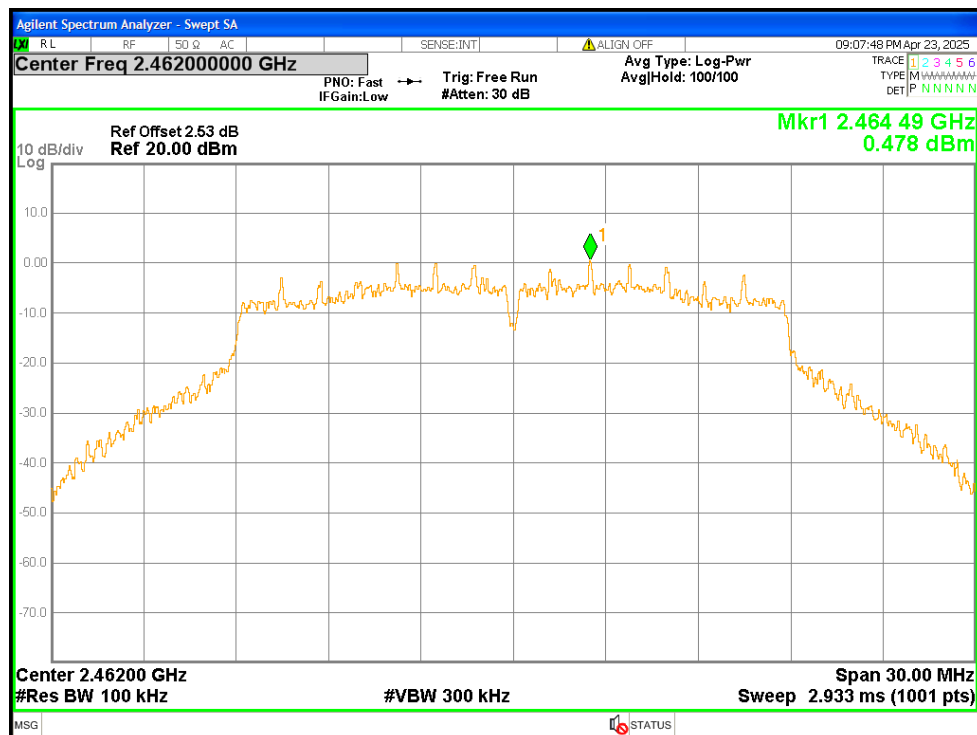

### Band Edge NVNT n20 2462MHz Emission

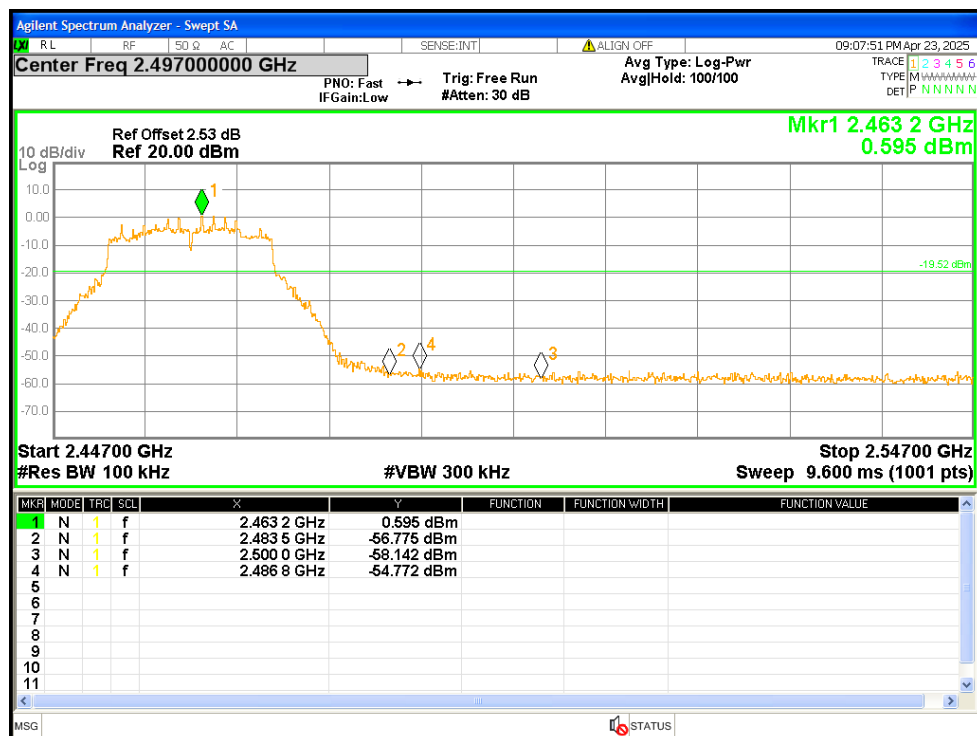


## Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | -46.57          | $\leq -20$  | Pass    |
| NVNT      | b    | 2437            | -45.21          | $\leq -20$  | Pass    |
| NVNT      | b    | 2462            | -47.43          | $\leq -20$  | Pass    |
| NVNT      | g    | 2412            | -46.04          | $\leq -20$  | Pass    |
| NVNT      | g    | 2437            | -46.33          | $\leq -20$  | Pass    |
| NVNT      | g    | 2462            | -45.76          | $\leq -20$  | Pass    |
| NVNT      | n20  | 2412            | -44.87          | $\leq -20$  | Pass    |
| NVNT      | n20  | 2437            | -46.19          | $\leq -20$  | Pass    |
| NVNT      | n20  | 2462            | -45.28          | $\leq -20$  | Pass    |

# Test Graphs


## Tx. Spurious NVNT b 2412MHz Ref

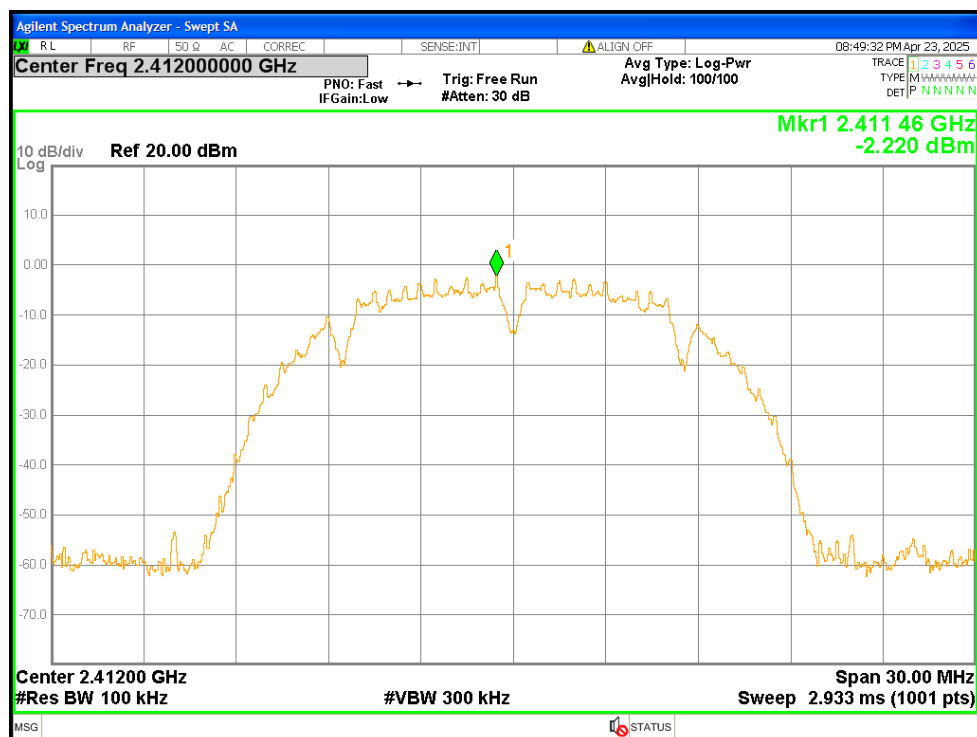


## Tx. Spurious NVNT b 2412MHz Emission

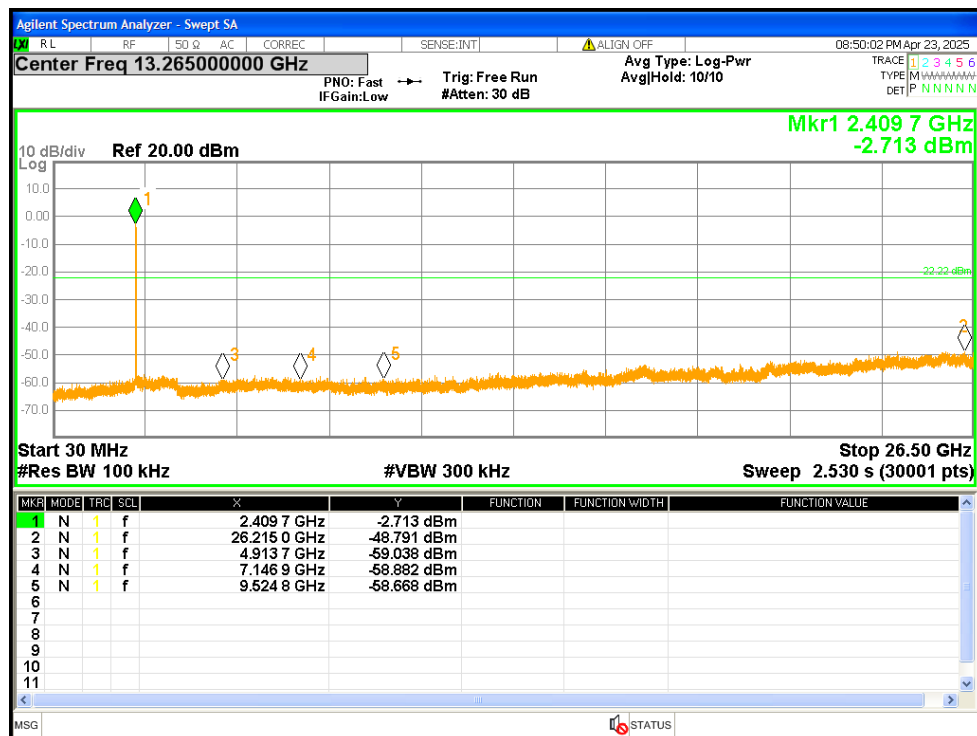


## Tx. Spurious NVNT b 2437MHz Ref

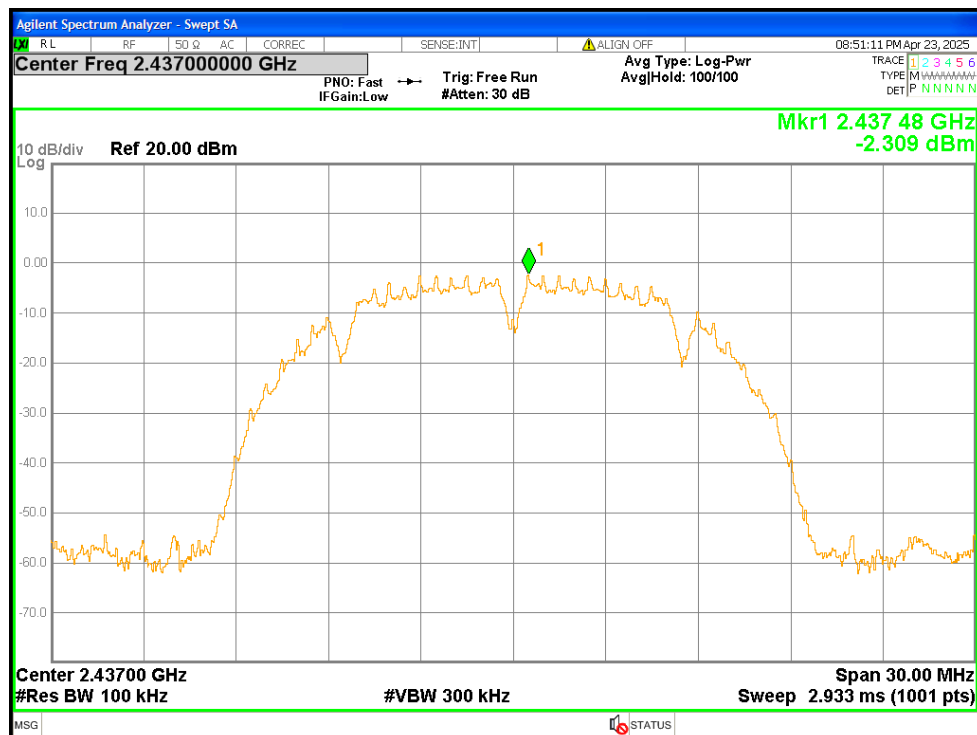


## Tx. Spurious NVNT b 2437MHz Emission

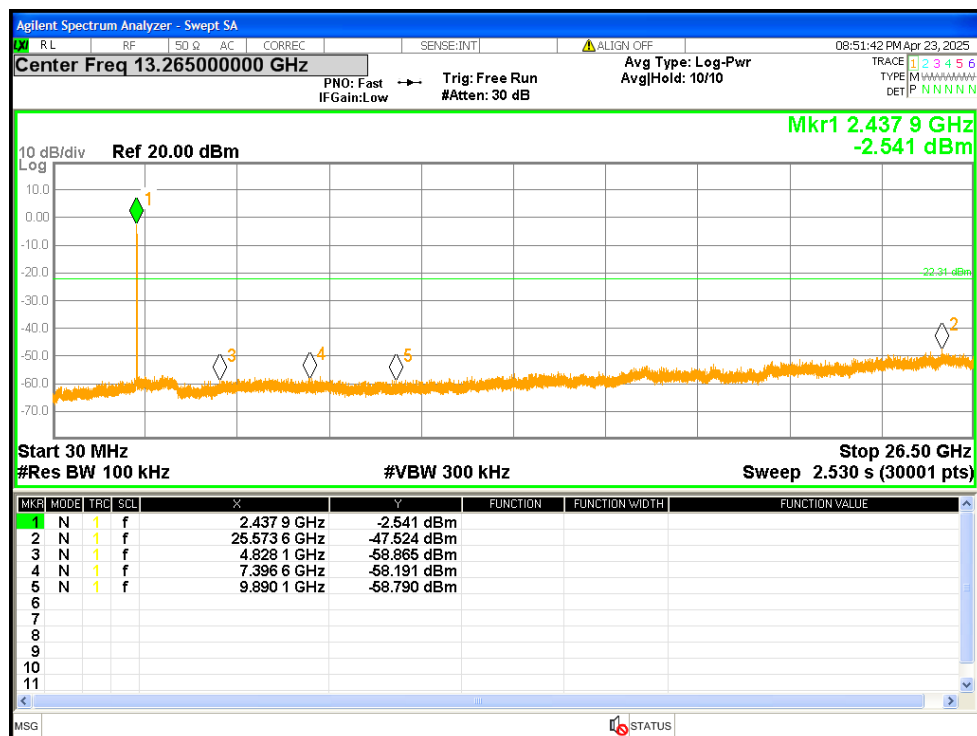


## Tx. Spurious NVNT b 2462MHz Ref

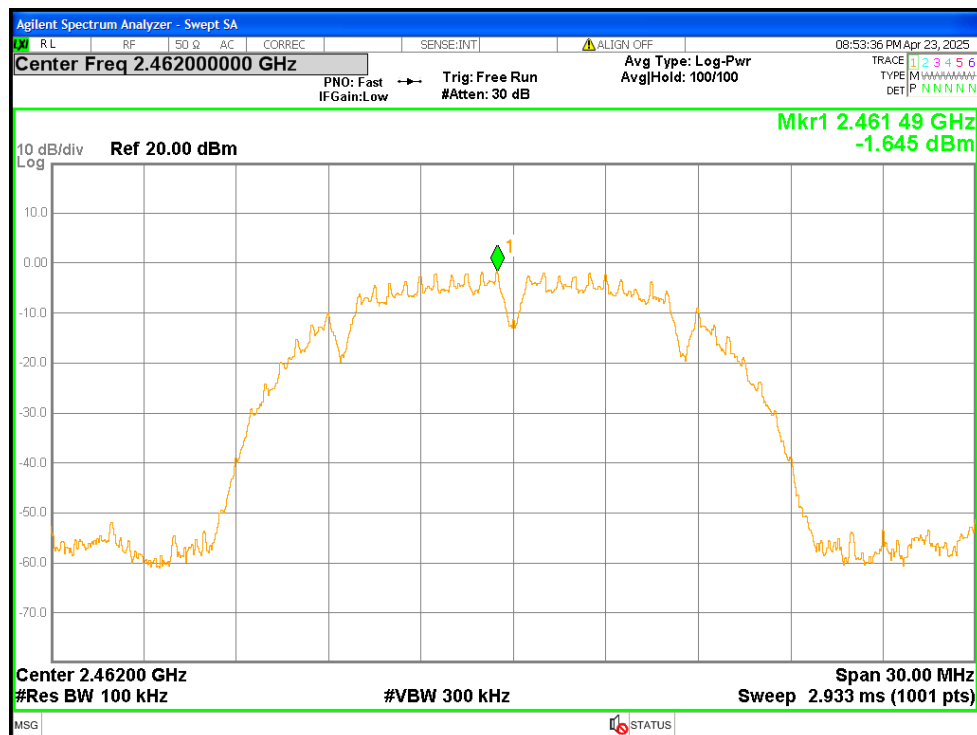


## Tx. Spurious NVNT b 2462MHz Emission

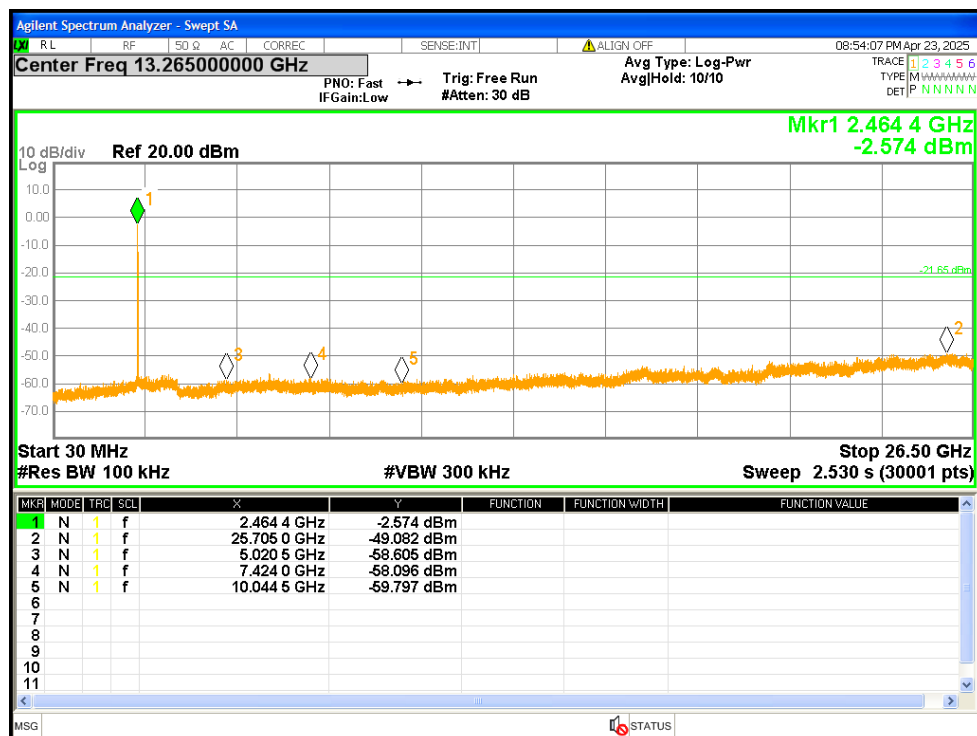


## Tx. Spurious NVNT g 2412MHz Ref

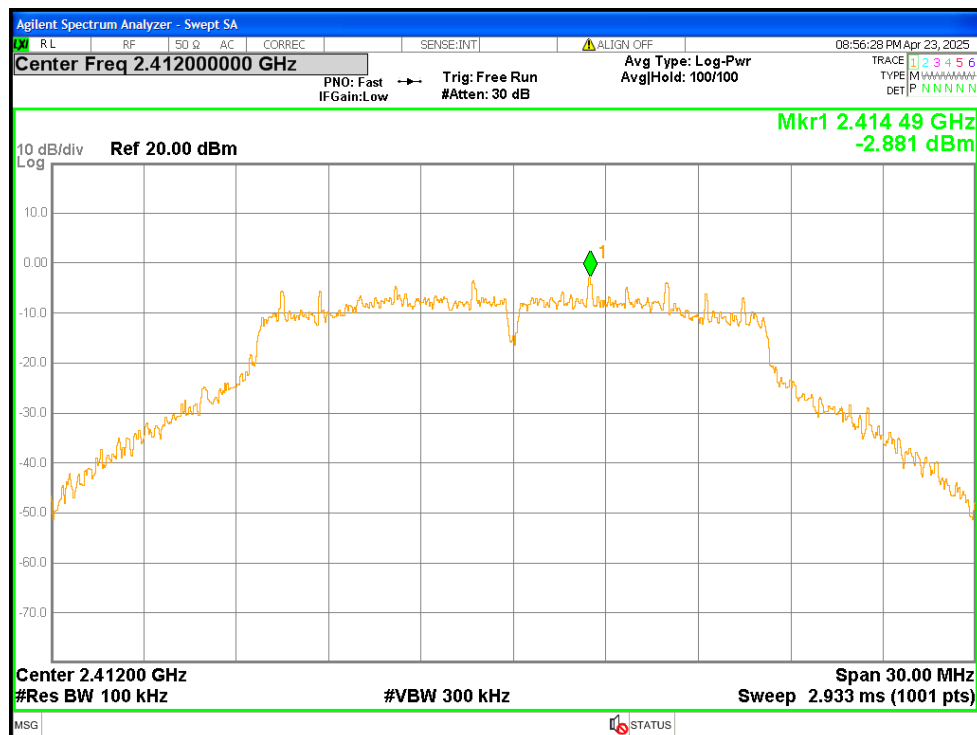


## Tx. Spurious NVNT g 2412MHz Emission

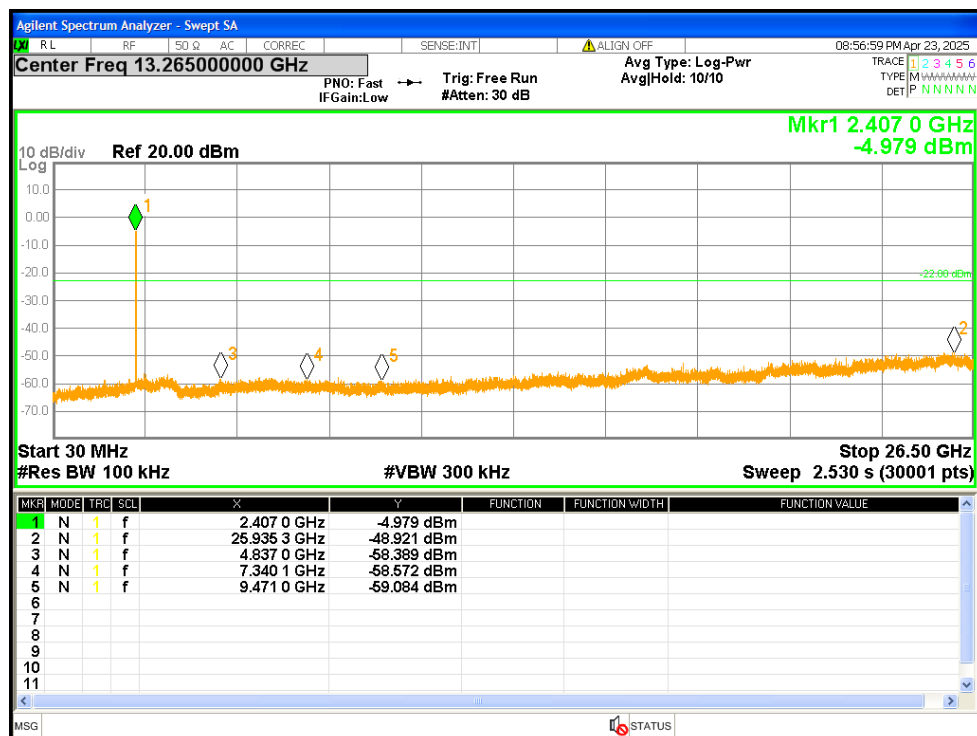


## Tx. Spurious NVNT g 2437MHz Ref

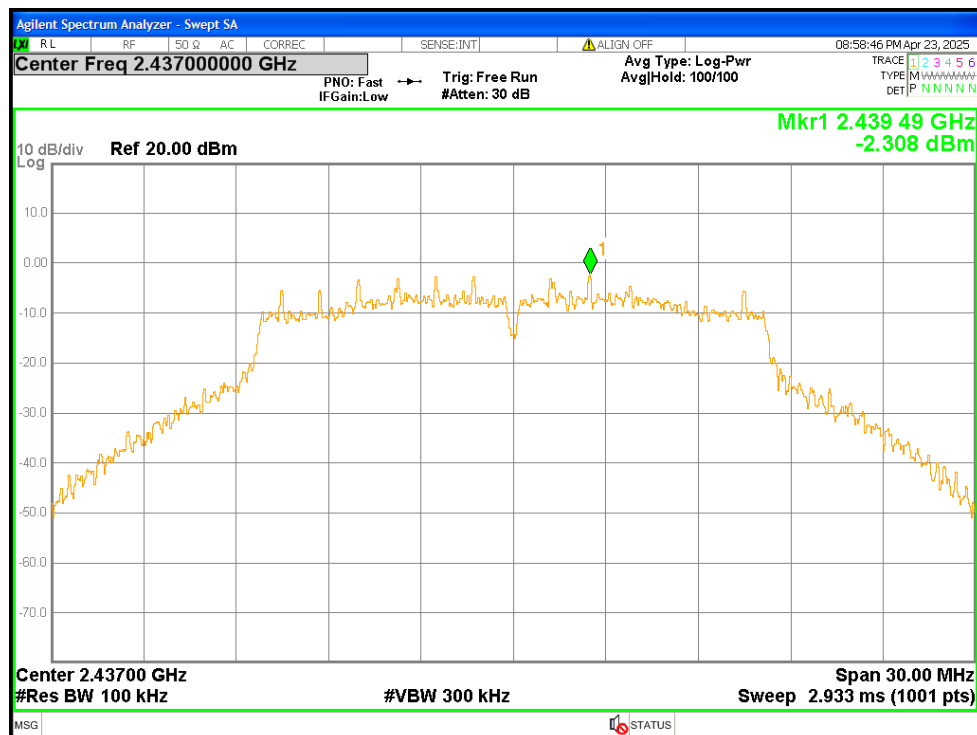


## Tx. Spurious NVNT g 2437MHz Emission

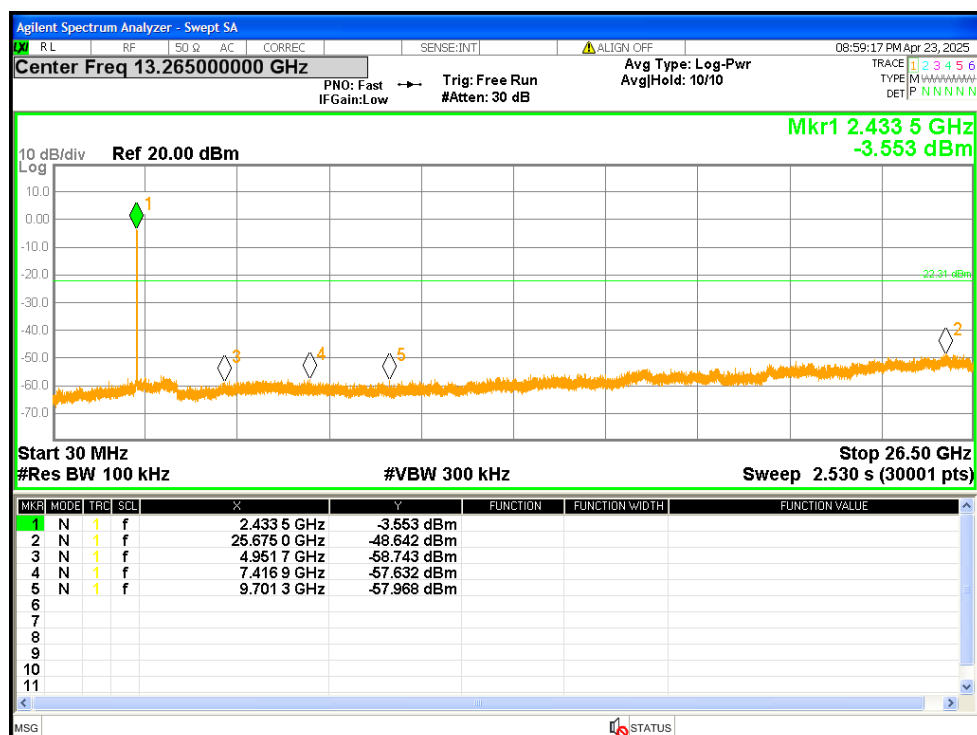

## Tx. Spurious NVNT g 2462MHz Ref

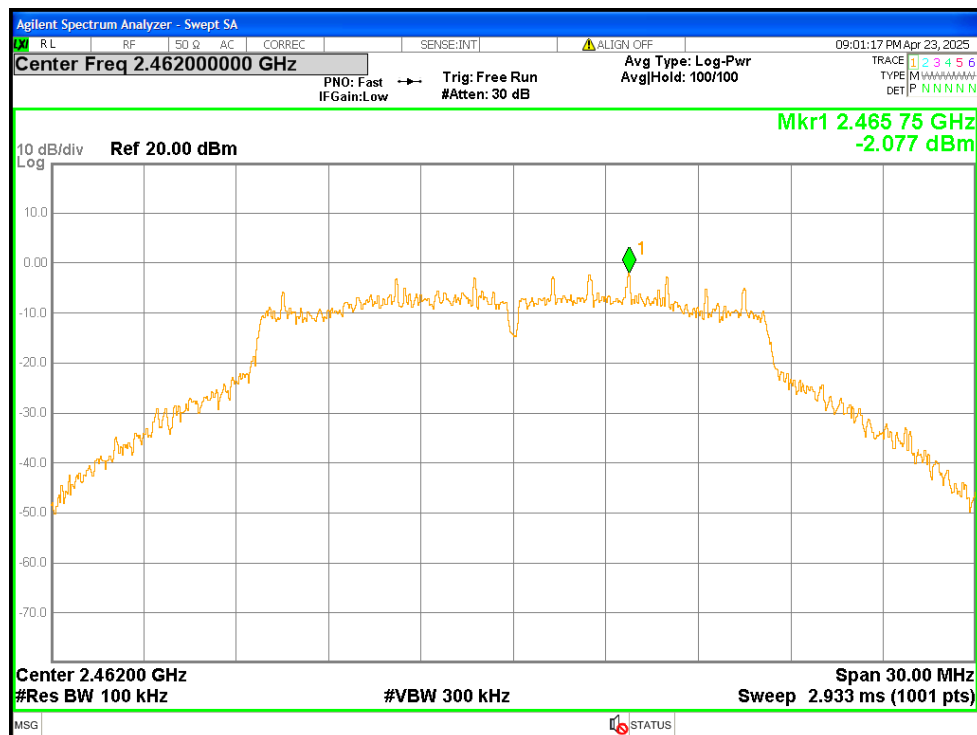


## Tx. Spurious NVNT g 2462MHz Emission

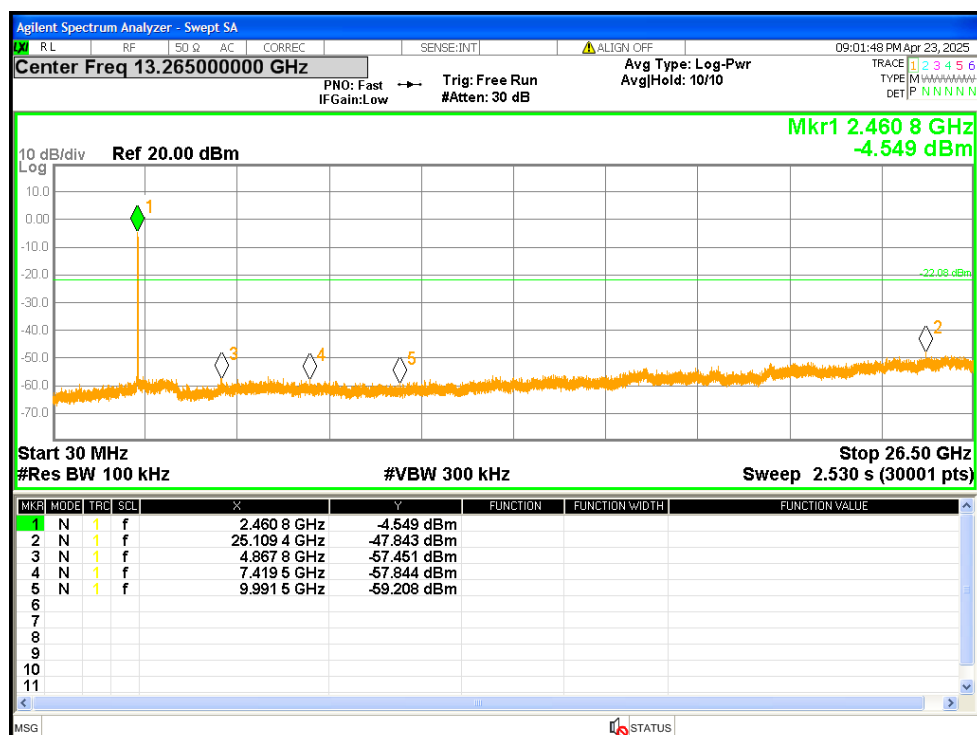





## Tx. Spurious NVNT n20 2412MHz Ref

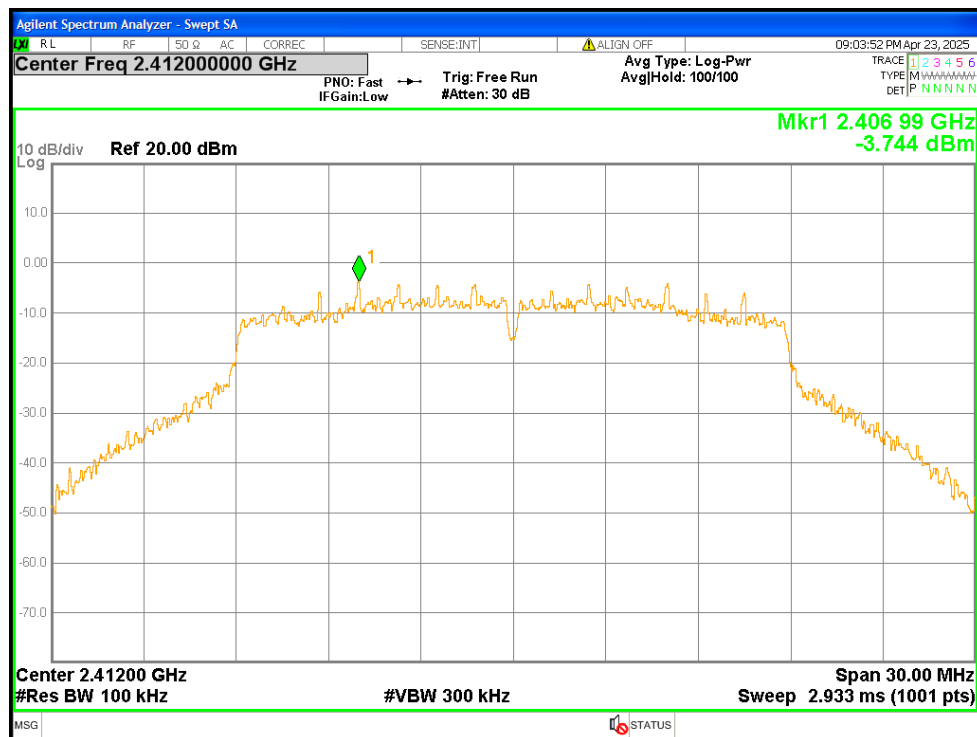


## Tx. Spurious NVNT n20 2412MHz Emission

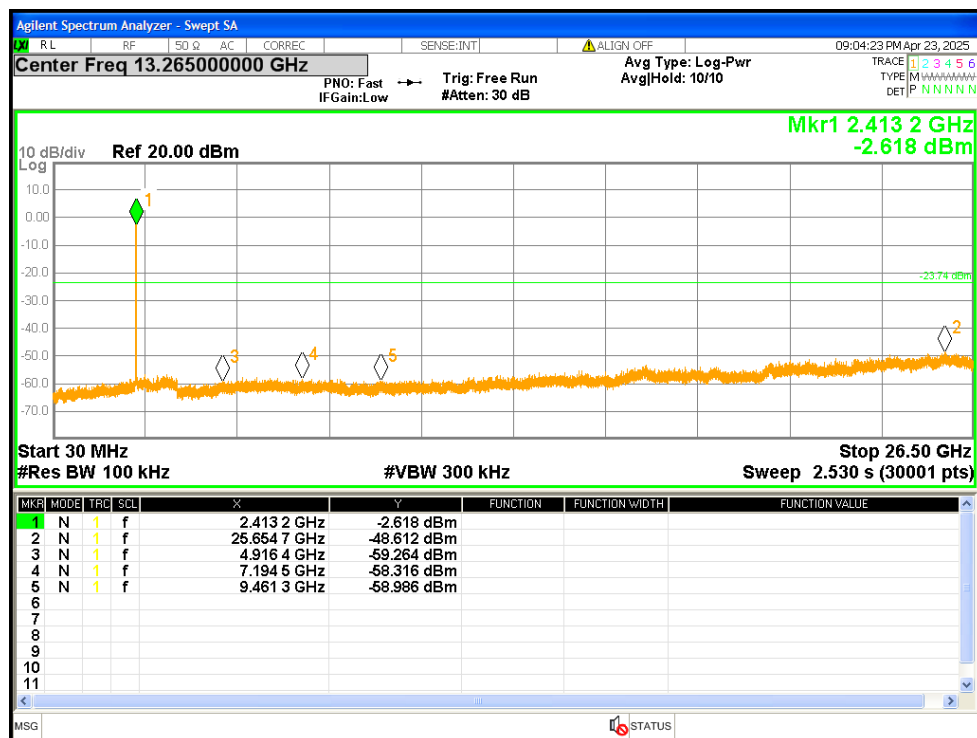


## Tx. Spurious NVNT n20 2437MHz Ref

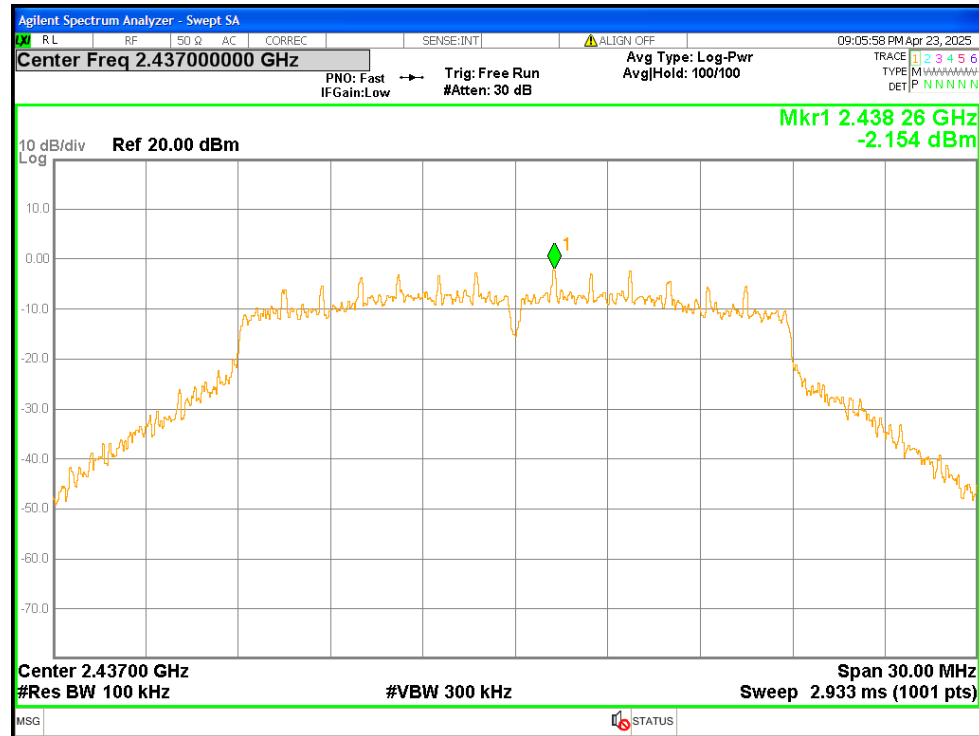


## Tx. Spurious NVNT n20 2437MHz Emission

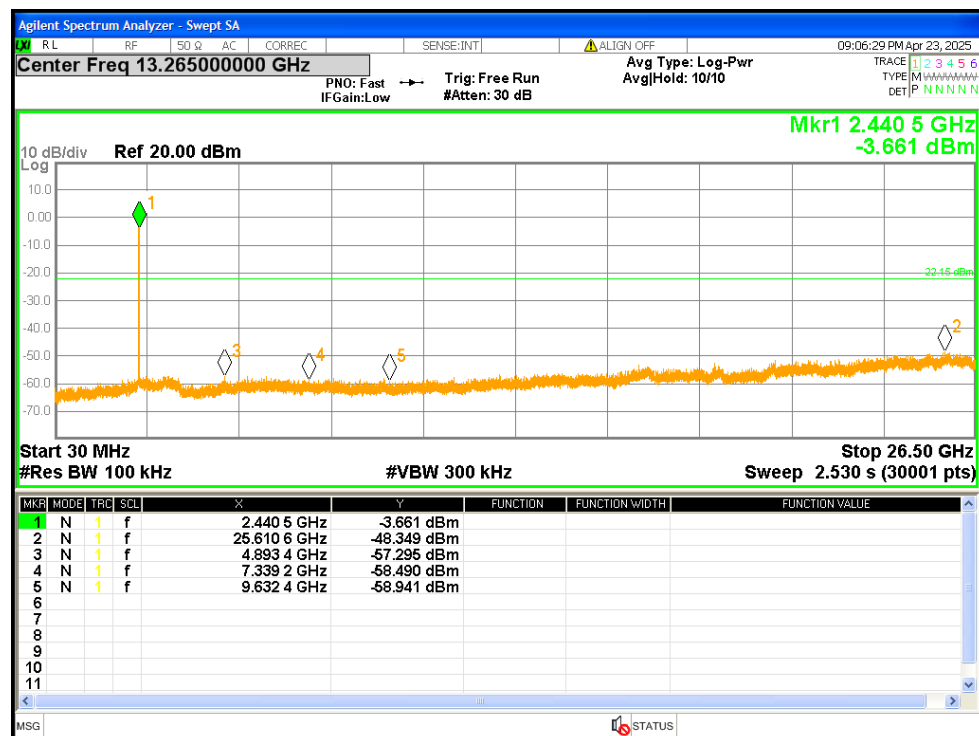

## Tx. Spurious NVNT n20 2462MHz Ref

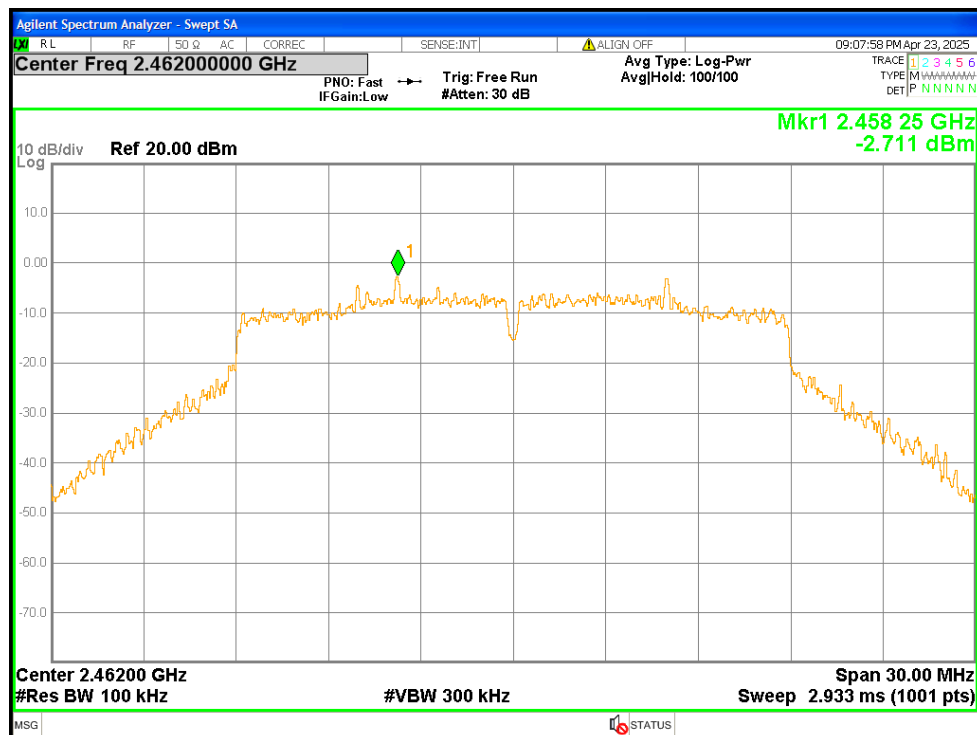

## Tx. Spurious NVNT n20 2462MHz Emission

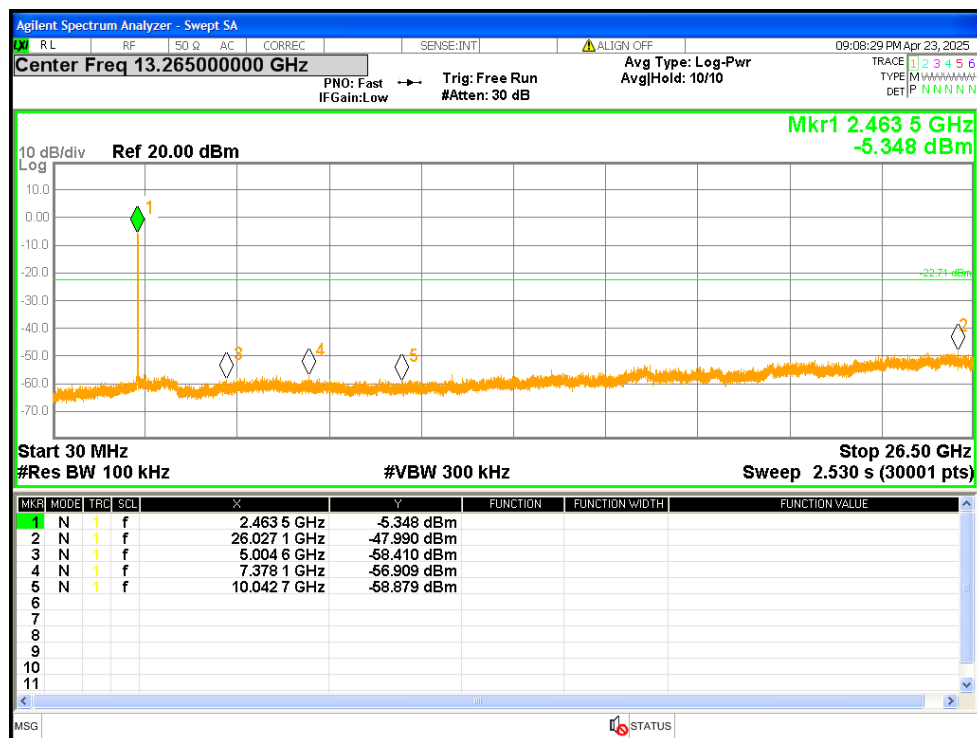

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*