



RF MEASUREMENT REPORT

FCC ID: 2BPK5-LJ0001
Applicant: Lingji Innovations Technology Co., Ltd.
Product: BLES100
Model No.: BT-LE01-WR02-02
Serial/Family Model: BT-LE02-WR02-02
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2025-05-09
Test Date: 2025-05-19 ~ 2025-05-28

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1020055-U201	V01	Initial Report	2025-06-04	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Test Software	8
2.4. Applied Standards	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result	13
6.1. Summary	13
6.2. 6dB Bandwidth Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16
6.4.2. Test Procedure	16

6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	16
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	17
6.5.1.	Test Limit	17
6.5.2.	Test Procedure	17
6.5.3.	Test Setting	17
6.5.4.	Test Setup	18
6.5.5.	Test Result	18
6.6.	Radiated Spurious Emission Measurement.....	19
6.6.1.	Test Limit	19
6.6.2.	Test Procedure	19
6.6.3.	Test Setting	19
6.6.4.	Test Setup	21
6.6.5.	Test Result	22
6.7.	Radiated Restricted Band Edge Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	24
6.7.4.	Test Setup	25
6.7.5.	Test Result	26
6.8.	AC Conducted Emissions Measurement	27
6.8.1.	Test Limit	27
6.8.2.	Test Setup	27
6.8.3.	Test Result	27
Appendix A - Test Result.....		28
A.1	Duty Cycle Test Result	28
A.2	6dB Bandwidth Test Result	29
A.3	Output Power Test Result	31
A.4	Power Spectral Density Test Result	32
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	34
A.6	Radiated Spurious Emission Test Result	38
A.7	Radiated Restricted Band Edge Test Result.....	50
Appendix B - Test Setup Photograph		82
Appendix C - EUT Photograph		83

1. General Information

1.1. Applicant

Lingji Innovations Technology Co., Ltd.

Room 106, A-1 Bldg. No.66. Xixiaokou Rd, Haidian Dist., Beijing, China

1.2. Manufacturer

Lingji Innovations Technology Co., Ltd.

Room 106, A-1 Bldg. No.66. Xixiaokou Rd, Haidian Dist., Beijing, China

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	BLES100
Model No.	BT-LE01-WR02-02
Serial/Family Model ^{Note 2}	BT-LE02-WR02-02
EUT Identification No.	20250516Sample#01 (Conducted) 20250513Sample#03 (Radiated) 20250509Sample#06 (Radiated)
Bluetooth Specification	Bluetooth_LE 1M/2M
Antenna Specification	Refer to clause 1.5
Operating Temp.	-30~85 °C
Power Type	3.3VDC
Note 1: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. Note 2: The only difference between the two models is the antenna selection. Model BT-LE01-WR02-02 uses a PCB on board antenna, while model BT-LE02-WR02-02 uses an external PCB antenna. RF power settings are exactly the same.	

1.5. Radio Specification under Test

Bluetooth Frequency	2402 ~ 2480MHz
Channel Number	40
Type of modulation	GFSK
Data Rate	1Mbps & 2Mbps
Antenna Type	PCB Antenna
Antenna Gain	PCB Antenna (On Board): 4.59dBi PCB Antenna (External): 4.25dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1Mbps
Mode 2: Transmit by BLE-2Mbps

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

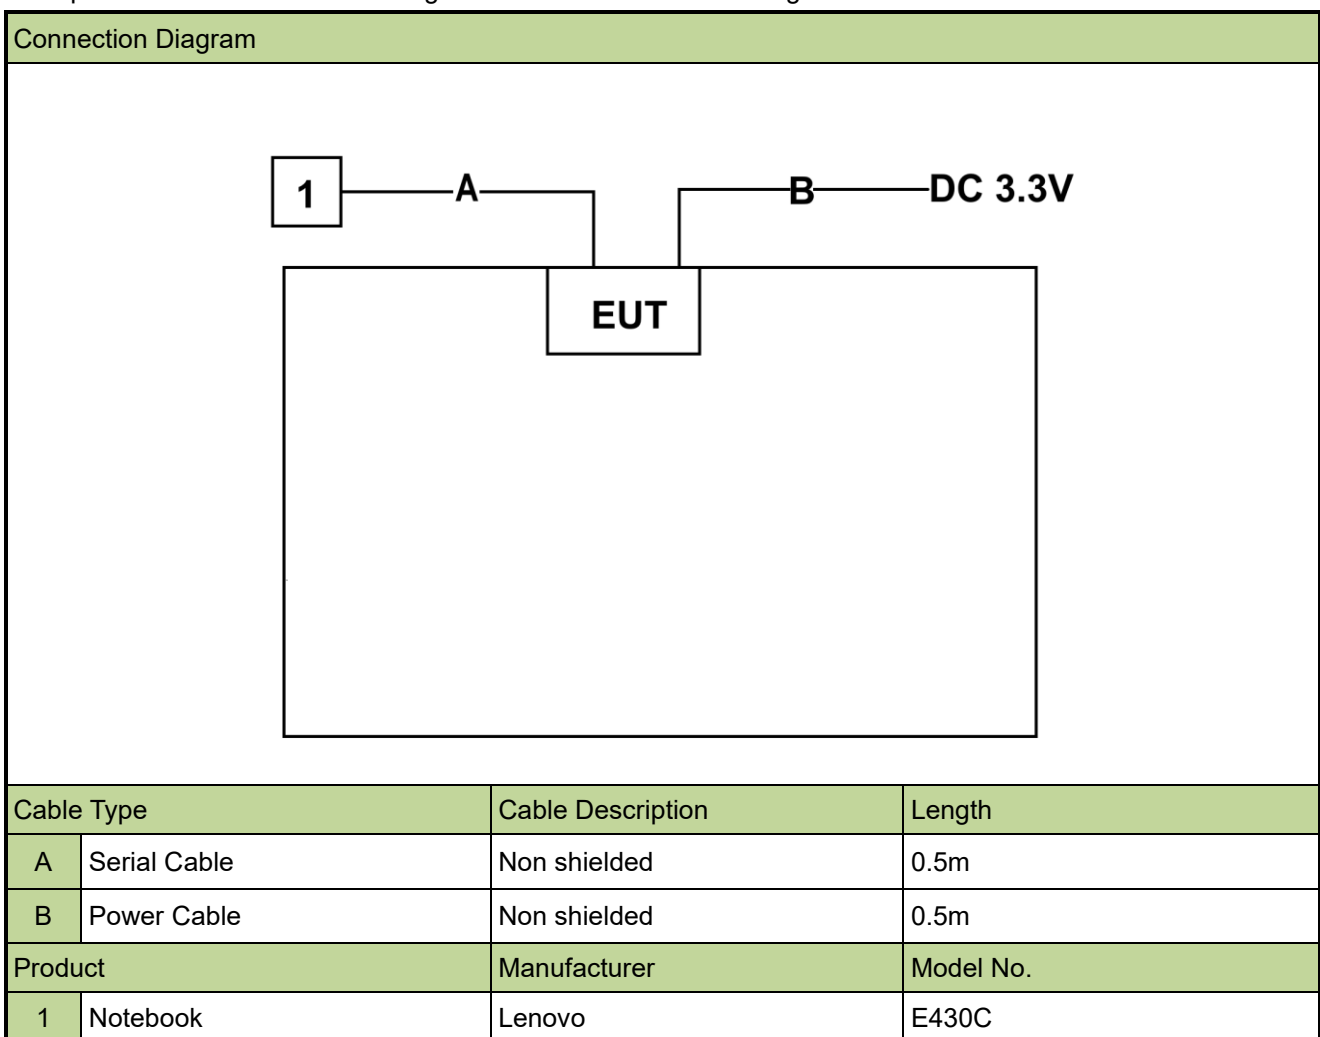

2.3. Test Software

The test utility software used during testing was “BLES100_TestTool” and the version was 1.0.2.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2025-10-20	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2025-11-01	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2025-10-08	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2025-06-15	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2025-12-20	SIP-AC2
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2025-09-05	SIP-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2025-10-13	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2025-11-03	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2025-10-29	SIP-AC2
Cable	HUBER+SUHNER	SF106	MRTSUE06875	1 year	2025-12-19	SIP-AC2
Attenuator	MVE	MVE2213	MRTSUE11057	1 year	2025-06-06	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2025-10-16	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2026-01-21	SIP-TR1
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2025-07-23	SIP-TR1

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802BS	1.02	RE Antenna & Turntable
Agilent Power Panel	V R03.09.00	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB 200MHz~1GHz: 4.17dB 1GHz~40GHz: 4.97dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
3. "N/A" means that this item is not applicable, and the detail information refer to relevant section.
4. The power setting values used for both antennas are the same. Conducted testing was only performed on on-Board Antenna, while radiated testing was carried out for both antennas.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

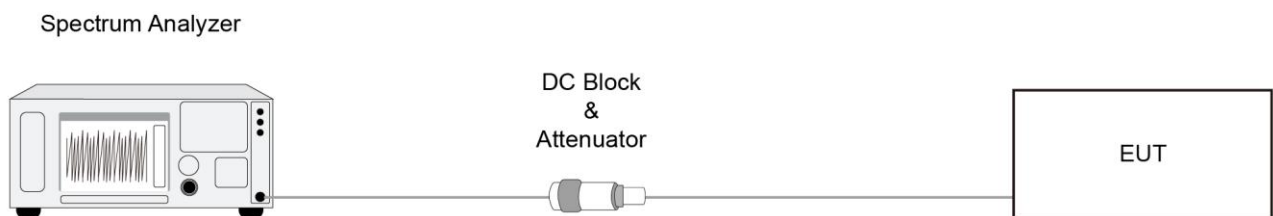

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.1.3

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

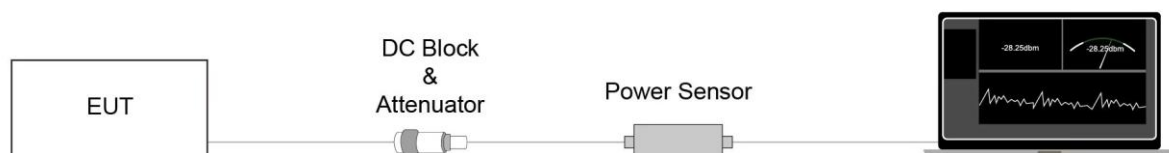

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2013 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

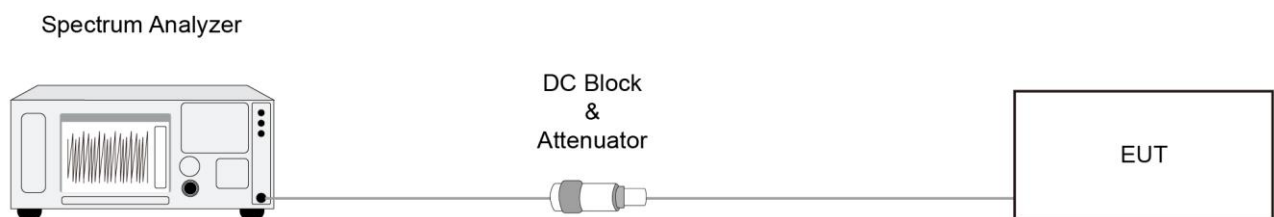

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

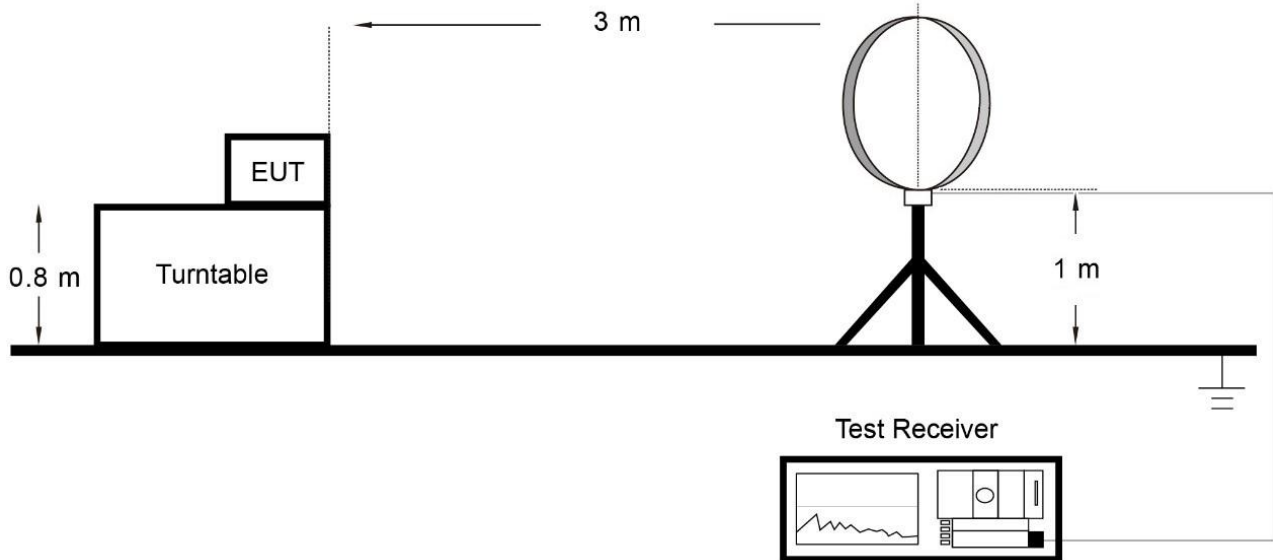

Below 1GHz Test Setup:

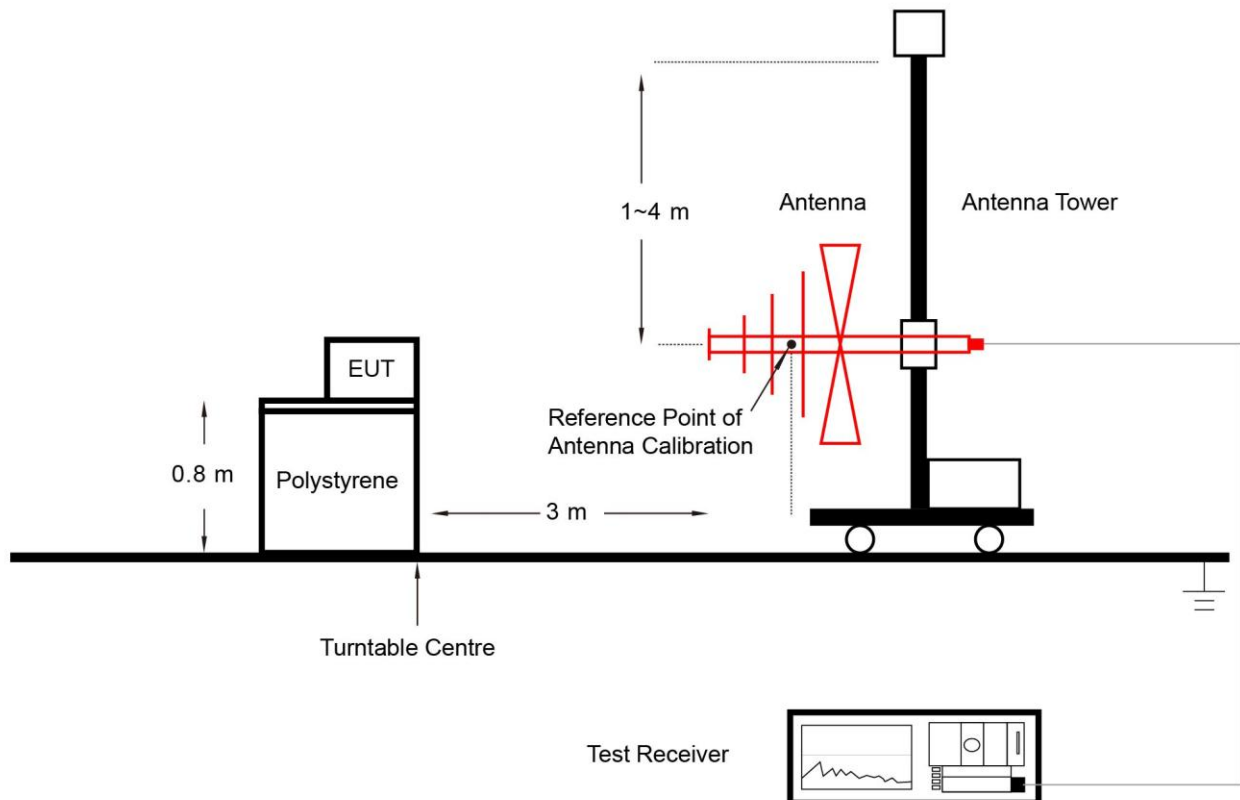

Above 1GHz Test Setup:

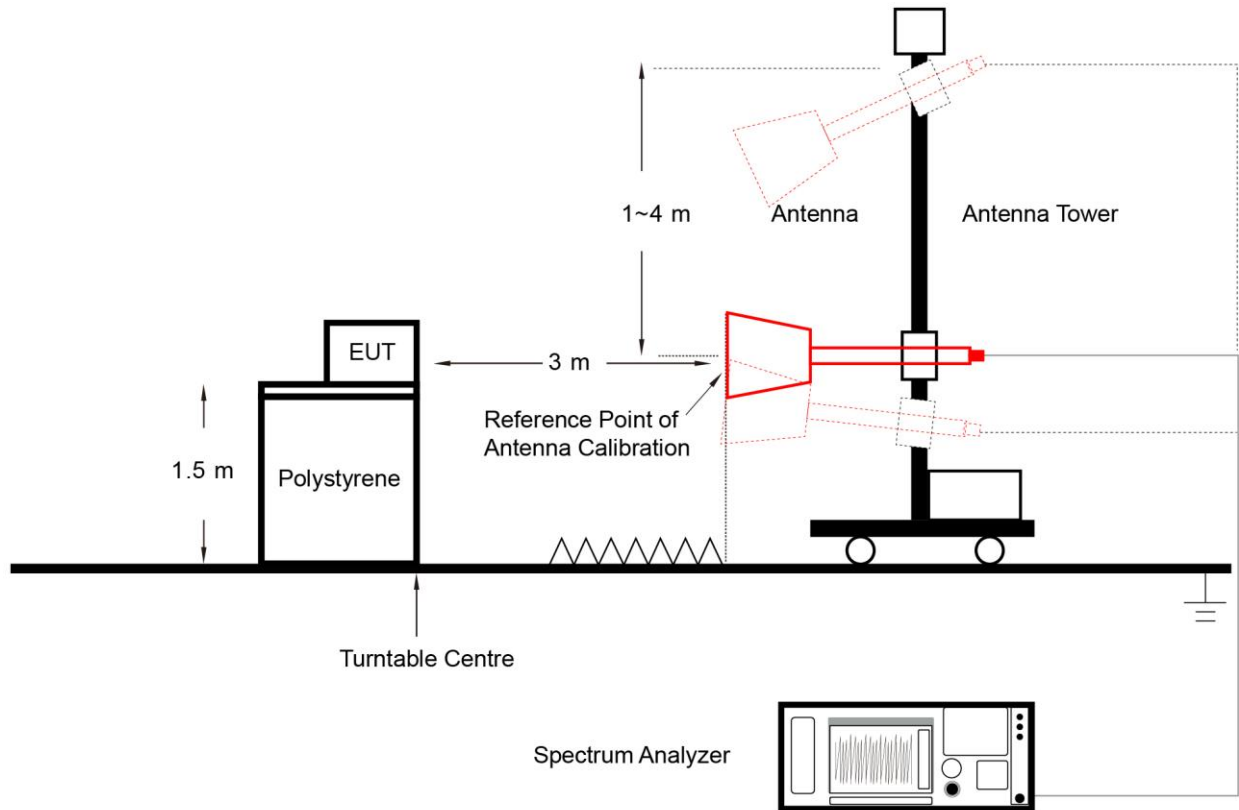

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

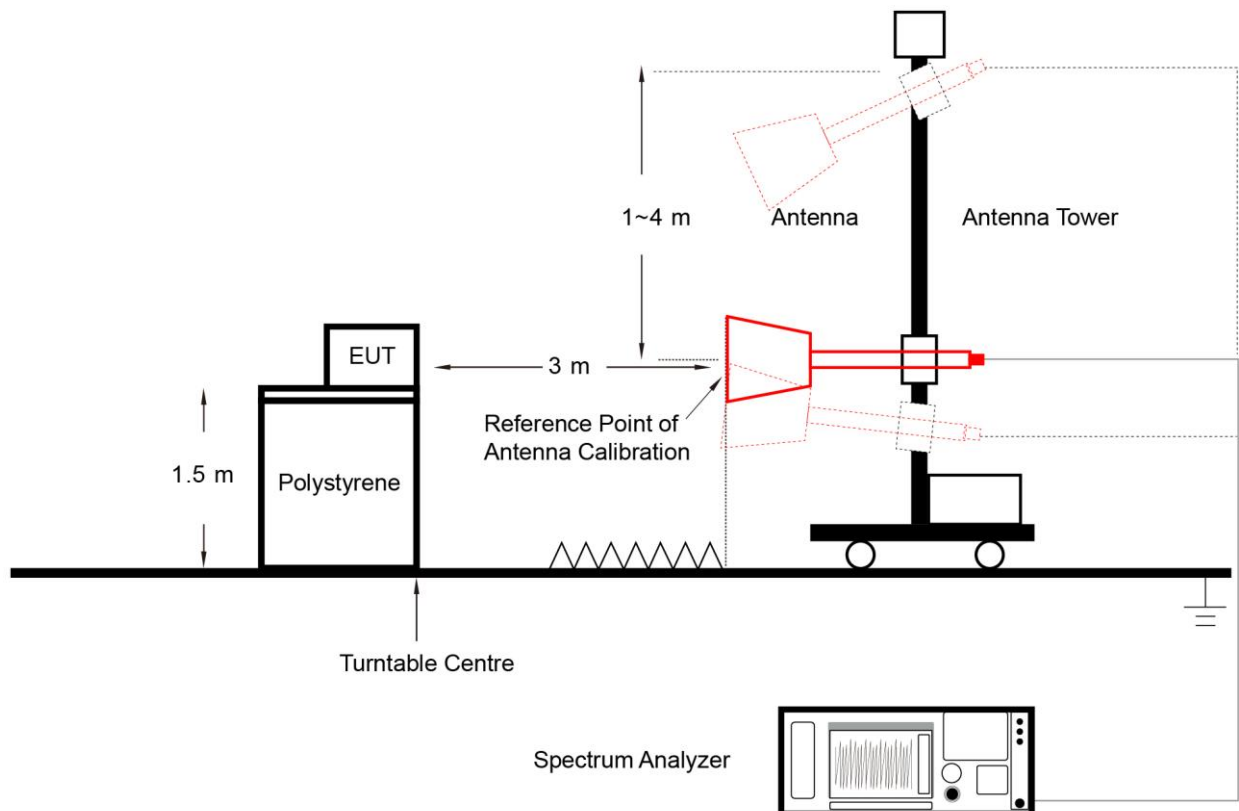

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

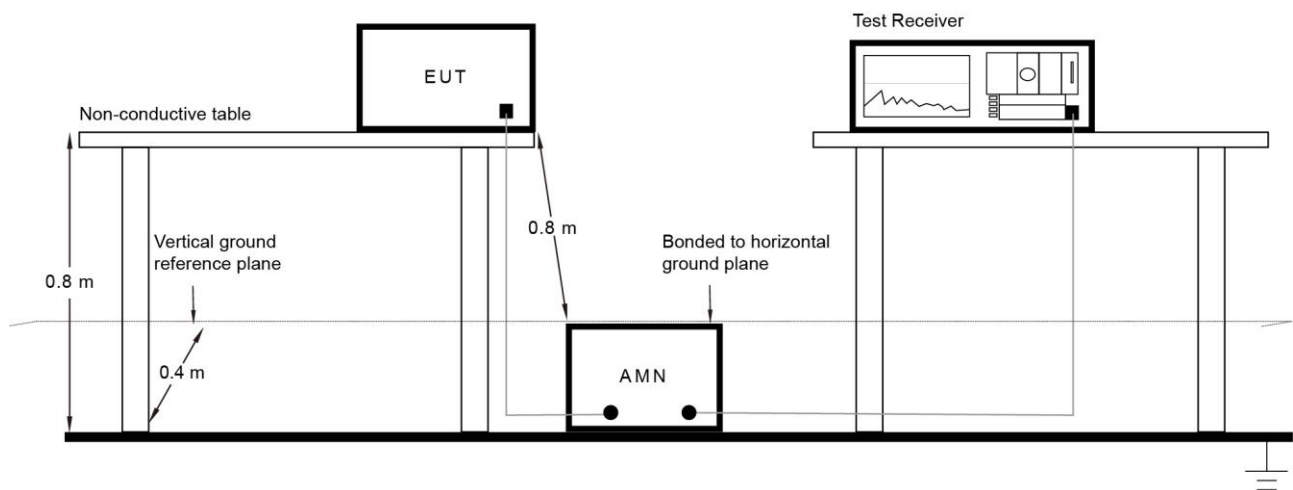

6.8.3. Test Result



The EUT is powered by DC supply, so this item is not applicable.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-19		


Test Mode	Duty Cycle
BLE-1Mbps	86.8%
BLE-2Mbps	59.2%
Duty Cycle (T = Transmission Duration)	
BLE-1Mbps (T = 2.170ms)	BLE-2Mbps (T = 1.110ms)

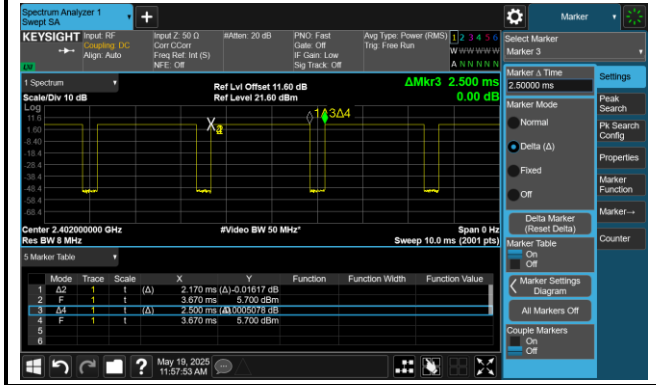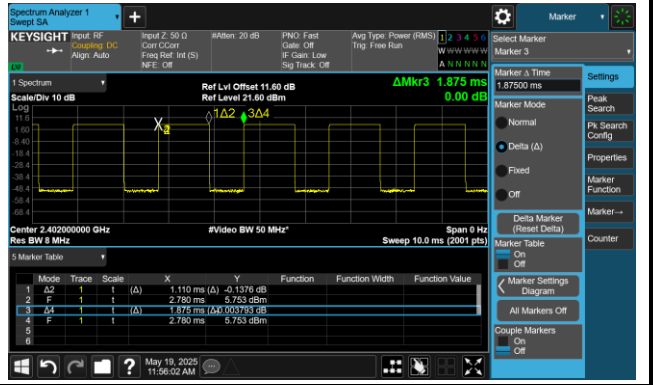A.2 6dB Bandwidth Test Result


Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	1Mbps	00	2402	0.6996	≥ 0.5
BLE	1Mbps	19	2440	0.7012	≥ 0.5
BLE	1Mbps	39	2480	0.7035	≥ 0.5
BLE	2Mbps	00	2402	1.200	≥ 0.5
BLE	2Mbps	19	2440	1.212	≥ 0.5
BLE	2Mbps	39	2480	1.209	≥ 0.5

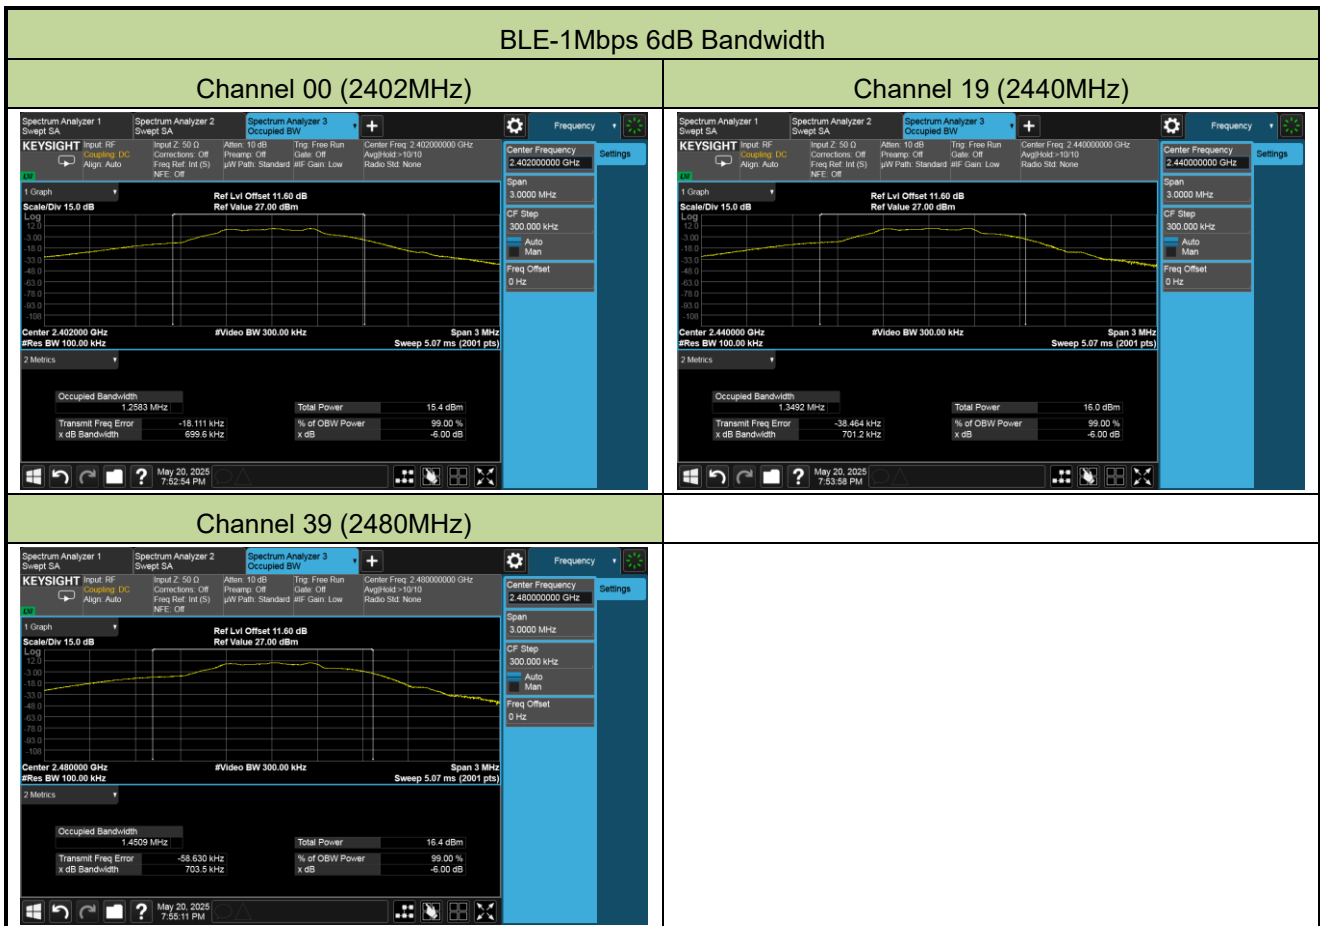


BLE-2Mbps 6dB Bandwidth


Channel 00 (2402MHz)

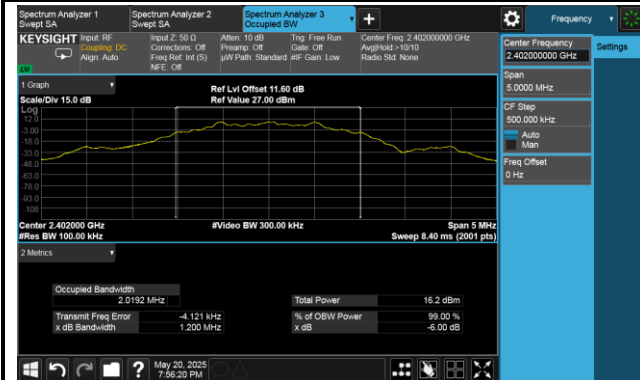

Channel 19 (2440MHz)

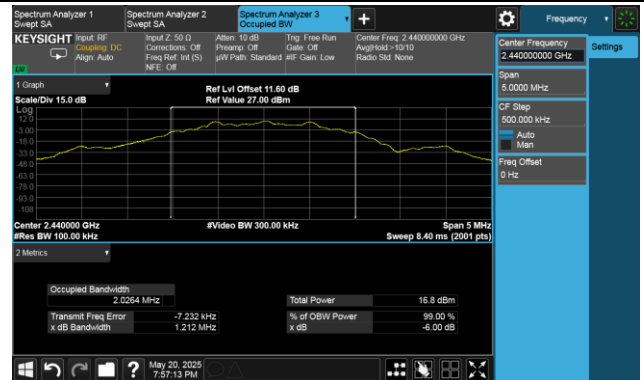

Channel 39 (2480MHz)

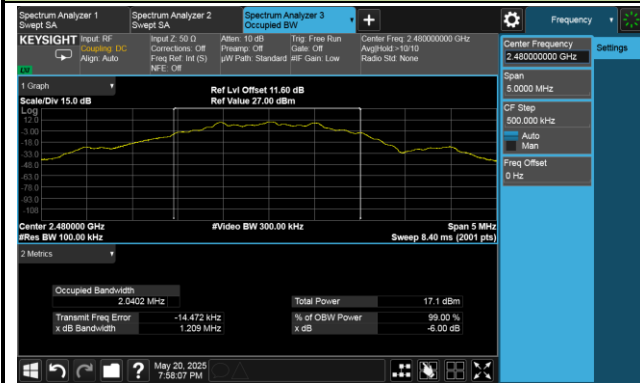

A.3 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20		

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	8.43	≤ 30.00	Pass
BLE	1Mbps	19	2440	8.89	≤ 30.00	Pass
BLE	1Mbps	39	2480	9.17	≤ 30.00	Pass
BLE	2Mbps	00	2402	8.41	≤ 30.00	Pass
BLE	2Mbps	19	2440	8.87	≤ 30.00	Pass
BLE	2Mbps	39	2480	9.16	≤ 30.00	Pass


Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	8.35	≤ 30.00	Pass
BLE	1Mbps	19	2440	8.82	≤ 30.00	Pass
BLE	1Mbps	39	2480	9.10	≤ 30.00	Pass
BLE	2Mbps	00	2402	8.34	≤ 30.00	Pass
BLE	2Mbps	19	2440	8.79	≤ 30.00	Pass
BLE	2Mbps	39	2480	9.08	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1Mbps	00	2402	-5.38	≤ 8.00	Pass
BLE	1Mbps	19	2440	-5.01	≤ 8.00	Pass
BLE	1Mbps	39	2480	-4.81	≤ 8.00	Pass
BLE	2Mbps	00	2402	-5.21	≤ 8.00	Pass
BLE	2Mbps	19	2440	-5.03	≤ 8.00	Pass
BLE	2Mbps	39	2480	-4.80	≤ 8.00	Pass

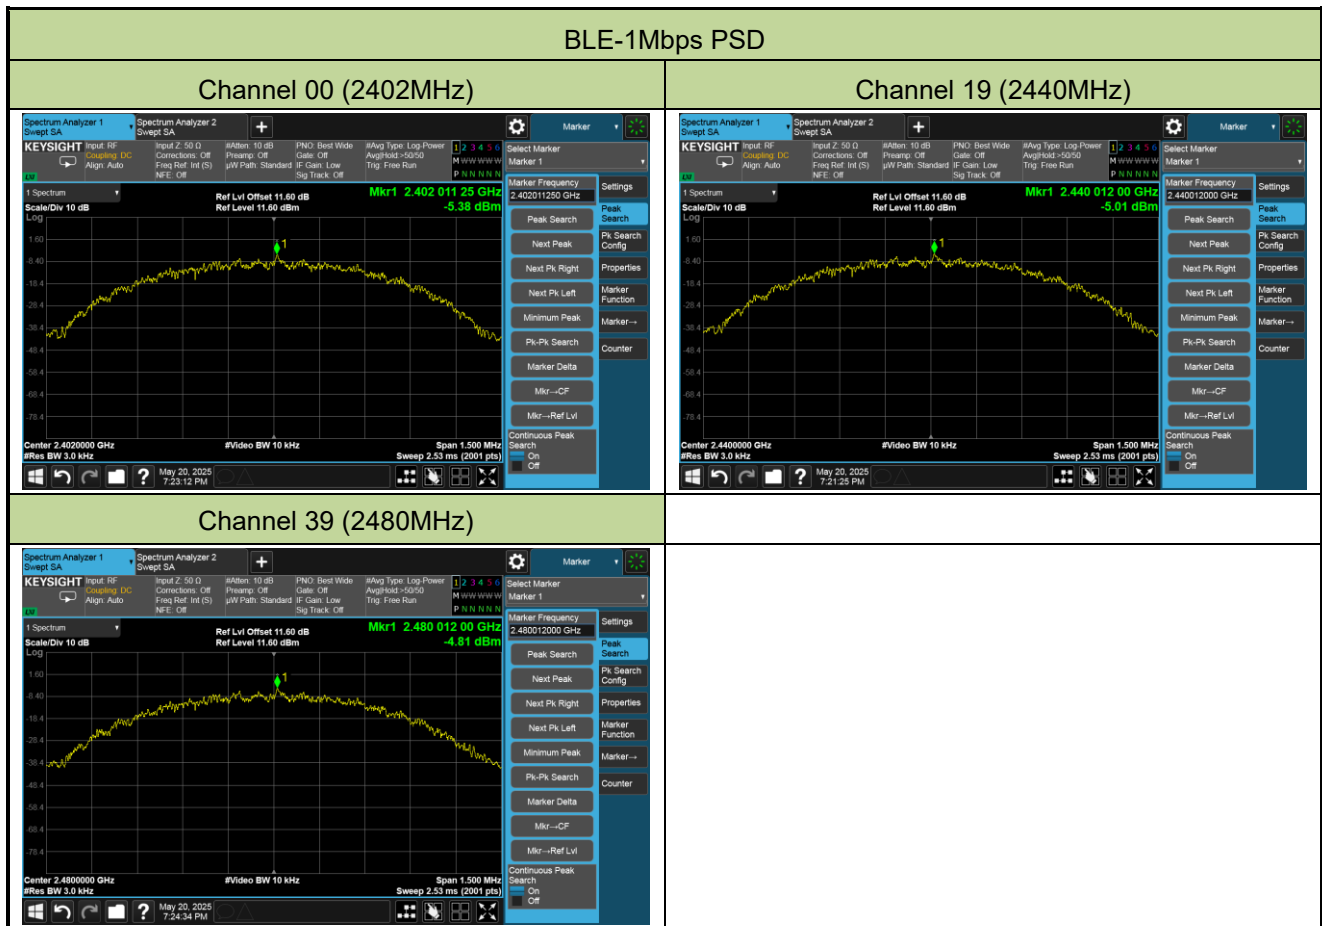

BLE-2Mbps PSD

Channel 00 (2402MHz)



Channel 19 (2440MHz)




Channel 39 (2480MHz)



A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	SIP-TR1	Test Engineer	Alan Yu
Test Date	2025-05-20 ~ 2025-05-28		

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	Limit (dBc)	Result
BLE	1	00	2402	20	Pass
BLE	1	19	2440	20	Pass
BLE	1	39	2480	20	Pass
BLE	2	00	2402	20	Pass
BLE	2	19	2440	20	Pass
BLE	2	39	2480	20	Pass

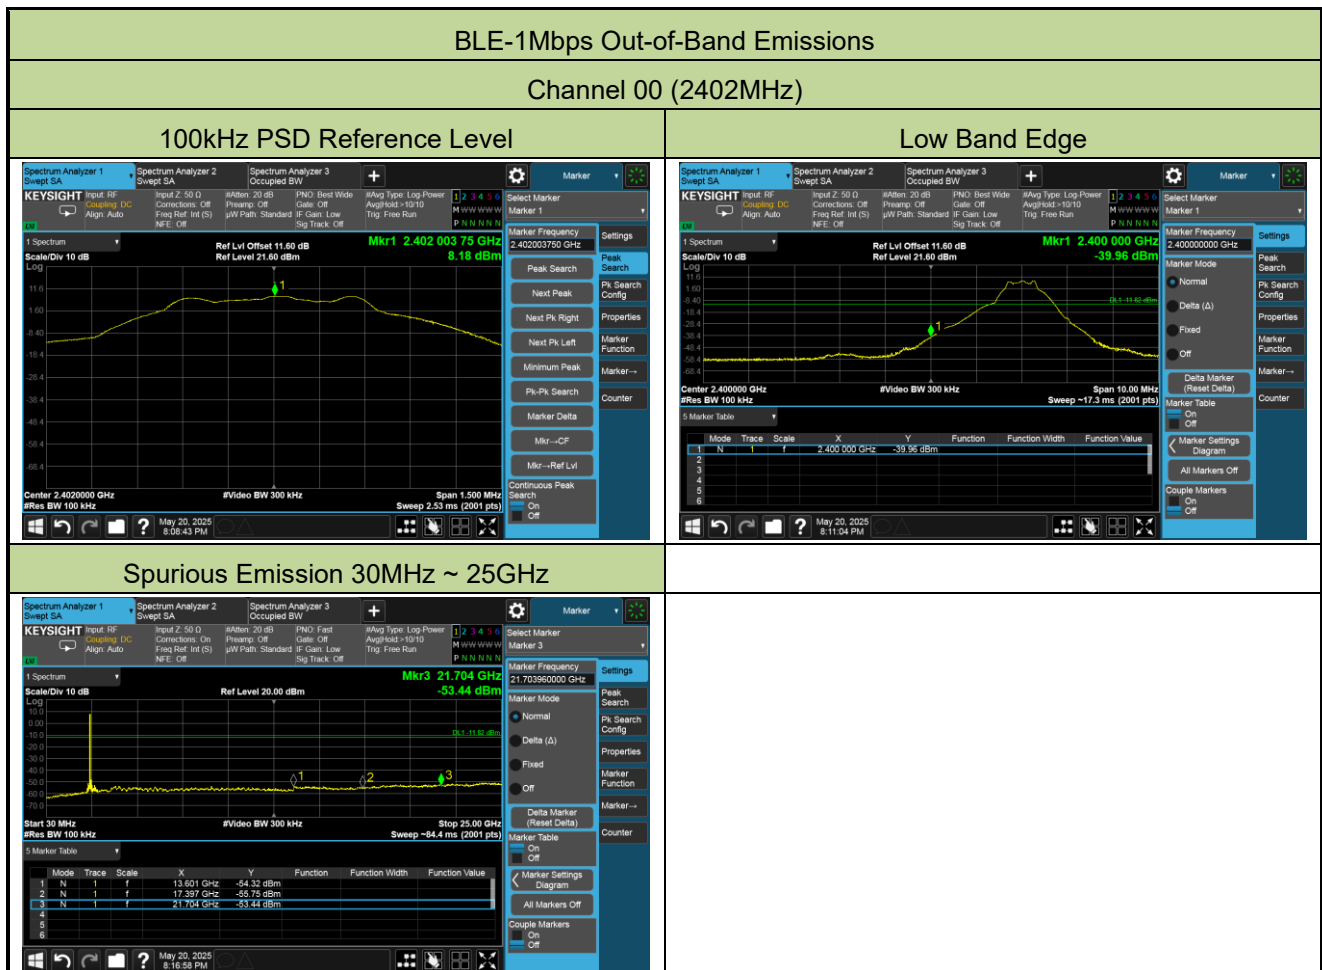


Channel 19 (2440MHz)

100kHz PSD Reference Level

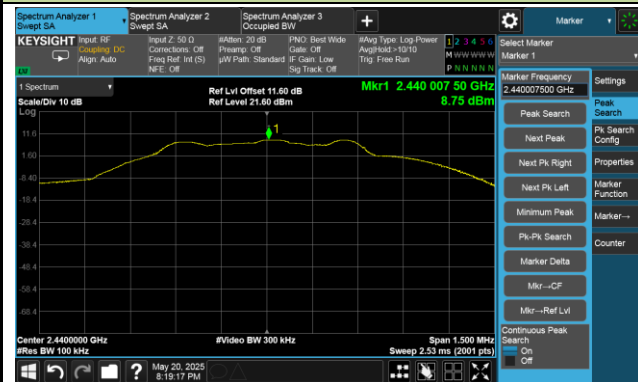


Spurious Emission 30MHz ~ 25GHz

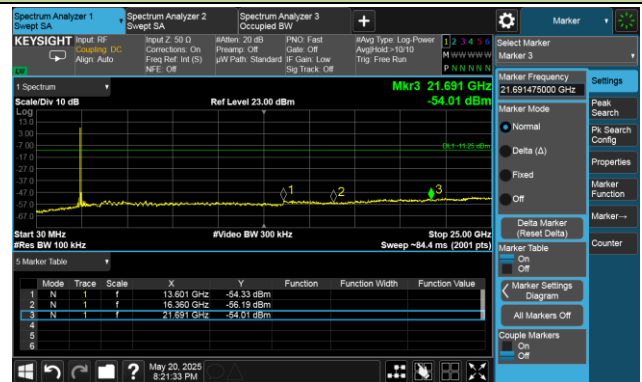


Channel 39 (2480MHz)


100kHz PSD Reference Level

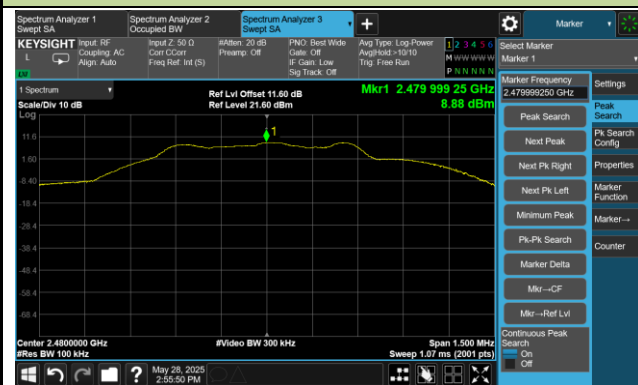

High Band Edge

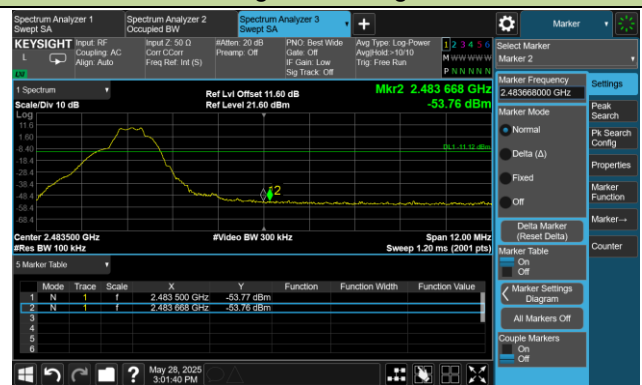


Spurious Emission 30MHz ~ 25GHz

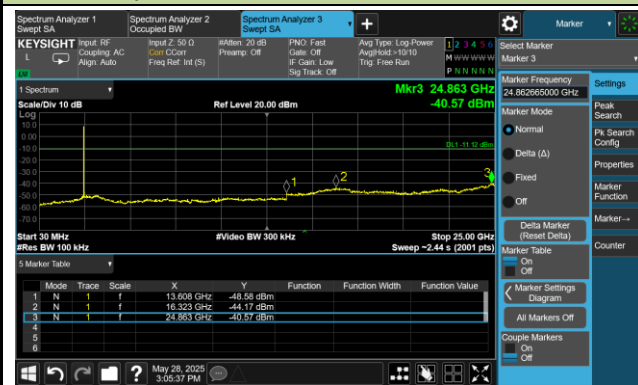


BLE-2Mbps Out-of-Band Emissions

Channel 00 (2402MHz)


100kHz PSD Reference Level

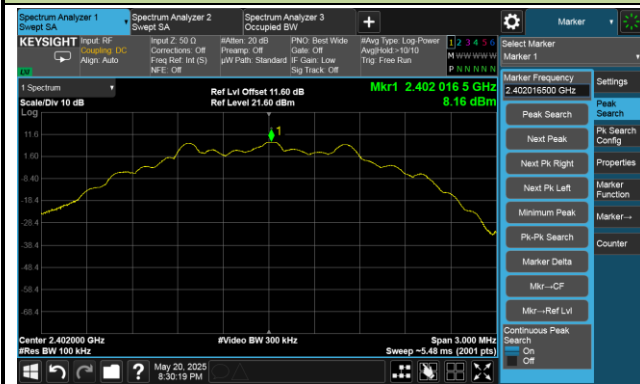

Low Band Edge

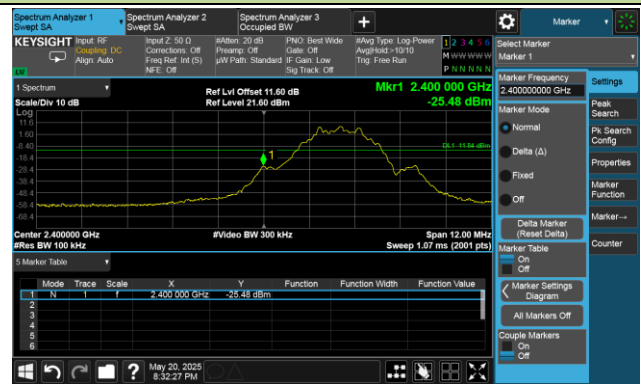


Spurious Emission 30MHz ~ 25GHz

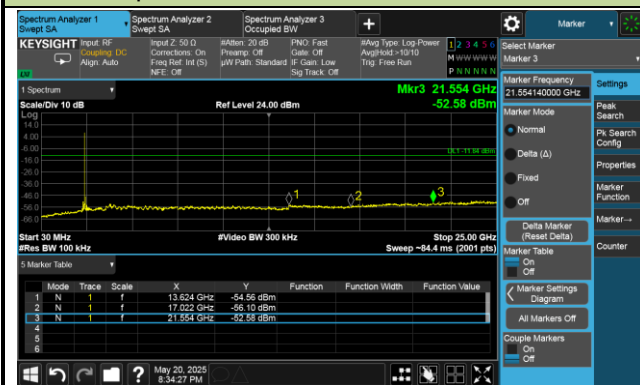


Channel 19 (2440MHz)

100kHz PSD Reference Level

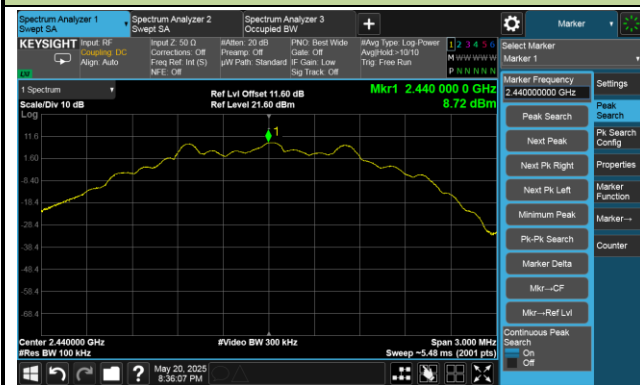


Spurious Emission 30MHz ~ 25GHz

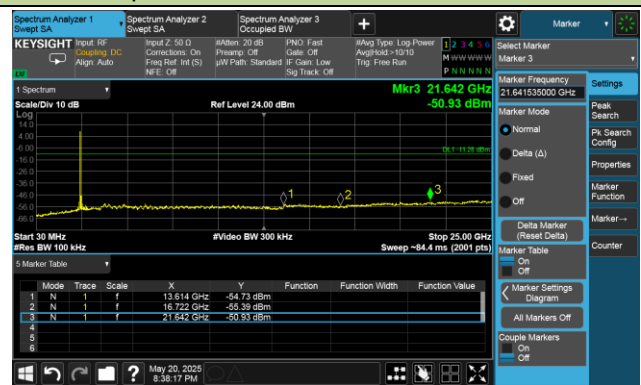


Channel 39 (2480MHz)


100kHz PSD Reference Level

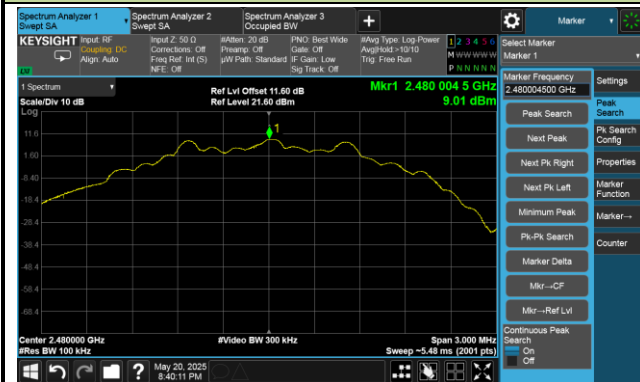

High Band Edge

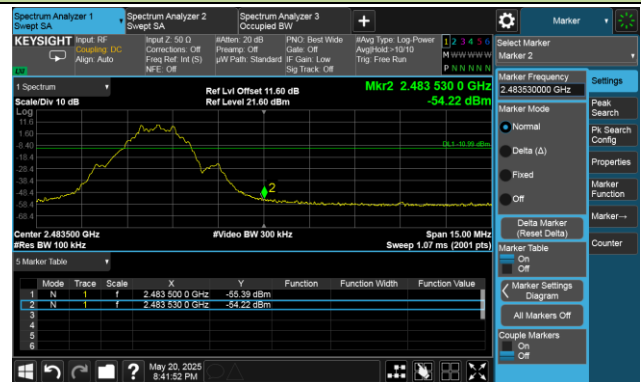

Spurious Emission 30MHz ~ 25GHz

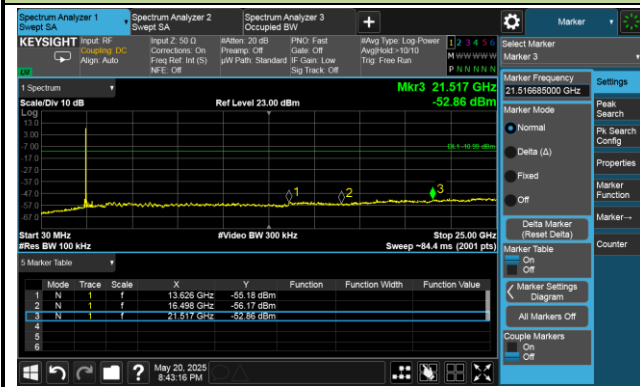

A.6 Radiated Spurious Emission Test Result

PCB Antenna (On Board):

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2025-05-24	Test Mode	BLE-1Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4802.90	52.40	-3.86	48.54	74.00	-25.46	Peak	Horizontal
	12010.90	51.13	6.84	57.97	74.00	-16.03	Peak	Horizontal
	12010.90	43.32	6.84	50.16	54.00	-3.84	Average	Horizontal
	17988.10	35.92	20.53	56.45	74.00	-17.55	Peak	Horizontal
	17988.10	24.73	20.53	45.26	54.00	-8.74	Average	Horizontal
	4802.90	52.50	-3.86	48.64	74.00	-25.36	Peak	Vertical
	12009.20	50.20	6.90	57.10	74.00	-16.90	Peak	Vertical
	12009.20	42.40	6.90	49.30	54.00	-4.70	Average	Vertical
	17972.80	36.86	19.85	56.71	74.00	-17.29	Peak	Vertical
	17972.80	24.56	19.85	44.41	54.00	-9.59	Average	Vertical
19	4881.10	51.18	-4.05	47.13	74.00	-26.87	Peak	Horizontal
	7320.60	52.73	2.01	54.74	74.00	-19.26	Peak	Horizontal
	7320.60	46.28	2.01	48.29	54.00	-5.71	Average	Horizontal
	12197.90	51.71	7.51	59.22	74.00	-14.78	Peak	Horizontal
	12197.90	43.91	7.51	51.42	54.00	-2.58	Average	Horizontal
	4879.40	52.79	-4.06	48.73	74.00	-25.27	Peak	Vertical
	7318.90	51.30	2.01	53.31	74.00	-20.69	Peak	Vertical
	7318.90	44.50	2.01	46.51	54.00	-7.49	Average	Vertical
	12197.90	48.90	7.51	56.41	74.00	-17.59	Peak	Vertical
	12197.90	40.52	7.51	48.03	54.00	-5.97	Average	Vertical
39	4959.30	51.08	-3.93	47.15	74.00	-26.85	Peak	Horizontal
	7439.60	52.83	1.76	54.59	74.00	-19.41	Peak	Horizontal
	7439.60	46.07	1.76	47.83	54.00	-6.17	Average	Horizontal
	12401.90	48.22	7.07	55.29	74.00	-18.71	Peak	Horizontal
	12401.90	39.93	7.07	47.00	54.00	-7.00	Average	Horizontal
	4959.30	50.02	-3.93	46.09	74.00	-27.91	Peak	Vertical
	7439.60	53.15	1.76	54.91	74.00	-19.09	Peak	Vertical

	7439.60	43.78	1.76	45.54	54.00	-8.46	Average	Vertical
	12398.50	46.81	7.08	53.89	74.00	-20.11	Peak	Vertical
	12398.50	37.99	7.08	45.07	54.00	-8.93	Average	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2025-05-24	Test Mode	BLE-2Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3782.90	45.85	-6.99	38.86	74.00	-35.14	Peak	Horizontal
	4802.90	49.73	-3.86	45.87	74.00	-28.13	Peak	Horizontal
	12007.50	50.49	6.96	57.45	74.00	-16.55	Peak	Horizontal
	12007.50	42.38	6.96	49.34	54.00	-4.66	Average	Horizontal
	3709.80	46.00	-7.23	38.77	74.00	-35.23	Peak	Vertical
	4804.60	52.18	-3.88	48.30	74.00	-25.70	Peak	Vertical
	12007.50	50.32	6.96	57.28	74.00	-16.72	Peak	Vertical
	12007.50	42.19	6.96	49.15	54.00	-4.85	Average	Vertical
19	4879.40	51.06	-4.06	47.00	74.00	-27.00	Peak	Horizontal
	7320.60	52.36	2.01	54.37	74.00	-19.63	Peak	Horizontal
	7320.60	44.71	2.01	46.72	54.00	-7.28	Average	Horizontal
	12203.00	52.22	7.46	59.68	74.00	-14.32	Peak	Horizontal
	12203.00	43.47	7.46	50.93	54.00	-3.07	Average	Horizontal
	4879.40	52.34	-4.06	48.28	74.00	-25.72	Peak	Vertical
	7320.60	51.21	2.01	53.22	74.00	-20.78	Peak	Vertical
	7320.60	43.39	2.01	45.40	54.00	-8.60	Average	Vertical
	12203.00	48.12	7.46	55.58	74.00	-18.42	Peak	Vertical
	12203.00	38.91	7.46	46.37	54.00	-7.63	Average	Vertical
39	4959.30	50.30	-3.93	46.37	74.00	-27.63	Peak	Horizontal
	7437.90	53.55	1.73	55.28	74.00	-18.72	Peak	Horizontal
	7437.90	45.95	1.73	47.68	54.00	-6.32	Average	Horizontal
	12400.20	47.95	7.08	55.03	74.00	-18.97	Peak	Horizontal
	12400.20	39.25	7.08	46.33	54.00	-7.67	Average	Horizontal
	4959.30	50.61	-3.93	46.68	74.00	-27.32	Peak	Vertical
	7441.30	49.00	1.78	50.78	74.00	-23.22	Peak	Vertical
	12396.80	46.56	7.09	53.65	74.00	-20.35	Peak	Vertical
	12396.80	37.21	7.09	44.30	54.00	-9.70	Average	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

$\text{Factor (dB/m)} = \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)} - \text{Pre_Amplifier Gain (dB)}$
--

PCB Antenna (External):

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2025-05-28	Test Mode	BLE-1Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4804.60	53.43	-3.88	49.55	54.00	-4.45	Average	Horizontal
	4804.60	58.36	-3.88	54.48	74.00	-19.52	Peak	Horizontal
	12010.90	42.53	6.84	49.37	54.00	-4.63	Average	Horizontal
	12010.90	52.10	6.84	58.94	74.00	-15.06	Peak	Horizontal
	17998.30	24.86	21.12	45.98	54.00	-8.02	Average	Horizontal
	17998.30	37.71	21.12	58.83	74.00	-15.17	Peak	Horizontal
	4802.90	53.24	-3.86	49.38	74.00	-24.62	Peak	Vertical
	12010.90	43.32	6.84	50.16	54.00	-3.84	Average	Vertical
	12010.90	50.82	6.84	57.66	74.00	-16.34	Peak	Vertical
	17974.50	24.93	19.91	44.84	54.00	-9.16	Average	Vertical
	17974.50	39.13	19.91	59.04	74.00	-14.96	Peak	Vertical
19	4876.00	46.29	-4.08	42.21	54.00	-11.79	Average	Horizontal
	4876.00	58.18	-4.08	54.10	74.00	-19.90	Peak	Horizontal
	7318.90	47.38	2.01	49.39	54.00	-4.61	Average	Horizontal
	7318.90	54.10	2.01	56.11	74.00	-17.89	Peak	Horizontal
	12201.30	40.08	7.48	47.56	54.00	-6.44	Average	Horizontal
	12201.30	48.39	7.48	55.87	74.00	-18.13	Peak	Horizontal
	4879.40	51.81	-4.06	47.75	74.00	-26.25	Peak	Vertical
	7320.60	46.96	2.01	48.97	54.00	-5.03	Average	Vertical
	7320.60	54.00	2.01	56.01	74.00	-17.99	Peak	Vertical
	12201.30	41.40	7.48	48.88	54.00	-5.12	Average	Vertical
	12201.30	49.65	7.48	57.13	74.00	-16.87	Peak	Vertical
39	4957.60	53.64	-3.90	49.74	74.00	-24.26	Peak	Horizontal
	7441.30	46.53	1.78	48.31	54.00	-5.69	Average	Horizontal
	7441.30	53.37	1.78	55.15	74.00	-18.85	Peak	Horizontal
	12398.50	38.20	7.08	45.28	54.00	-8.72	Average	Horizontal
	12398.50	46.70	7.08	53.78	74.00	-20.22	Peak	Horizontal
	4961.00	52.16	-3.96	48.20	74.00	-25.80	Peak	Vertical

	7439.60	44.81	1.76	46.57	54.00	-7.43	Average	Vertical
	7439.60	52.35	1.76	54.11	74.00	-19.89	Peak	Vertical
	12398.50	38.46	7.08	45.54	54.00	-8.46	Average	Vertical
	12398.50	47.64	7.08	54.72	74.00	-19.28	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2025-05-28	Test Mode	BLE-2Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4804.60	58.36	-3.88	54.48	74.00	-19.52	Peak	Horizontal
	4804.60	51.60	-3.88	47.72	54.00	-6.28	Average	Horizontal
	12012.60	50.49	6.78	57.27	74.00	-16.73	Peak	Horizontal
	12012.60	42.34	6.78	49.12	54.00	-4.88	Average	Horizontal
	17984.70	38.14	20.33	58.47	74.00	-15.53	Peak	Horizontal
	17984.70	24.78	20.33	45.11	54.00	-8.89	Average	Horizontal
	4802.90	53.86	-3.86	50.00	74.00	-24.00	Peak	Vertical
	12012.60	51.00	6.78	57.78	74.00	-16.22	Peak	Vertical
	12012.60	42.65	6.78	49.43	54.00	-4.57	Average	Vertical
	17988.10	38.33	20.53	58.86	74.00	-15.14	Peak	Vertical
	17988.10	24.90	20.53	45.43	54.00	-8.57	Average	Vertical
19	4876.00	57.53	-4.08	53.45	74.00	-20.55	Peak	Horizontal
	4876.00	44.67	-4.08	40.59	54.00	-13.41	Average	Horizontal
	7320.60	54.82	2.01	56.83	74.00	-17.17	Peak	Horizontal
	7320.60	47.39	2.01	49.40	54.00	-4.60	Average	Horizontal
	12197.90	49.44	7.51	56.95	74.00	-17.05	Peak	Horizontal
	12197.90	39.68	7.51	47.19	54.00	-6.81	Average	Horizontal
	4876.00	53.16	-4.08	49.08	74.00	-24.92	Peak	Vertical
	7320.60	53.44	2.01	55.45	74.00	-18.55	Peak	Vertical
	7320.60	46.07	2.01	48.08	54.00	-5.92	Average	Vertical
	12197.90	48.98	7.51	56.49	74.00	-17.51	Peak	Vertical
	12197.90	40.23	7.51	47.74	54.00	-6.26	Average	Vertical
39	4957.60	58.40	-3.90	54.50	74.00	-19.50	Peak	Horizontal
	4957.60	47.60	-3.90	43.70	54.00	-10.30	Average	Horizontal
	7441.30	53.87	1.78	55.65	74.00	-18.35	Peak	Horizontal
	7441.30	46.31	1.78	48.09	54.00	-5.91	Average	Horizontal
	12400.20	42.52	7.08	49.60	74.00	-24.40	Peak	Horizontal
	4959.30	52.07	-3.93	48.14	74.00	-25.86	Peak	Vertical

	7441.30	51.10	1.78	52.88	74.00	-21.12	Peak	Vertical
	7441.30	43.29	1.78	45.07	54.00	-8.93	Average	Vertical
	12396.80	43.57	7.09	50.66	74.00	-23.34	Peak	Vertical


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

PCB Antenna (On Board):

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9 °C	Humidity	64.5 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

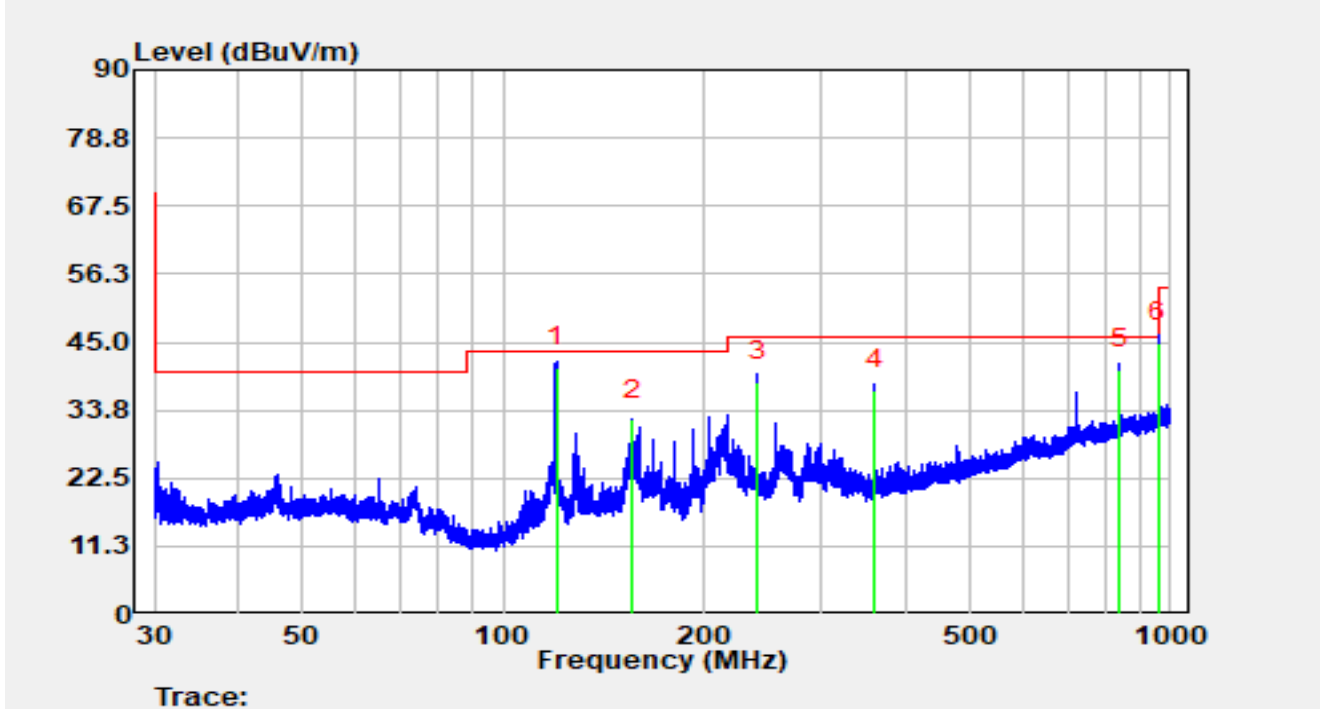


Trace:

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	120.066	22.90	17.92	40.82	-2.68	43.50	QP
2		155.965	11.80	20.32	32.12	-11.38	43.50	QP
3		239.987	19.90	18.65	38.55	-7.45	46.00	QP
4		360.069	15.00	22.16	37.16	-8.84	46.00	QP
5		840.065	8.70	31.79	40.49	-5.51	46.00	QP
6		960.140	12.20	32.79	44.99	-9.01	54.00	QP

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9 °C	Humidity	64.5 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

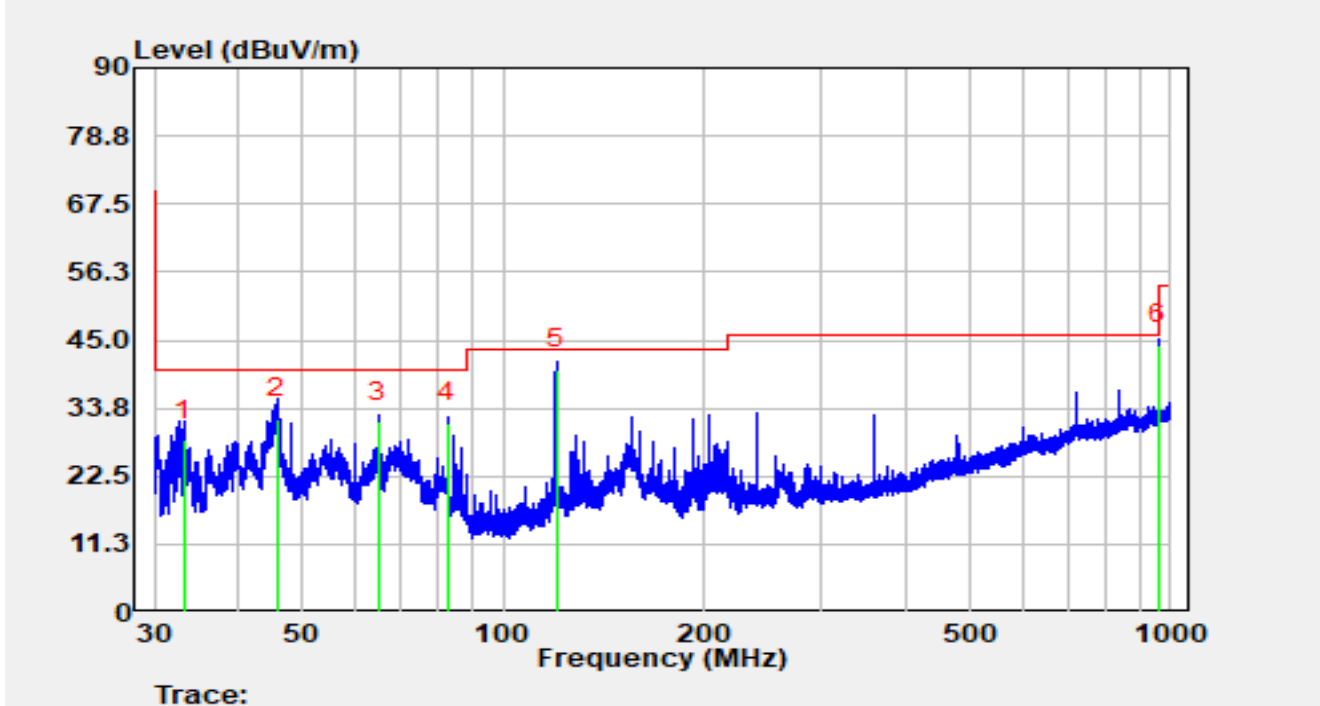


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		33.269	9.60	18.86	28.46	-11.54	40.00	QP
2		45.743	11.90	20.18	32.08	-7.92	40.00	QP
3		64.955	12.70	18.76	31.46	-8.54	40.00	QP
4		82.677	16.20	15.13	31.33	-8.67	40.00	QP
5	*	120.024	22.30	17.91	40.21	-3.29	43.50	QP
6		960.140	11.40	32.79	44.19	-9.81	54.00	QP

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

PCB Antenna (External):

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

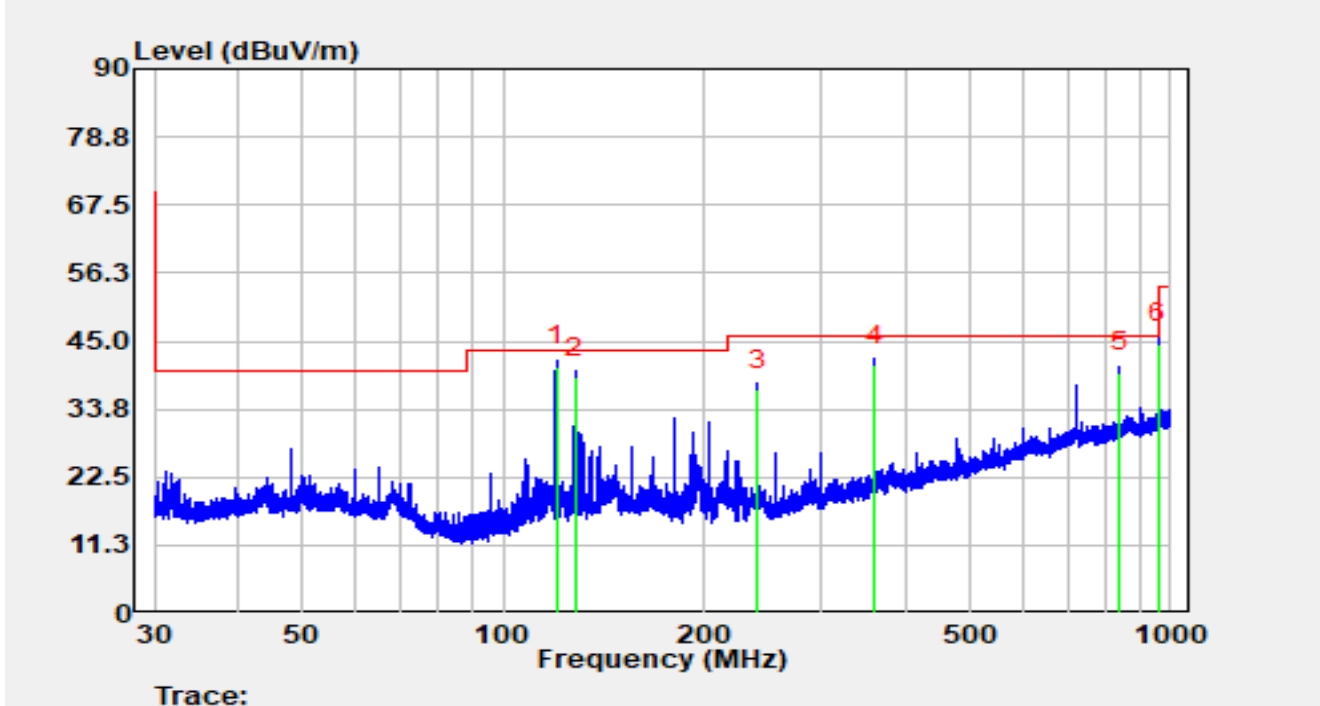


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	120.024	22.90	17.91	40.81	-2.69	43.50	QP
2		128.023	20.30	18.62	38.92	-4.58	43.50	QP
3		239.987	18.30	18.65	36.95	-9.05	46.00	QP
4		360.069	18.80	22.16	40.96	-5.04	46.00	QP
5		840.065	8.10	31.79	39.89	-6.11	46.00	QP
6		960.140	11.80	32.79	44.59	-9.41	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00999	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

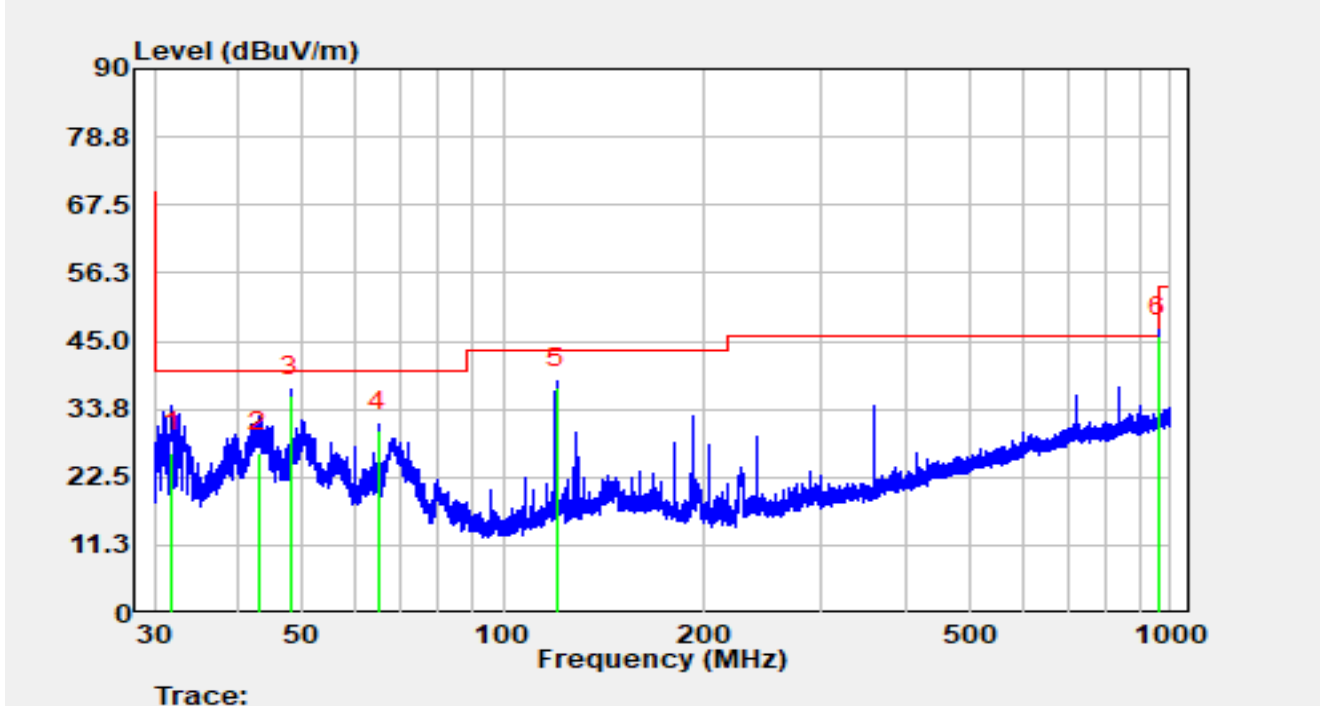

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		31.865	7.80	18.75	26.55	-13.45	40.00	QP
2		42.885	6.60	20.01	26.61	-13.39	40.00	QP
3	*	47.994	15.60	20.25	35.85	-4.15	40.00	QP
4		65.000	11.40	18.75	30.15	-9.85	40.00	QP
5		119.982	19.40	17.91	37.31	-6.19	43.50	QP
6		960.140	12.90	32.79	45.69	-8.31	54.00	QP


Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

PCB Antenna (On Board):

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

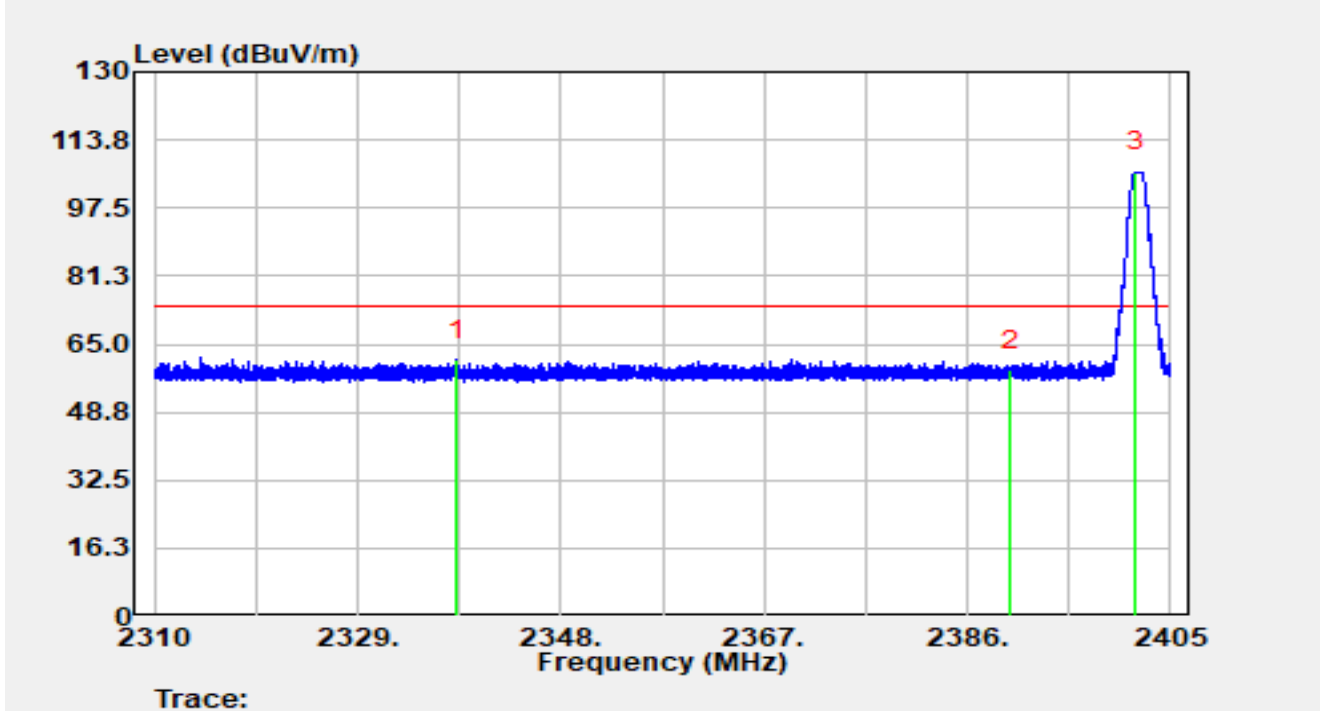


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2338.329	27.64	33.55	61.20	-12.80	74.00	Peak
2		2390.000	25.31	33.38	58.69	-15.31	74.00	Peak
3		2401.704	72.65	33.33	105.97	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

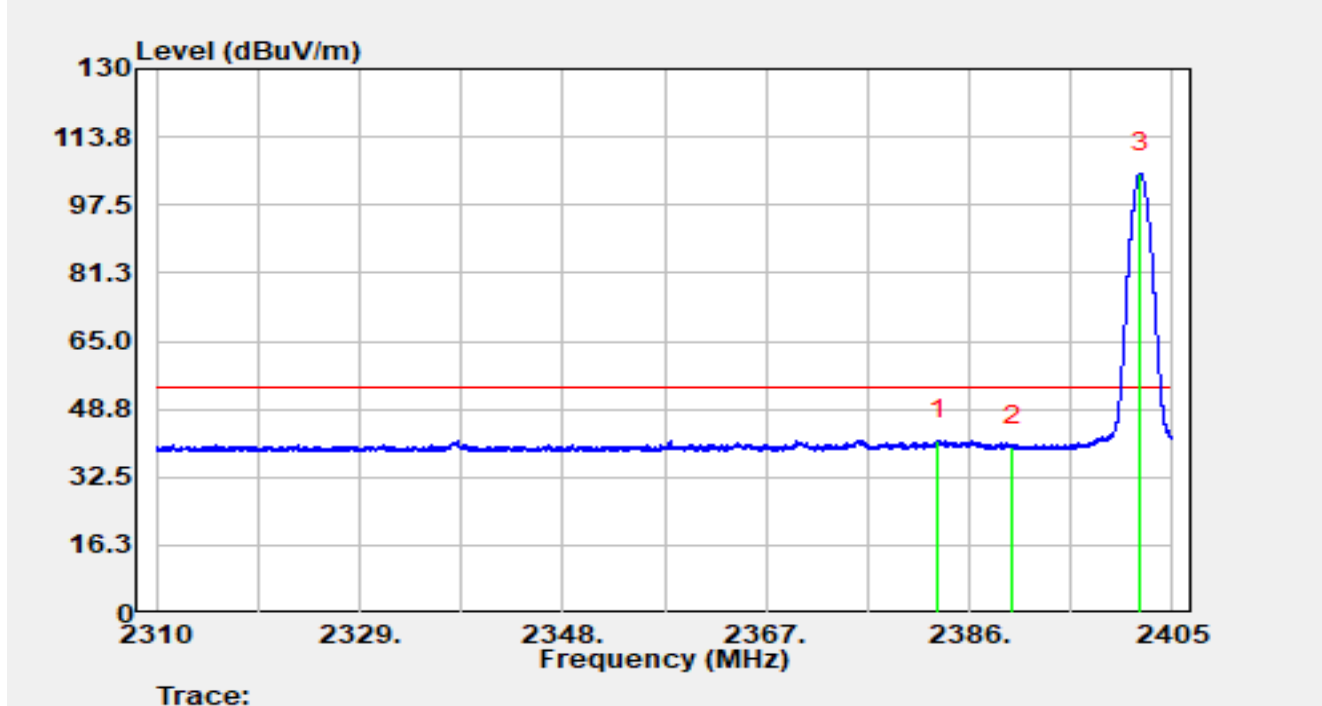


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2383.055	7.82	33.40	41.23	-12.77	54.00	Average
2		2390.000	6.42	33.38	39.80	-14.20	54.00	Average
3		2401.998	71.70	33.33	105.03	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

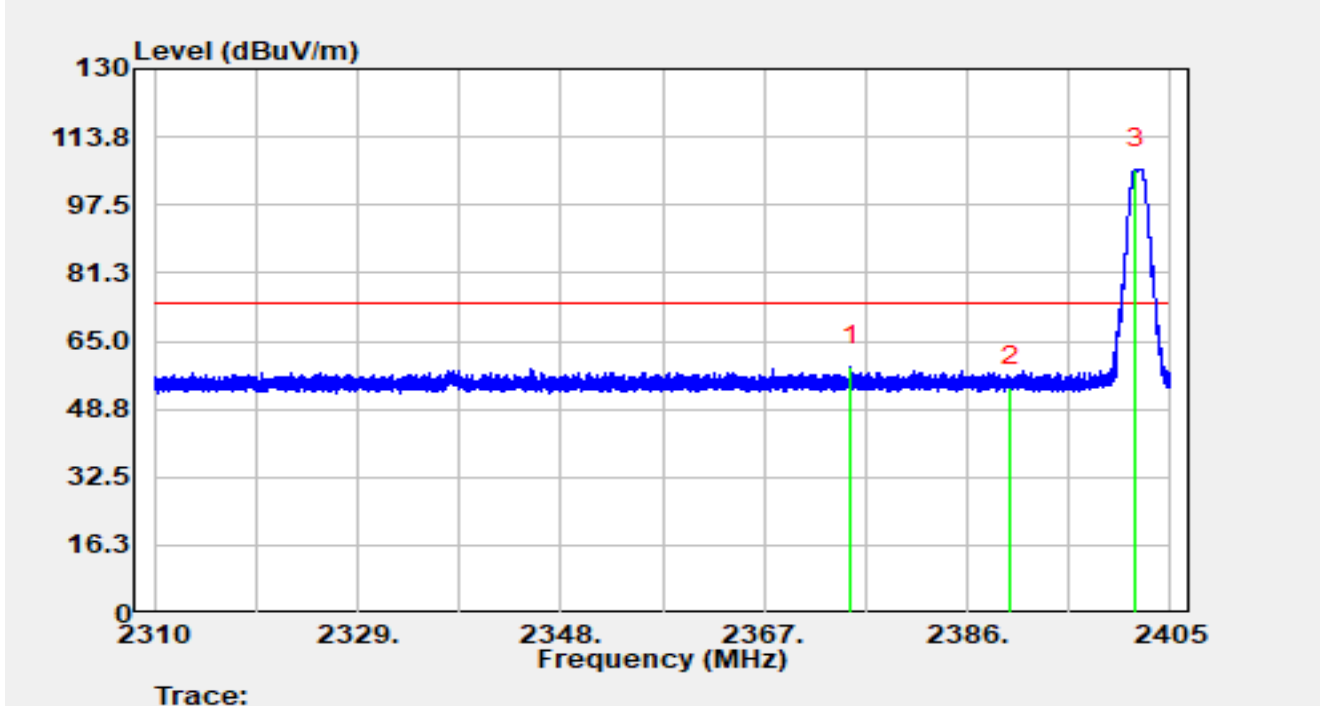


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2375.113	25.44	33.44	58.88	-15.12	74.00	Peak
2		2390.000	20.73	33.38	54.10	-19.90	74.00	Peak
3		2401.722	72.64	33.33	105.97	N/A	N/A	Peak

Notes:

1. "**", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

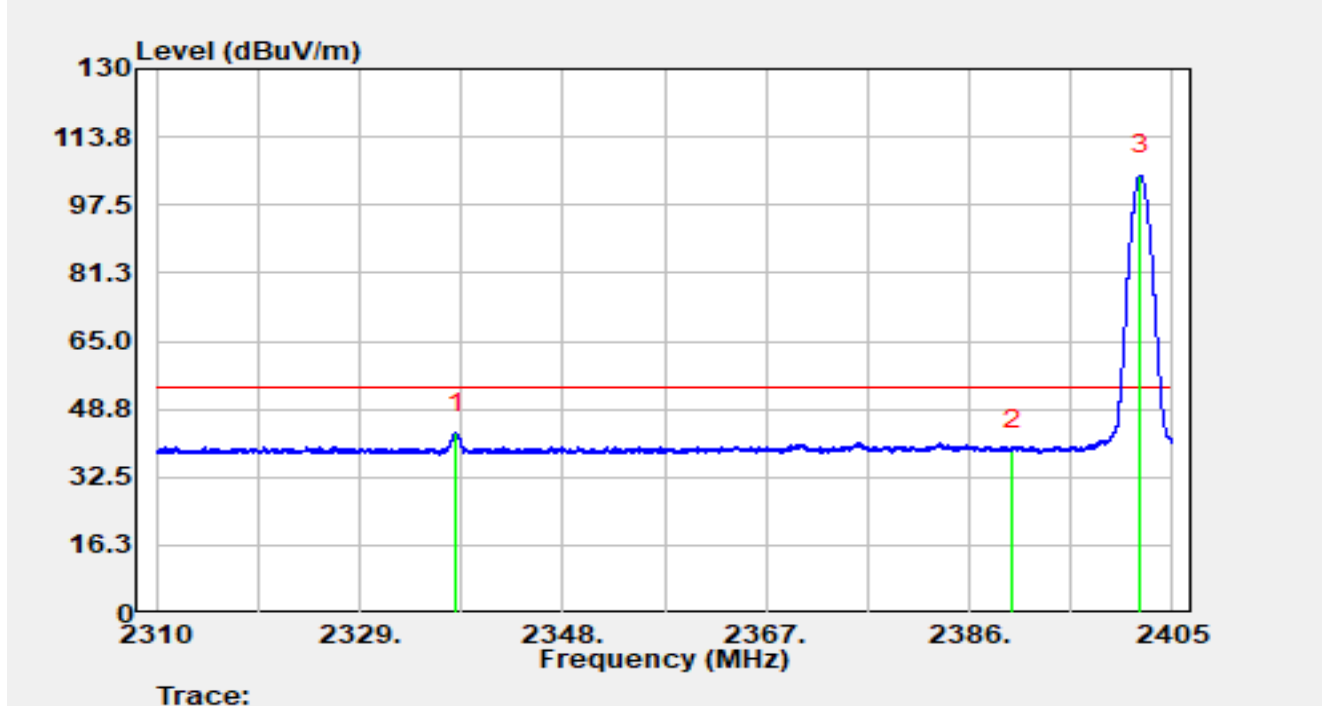


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.997	9.55	33.56	43.11	-10.89	54.00	Average
2		2390.000	5.56	33.38	38.94	-15.06	54.00	Average
3		2401.989	71.17	33.33	104.49	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

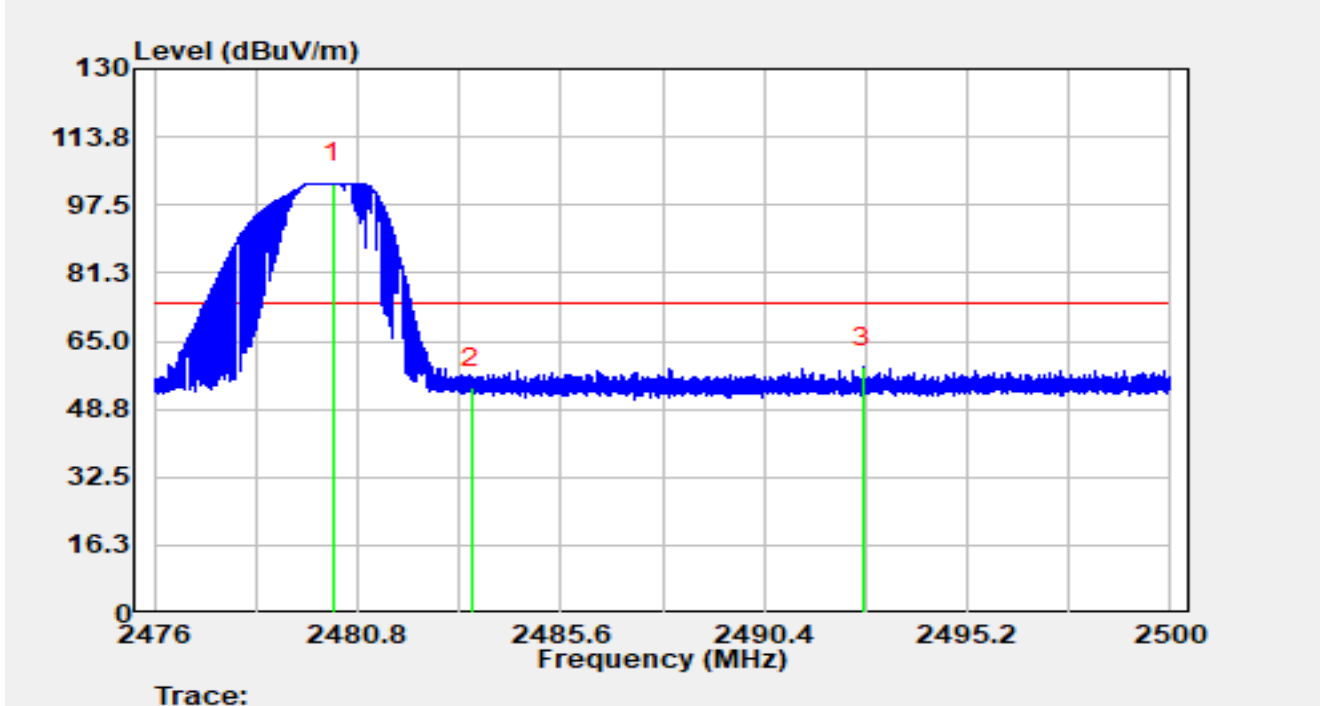


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.224	69.53	33.23	102.76	N/A	N/A	Peak
2		2483.500	20.53	33.25	53.78	-20.22	74.00	Peak
3	*	2492.733	25.40	33.30	58.70	-15.30	74.00	Peak

Notes:

1. "**", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

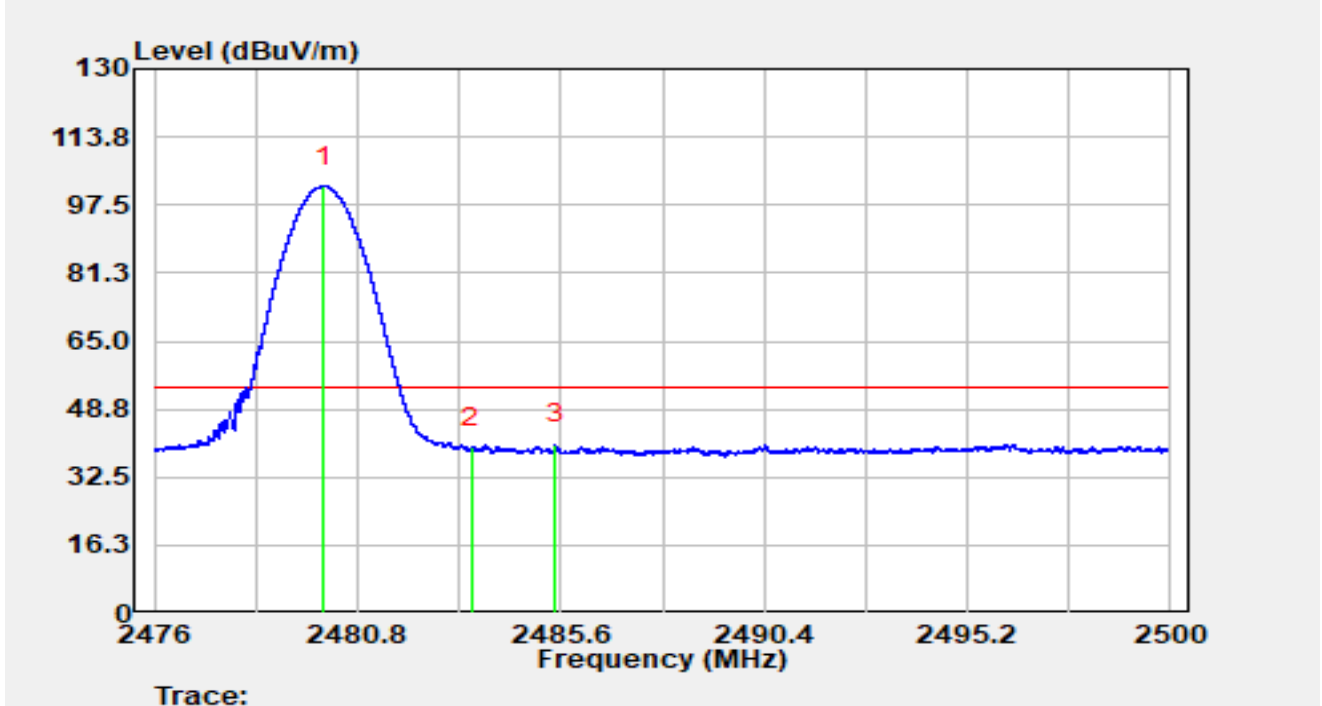


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.986	68.74	33.23	101.97	N/A	N/A	Average
2		2483.500	6.28	33.25	39.53	-14.47	54.00	Average
3	*	2485.482	7.08	33.26	40.34	-13.66	54.00	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

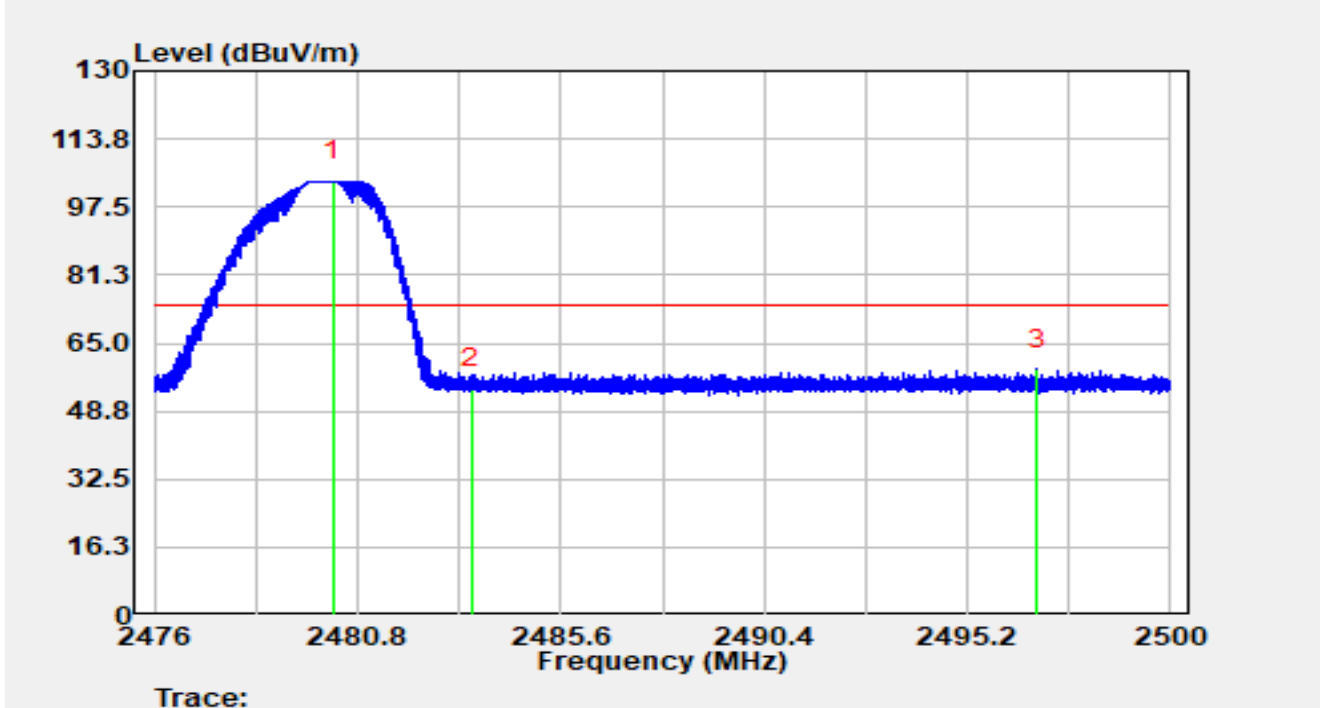


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.234	70.37	33.23	103.60	N/A	N/A	Peak
2		2483.500	20.82	33.25	54.07	-19.93	74.00	Peak
3	*	2496.858	25.48	33.32	58.80	-15.20	74.00	Peak

Notes:

1. "**", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

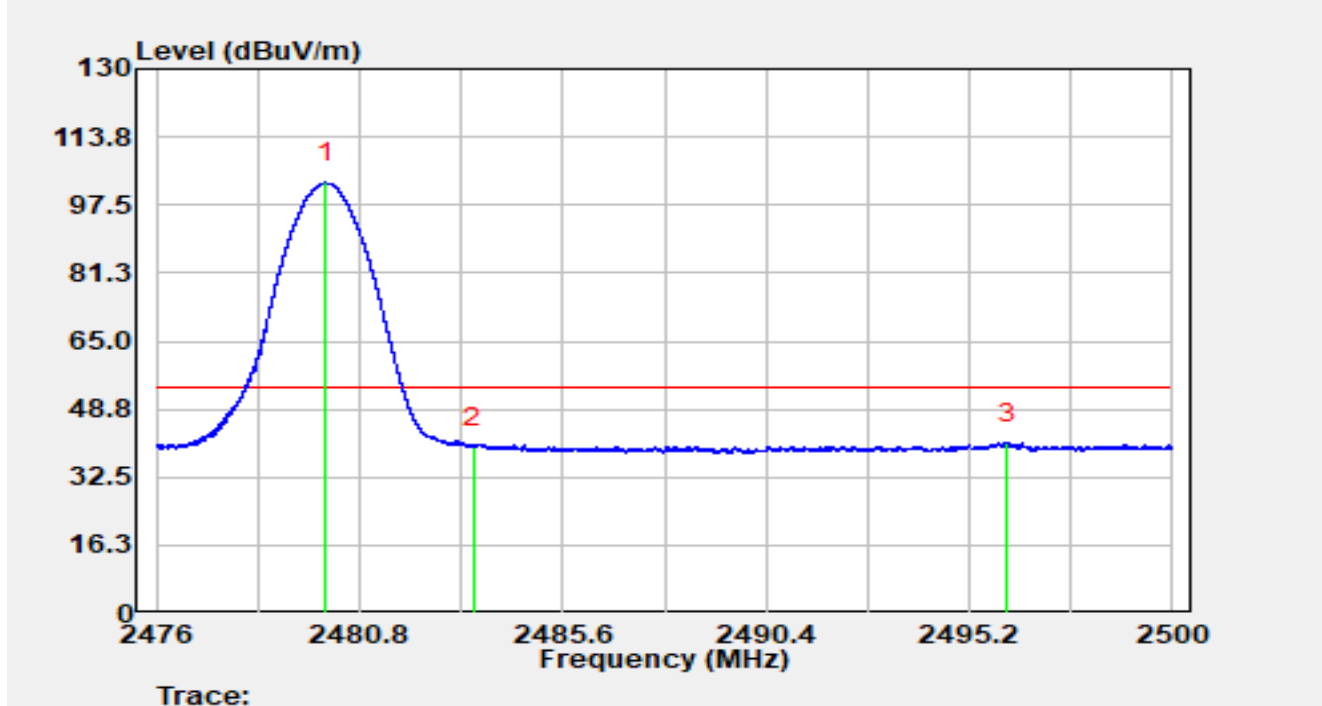


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.013	69.55	33.23	102.78	N/A	N/A	Average
2		2483.500	6.47	33.25	39.72	-14.28	54.00	Average
3	*	2496.093	7.29	33.32	40.62	-13.38	54.00	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

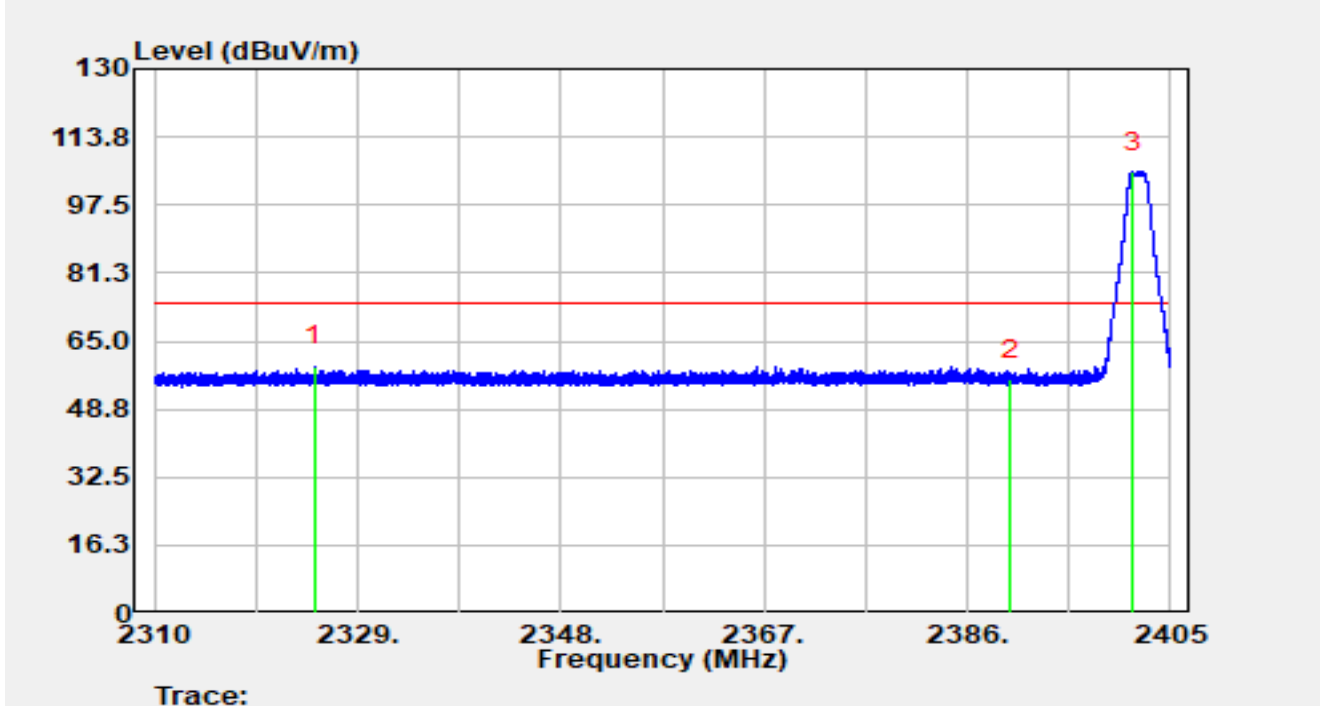


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2325.020	25.38	33.66	59.03	-14.97	74.00	Peak
2		2390.000	22.38	33.38	55.75	-18.25	74.00	Peak
3		2401.476	72.02	33.33	105.35	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

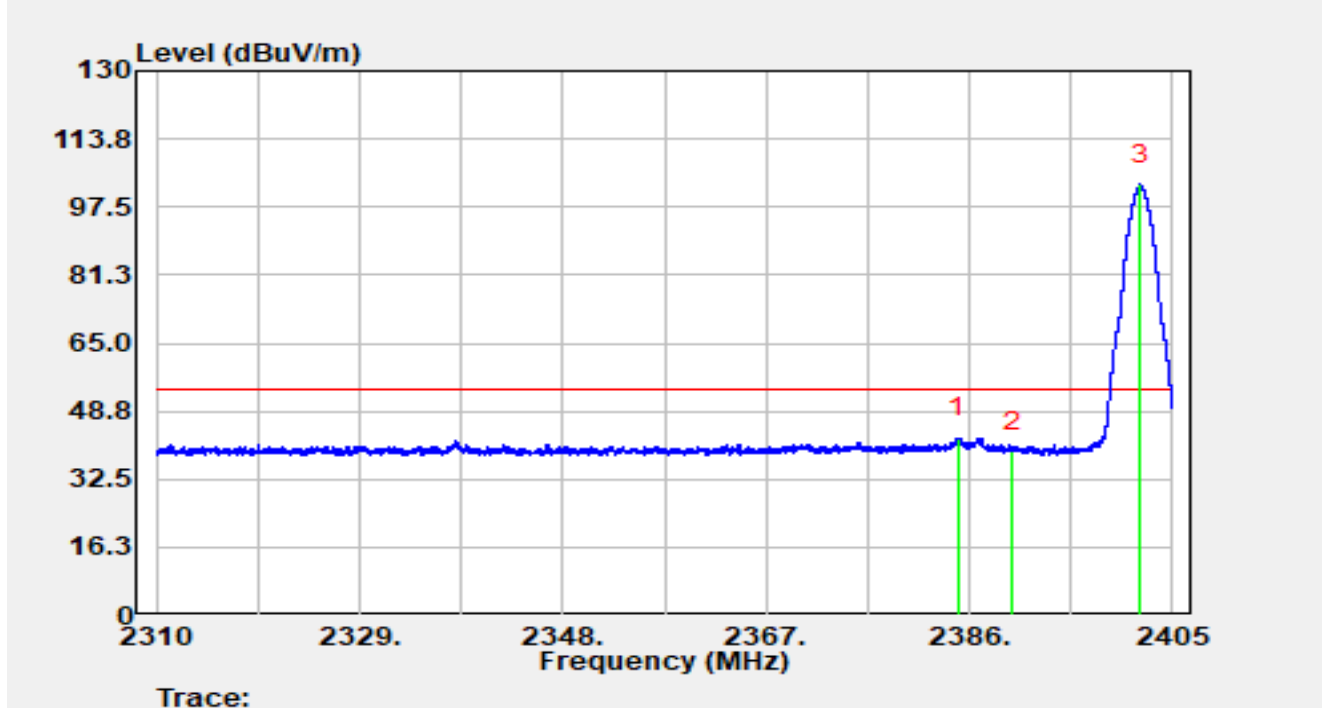


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.888	9.02	33.40	42.42	-11.58	54.00	Average
2		2390.000	5.82	33.38	39.19	-14.81	54.00	Average
3		2401.998	69.47	33.33	102.80	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

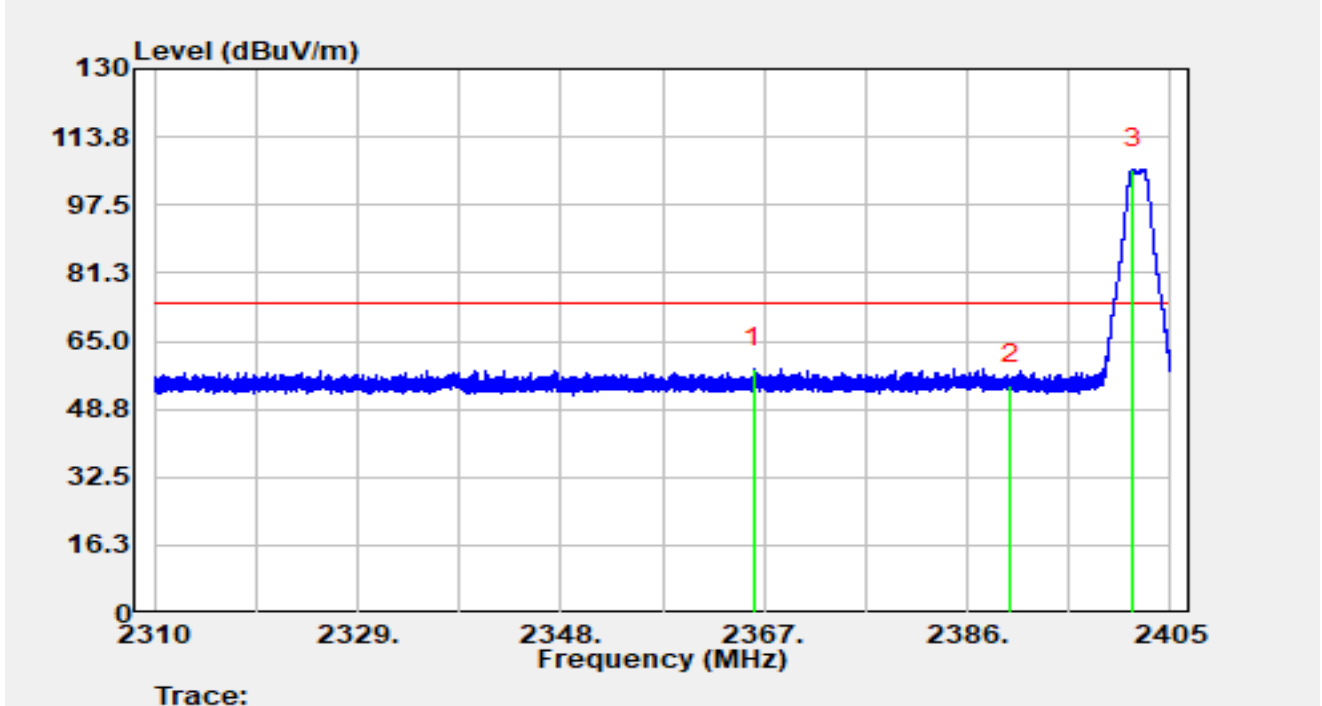


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2366.060	24.98	33.50	58.48	-15.52	74.00	Peak
2		2390.000	21.13	33.38	54.50	-19.50	74.00	Peak
3		2401.438	72.70	33.33	106.03	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

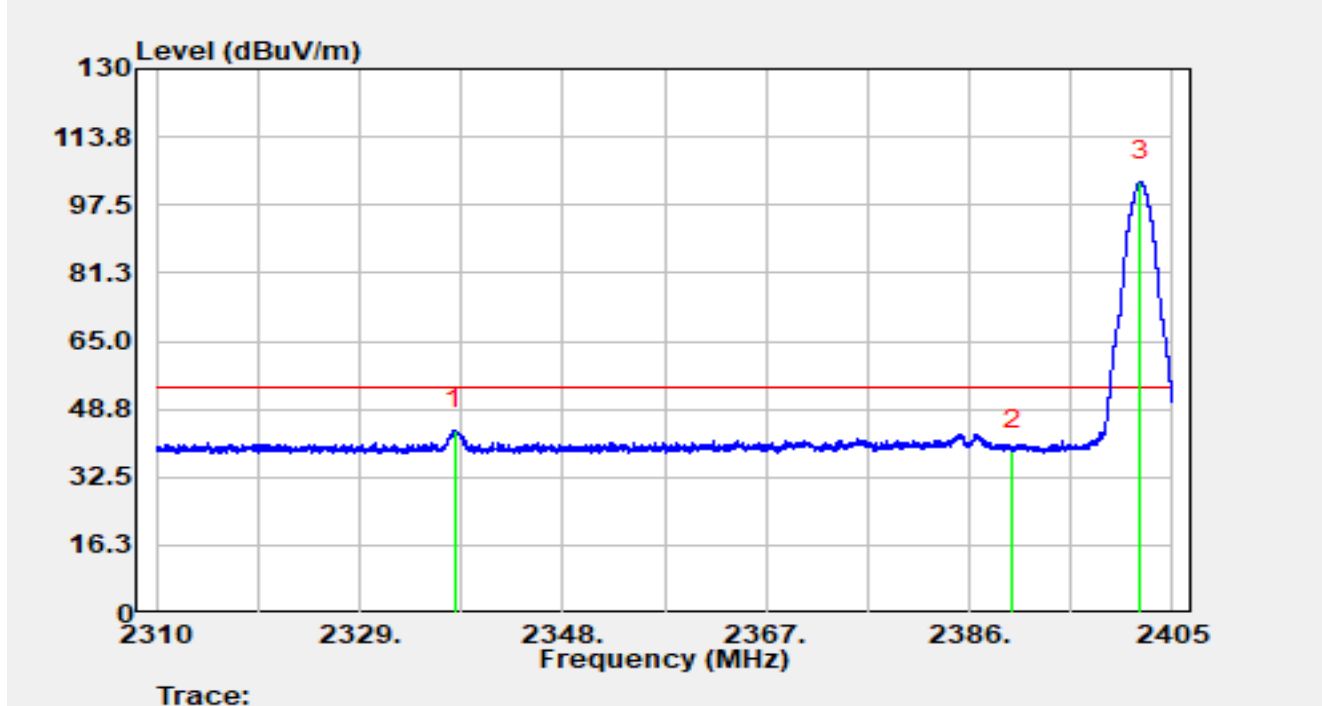


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.873	10.21	33.56	43.77	-10.23	54.00	Average
2		2390.000	5.44	33.38	38.82	-15.18	54.00	Average
3		2401.989	69.84	33.33	103.17	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

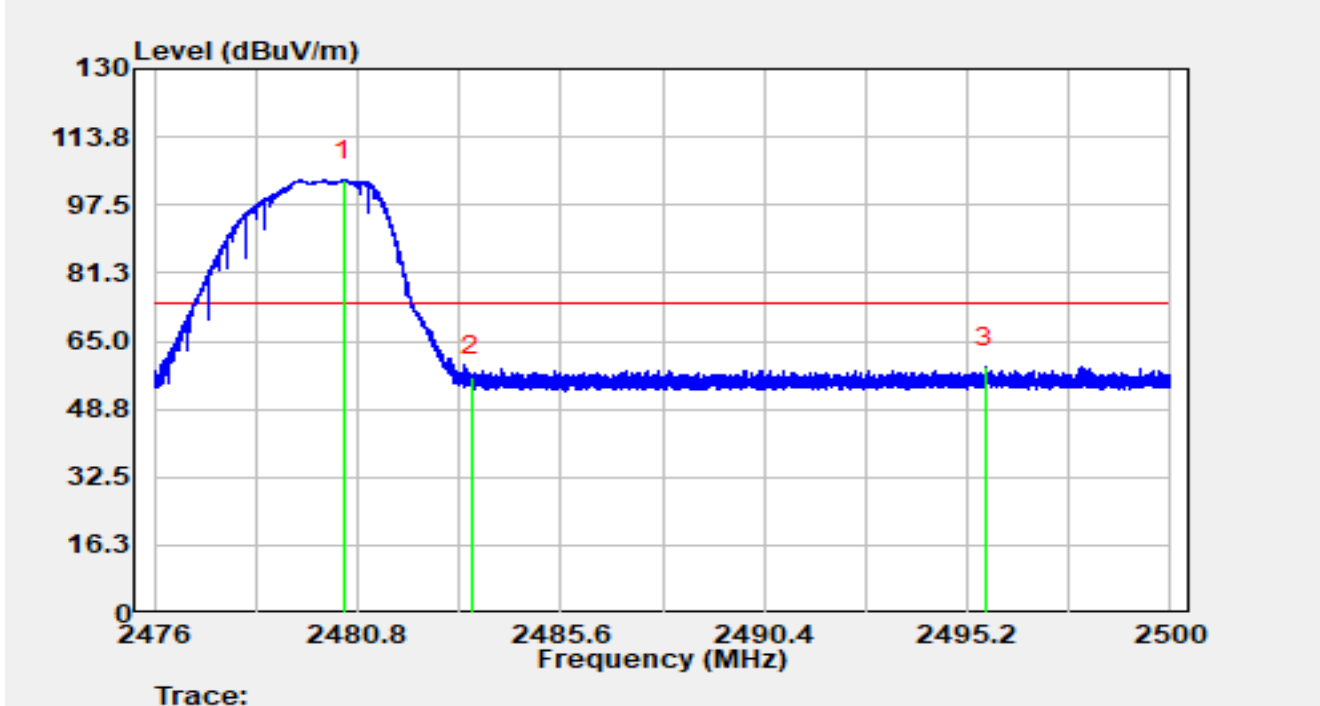


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.474	70.10	33.23	103.33	N/A	N/A	Peak
2		2483.500	23.26	33.25	56.51	-17.49	74.00	Peak
3	*	2495.620	25.34	33.32	58.66	-15.34	74.00	Peak

Notes:

1. "**", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

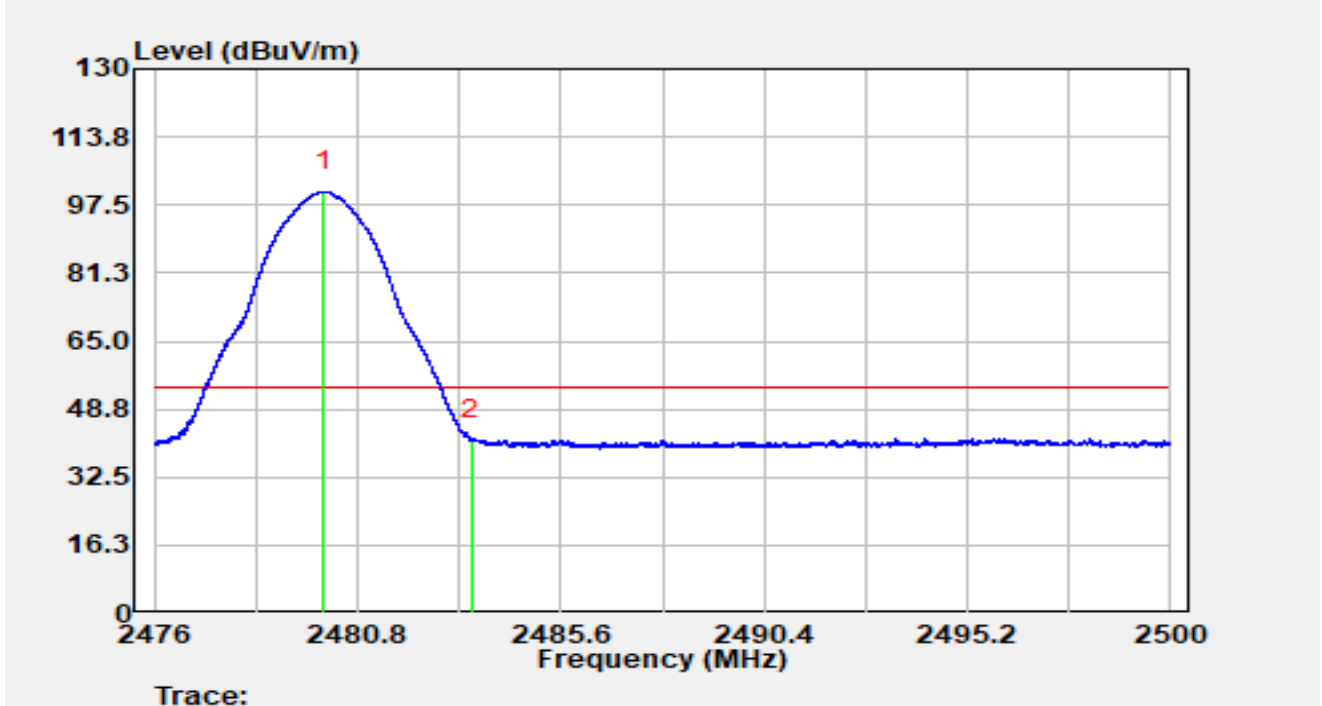


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.001	67.34	33.23	100.57	N/A	N/A	Average
2	*	2483.500	8.03	33.25	41.28	-12.72	54.00	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

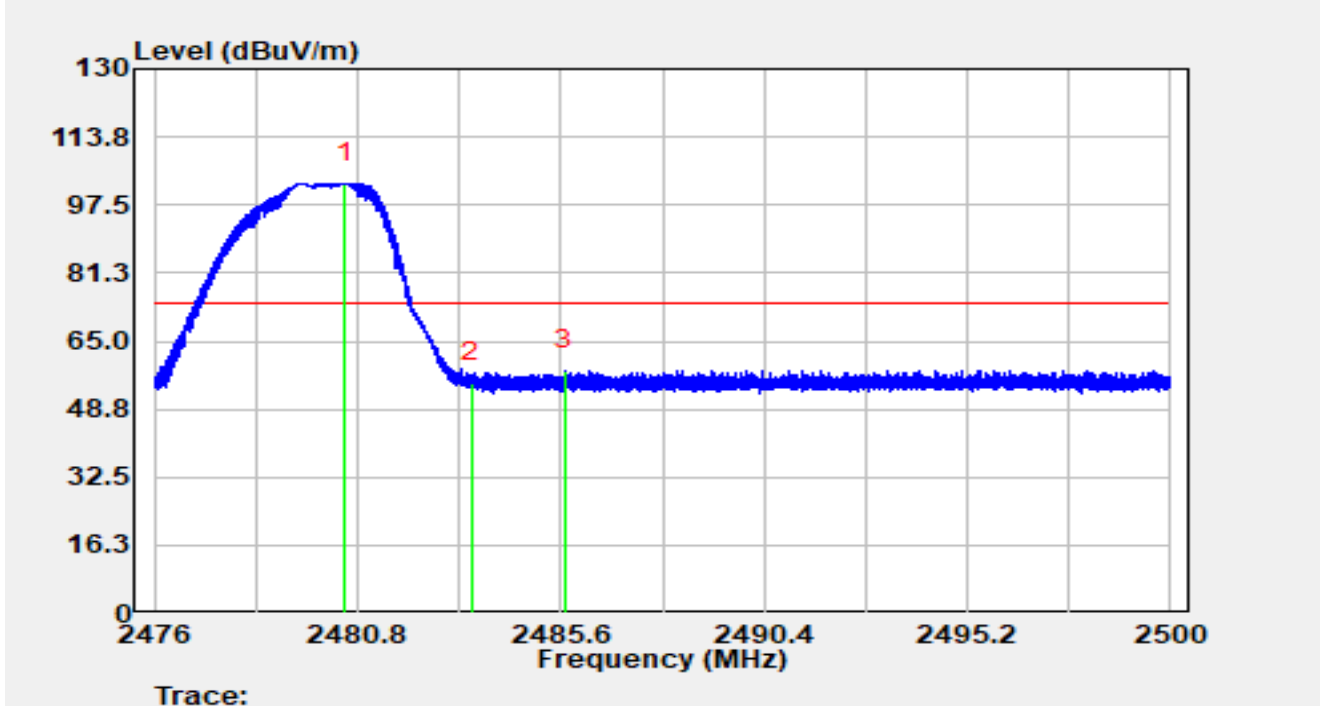


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.505	69.46	33.23	102.70	N/A	N/A	Peak
2		2483.500	21.75	33.25	55.00	-19.00	74.00	Peak
3	*	2485.686	24.83	33.26	58.10	-15.90	74.00	Peak

Notes:

1. "**", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-24
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

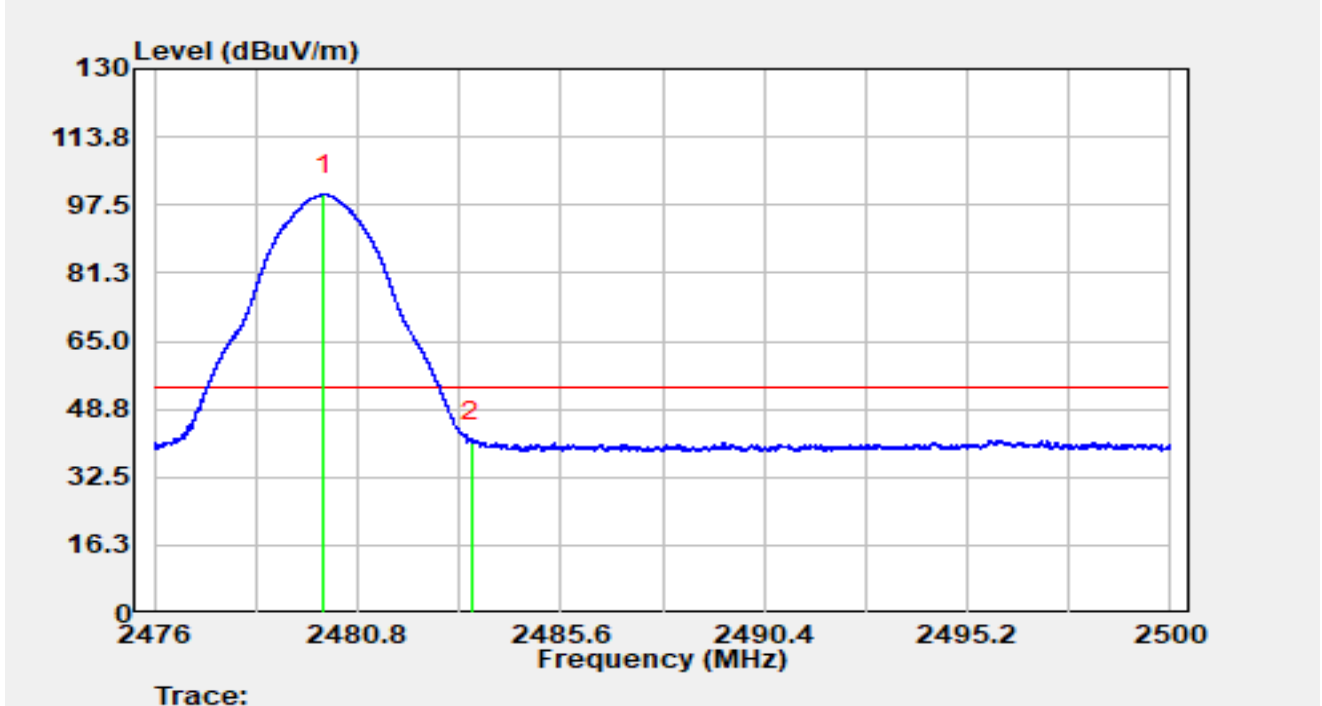


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.001	66.73	33.23	99.96	N/A	N/A	Average
2	*	2483.500	7.69	33.25	40.94	-13.06	54.00	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

PCB Antenna (External):

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

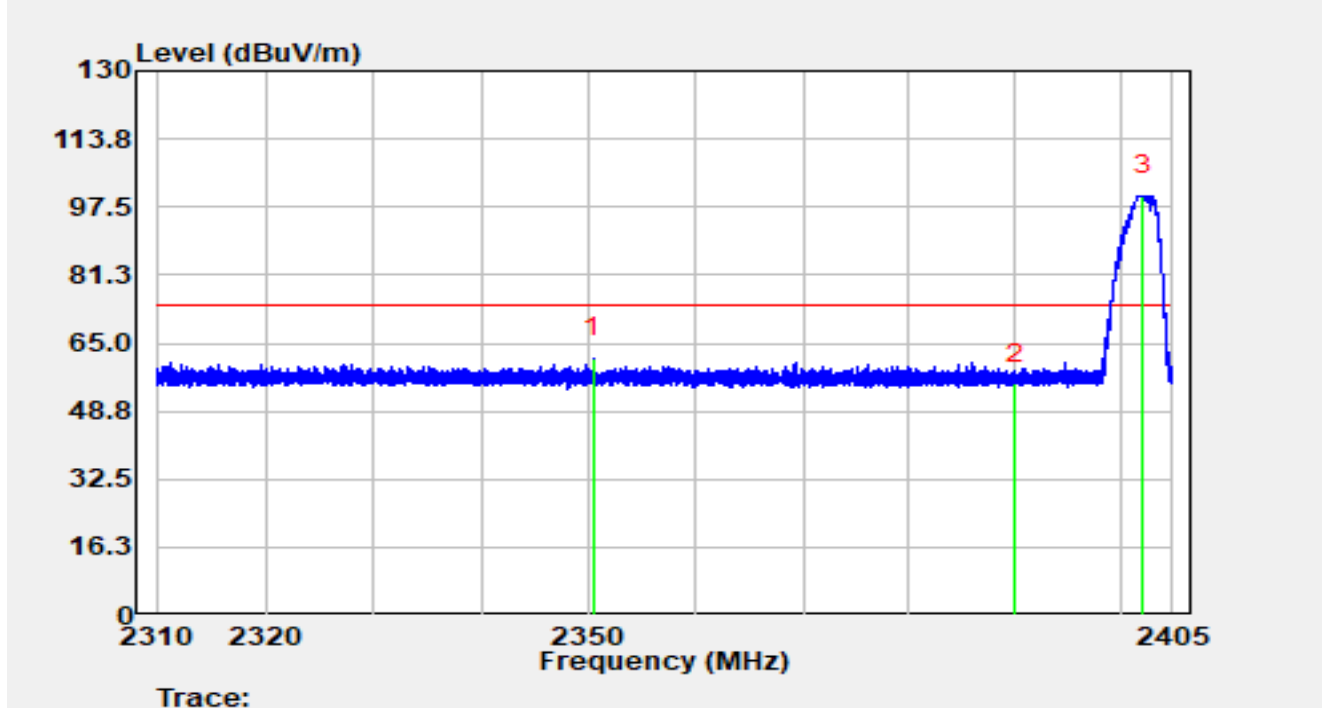


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2350.413	27.84	33.52	61.36	-12.64	74.00	Peak
2		2390.000	21.91	33.38	55.28	-18.72	74.00	Peak
3		2402.236	66.98	33.33	100.31	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

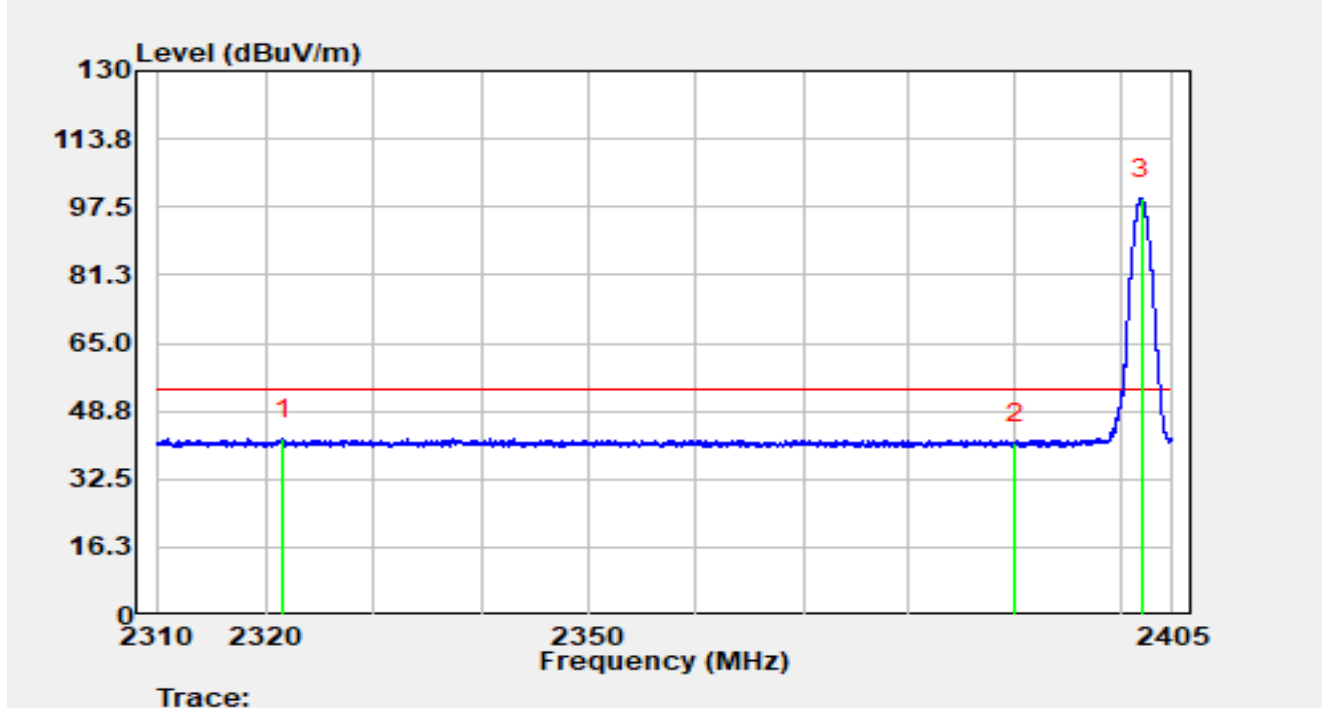


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2321.618	8.50	33.65	42.15	-11.85	54.00	Average
2		2390.000	7.69	33.38	41.06	-12.94	54.00	Average
3		2402.027	66.14	33.33	99.47	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

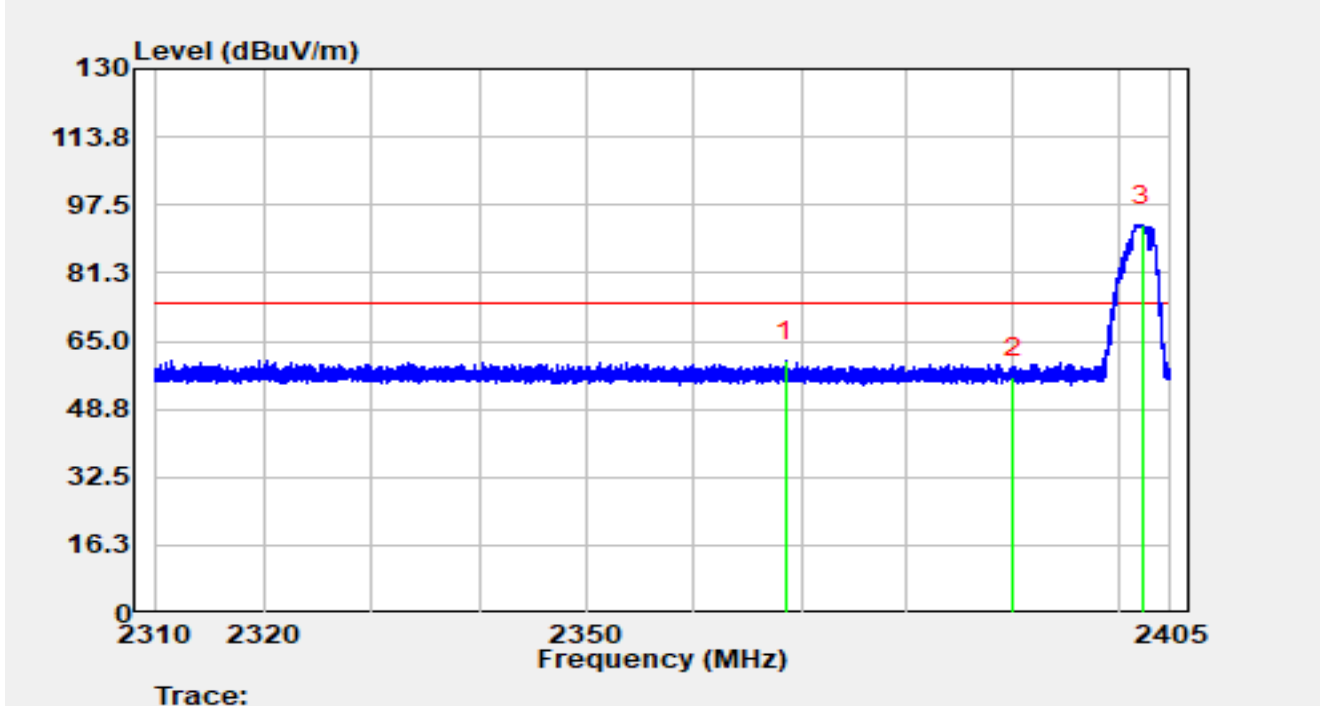


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2368.549	26.83	33.48	60.31	-13.69	74.00	Peak
2		2390.000	22.91	33.38	56.29	-17.71	74.00	Peak
3		2402.264	59.37	33.33	92.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2402MHz		

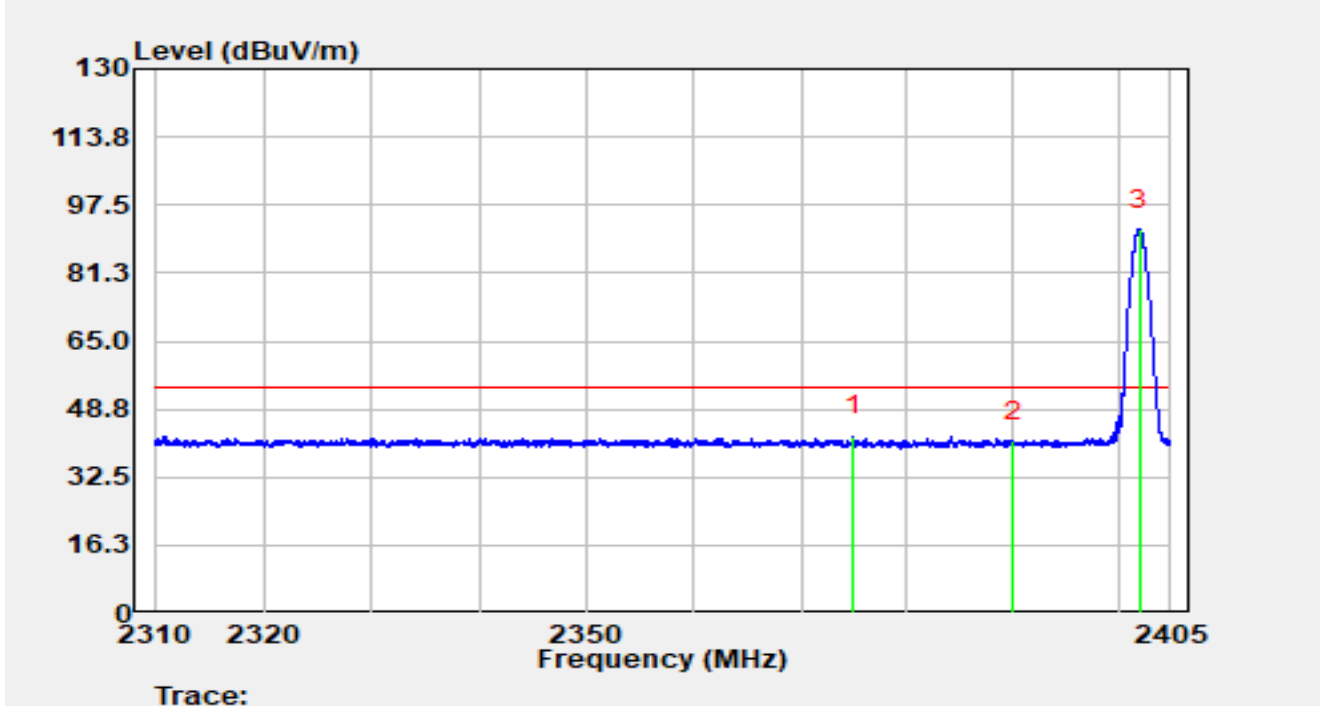


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2374.970	8.76	33.44	42.20	-11.80	54.00	Average
2		2390.000	7.64	33.38	41.01	-12.99	54.00	Average
3		2402.008	58.39	33.33	91.72	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

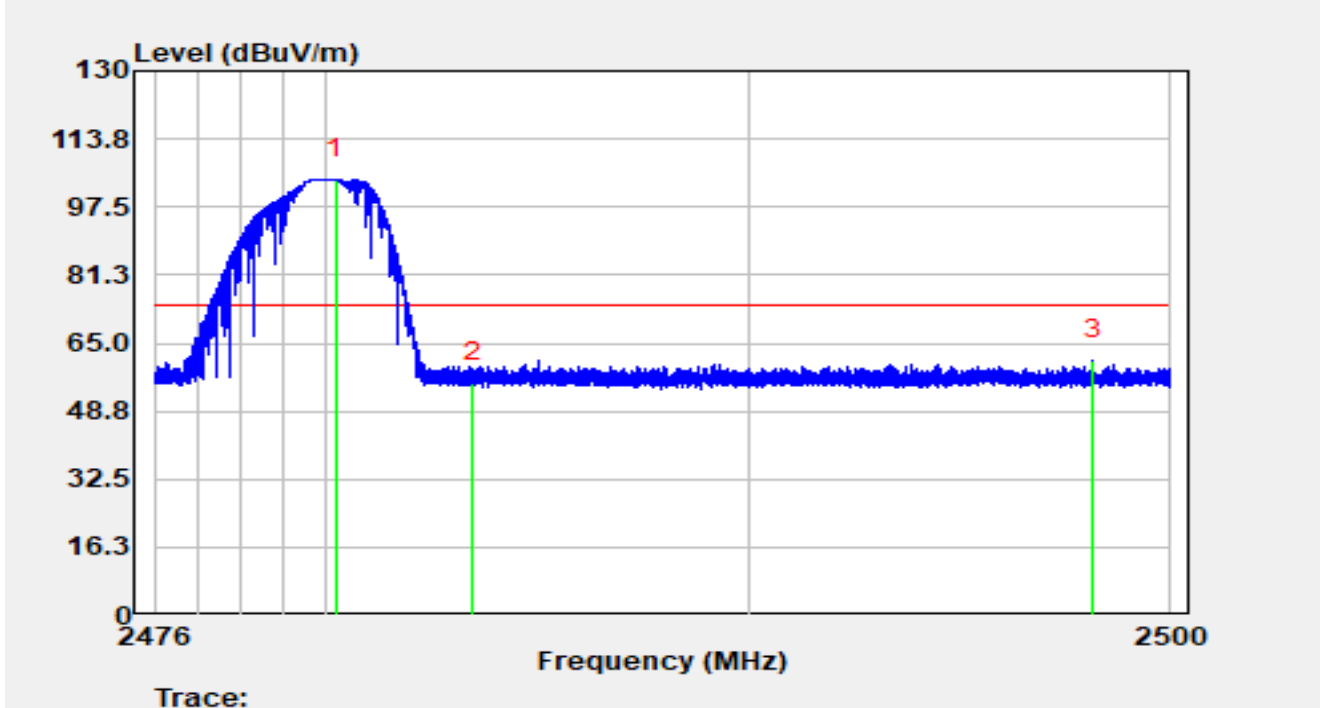


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.250	70.80	33.23	104.03	N/A	N/A	Peak
2		2483.500	22.39	33.25	55.64	-18.36	74.00	Peak
3	*	2498.159	27.61	33.32	60.93	-13.07	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

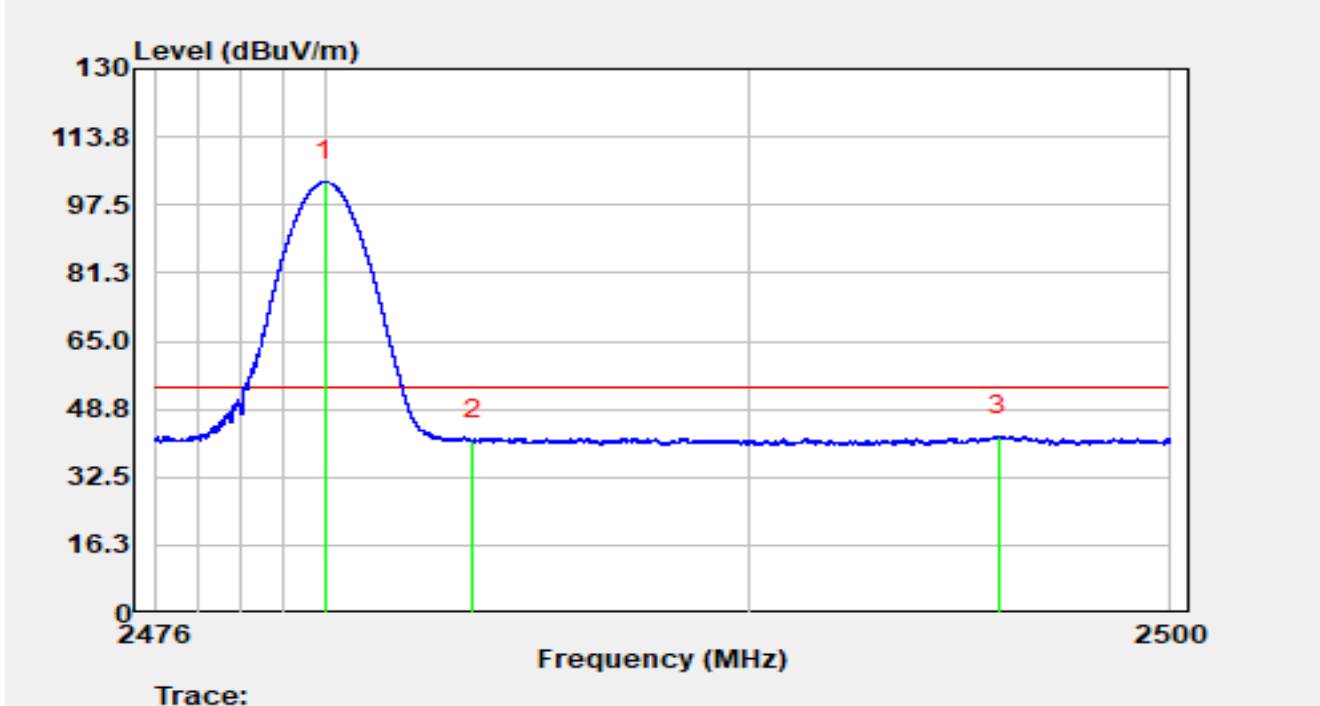


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.018	69.80	33.23	103.03	N/A	N/A	Average
2		2483.500	8.01	33.25	41.26	-12.74	54.00	Average
3	*	2495.934	9.10	33.32	42.42	-11.58	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

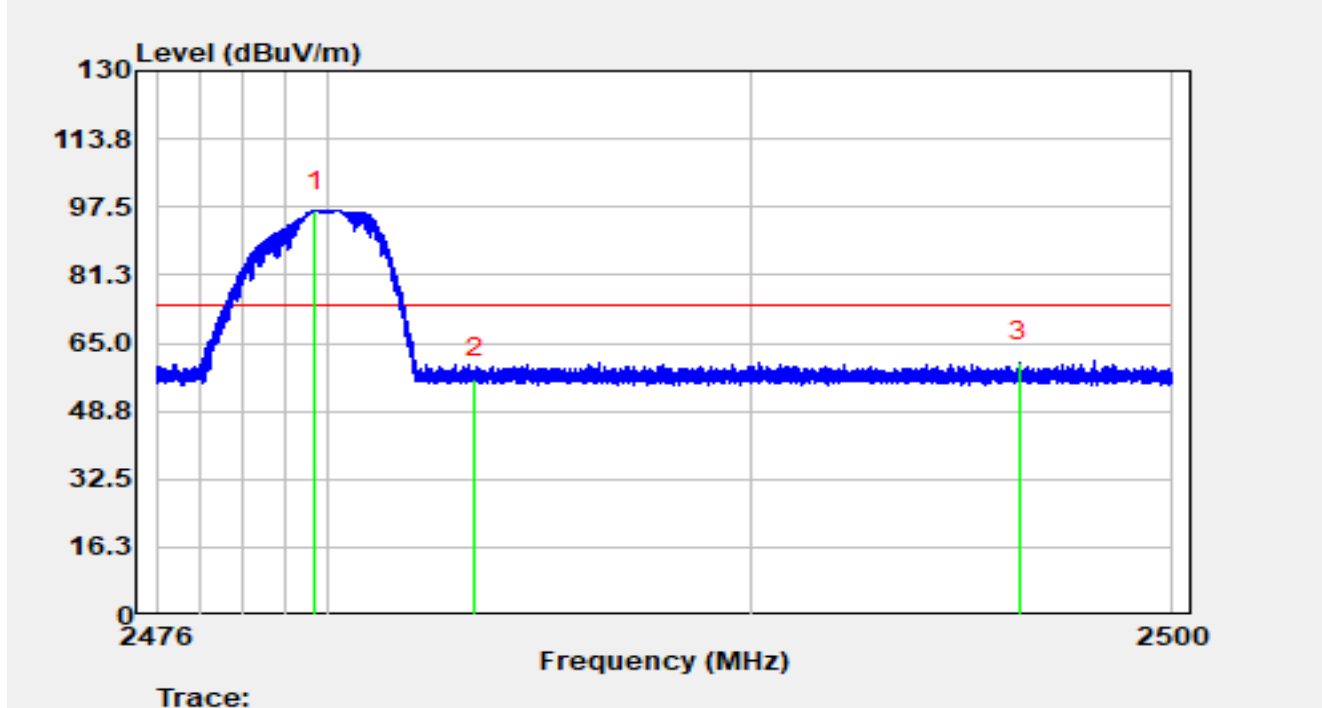


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2479.720	63.35	33.23	96.58	N/A	N/A	Peak
2		2483.500	23.39	33.25	56.64	-17.36	74.00	Peak
3	*	2496.347	27.02	33.32	60.34	-13.66	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 1M at 2480MHz		

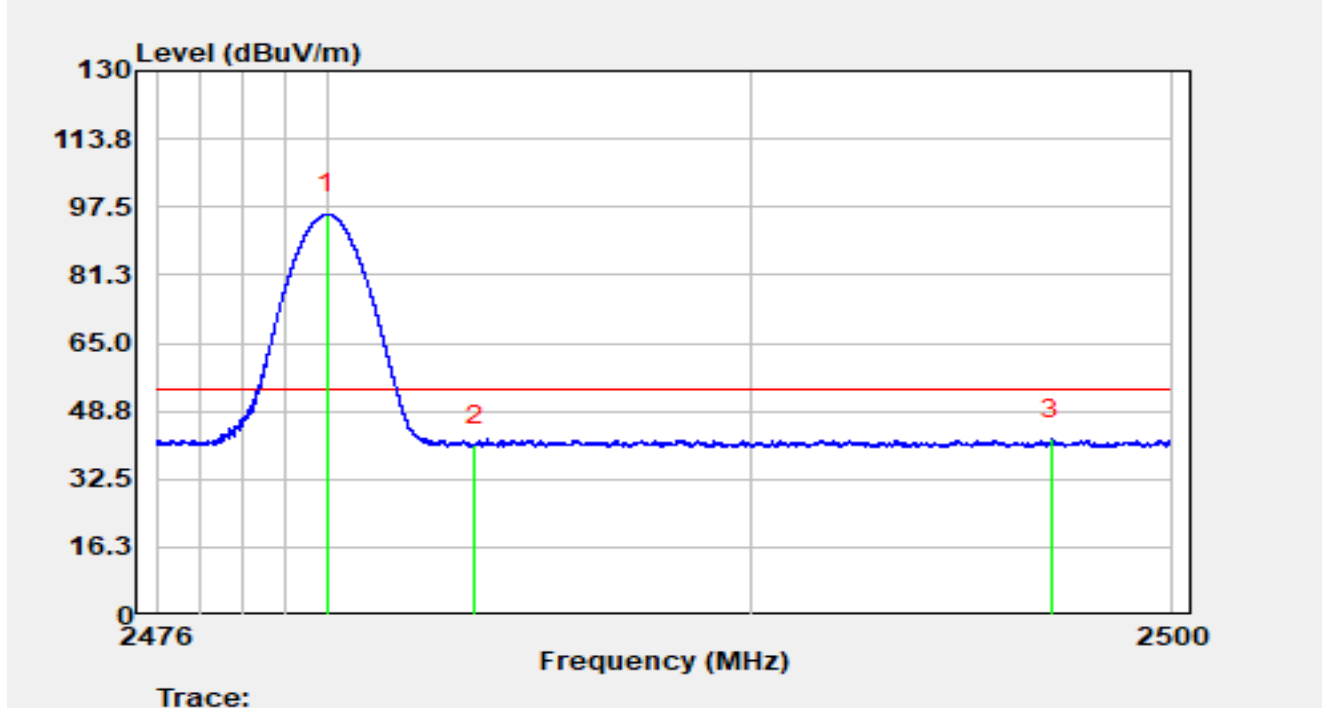


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.025	62.46	33.23	95.69	N/A	N/A	Average
2		2483.500	7.37	33.25	40.62	-13.38	54.00	Average
3	*	2497.132	8.66	33.32	41.98	-12.02	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

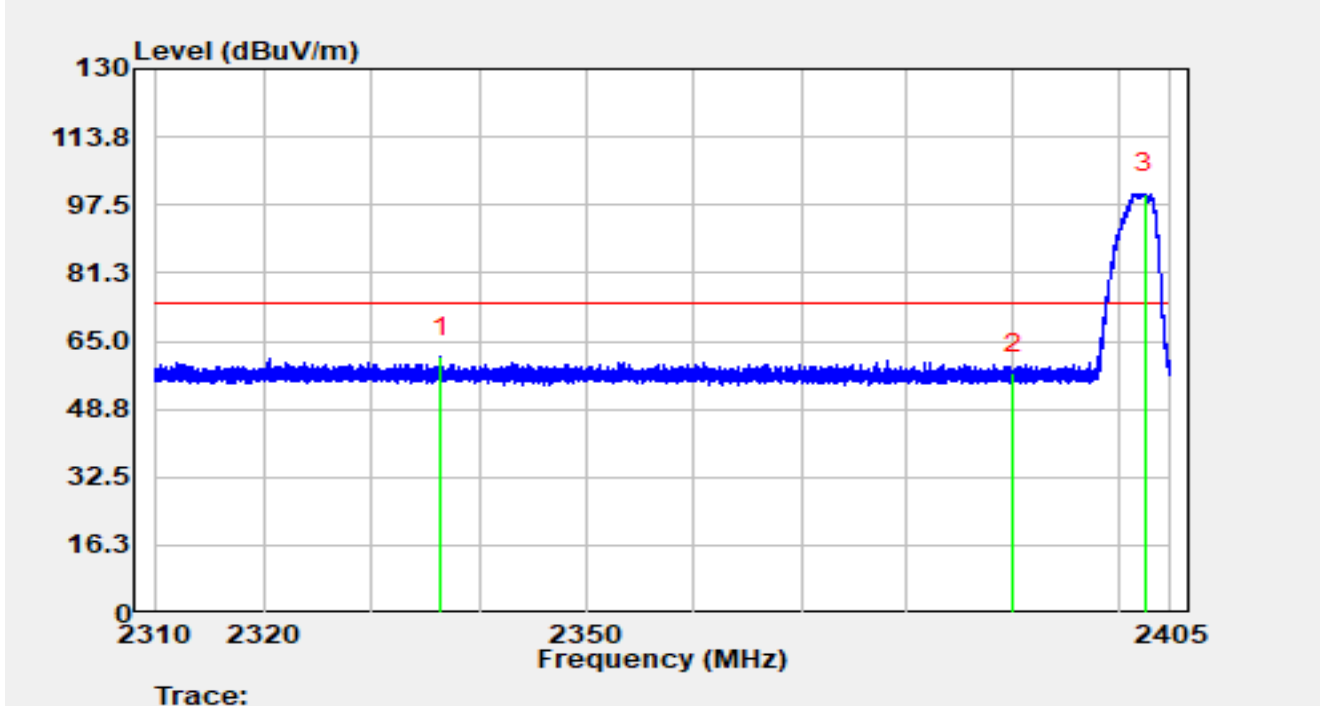


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2336.391	27.54	33.57	61.11	-12.89	74.00	Peak
2		2390.000	23.88	33.38	57.25	-16.75	74.00	Peak
3		2402.549	66.86	33.32	100.19	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

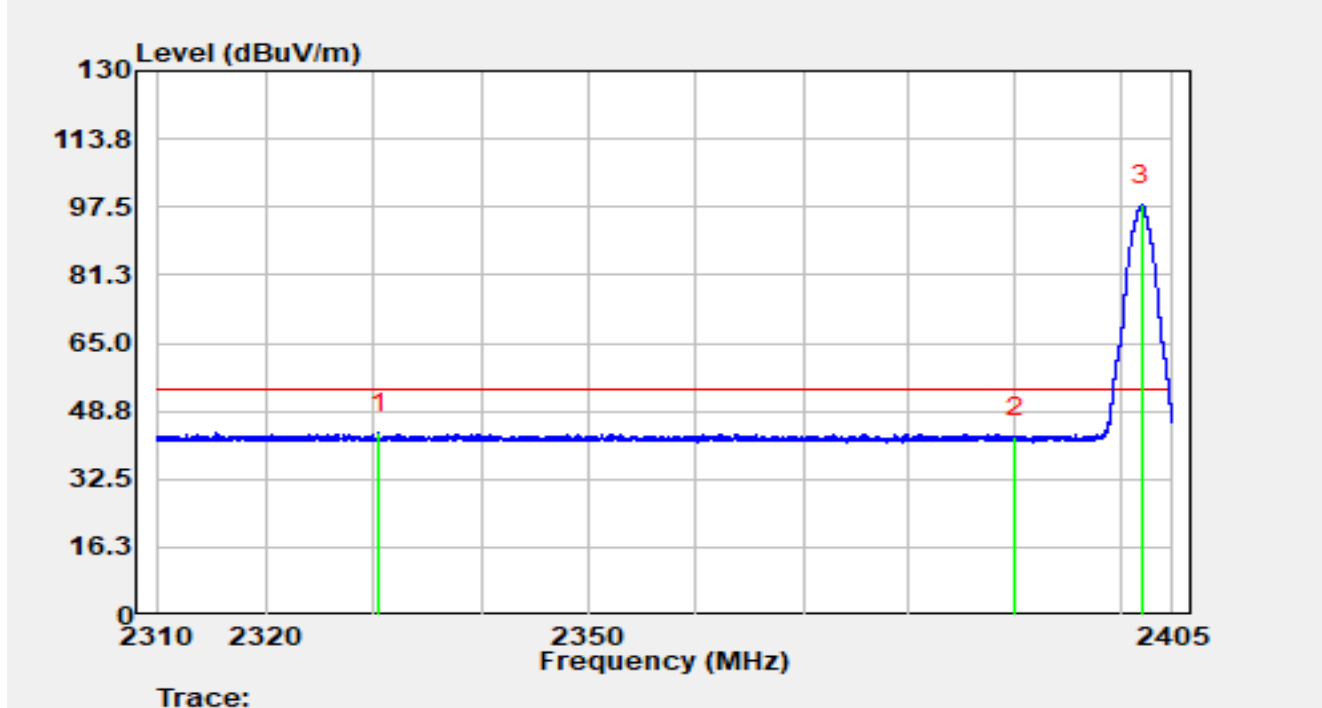


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2330.463	9.90	33.62	43.53	-10.47	54.00	Average
2		2390.000	9.27	33.38	42.64	-11.36	54.00	Average
3		2402.017	64.57	33.33	97.89	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

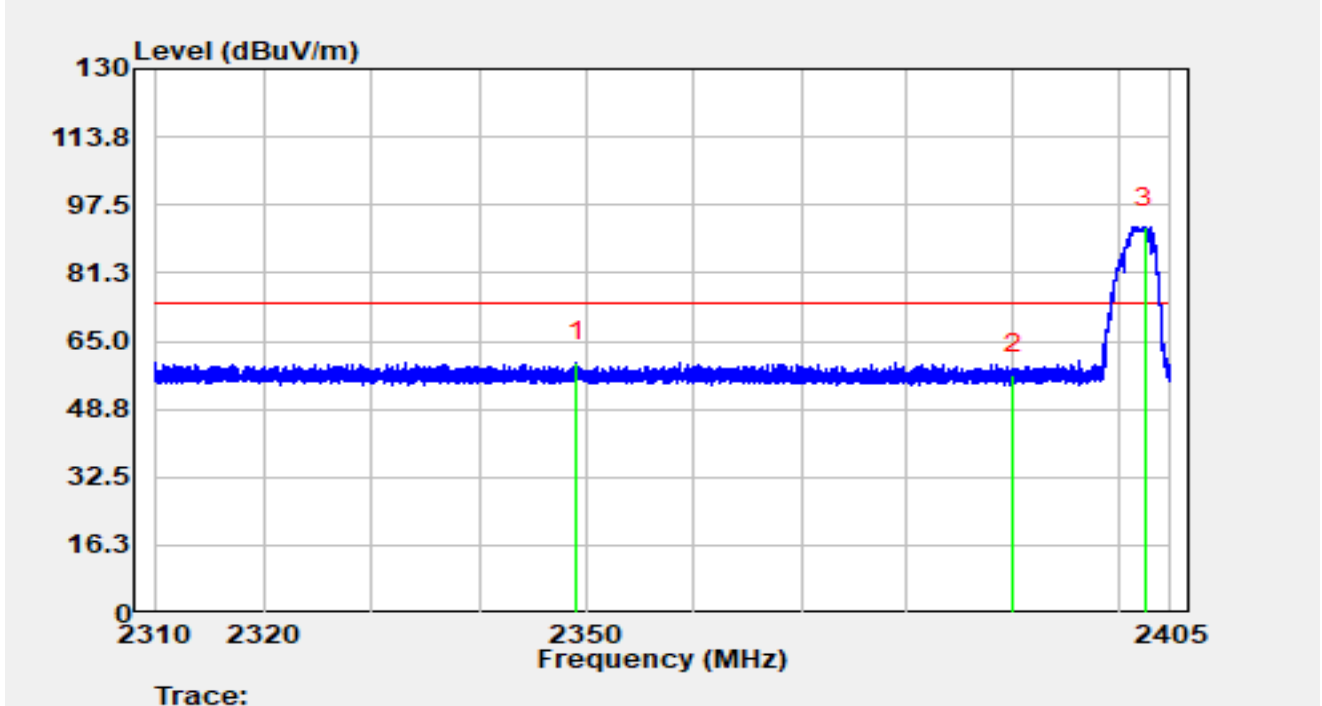


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2349.035	26.56	33.52	60.08	-13.92	74.00	Peak
2		2390.000	23.70	33.38	57.07	-16.93	74.00	Peak
3		2402.521	58.82	33.32	92.15	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2402MHz		

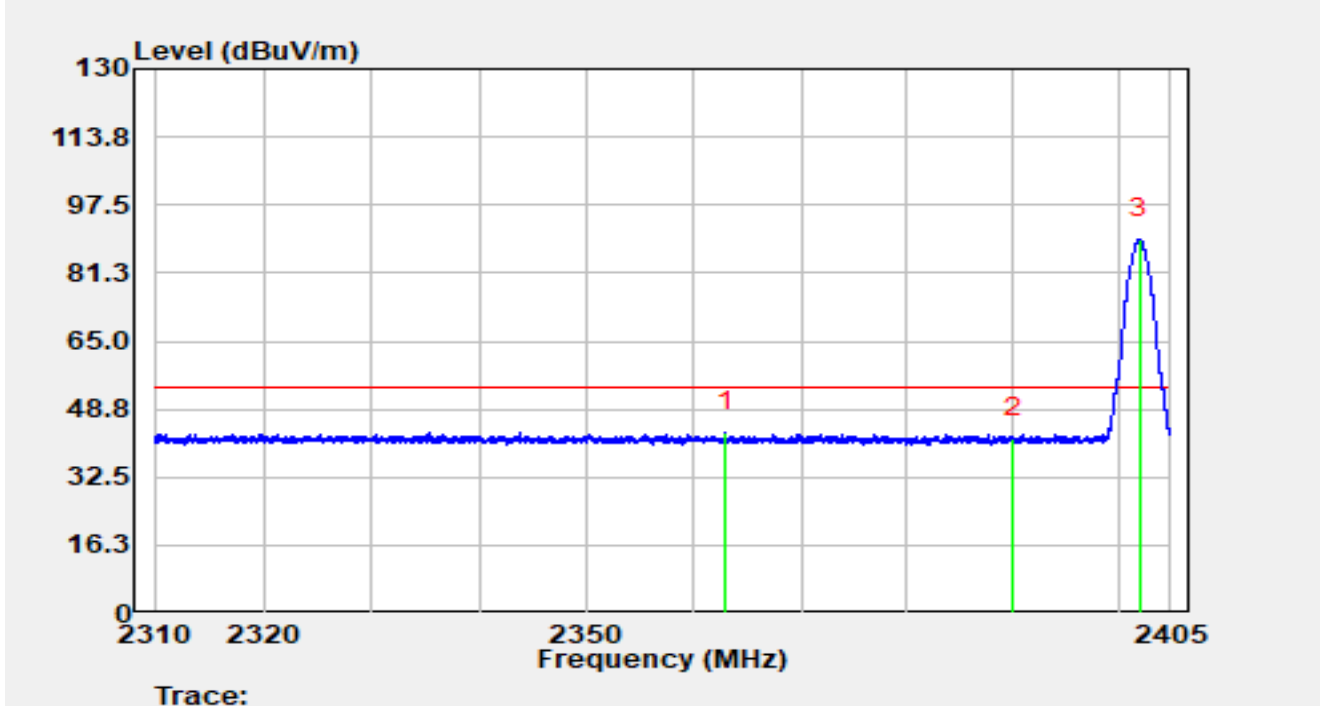


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2362.877	9.79	33.52	43.31	-10.69	54.00	Average
2		2390.000	8.39	33.38	41.77	-12.23	54.00	Average
3		2402.017	56.00	33.33	89.32	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

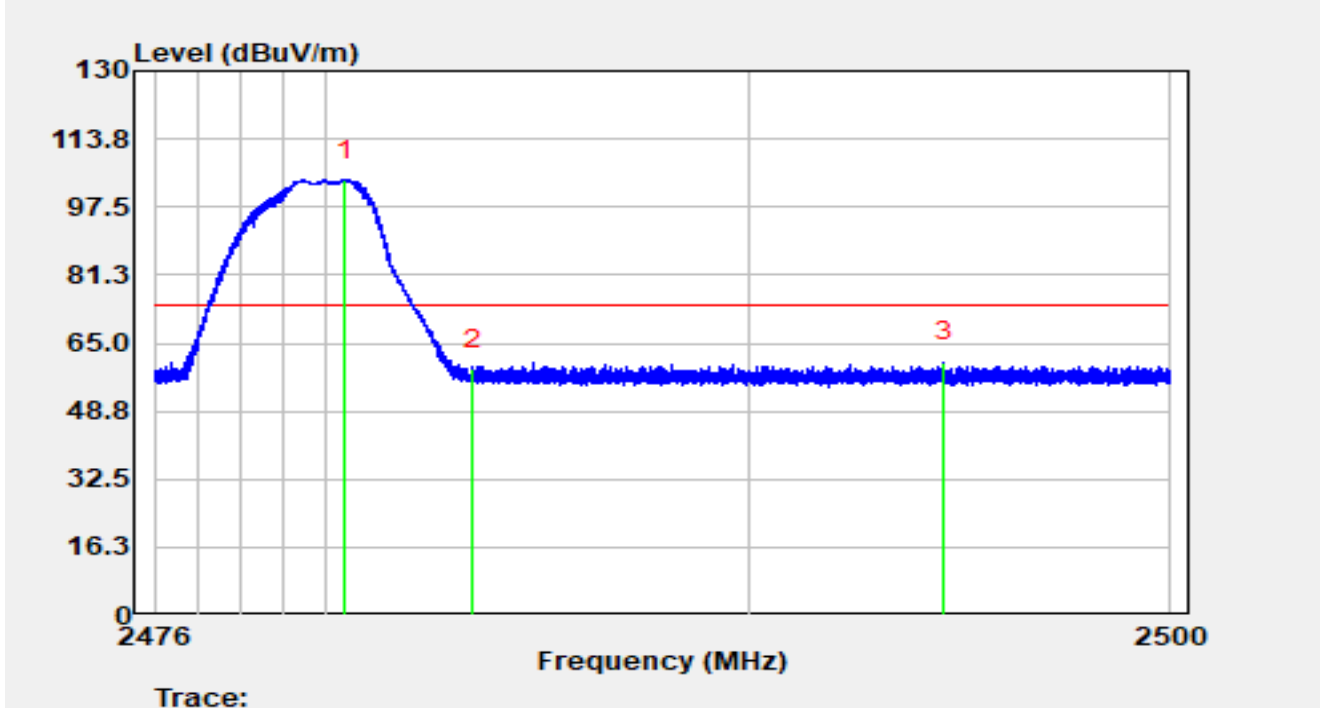


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2480.486	70.64	33.23	103.87	N/A	N/A	Peak
2		2483.500	25.52	33.25	58.78	-15.22	74.00	Peak
3	*	2494.619	27.07	33.32	60.39	-13.61	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

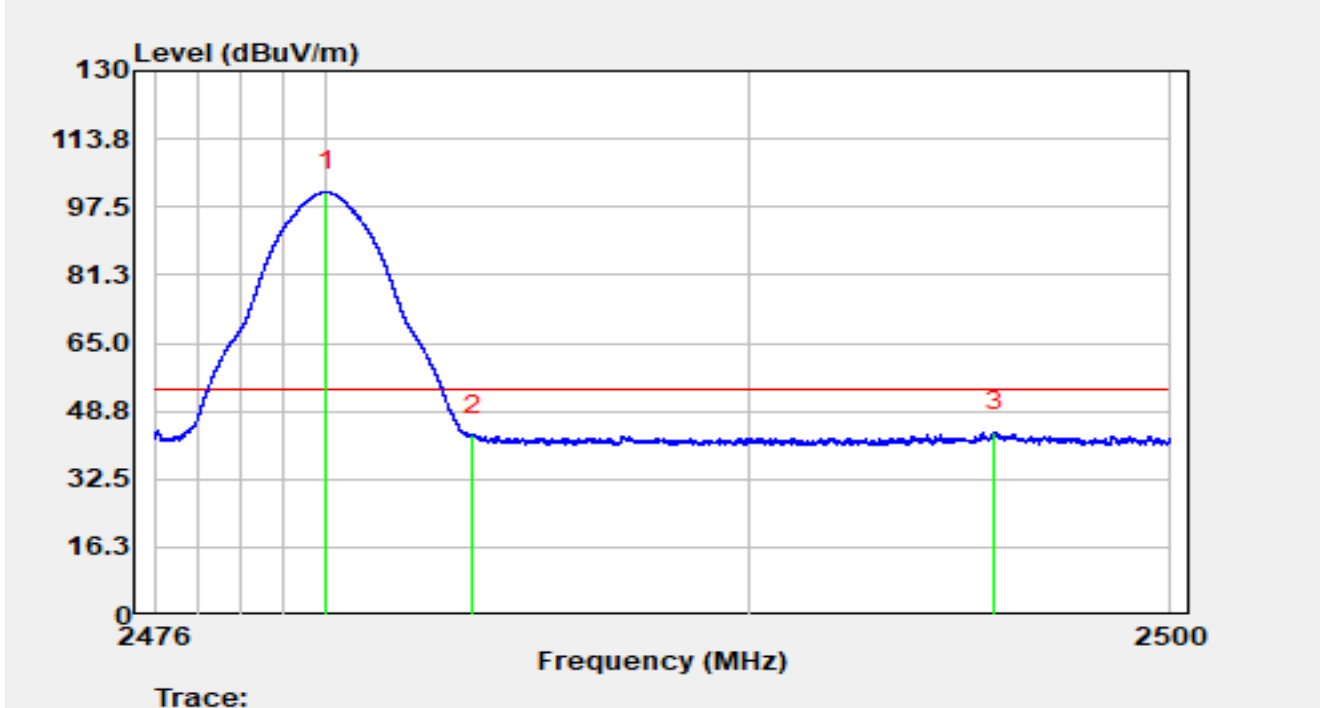


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.039	67.86	33.23	101.09	N/A	N/A	Average
2		2483.500	9.73	33.25	42.98	-11.02	54.00	Average
3	*	2495.812	10.40	33.32	43.72	-10.28	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

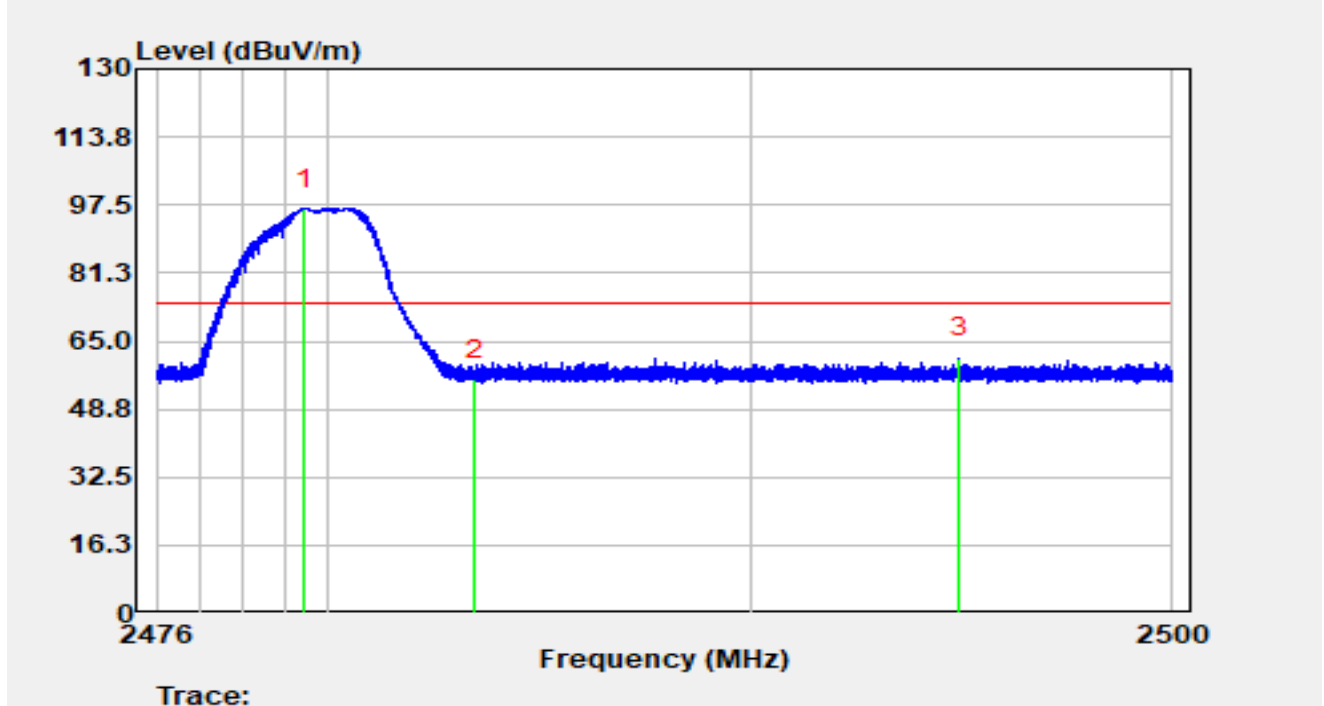


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2479.492	63.36	33.23	96.58	N/A	N/A	Peak
2		2483.500	22.67	33.25	55.92	-18.08	74.00	Peak
3	*	2494.955	27.68	33.32	61.00	-13.00	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-05-28
Temperature	22.9°C	Humidity	64.5%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	BLES100	Test Voltage	By DC 3.3V
Test Mode	Transmit by BLE 2M at 2480MHz		

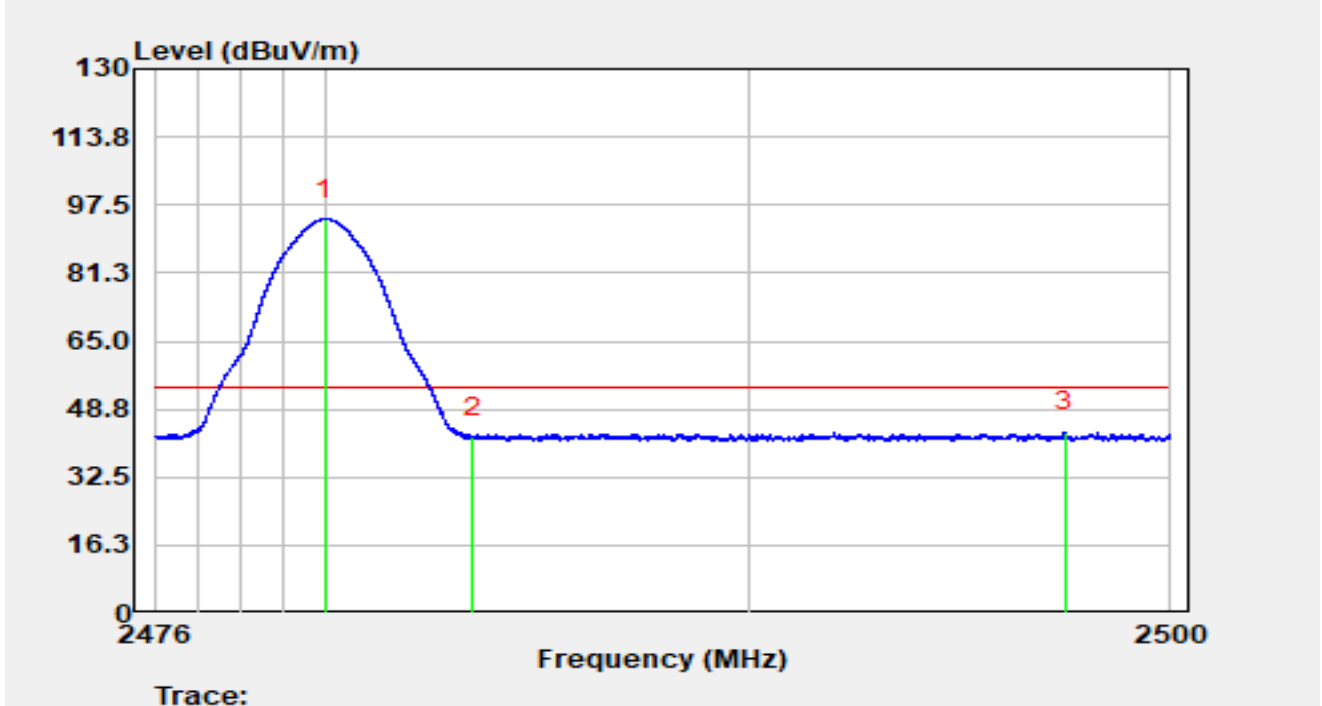

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.025	60.86	33.23	94.09	N/A	N/A	Average
2		2483.500	8.70	33.25	41.95	-12.05	54.00	Average
3	*	2497.514	10.05	33.32	43.37	-10.63	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Appendix B - Test Setup Photograph

Refer to "R25S1020055-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1020055-UE" file.

The End
