

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0dBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P White

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C



Manufacture:Shantou City Chenghai District Yaxuan Toy Factory

Address:West Shunfa Road, Longtian, Guangyi Street, Chenghai District, Shantou City, Guangdong Province, China

Test Equipment & Conditions

1. Network Analyzers :


Agilent 8753D 5071B

2. Communications Test Set:


Agilent E5515C

3. 3D Chamber Test System


Efficiency & Gain

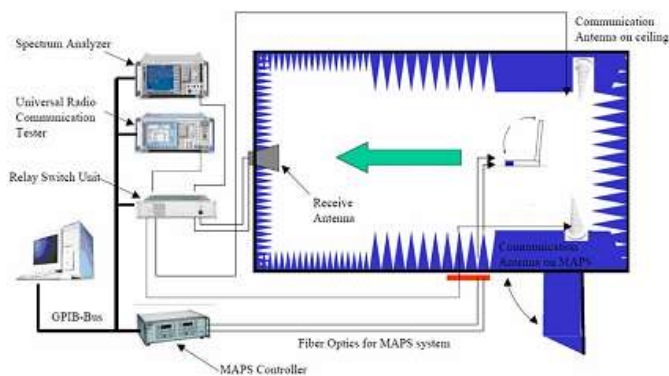

(Testing by 3D anechoic chamber)



Phi axis test



Theta axis test

Efficiency & Gain

2.40	-0.00
2.440	-0.11
2.48	-0.13

Radiation Pattern:

