

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
豪 輝 料 號:	A11-50-6.5UH 单线圈 0.08*105*2P*10TS
FINE P/N:	
產 品 型 號:	Φ50MMX2.5MMX1.0MM PC50 材质
DESC:	
日 期:	2023/7/19
DATE:	
版 本:	A.0.05
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
陈小英	陈小英		

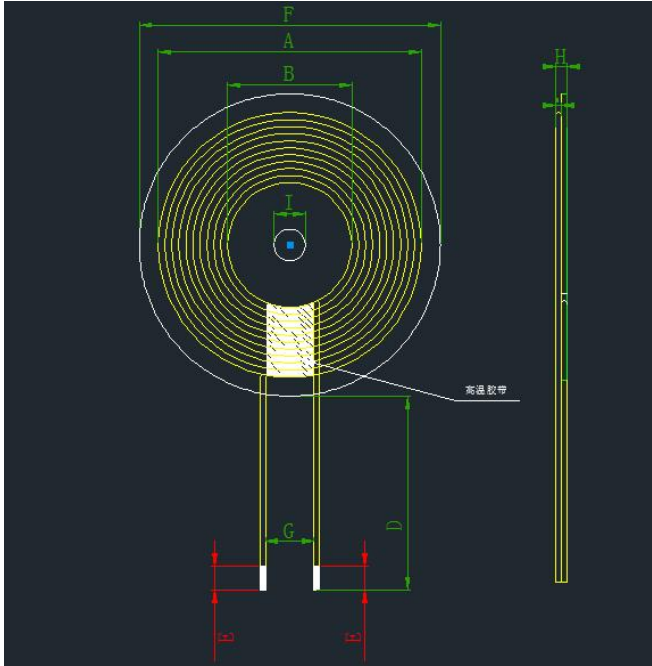
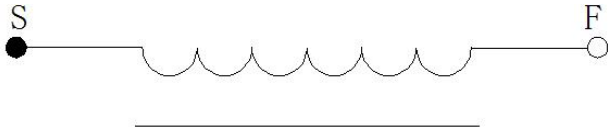
制造商： 东莞市豪辉电子有限公司

Version Change History

[illegible]

SPECIFICATION

產 品 型	Φ17.5x43-6.3uH-0.08x80-15mm	版本	客戶 CUST:	XXX
-------	-----------------------------	----	----------	-----

號: DESC		Rev: A.0	客户料号 CUST P/N:																																					
mm)  二、原理图 SCHEMATIC DIAGRAM:  三、绕线参数 Winding Specification: <table><tr><th>序号 NO.</th><th colspan="2">端子 TERMINAL</th><th>线径 WIRE</th><th>圈数 Turns</th><th>绕线方向 Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>Silk covered wire0.08*108P</td><td>11Ts</td><td>CCW</td></tr></table> 四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20% <table><tr><th>序号 NO.</th><th>项目 ITEM</th><th>端子 TERMINAL</th><th>标准 SPECIFICATION</th><th>测试条件 TEST FREQUENCY</th><th>测试仪器 TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>3.8uH ±20%Single coil</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>6.5uH ±10%Add magnetic disk</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤50mΩ</td><td></td><td>LCZ METER 502B</td></tr></table> 注: 1. Cross the wires; 2. Wrap 8mm (ref) width high temperature adhesive tape 1-2Ts at the wire outlet; 3. Paste the round hard magnetic sheet with grooves on the coil, the magnetic sheet has a size of 50±1mm, an inner hole of 5.3mm, and a thickness of 1.0±0.2mm.			序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	Silk covered wire0.08*108P	11Ts	CCW	序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	3.8uH ±20%Single coil	100KHz/1.0V	LCZ METER 1062B	2	IND.	S-F	6.5uH ±10%Add magnetic disk	100KHz/1.0V	LCZ METER 1062B	3	DCR	S-F	≤50mΩ		LCZ METER 502B	A	43.0±0.5
			序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																
			1	S	F	Silk covered wire0.08*108P	11Ts	CCW																																
			序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																
			1	IND.	S-F	3.8uH ±20%Single coil	100KHz/1.0V	LCZ METER 1062B																																
			2	IND.	S-F	6.5uH ±10%Add magnetic disk	100KHz/1.0V	LCZ METER 1062B																																
			3	DCR	S-F	≤50mΩ		LCZ METER 502B																																
			B	20.0±0.5																																				
			C	1.0 Max																																				
			D	16±2																																				
E	4±2																																							
F	50±1																																							
G	10.0 ref																																							
H	2.5 Max																																							
I	5.3 ref																																							
注:																																								
1. Cross the wires;																																								
2. Wrap 8mm (ref) width high temperature adhesive tape 1-2Ts at the wire outlet;																																								
3. Paste the round hard magnetic sheet with grooves on the coil, the magnetic sheet has a size of 50±1mm, an inner hole of 5.3mm, and a thickness of 1.0±0.2mm.																																								

东莞市豪辉电子有限公司