

Testing Tomorrow's Technology

Application for Certification

Per

Title 47 USC Part 2, Subpart J, Equipment Authorization Procedures, Paragraph 2.907, Certification and Part 15, Subpart C, Intentional Radiators, Paragraph 15.231, Periodic Operation in the band 40.66 MHz to 40.70 MHz and above 70 MHz

And

Innovation, Science, and Economic Development Canada

Certification Per

ICRSS-Gen General Requirements for Radio Apparatus

And

RSS-210 License-Exempt Radio Apparatus: Category I Equipment

For the

PBM Industries, Inc.

Floating Pool and Spa Alarm

Model: PGRM-SB2

UST Project: 25-0109


Issue Date: June 17, 2024

Number of Pages in this report: 19

3505 Francis Circle Alpharetta, GA 30004

PH: 770-740-0717 Fax: 770-740-1508

www.ustech-lab.com

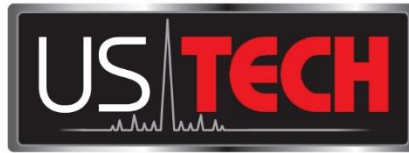

Testing Tomorrow's Technology

I certify that I am authorized to sign for the test facility and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US Tech (Agent Responsible For Test):

By: _____

Name: Alan Ghasiani

Title: President – Consulting Engineer

Date: June 17, 2024



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

MEASUREMENT TECHNICAL REPORT

Company Name:	PBM INDUSTRIES, INC.
Address:	1150 W. JFK Dr. North Vernon, Indiana 47265 USA
Model:	PGRM-SB2
FCC ID:	2BPQ2-PGRMSB2
Date:	June 17, 2024

This report concerns (check one): ☒ Original ☐ Class II Permissive Change

Equipment type: 433.92 MHz UHF transmitter

Technical Information:

Radio Technology:	
Frequency of Operation (MHz):	433.92 MHz
Output Power (AVG):	79.31 dBuV/m @ 3m
Type of Modulation:	OOK
Data/Bit Rate:	3600 baud
Antenna Gain (dB):	2.0 dBi
Software used to program EUT:	Proprietary
EUT firmware:	Test firmware
Power setting:	max level selected

Report prepared by:

US Tech

3505 Francis Circle Alpharetta, GA 30004

PH : 770-740-0717 Fax : 770-740-1508

www.ustech-lab.com

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1.	General Information	6
1.1	Product Description.....	6
1.2	Characterization of Test Sample.....	6
1.3	Related Submittal(s)/Grant(s)	6
2.	Tests and Measurements.....	7
2.1	Configuration of Tested System.....	7
2.2	Test Facility.....	7
2.3	Test Equipment.....	7
2.4	EUT Antenna Description (FCC Sec. 15.203).....	9
2.5	Modifications to Equipment.....	9
2.6	Test Procedure	9
2.7	Compliance to CFR 15.231(a) Transmitter Activation/Deactivation	10
2.8	Field Strength of Fundamental (47 CFR 15.231(b), RSS-210, A.1.2(b)).....	12
2.9	Limits for Operation in the Band above 70 MHz (CFR15.231 (b)).....	13
2.10	Power Line Conducted Emissions and Radiated Spurious Emissions.....	16
	Signature: Name: Ian Charboneau.....	17
2.12	Bandwidth of Fundamental (CFR15.231(c))	18
	Signature: Name: Ian Charboneau.....	18
2.13	Measurement Uncertainty.....	19
2.13.1	Conducted Emissions Measurement Uncertainty.....	19
2.13.2	Radiated Emissions Measurement Uncertainty.....	19
3.	Conclusion	19

List of Figures

<u>Figure</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration.....	10
Figure 2.	Radiated Emissions Below 30 MHz	13
Figure 3.	Radiated Emissions 30 MHz to 1 GHz	14
Figure 4.	Radiated Emissions above 1 GHz.....	14
Figure 5.	Occupied Bandwidth (20 dB BW).....	18

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

List of Tables

<u>Tables</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals	7
Table 2.	Test Instruments.....	8
Table 3.	Antenna Description	9
Table 4.	Intentional Radiated Emissions Measurements.....	15
Table 5.	Conducted Emissions, 150kHz - 30MHz	16
Table 6.	Radiated Emissions, 9 kHz - 30 MHz	17
Table 7.	Radiated Emissions other than Fundamental & Harmonics	17

List of Attachments

FCC Agency Agreement	Confidential Schematics
Application Forms	Confidential Theory of Operation
Confidentiality Request Letter	Confidential Block Diagram
Test Configuration Photographs	User Manual
External Photographs	Sample Label
Internal Photographs	

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

1. General Information

This report is prepared as a means of presenting test data to be used by a Telecom Certification Body in determination of whether this product is permitted for unlicensed dissemination to the general public according to the Innovation, Science, and Economic Development Canada and FCC Rules and Regulations for RF Devices Intentional Radiators.

1.1 Product Description

The Equipment under Test (EUT) is the PBM Industries, Inc. floating pool and spa alarm. The device operates at 433.92 MHz, single channel operation.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on May 28, 2025 in good operating condition.

1.3 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the EUT as an intentional transmitter under Part 15 Subpart C, paragraph 15.231 (this test report)
- b) Verification under Part 15 Subpart B as a digital device for Supplier Declaration of Conformity compliance.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

2. Tests and Measurements

2.1 Configuration of Tested System

The Test sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* to show compliance to CFR 47, Part 15.231.

All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the resolution bandwidth or off throughout the evaluation process. There were no interconnecting cables to manipulate in an attempt to maximize emissions; however, the physical position of the EUT was varied through the three mutually exclusive orthogonal planes in an attempt to maximize the emissions. The worst case position is the position used for final measurements and is gathered in this test report. A block diagram of the tested system is shown in Figure 1.

2.2 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered with the FCC, under site registration number 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1 and is also a NVLAP accredited test lab; lab code 200162-0.

2.3 Test Equipment

Table 1. EUT and Peripherals

MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID:	CABLES P/D
Floating Pool and Spa Alarm/ PBM INDUSTRIES, INC. (EUT)	PGRM-SB2	Engineering Sample	Pending: FCC ID: 2BPQ2-PGRMSB2	None

S= Shielded, U=Unshielded, P= Power line, D= Data line

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

Table 2. Test Instruments

INSTRUMENT	MANUFACTURER	ASSET NUMBER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
Spectrum Analyzer	Agilent	SA113	E4440A	MY45304803	7/21/2025 2 yr.
Loop Antenna	ETS Lindgren	LA102	6502	9810-3246	11/15/2026 2 yr.
Broadband Biconical Antenna	AARONIA AG	BA103	BicoLOG* 20100E	20400600036	9/25/2025
Horn Antenna	A.H. Systems	HA102	SAS-571	605	3/18/2027
LF Pre-Amplifier	Hewlett-Packard	RA111	8447D	2944A07519	3/7/2026
HF Pre-Amplifier	Hewlett-Packard	RA110	8449B	3008A01275	3/10/2026
Radiated Emissions Cable	US Tech Lab	CA 411	N/A	N/A	1/23/2026
Radiated Emissions Cable	Time Microwave Systems	CA 413	LMR400	19424	3/7/2026
Radiated Emissions Cable	BRACKE M	CA 414	BM96603.60	N/A	3/11/2026
Radiated Emissions Cable	Time Microwave Systems	CA 415	LMR400	N/A	4/3/2026

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

2.4 EUT Antenna Description (FCC Sec. 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Table 3. Antenna Description

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB	TYPE OF CONNECTOR
None	PBM INDUSTRIES, INC.	Wire Monopole	N/A	2.0	Permanent

2.5 Modifications to Equipment

No modifications were needed to bring the EUT into compliance with the FCC Part 15.231 limits.

2.6 Test Procedure

The EUT was configured as shown in the following block diagram(s) and photograph(s). The sample was tested per ANSI C63.10:2013. Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz depending on the frequency range of testing, 150 kHz-30 MHz or 30 MHz to 1000 MHz, respectively. All measurements are peak unless stated otherwise. The video filter on the spectrum analyzer was OFF or set to 3x the RBW throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. The EUT was rotated 360 degrees with the turntable to maximize emissions. The physical position of the EUT was varied through the three mutually exclusive orthogonal planes in an attempt to maximize the emissions. The final setup description is found in the test section of this report.

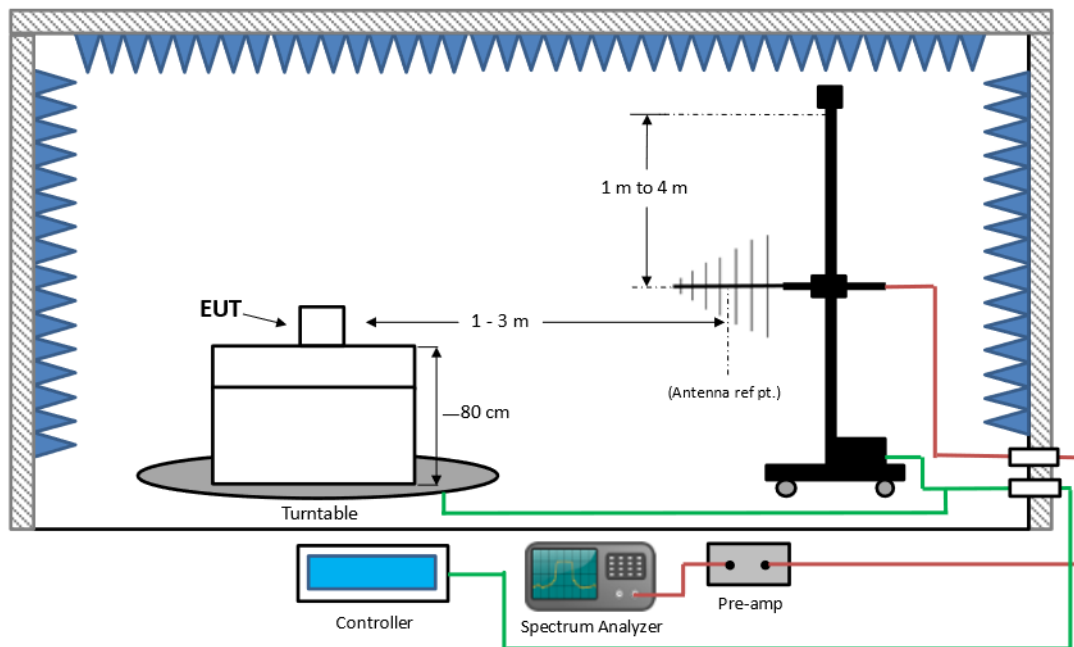


Figure 1. Block Diagram of Test Configuration

2.7 Compliance to CFR 15.231(a) Transmitter Activation/Deactivation

According to CFR 15.231(a) The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz . Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

The transmitter is not a manually operated transmitter.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

The transmitter is not classified as an automatically activated transmitter

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

This does not apply; the transmitter does not have periodic transmissions at pre-determined intervals, and does not have polling or supervision transmissions to determine system integrity.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

This is applicable. The transmitter is only active during an alarm for a potentially life threatening situation.

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

This does not apply; the transmitter is not used for security systems.

2.8 Field Strength of Fundamental (47 CFR 15.231(b), RSS-210, A.1.2(b))

The results of the measurements for peak fundamental emissions are given in Table 4. The EUT emissions measurement was started by setting up the Antenna in the vertical orientation at a distance of 3 meters from the EUT and at a height of 1.0 meters above the ground. The EUT's major axis was set normal to the direction of the measuring antenna.

The Spectrum Analyzer (SA) displays were set to: Channel A free-running, Channel B to Max-Hold. Choose a frequency or frequency range and scan it at a coupled rate. When a signal is detected, raise and lower the antenna to maximize the signal.

When the signal has been maximized, the antenna height is fixed the turn-table is rotated through 360 degrees to further maximize the signal.

When all signals have been maximized for antenna height and direction, the EUT is carefully maneuvered in each of the three mutually exclusive orthogonal planes while observing the same Max-hold/free-running SA display indication. When the EUT position is found that further maximizes the signal, record the antenna height, rotation orientation, EUT orthogonal position and signal strength on the data sheet for that particular frequency.

Next, the measurement antenna is re-oriented to a Horizontal polarization at 1 meter height and the process described above is repeated. All signals within 6 dB of the limit are recorded.

Finally, the collected data is input into the calculation spread sheet. The spread sheet is designed to calculate for the true value that is collected. The spread sheet takes into account the SA reading, the antenna correction factor, cable losses and duty cycle factors. See the data tables herein.

2.9 Limits for Operation in the Band above 70 MHz (CFR15.231 (b))

This limit versus frequency table is as follows (test distance = 3.0 meters):

Fundamental Frequency (MHz)	Limit Fundamental (Average) uV/m	Limit Harmonics and other spurious (Average) uV/m
260 to 470	3750 to 12500 ^{*, 1}	375 to 1250 ^{*, 2}
* Linear Interpolations		

Note: formula 1: $\text{limit}_1 = E = 41.667F - 7083.5$

2: $\text{limit}_2 = E = 4.1667F - 708.35$

E= Electric field strength

F= fundamental frequency in MHz

The frequency spectrum above the fundamental to its 10th harmonic was examined and measured for signals falling into the restricted bands of 15.205. If average emissions measurements are employed, the provisions in 15.35 for averaging pulsed emissions and for limiting peak emissions were applied. Spurious and harmonics signals meet the requirements of the above table or the requirements of 15.209, whichever requirement permits higher field strength.

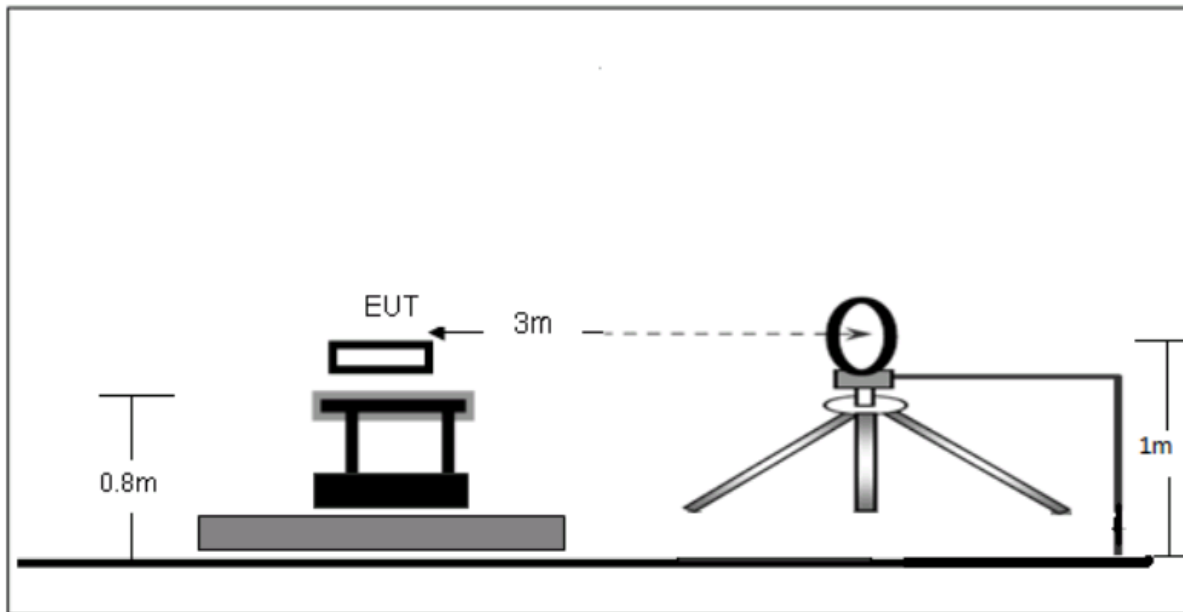


Figure 2. Radiated Emissions Below 30 MHz

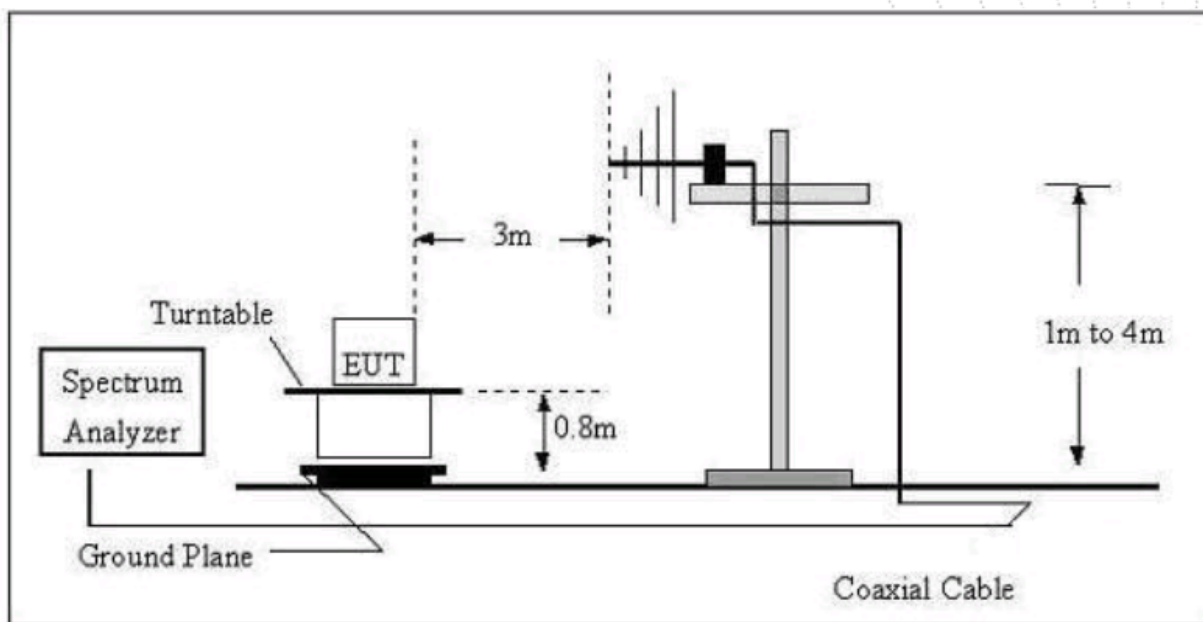


Figure 3. Radiated Emissions 30 MHz to 1 GHz

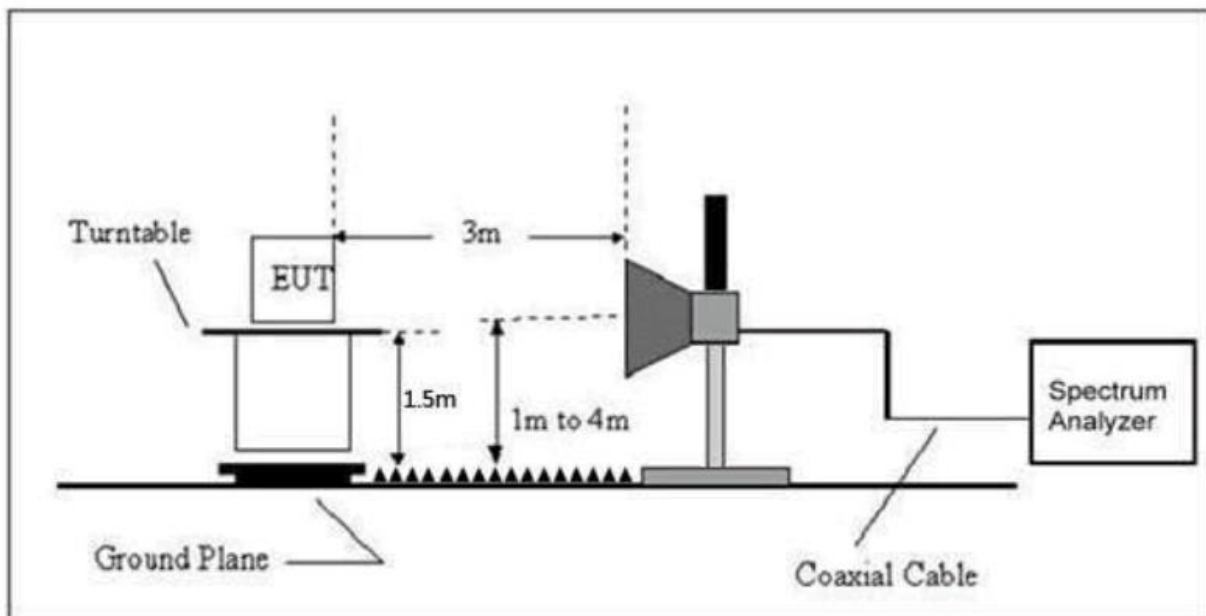


Figure 4. Radiated Emissions above 1 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

Table 4. Intentional Radiated Emissions Measurements

Part 15C, Para 15.231							
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	AVG Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detection Method
433.91*	83.63	1.67	85.30	100.8*	3m./HORZ	5.9	PK
433.91	77.64	1.67	79.31	80.8	3m./HORZ	10.7	AVG
No other emissions found less than 20 dB from the applicable limit.							

1. (*) Peak Detection compared to Peak Limit.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 433.92:

Magnitude of Measured Frequency	83.63	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	1.67	dB/m
Corrected Result	85.30	dBuV/m

Test Date: June 4, 2024

Tested By

Signature: 

Name: Ian Charboneau

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

2.10 Power Line Conducted Emissions and Radiated Spurious Emissions (CFR 15.207, 15.209)

The EUT was placed in a state representative of how the device will function under normal operation. The power line conducted emissions were measured over the frequency range of 150 kHz to 30 MHz. Measurements were recorded from the LISN RF port. The radiated spurious emissions were measured over the frequency range of 9 KHz to 30MHz and 30 MHz to the 10th harmonic of the fundamental frequency of the intentional transmitter. The test results are shown below.

Table 5. Conducted Emissions, 150kHz - 30MHz

150kHz to 30MHz, 15.207 limits							
Frequency (MHz)	Test Data (dBuV)	AF+CA- AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
Not Applicable. EUT is battery operated and does not connect to AC mains.							

Sample Calculation: N/A

Test Date: November 1, 2024

Tested By

Signature: 

Name: Ian Charboneau

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

Table 6. Radiated Emissions, 9 kHz - 30 MHz

9kHz to 30MHz, 15.209 limits							
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions seen were more than 20 dB below the applicable limit.							

Sample Calculation: N/A

Test Date: November 1, 2024
Tested By

Signature: Ian Charboneau

Name: Ian Charboneau

Table 7. Radiated Emissions other than Fundamental & Harmonics

Above 30MHz, 15.209 Limits							
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
No emissions seen were above 20 dB below the applicable limit.							

Test Date: June 4, 2024

Tested By

Signature: Ian Charboneau

Name: Ian Charboneau

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

2.12 Bandwidth of Fundamental (CFR15.231(c))

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined by those frequencies that are at least 20 dB down on either side of the center frequency of the pulse.

$$\text{Bandwidth of Fundamental} = 0.0025 \times 433.92 \text{ MHz} = 1.085 \text{ MHz}$$

The measured bandwidth is 19.314 kHz, well within the limit. See the figure below.



Figure 5. Occupied Bandwidth (20 dB BW)

Test Date: June 9, 2025

Tested By

Signature: Ian Charboneau

Name: Ian Charboneau

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15
2BPQ2-PGRMSB2
25-0109
June 17, 2025
PBM Industries, Inc.
PGRM-SB2

2.13 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2: 2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.13.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.85 dB.

2.13.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Broadband Biconical Antenna (30 MHz to 1000 MHz) is ± 5.01 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.08 dB.

3. Conclusion

The EUT meets the Technical Requirements of CFR 47 of the US Code, Part 15 Subpart C, Intentional Radiators, per paragraph 15.209, 15.231 for operation as an Intentional Radiator Device when tested and configured as presented in this test report.

END REPORT