

Test Plot 1#: WLAN 802.11b Low Head Right Cheek**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.019

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.727$ S/m; $\epsilon_r = 39.967$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.2, 7.2, 7.2) @2412 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.475 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.846 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.3%

Maximum value of SAR (measured) = 0.401 W/kg

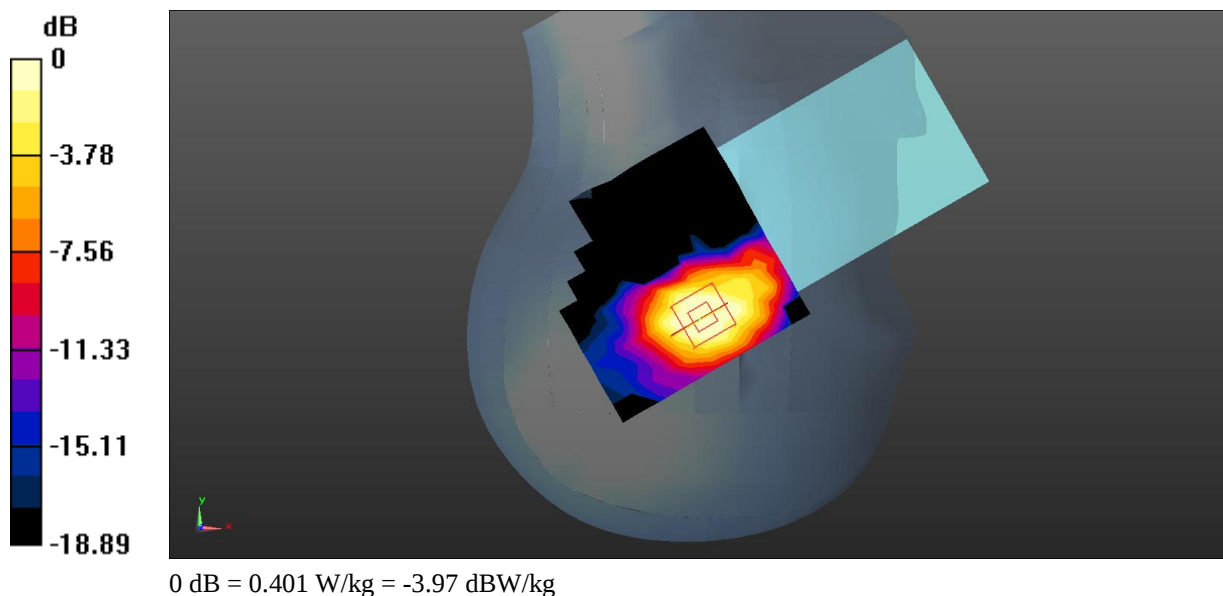

Test Plot 2#: WLAN 802.11b Low Body Back**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.019
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.727$ S/m; $\epsilon_r = 39.967$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.2, 7.2, 7.2) @2412 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.401 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.57 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 0.364 W/kg

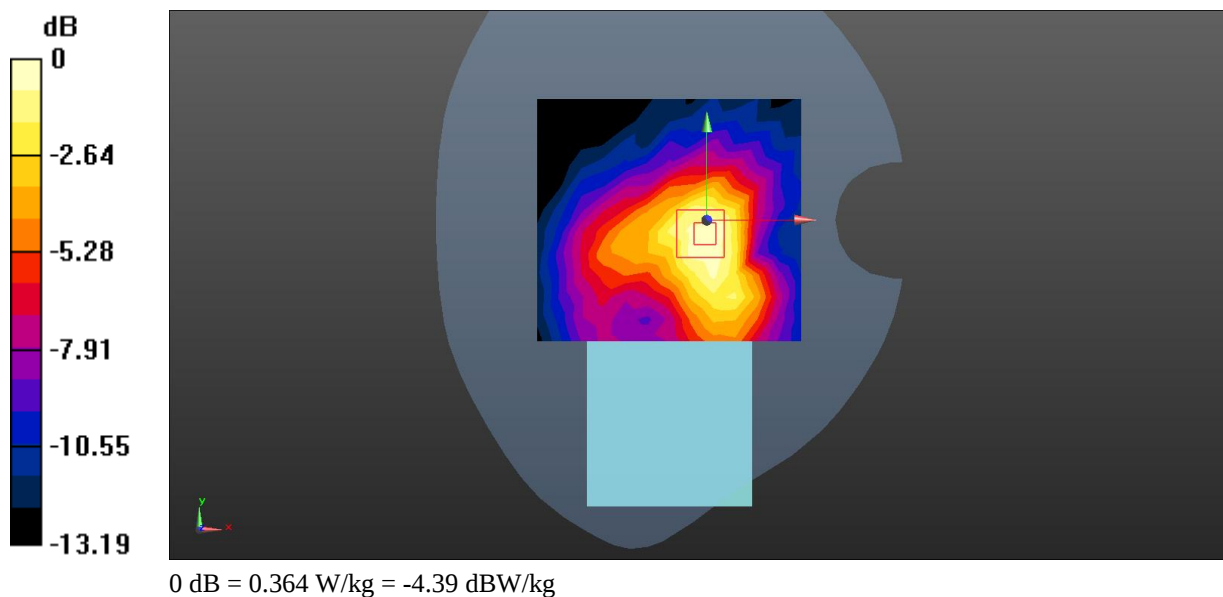

Test Plot 3#: WLAN 5.2G 802.11a Mid Head Right Tilt**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.108

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.632$ S/m; $\epsilon_r = 36.287$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.36, 5.36, 5.36) @5200 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.618 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.711 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 1.05 W/kg

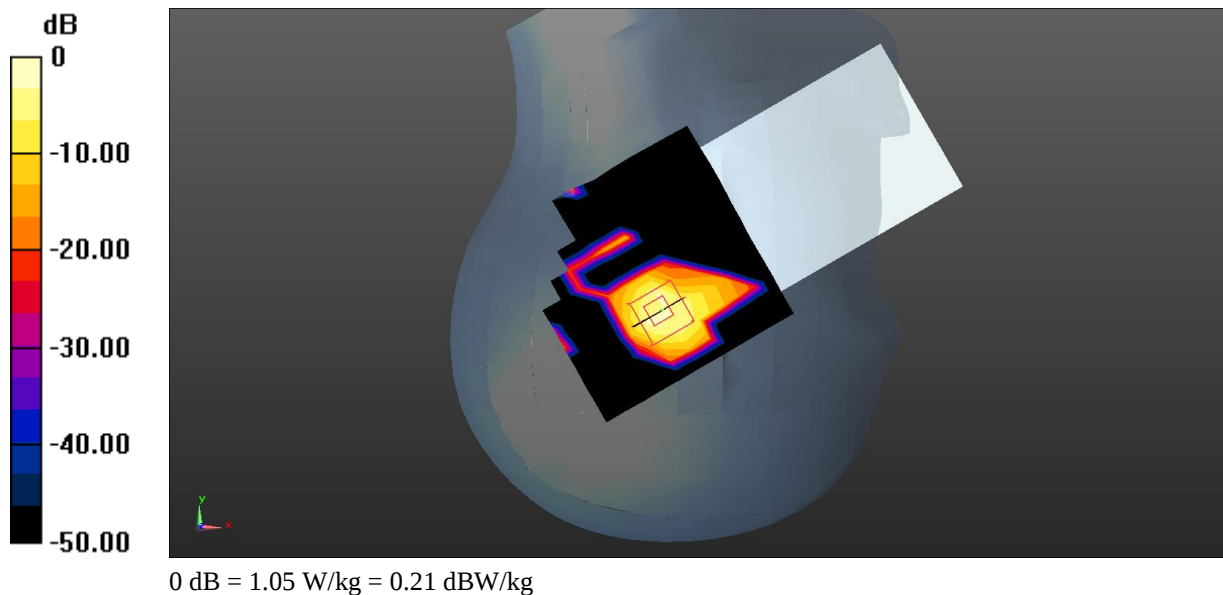

Test Plot 4#: WLAN 5.2G 802.11a Mid Body Top**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.108
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.632$ S/m; $\epsilon_r = 36.287$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.36, 5.36, 5.36) @5200 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.575 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.030 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 0.682 W/kg

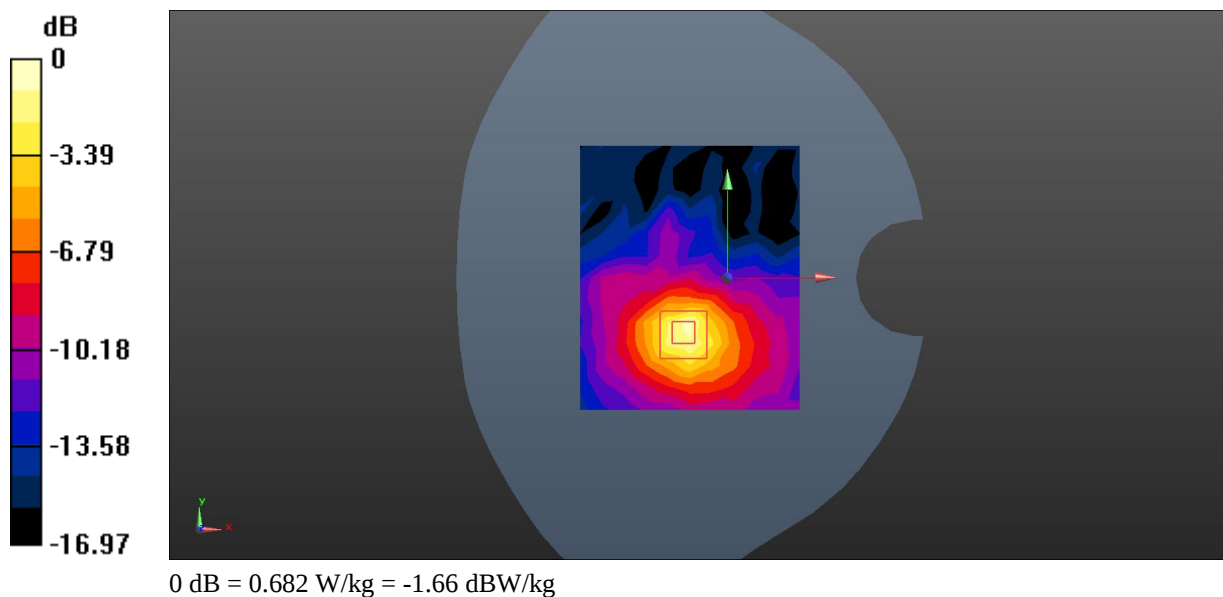

Test Plot 5#: WLAN 5.3G 802.11a Mid Head Right Tilt**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 5.3G WiFi (0); Frequency: 5300 MHz; Duty Cycle: 1:1.113
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.827$ S/m; $\epsilon_r = 36.762$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.36, 5.36, 5.36) @5300 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.381 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.89 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.521 W/kg

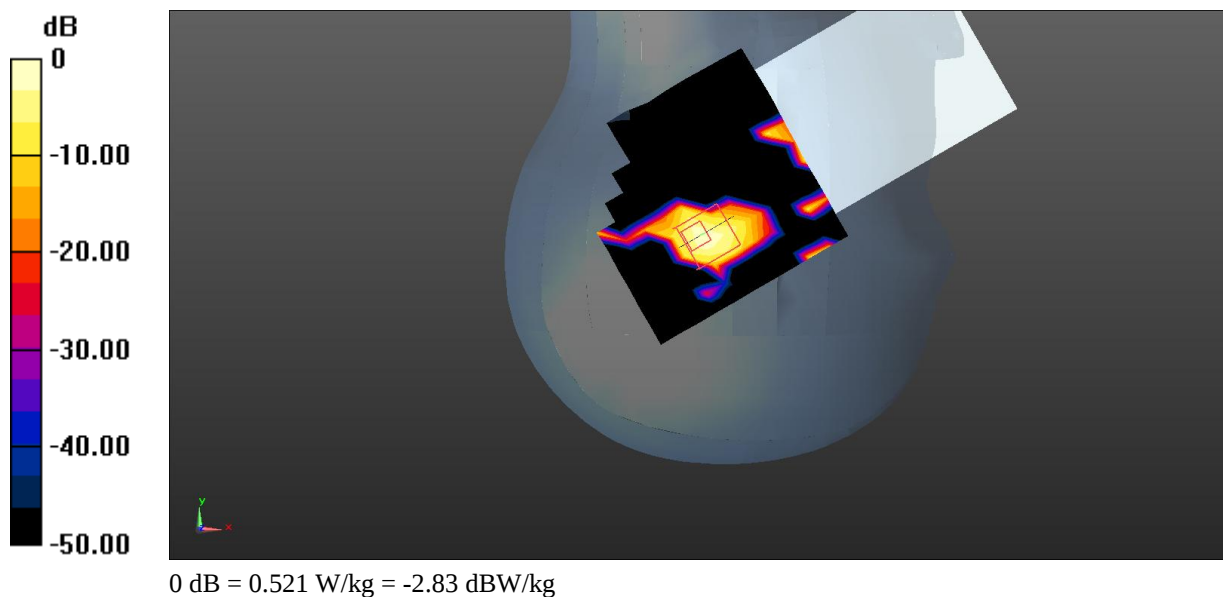

Test Plot 6#: WLAN 5.3G 802.11a Mid Body Top**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 5.3G WiFi (0); Frequency: 5300 MHz; Duty Cycle: 1:1.113
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.827$ S/m; $\epsilon_r = 36.762$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.36, 5.36, 5.36) @5300 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.433 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.465 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.496 W/kg

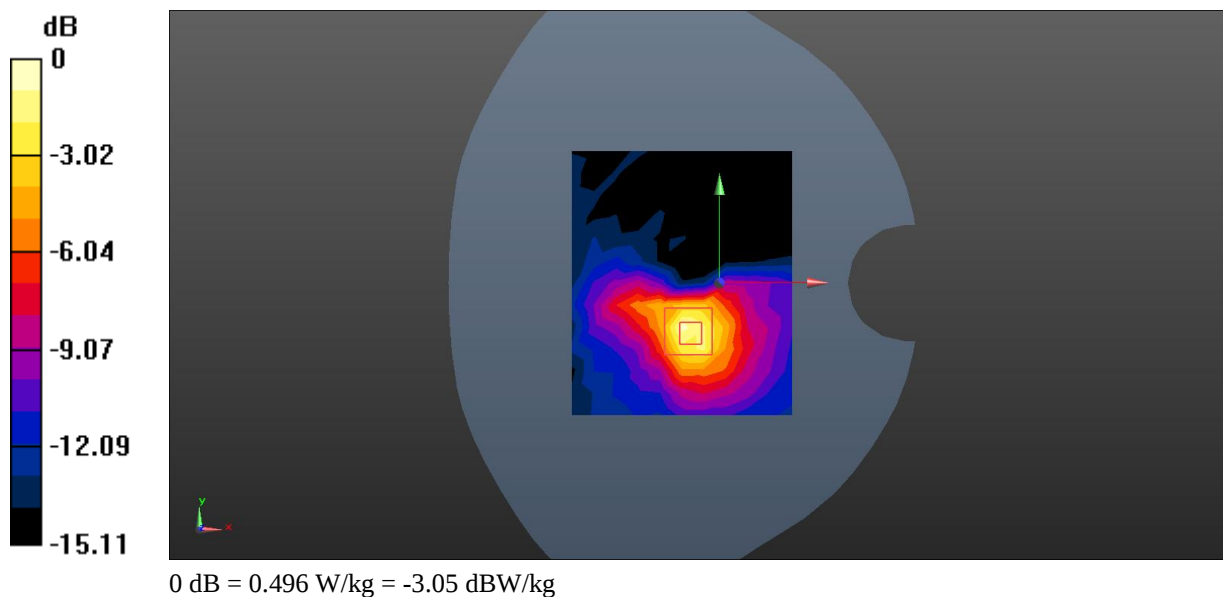

Test Plot 7#: WLAN 5.8G 802.11a Mid Head Right Tilt**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**


Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.107

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.32 \text{ S/m}$; $\epsilon_r = 36.248$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.87, 4.87, 4.87) @5785 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

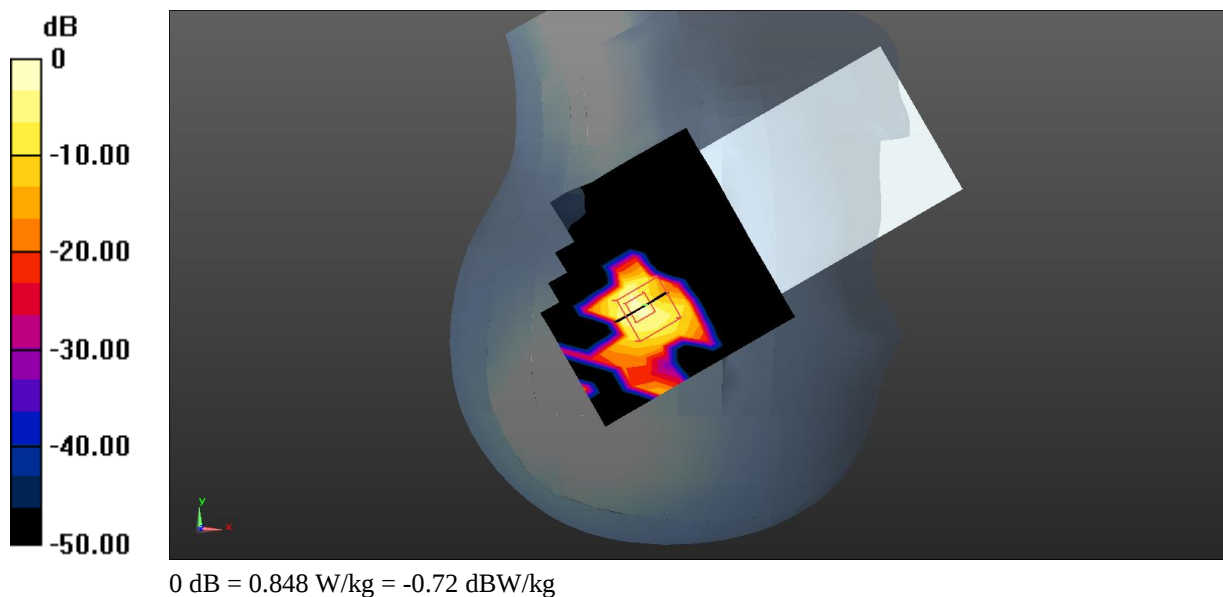Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.632 W/kg **Zoom Scan (8x8x12) /Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0 V/m ; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.33 W/kg **SAR(1 g) = 0.346 W/kg ; SAR(10 g) = 0.075 W/kg** Smallest distance from peaks to all points 3 dB below = 4.1 mm Ratio of SAR at M2 to SAR at M1 = 70.6% Maximum value of SAR (measured) = 0.848 W/kg 

Test Plot 8#: WLAN 5.8G 802.11a Mid Body Top**DUT: LKTABLET3; Type: Look3; Serial: 30VK-1**

Communication System: 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.107
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.32 \text{ S/m}$; $\epsilon_r = 36.248$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(4.87, 4.87, 4.87) @5785 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.464 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.110 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.524 W/kg

