



FCC TEST REPORT

FCC ID: 2BPT9-WO1

Product	:	Smartphone
Model Name	:	WO1
Brand	:	N/A
Report No.	:	PTC25051316801E-FC06

Prepared for

Shenzhen Xiaoxing Times Technology Co., Ltd.

19A, Block C, Electronic Technology Building, No. 2070 Middle Shennan Road, Futian District, Shenzhen, Guangdong Province, China

Prepared by

Precise Testing & Certification Co., Ltd

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China



1 Test Result Certification

Applicant's name : Shenzhen Xiaoxing Times Technology Co., Ltd.
Address : 19A, Block C, Electronic Technology Building, No. 2070 Middle Shennan Road, Futian District, Shenzhen, Guangdong Province, China
Manufacturer's name : Shenzhen Yishunxing Technology Co. , Ltd
Address : 4/F, Building A2, Tangwei Fuyuan Industrial Zone, Tangwei Community Fuyong Street, Xixiang, Bao'an District, Shenzhen
Product name : Smartphone
Model name : WO1
Standards : 47 CFR FCC Part 2, 47 CFR FCC Part 22 Subpart H, 47 CFR FCC Part 24 Subpart E, 47 CFR FCC Part 27, ANSI C63.26-2015, ANSI TIA-603-E-2016, KDB 971168 D01 Power Meas License Digital Systems v03r01
Test Date : May. 25, 2025 to Jun. 9, 2025
Date of Issue : Jun. 9, 2025
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'JW'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



TABLE OF CONTENTS

1	Test Result Certification	2
1.	General Description Of Eut	4
2.	Facilities And Accreditations.....	6
2.1.	TEST FACILITY	6
2.2.	DESCRIPTION OF TEST CHANNELS AND TEST MODES	7
2.3.	EQUIPMENT MODIFICATIONS	8
3.	Summary Of Test Requirements And Results.....	9
4.	Measurement Instruments	11
5.	Effective (Isotropic) Radiated Power and Conducted Output Power	13
5.1.	CONDUCTED OUTPUT POWER	13
5.2.	EFFECTIVE (ISOTROPIC) RADIATED POWER	13
6.	Spurious Emission (Conducted and Radiated)	17
6.1.	MEASUREMENT RESULT (PRE-MEASUREMENT).....	17
8.	Occupied Bandwidth and Emission Bandwidth	33
9.	Band Edge.....	38
10.	Frequency Stability.....	42
10.1.	MEASUREMENT RESULT (WORST).....	43
11.	Peak-to-Average Ratio (PAR).....	45
12	APPENDIX I -- TEST SETUP PHOTOGRAPH	50
13	APPENDIX II -- EUT PHOTOGRAPH	51



1. General Description Of Eut

Equipment Type:	Smartphone	
Model Name:	WO1	
Model Description:	WO1 comes in two colors: black and blue	
Hardware version:	V1.1	
Software version:	v739t_v1.1_hdplus1560_yishunxing_A1_g4_w12458_f123457812131720252628AB 6671T3438394041_6GB_256GB_S_user_20250509_00_07	
Frequency Bands:	WCDMA: <input checked="" type="checkbox"/> WCDMA Band II <input checked="" type="checkbox"/> WCDMA Band IV <input checked="" type="checkbox"/> WCDMA Band V	
Operation Frequency Range:	WCDMA Band II :	1852.4 MHz-1907.6 MHz
	WCDMA Band IV:	1712.4 MHz-1752.6 MHz
	WCDMA Band V:	826.4 MHz-846.6 MHz
Antenna Type:	PIFA Antenna	
Antenna gain:	WCDMA Band II : 1.11dBi WCDMA Band IV : 1.02dBi WCDMA Band V : 0.65dBi	
Type of Modulation:	<input checked="" type="checkbox"/> RMC(QPSK) <input checked="" type="checkbox"/> HSUPA(QPSK) <input checked="" type="checkbox"/> HSDPA(QPSK,16QAM)	
Power supply:	Input: DC9V2.5A 22W Max Li-ion Battery : H726791P Rated Voltage: 3.87V Capacity:8000mAh	
Max power:	See Table 2.1	
Extreme Vol. Limits:	DC 3.5V to 4.35V (Normal: DC 3.87V)	
Test sample No.	PTC25051316801E-1/2, PTC25051316801E-2/2.	

Table 2.1 The Basic Technical Specification for Working BAND(S).

operation band(s)	Power Class	Mod.	Max Conducted Power(dBm)
WCDMA Band II	Class 3	QPSK	22.70
WCDMA Band IV	Class 3	QPSK	22.07
WCDMA Band V	Class 3	QPSK	23.46



Report No.: PTC25051316801E-FC06

2. Facilities And Accreditations

2.1. Test Facility

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

2.2. Description Of Test Channels And Test Modes

Test channels:

WCDMA BAND II			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	9262	1852.4
Mid Range	5	9400	1880
High Range	5	9538	1907.6

WCDMA BAND IV			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	1312	1712.4
Mid Range	5	1413	1732.6
High Range	5	1513	1752.6

WCDMA BAND V			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	4132	826.4
Mid Range	5	4182	836.4
High Range	5	4233	846.6

Note 1: The worst condition was recorded in the test report if no other modes test data.



Report No.: PTC25051316801E-FC06

2.3. Equipment Modifications

Not available for this EUT intended for grant.

3. Summary Of Test Requirements And Results

WCDMA Band II:

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	§2.1046, §24.232(c)	EIRP ≤ 2W(33dBm)	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges	§2.1051, §24.238	≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	FCC: ≤-13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	-13dBm/1MHz	Pass
Frequency Stability	§2.1055, §24.235	the fundamental emission stays within the authorized frequency block. ≤±2.5ppm.	Pass
Peak to average ratio	§2.1046 §24.232	≤13dB	Pass

WCDMA Band IV:

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	§2.1046, §2.913(a)	EIRP ≤ 1W(30dBm)	Pass
Occupied Bandwidth	§2.1049	OBW: No limit.	Pass
Emission Bandwidth	§2.1049	EBW: No limit.	Pass
Band Edges Compliance	§2.1051 §27.53(h)	≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	FCC: ≤-13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤-13 dBm/100 kHz.	Pass
Frequency Stability	§2.1055, §27.54	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass
Peak to average ratio	§2.1046 §27.50(d)	≤13dB	Pass

**WCDMA Band V:**

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	§2.1046, §2.913(a)	EIRP \leq 7W(38.5dBm)	Pass
Occupied Bandwidth	§2.1049	OBW: No limit.	Pass
Emission Bandwidth	22.917(b)	EBW: No limit.	Pass
Band Edges Compliance	§2.1051 §22.917(a)	\leq -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: \leq -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: \leq -13 dBm/100 kHz.	Pass
Frequency Stability	§2.1055, §22.355	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass

4. Measurement Instruments

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 15, 2024	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 15, 2024	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 15, 2024	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 15, 2024	1 Year
Signal Analyzer 40GHz	Rohde&Schwarz	FSV40	101456	10Hz-40GHz	Aug. 15, 2024	1 Year
Wireless Communication Tester	Rohde&Schwarz	CMW500	134930	/	Aug. 15, 2024	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI7	101671	9KHz-7GHz	Aug. 15, 2024	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519B	192	9 KHz -30MHz	Aug. 15, 2024	1 Year
Bilog Antenna	SCHWARZBEC K	VULB9160	9160-3355	25MHz-2GHz	Sep. 10, 2024	1 Year
Preamplifier (low frequency)	SCHWARZBEC K	BBV 9475	9745-0013	1MHz-1GHz	Mar. 23,2025	1 Year
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 15, 2024	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 15, 2024	1 Year
Horn Antenna	SCHWARZBEC K	9120D	9120D-1246	1GHz-18GHz	Aug. 15, 2024	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 15, 2024	1 Year
Horn Antenna	SCHWARZBEC K	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 19, 2024	1 Year



Amplifier	SCHWARZBEC K	BBV 9721	9721-205	18GHz-40GHz	Jul. 19, 2024	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 15, 2024	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 15, 2024	1 Year
MXG Vector Signal Generator	Agilent	N5182A	MY49060455	-	Aug. 15, 2024	1 Year
ESG Series Analog signal generator	Agilent	E4421B	GB40051240	-	Aug. 15, 2024	1 Year



5. Effective (Isotropic) Radiated Power and Conducted Output Power

5.1. Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

5.2. Effective (Isotropic) Radiated Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015).

Calculate power in dBm by the following formula:

$$\text{ERP (dBm)} = \text{Conducted Power (dBm)} + \text{antenna gain (dBd)}$$

$$\text{EIRP(dBm)} = \text{Conducted Power (dBm)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Test result:
WCDMA Band 2; WCDMA Band 4; WCDMA Band 5 RMC:

Band	Channel	Conducted Power(dBm)	ERP/EIRP(dBm)	Limit(dBm)	Verdict
Band2	9262	22.62	23.73	33	PASS
Band2	9400	22.25	23.36	33	PASS
Band2	9538	22.00	23.11	33	PASS
Band4	1312	23.15	24.17	30	PASS
Band4	1413	23.09	24.11	30	PASS
Band4	1513	23.18	24.20	30	PASS
Band5	4132	23.10	21.60	38.5	PASS
Band5	4182	22.76	21.26	38.5	PASS
Band5	4233	22.79	21.29	38.5	PASS

WCDMA Band 2; WCDMA Band 4; WCDMA Band 5 HSDPA :

Band	Channel	SubTest	Power(dBm)	ERP/EIRP(dBm)	Limit(dBm)	Verdict
Band2	9262	1	21.69	22.80	33	PASS
Band2	9262	2	21.29	22.40	33	PASS
Band2	9262	3	21.00	22.11	33	PASS
Band2	9262	4	21.16	22.27	33	PASS
Band2	9400	1	20.77	21.88	33	PASS
Band2	9400	2	20.52	21.63	33	PASS
Band2	9400	3	21.07	22.18	33	PASS
Band2	9400	4	20.76	21.87	33	PASS
Band2	9538	1	20.50	21.61	33	PASS
Band2	9538	2	21.10	22.21	33	PASS
Band2	9538	3	20.74	21.85	33	PASS
Band2	9538	4	20.40	21.51	33	PASS
Band4	1312	1	22.17	23.19	30	PASS
Band4	1312	2	22.06	23.08	30	PASS
Band4	1312	3	22.18	23.20	30	PASS
Band4	1312	4	21.70	22.72	30	PASS
Band4	1413	1	21.62	22.64	30	PASS
Band4	1413	2	21.74	22.76	30	PASS
Band4	1413	3	21.75	22.77	30	PASS
Band4	1413	4	21.61	22.63	30	PASS
Band4	1513	1	21.68	22.70	30	PASS
Band4	1513	2	21.65	22.67	30	PASS
Band4	1513	3	21.54	22.56	30	PASS
Band4	1513	4	21.70	22.72	30	PASS
Band5	4132	1	22.14	20.64	38.5	PASS
Band5	4132	2	21.77	20.27	38.5	PASS
Band5	4132	3	21.78	20.28	38.5	PASS
Band5	4132	4	21.57	20.07	38.5	PASS
Band5	4182	1	21.31	19.81	38.5	PASS
Band5	4182	2	21.3	19.80	38.5	PASS
Band5	4182	3	21.63	20.13	38.5	PASS
Band5	4182	4	21.32	19.82	38.5	PASS
Band5	4233	1	21.28	19.78	38.5	PASS
Band5	4233	2	21.6	20.10	38.5	PASS
Band5	4233	3	21.28	19.78	38.5	PASS
Band5	4233	4	21.34	19.84	38.5	PASS



WCDMA Band 2 and Band 5 HSUPA :

Band	Channel	SubTest	Power(dBm)	ERP/EIRP(dBm)	Limit(dBm)	Verdict
Band2	9262	1	20.07	21.18	33	PASS
Band2	9262	2	19.34	20.45	33	PASS
Band2	9262	3	19.06	20.17	33	PASS
Band2	9262	4	19.70	20.81	33	PASS
Band2	9262	5	19.32	20.43	33	PASS
Band2	9400	1	19.01	20.12	33	PASS
Band2	9400	2	20.67	21.78	33	PASS
Band2	9400	3	20.28	21.39	33	PASS
Band2	9400	4	19.97	21.08	33	PASS
Band2	9400	5	19.21	20.32	33	PASS
Band2	9538	1	18.85	19.96	33	PASS
Band2	9538	2	18.55	19.66	33	PASS
Band2	9538	3	20.58	21.69	33	PASS
Band2	9538	4	20.26	21.37	33	PASS
Band2	9538	5	19.91	21.02	33	PASS
Band4	1312	1	20.25	21.27	30	PASS
Band4	1312	2	20.12	21.14	30	PASS
Band4	1312	3	20.28	21.30	30	PASS
Band4	1312	4	20.18	21.20	30	PASS
Band4	1312	5	20.11	21.13	30	PASS
Band4	1413	1	20.28	21.30	30	PASS
Band4	1413	2	21.17	22.19	30	PASS
Band4	1413	3	21.05	22.07	30	PASS
Band4	1413	4	21.23	22.25	30	PASS
Band4	1413	5	19.70	20.72	30	PASS
Band4	1513	1	19.61	20.63	30	PASS
Band4	1513	2	19.75	20.77	30	PASS
Band4	1513	3	21.13	22.15	30	PASS



Band4	1513	4	21.07	22.09	30	PASS
Band4	1513	5	21.16	22.18	30	PASS
Band5	4132	1	20.07	18.57	38.5	PASS
Band5	4132	2	19.81	18.31	38.5	PASS
Band5	4132	3	19.82	18.32	38.5	PASS
Band5	4132	4	20.09	18.59	38.5	PASS
Band5	4132	5	19.81	18.31	38.5	PASS
Band5	4182	1	19.82	18.32	38.5	PASS
Band5	4182	2	21.14	19.64	38.5	PASS
Band5	4182	3	20.82	19.32	38.5	PASS
Band5	4182	4	20.81	19.31	38.5	PASS
Band5	4182	5	19.65	18.15	38.5	PASS
Band5	4233	1	19.34	17.84	38.5	PASS
Band5	4233	2	19.34	17.84	38.5	PASS
Band5	4233	3	21.14	19.64	38.5	PASS
Band5	4233	4	20.77	19.27	38.5	PASS
Band5	4233	5	20.80	19.30	38.5	PASS

Note:

For getting the EIRP (Efficient Isotropic Radiated Power), the following formula The following formula is used for calculation:

1.ERP [dBm] = Conducted Power [dBm] + Gain [dBd]

2.EIRP [dBm] = Conducted Power [dBm] + Gain [dBi]



6. Spurious Emission (Conducted and Radiated)

6.1. Measurement Result (Pre-measurement)

WCDMA BAND II:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	9262	1852.4	Pass
Middle Range	5	9400	1880	Pass
High Range	5	9538	1907.6	Pass

WCDMA BAND IV:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	1312	1712.4	Pass
Middle Range	5	1413	1732.6	Pass
High Range	5	1513	1752.6	Pass

WCDMA BAND V:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	4132	826.4	Pass
Middle Range	5	4182	836.4	Pass
High Range	5	4233	846.6	Pass

Test Plot(s)

Conducted method

Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.

Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.

Test procedure:

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

Conducted Emission Test-Up:

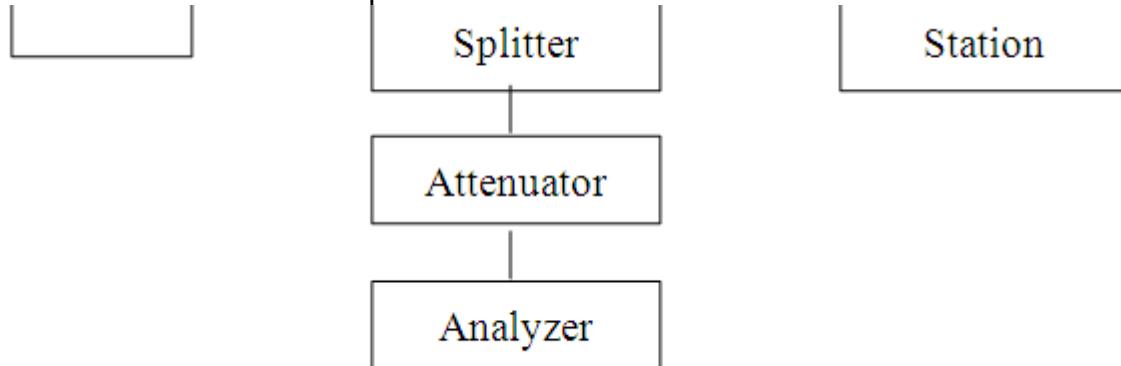



**Test Result:**


Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.009~0.15MHz	0.06	-48.37	-43	PASS
Band2	9262	0.15~30MHz	0.15	-51.11	-33	PASS
Band2	9262	30~1000MHz	909.31	-51.98	-13	PASS
Band2	9262	1000~20000MHz	17010.35	-37.06	-13	PASS
Band2	9400	0.009~0.15MHz	0.04	-51.43	-43	PASS
Band2	9400	0.15~30MHz	0.15	-53.27	-33	PASS
Band2	9400	30~1000MHz	913.19	-51.99	-13	PASS
Band2	9400	1000~20000MHz	16982.33	-37.37	-13	PASS
Band2	9538	0.009~0.15MHz	0.06	-49.5	-43	PASS
Band2	9538	0.15~30MHz	0.15	-51.47	-33	PASS
Band2	9538	30~1000MHz	787.57	-51.9	-13	PASS
Band2	9538	1000~20000MHz	17072.1	-37.16	-13	PASS
Band4	1312	0.009~0.15MHz	0.1	-51.15	-43	PASS
Band4	1312	0.15~30MHz	0.15	-53.57	-33	PASS
Band4	1312	30~1000MHz	932.1	-52	-13	PASS
Band4	1312	1000~20000MHz	16997.05	-37.33	-13	PASS
Band4	1413	0.009~0.15MHz	0.09	-52.26	-43	PASS
Band4	1413	0.15~30MHz	0.15	-50.41	-33	PASS
Band4	1413	30~1000MHz	902.03	-51.95	-13	PASS
Band4	1413	1000~20000MHz	17092.53	-37.18	-13	PASS
Band4	1513	0.009~0.15MHz	0.08	-51.34	-43	PASS
Band4	1513	0.15~30MHz	0.15	-52.67	-33	PASS
Band4	1513	30~1000MHz	924.34	-52.1	-13	PASS
Band4	1513	1000~20000MHz	16940.05	-37.29	-13	PASS
Band5	4132	0.009~0.15MHz	0.05	-51.05	-33	PASS
Band5	4132	0.15~30MHz	0.15	-53.59	-23	PASS
Band5	4132	30~1000MHz	929.19	-60.66	-13	PASS
Band5	4132	1000~10000MHz	3044.8	-42.94	-13	PASS
Band5	4182	0.009~0.15MHz	0.06	-51.77	-33	PASS
Band5	4182	0.15~30MHz	0.15	-50.98	-23	PASS
Band5	4182	30~1000MHz	995.15	-61.34	-13	PASS
Band5	4182	1000~10000MHz	2678.05	-42.87	-13	PASS
Band5	4233	0.009~0.15MHz	0.12	-49.99	-33	PASS
Band5	4233	0.15~30MHz	0.15	-52.93	-23	PASS
Band5	4233	30~1000MHz	948.11	-61.24	-13	PASS
Band5	4233	1000~10000MHz	3050.2	-42.55	-13	PASS


Test Graphs:


7.

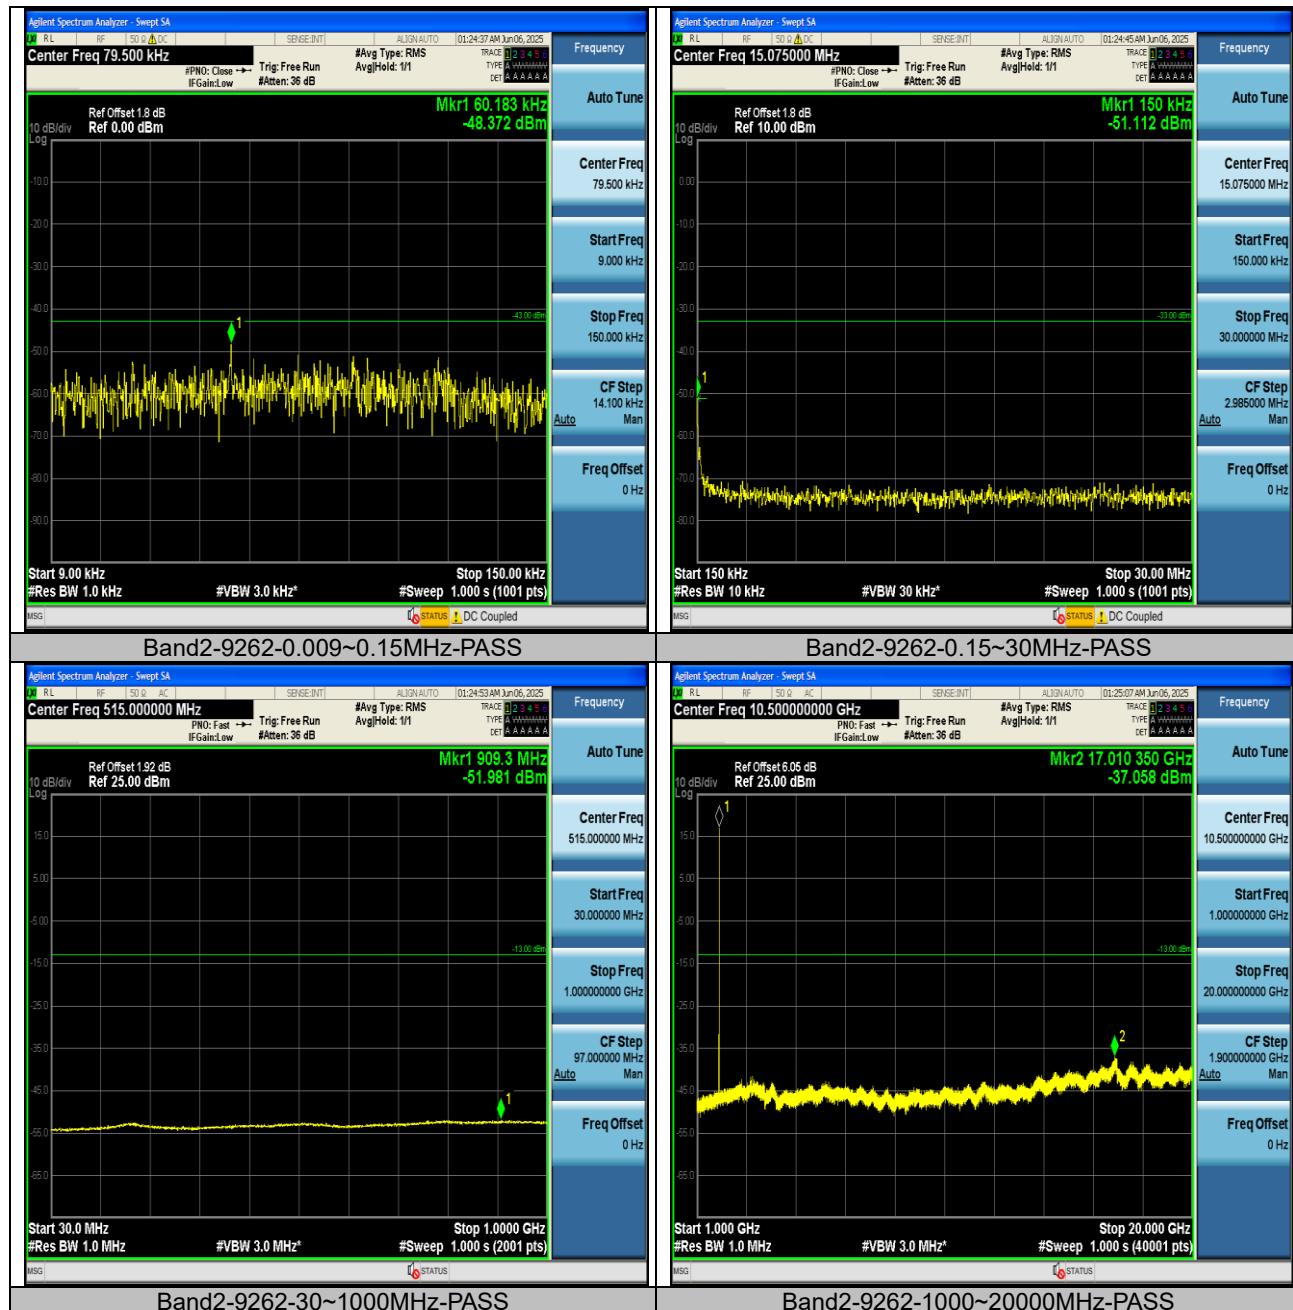


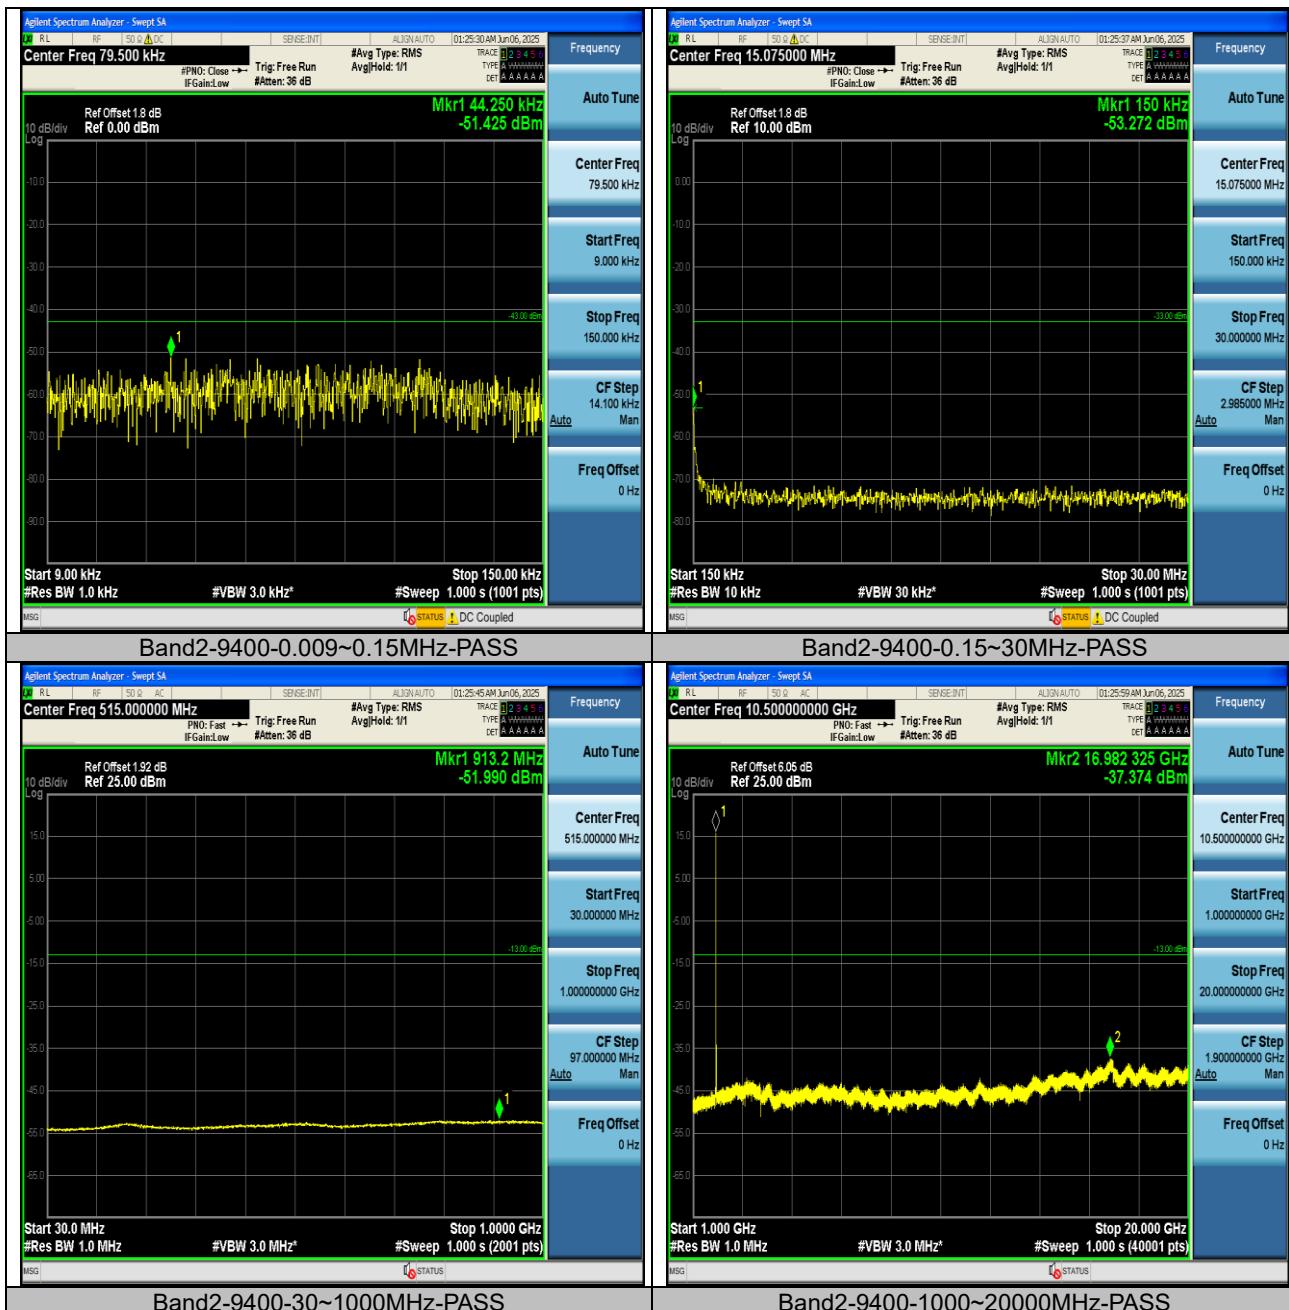


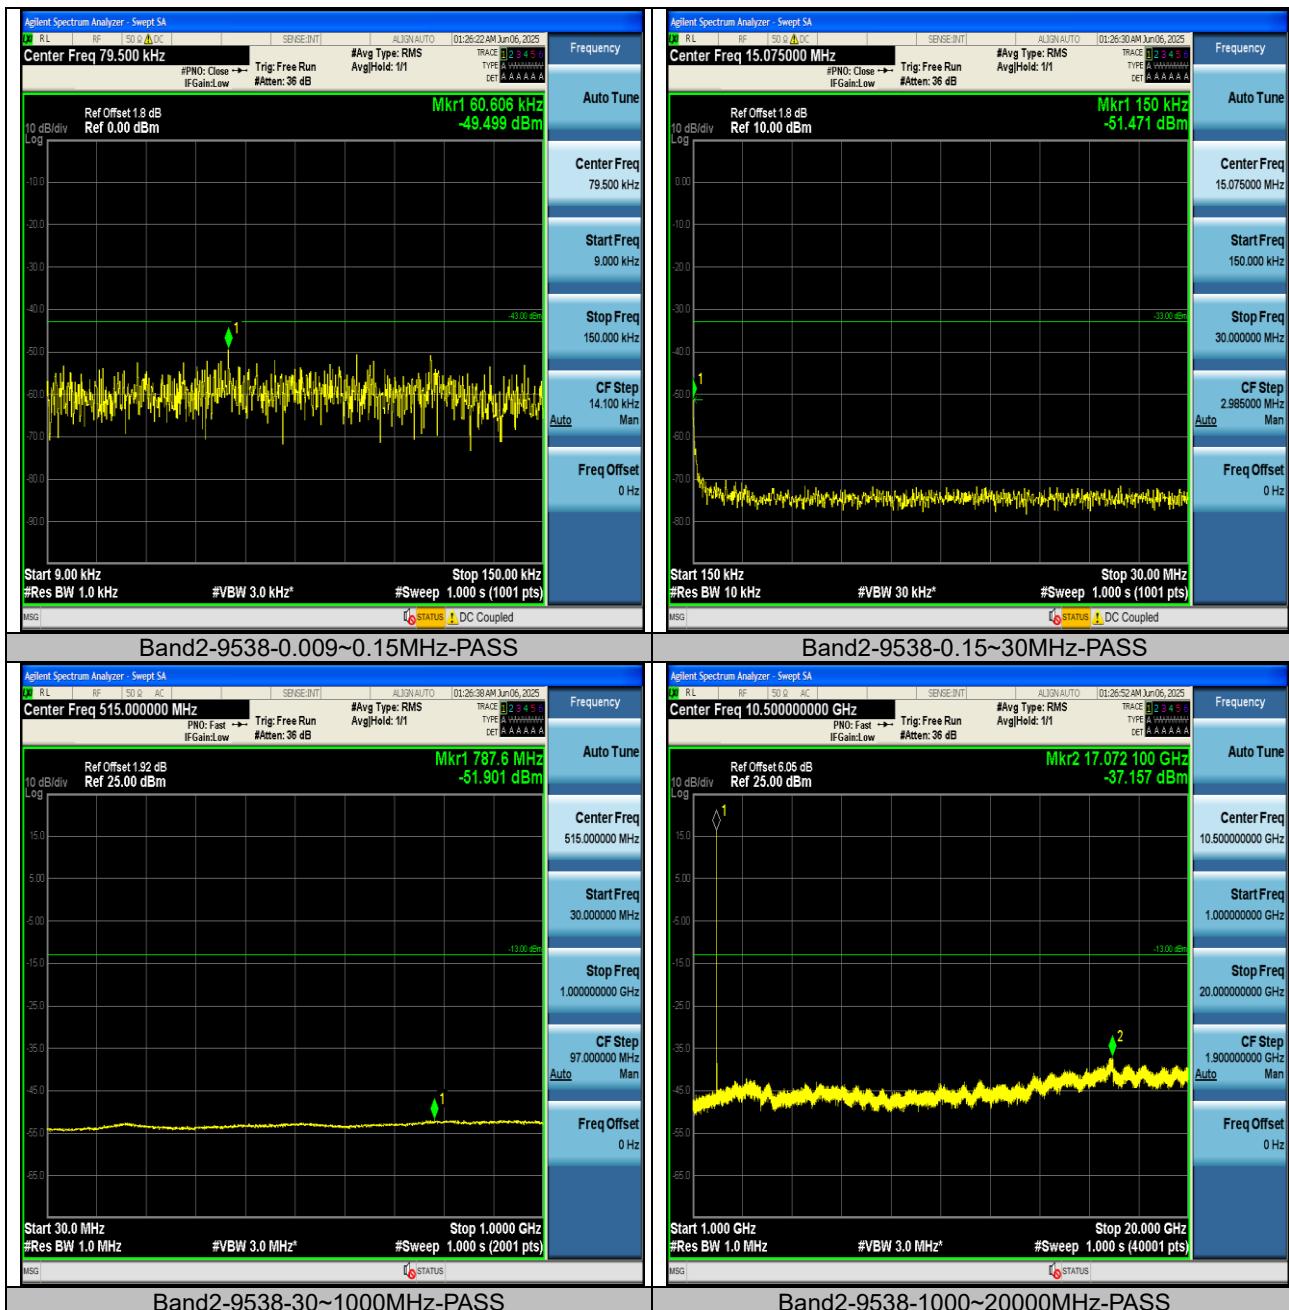


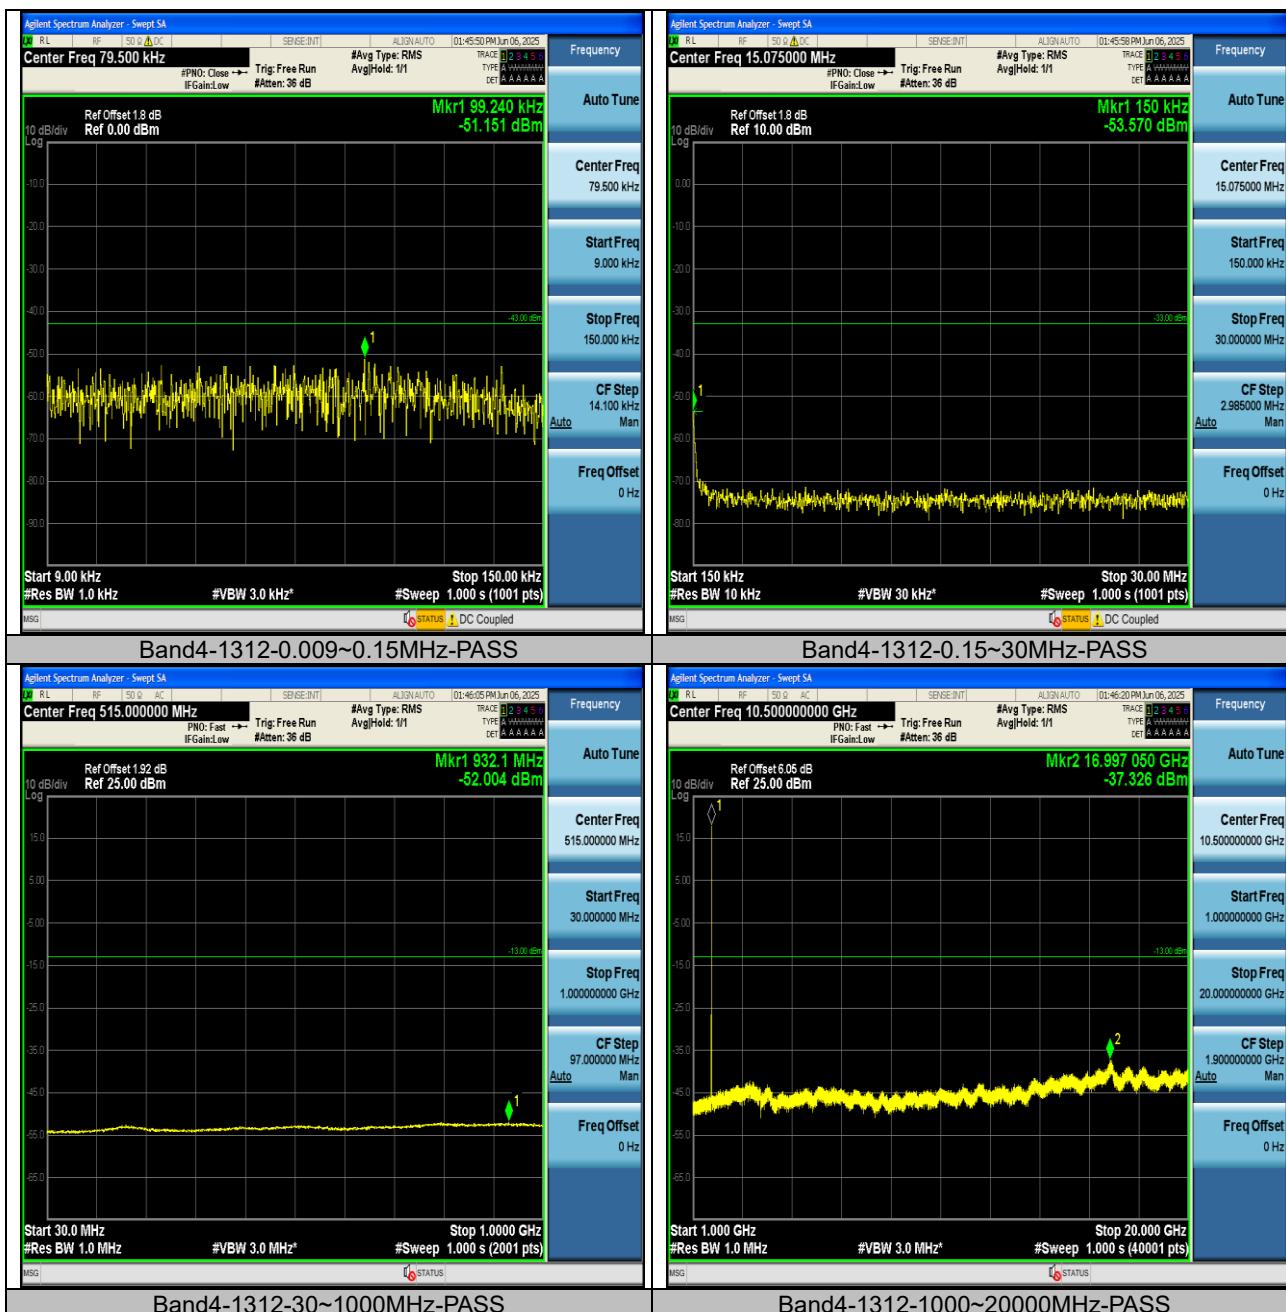


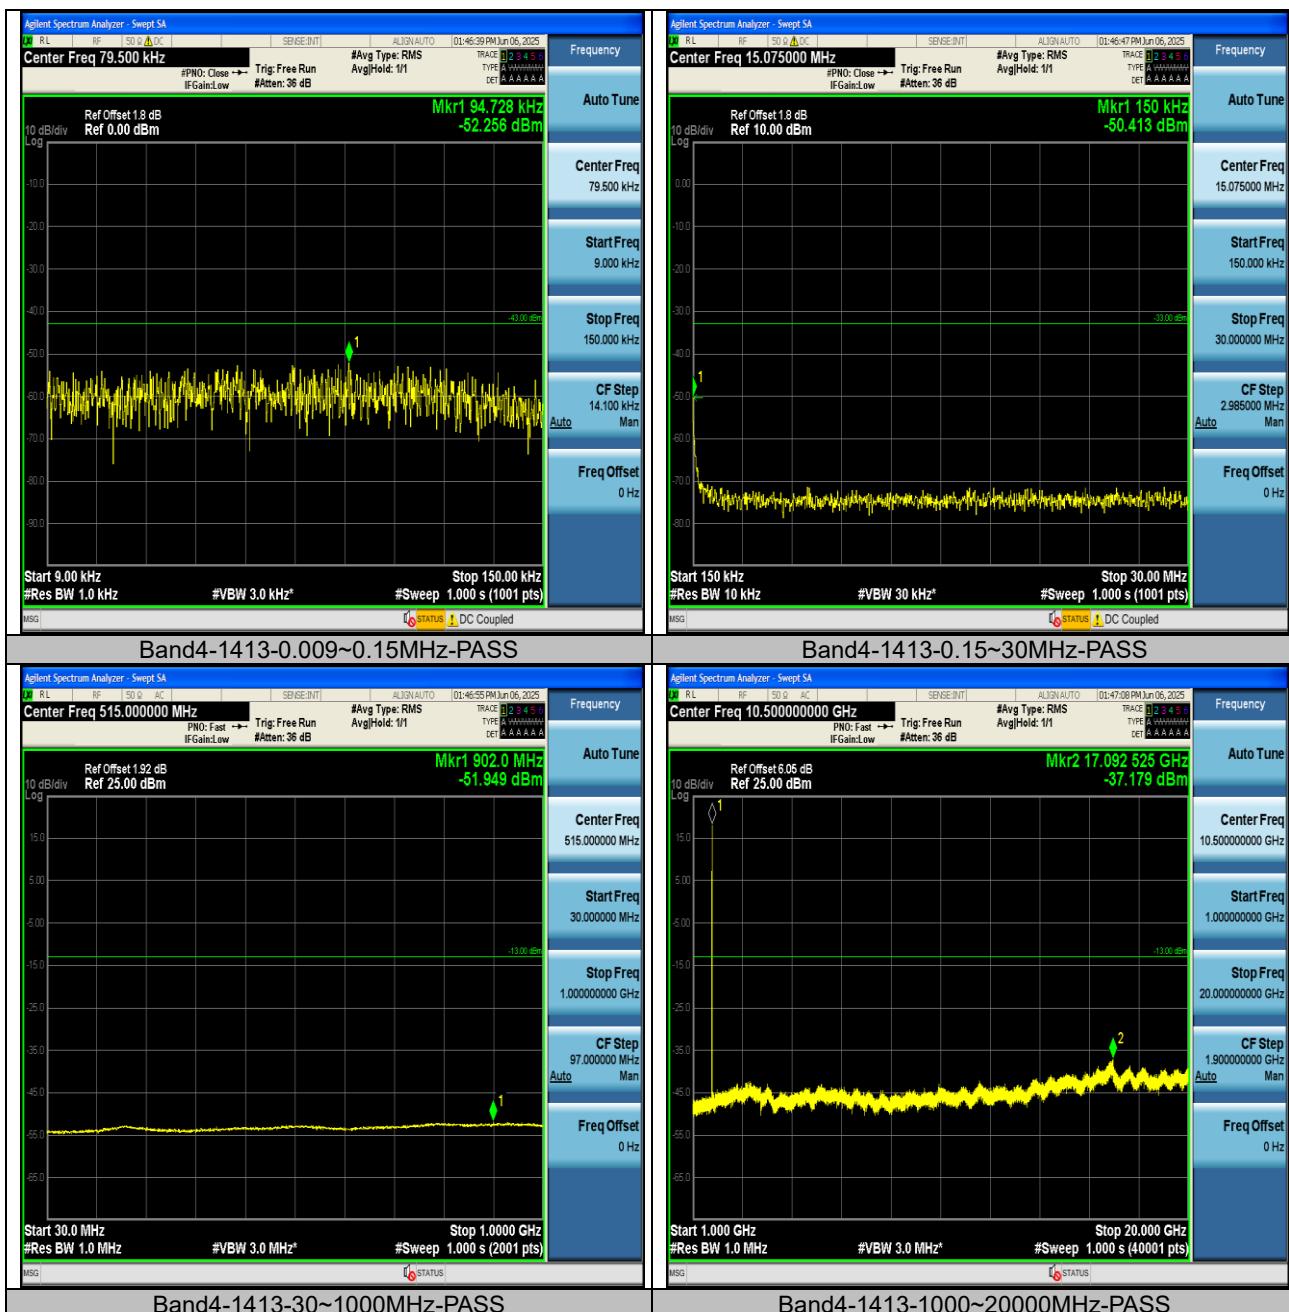

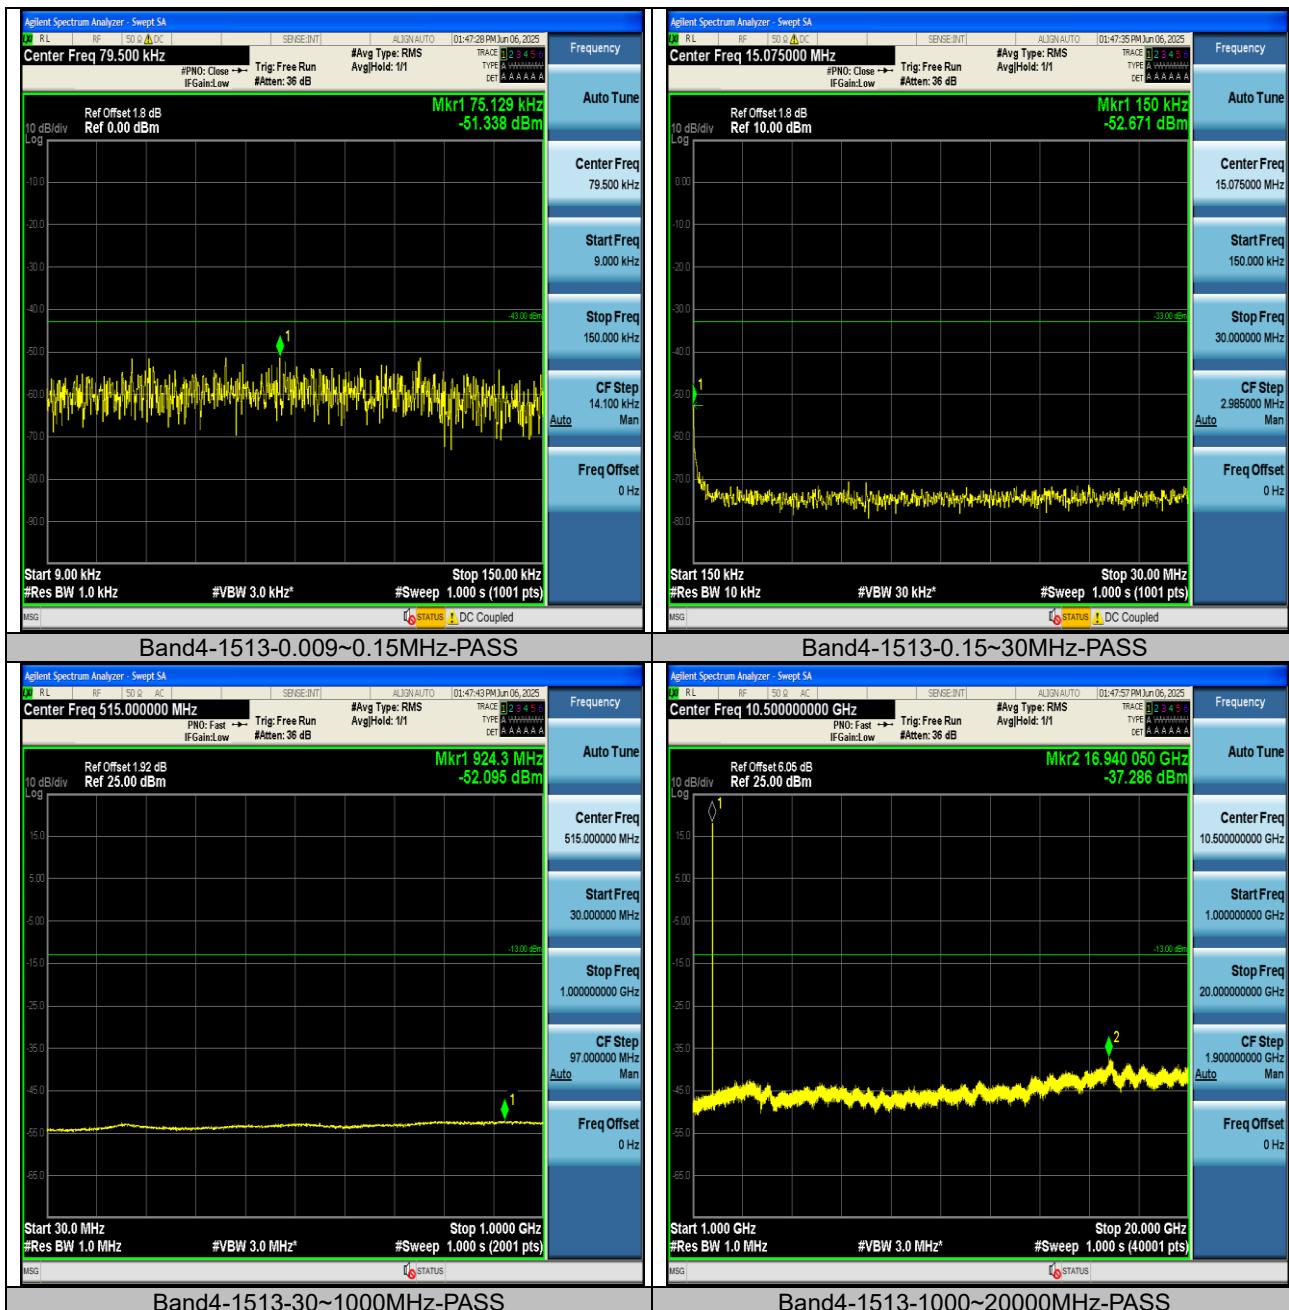

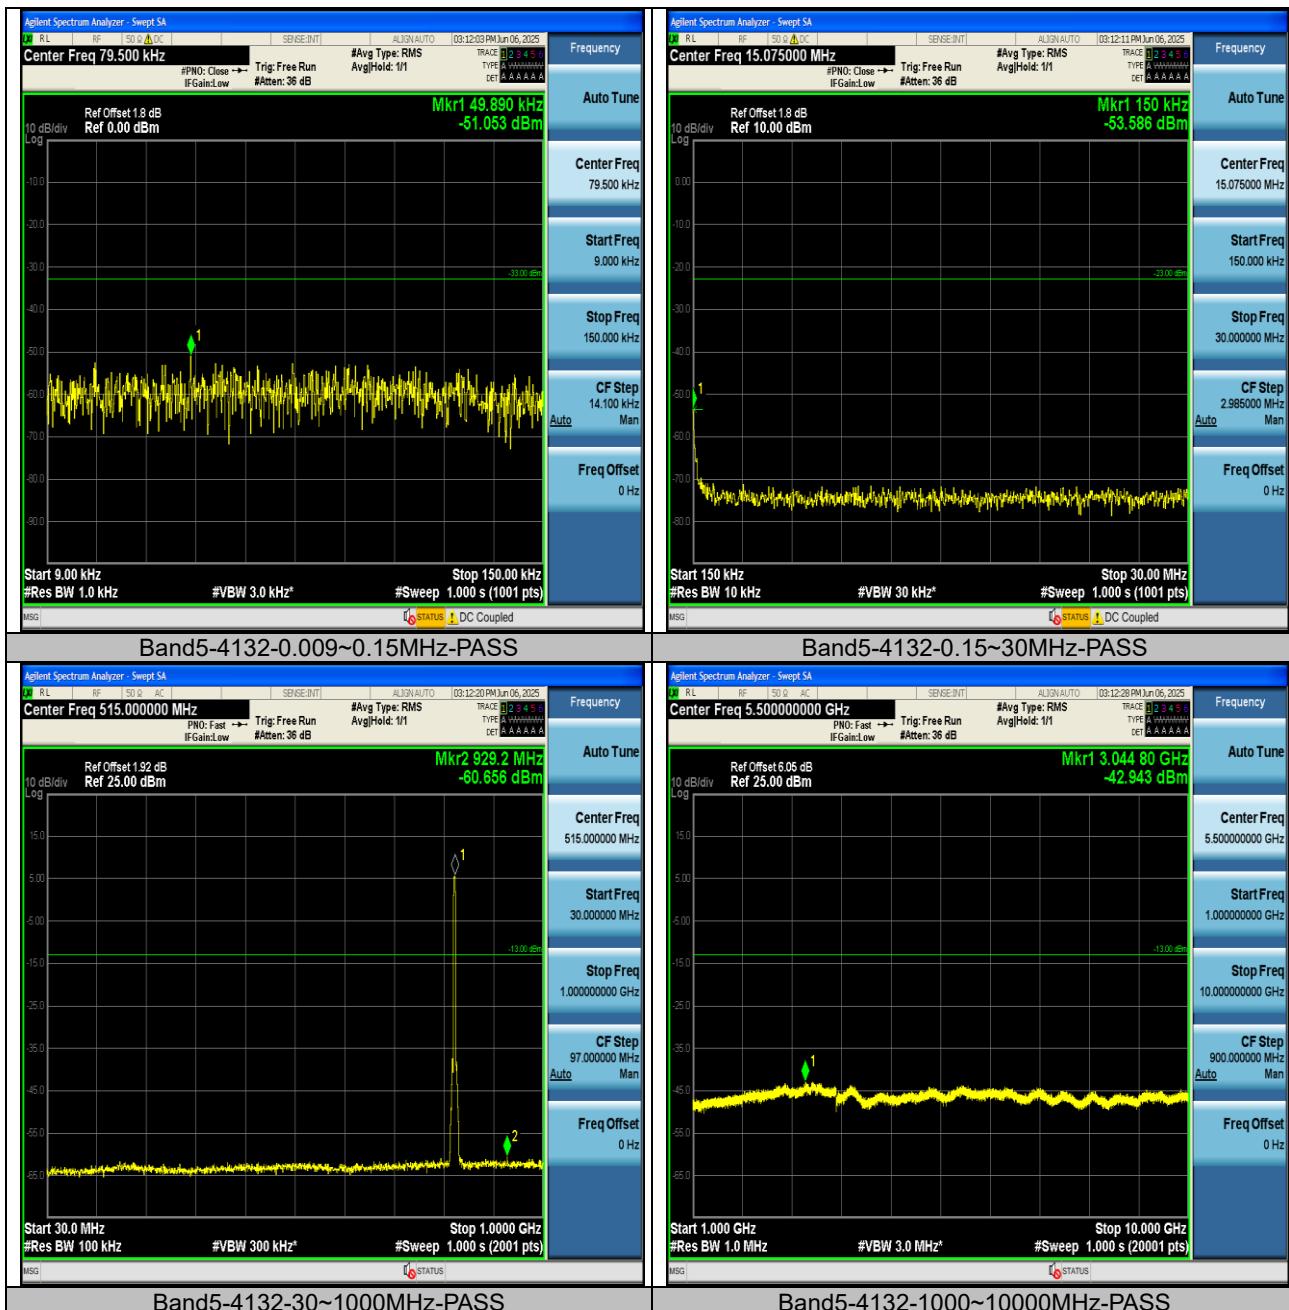

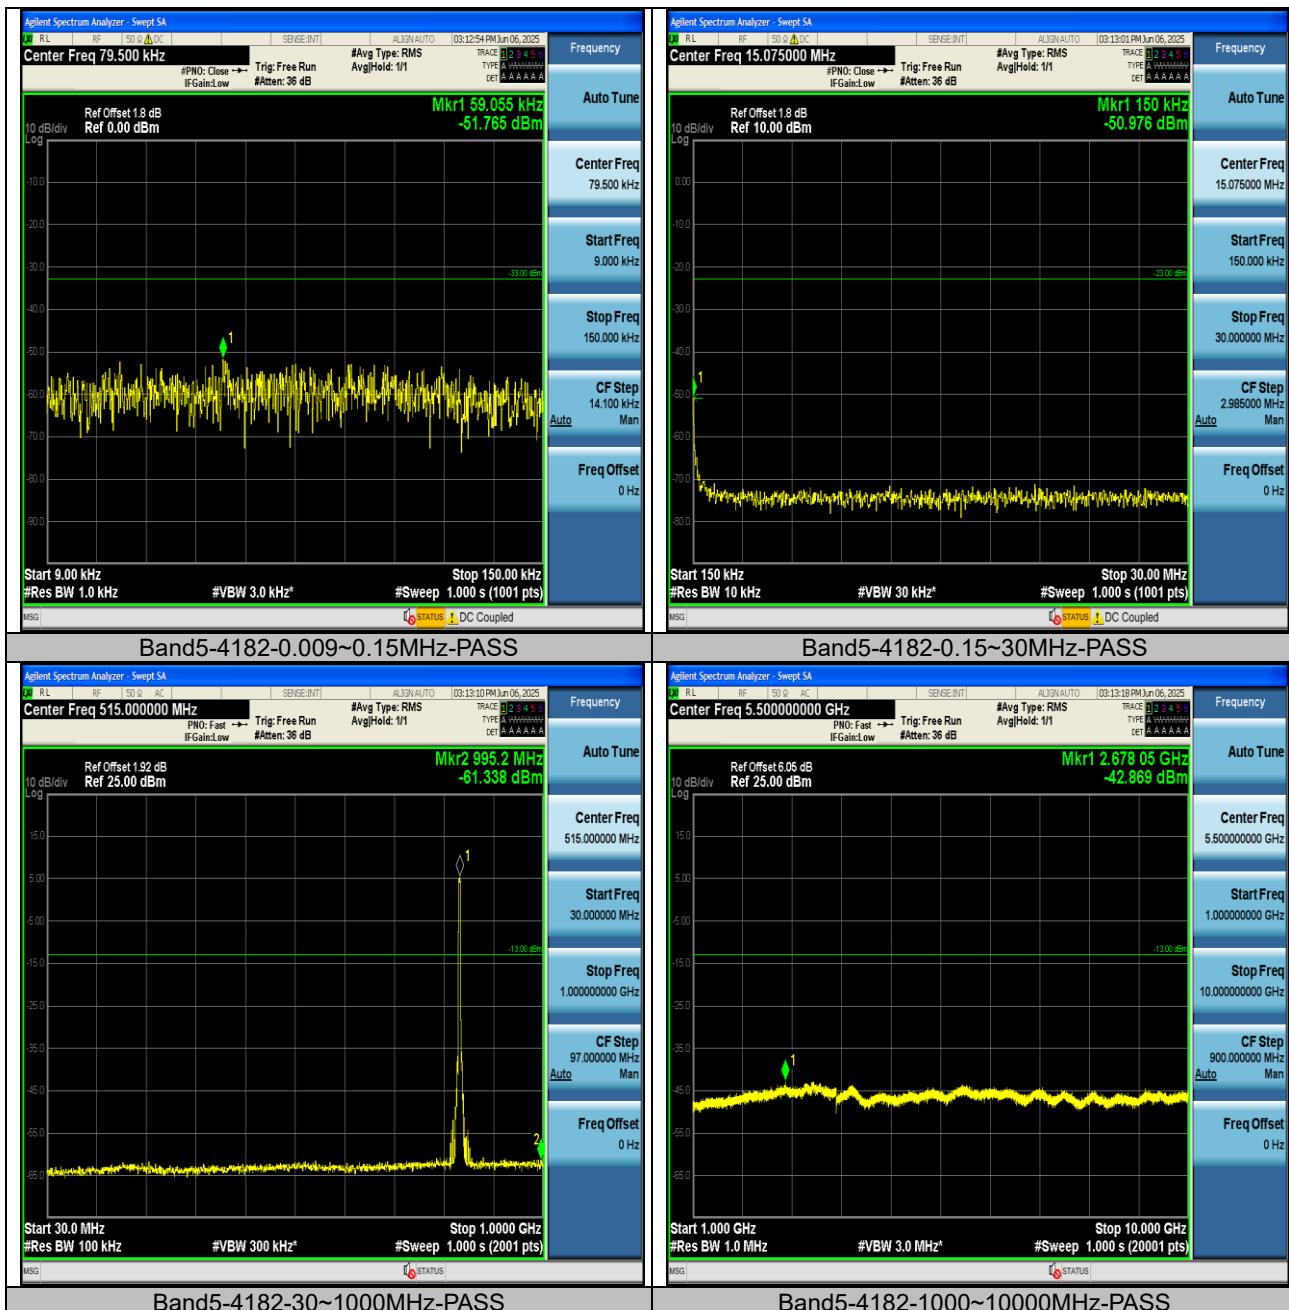

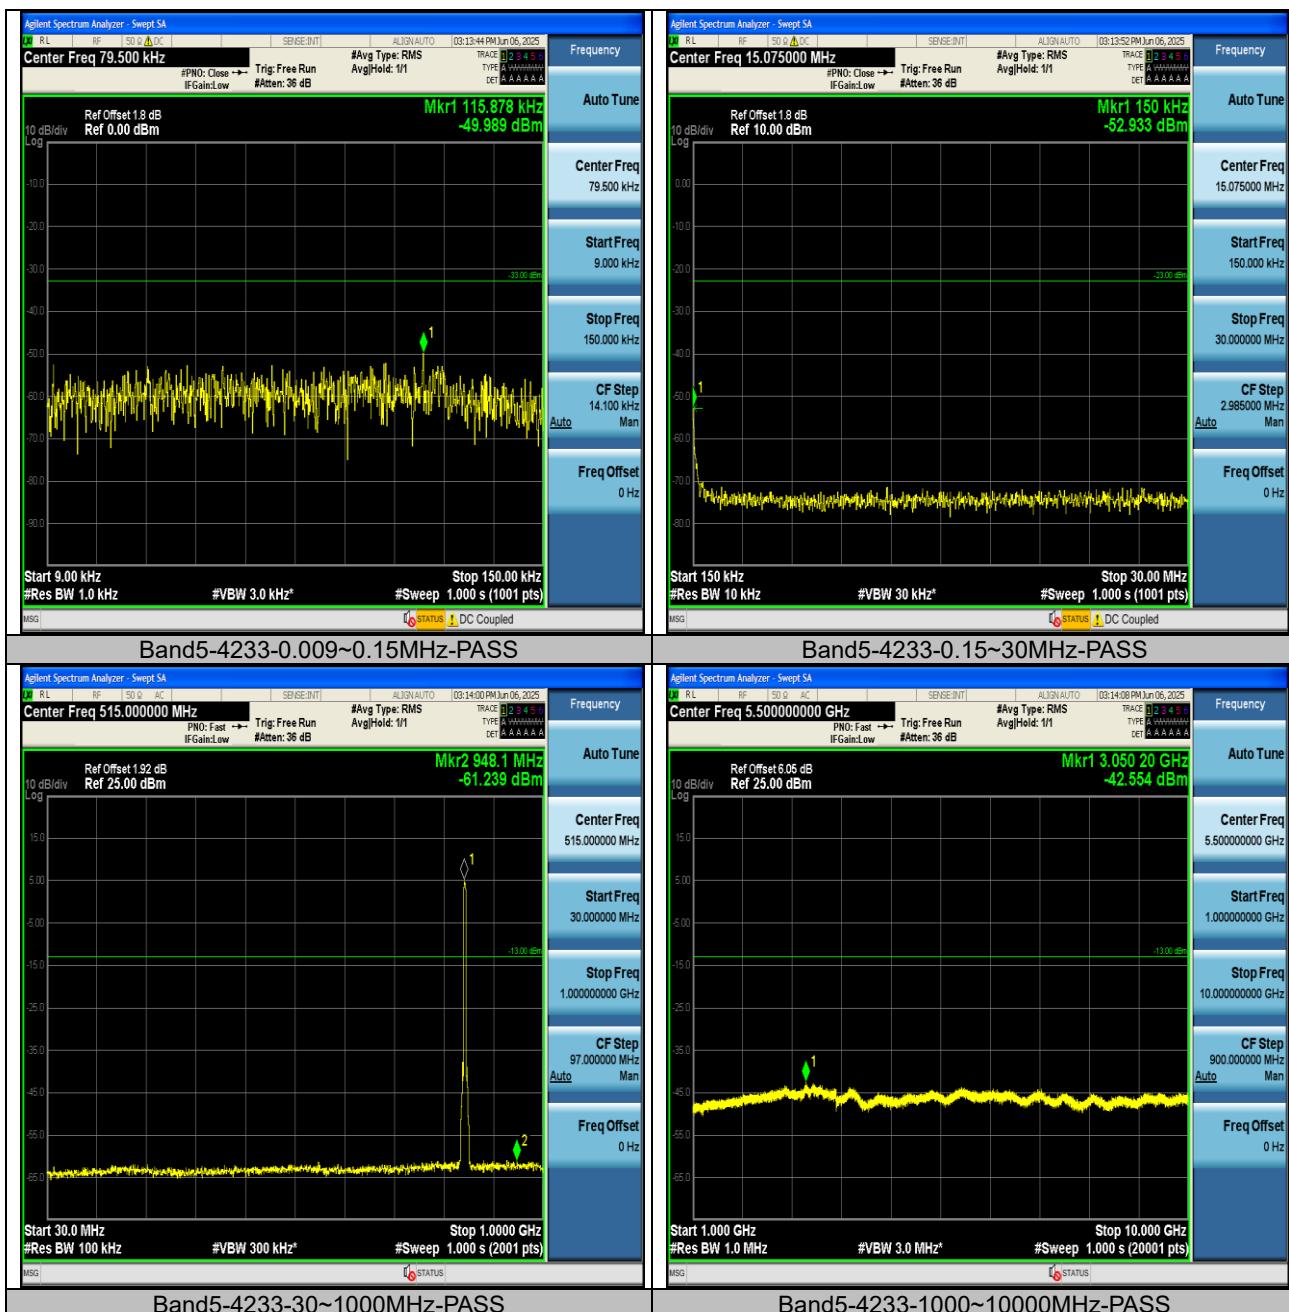

Radiated method

Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.

Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.


Test procedure:

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

Test setup:

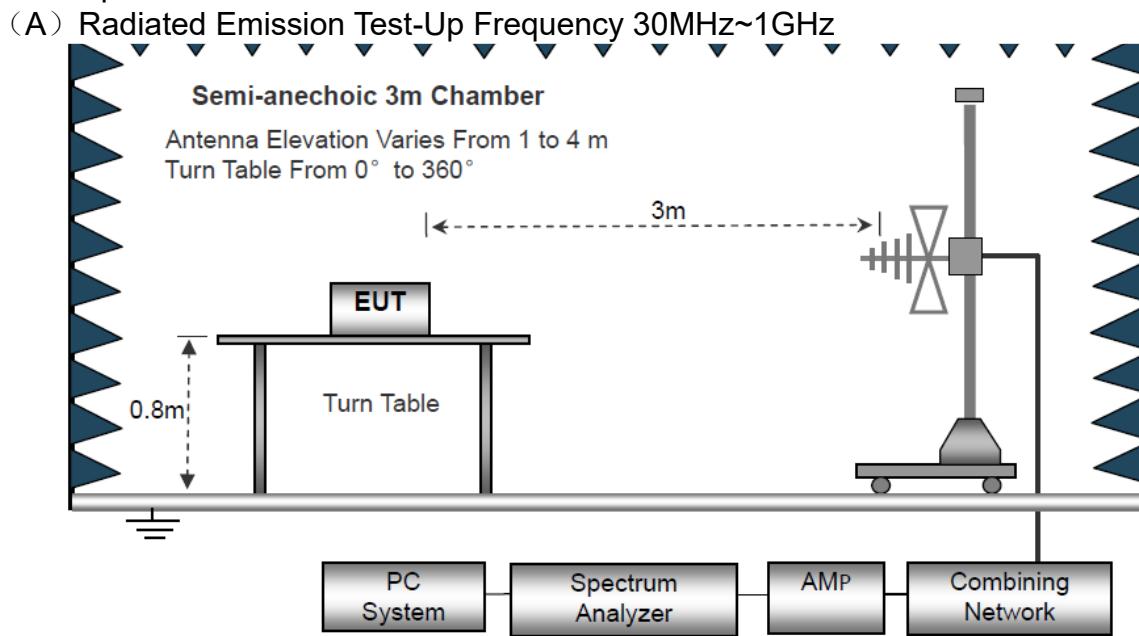

(B) Radiated Emission Test-Up Frequency Above 1GHz

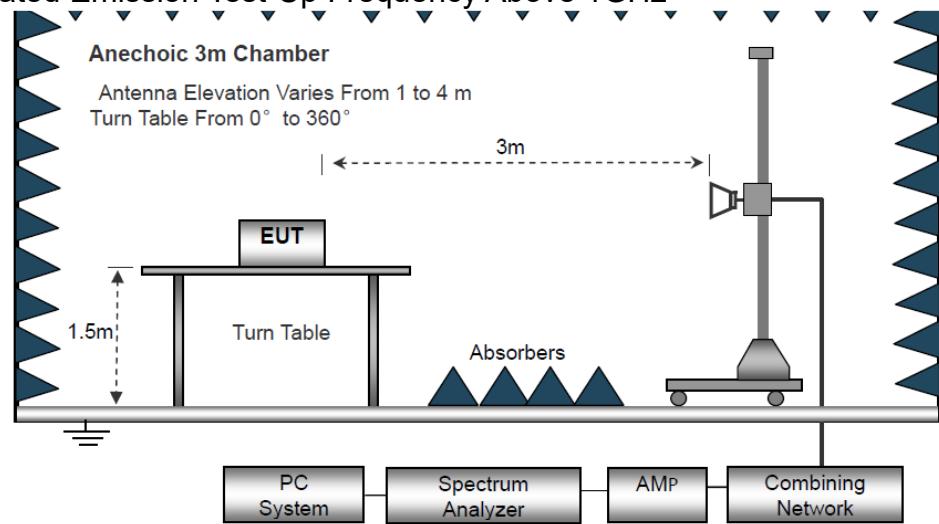

Note:

- 1, Below 30MHz no Spurious found.
- 2, UE is positioned at 3 axis at the pre-scan stage, and only the measurement of the worst case is reported in this part.



**List of final test modes:
WCDMA band II:**

Mode	UL Channel	Frequency	Judgement
1	9262	1852.4	Pass
2	9400	1880.0	Pass
3	9538	1907.6	Pass

WCDMA BANDIV:

Mode	UL Channel	Frequency	Judgement
1	1312	1712.4	Pass
2	1413	1732.6	Pass
3	1513	1752.6	Pass

WCDMA band V:

Mode	UL Channel	Frequency	Judgement
1	4132	826.4	Pass
2	4183	836.6	Pass
3	4233	846.6	Pass

Note: All modes have been tested and only the worst modes are recorded in the report.

Test record:

WCDMA band II:
Middle Channel

Frequency(MHz)	Reading level(dBm)	Factor(dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.00	-50.62	-1.04	-51.66	-13.00	38.66	Horizontal
5640.00	-50.38	6.05	-44.33	-13.00	31.33	Horizontal
3760.00	-50.09	-1.04	-51.13	-13.00	38.13	Vertical
5640.00	-50.72	6.05	-44.67	-13.00	31.67	Vertical

Note:1. Level= Reading level+ Factor. Margin=Limit-Level.

2. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

WCDMA band IV:
Middle Channel

Frequency(MHz)	Reading level(dBm)	Factor(dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3465.00	-47.67	-2.43	-50.10	-13.00	37.10	Horizontal
5197.50	-40.88	4.14	-36.74	-13.00	23.74	Horizontal
3465.00	-48.45	10.97	-37.48	-13.00	24.48	Vertical
5197.50	-49.02	-2.18	-51.20	-13.00	38.20	Vertical

Note:1. Level= Reading level+ Factor. Margin=Limit-Level.

2. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

WCDMA band V:
Highest Channel

Frequency(MHz)	Reading level(dBm)	Factor(dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.20	-48.93	-11.08	-60.01	-13.00	47.01	Horizontal
2546.40	-40.22	-6.35	-46.57	-13.00	33.57	Horizontal
3386.40	-46.70	-5.17	-51.87	-13.00	38.873	Horizontal
1693.20	-48.60	-11.08	-59.68	-13.00	46.68	Vertical
2546.40	-30.83	-6.35	-37.18	-13.00	24.18	Vertical
3386.40	-46.47	-5.17	-51.64	-13.00	38.64	Vertical

Note:1. Level= Reading level+ Factor. Margin=Limit-Level.

2. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

8. Occupied Bandwidth and Emission Bandwidth

Test limit:

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission, shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user. [i2.1049(h)]

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

The relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The test report shall specify which OBW is reported.

A spectrum/signal analyzer or other instrument providing a spectral display is recommended for these measurements and the video bandwidth shall be set to a value at least three times greater than the IF/resolution bandwidth to avoid any amplitude smoothing. Video filtering shall not be used during occupied bandwidth tests.

The OBW shall be measured for all operating conditions that will affect the bandwidth results (e.g. variable modulations, coding, or channel bandwidth settings). See section 4.

Test procedure:

Occupied bandwidth – relative measurement procedure

The reference value is the highest level of the spectral envelope of the modulated signal.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target “-X dB down” requirement (i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-X dB down amplitude” as equal to (Reference Value – X). Alternatively,

this calculation can be performed by the analyzer by using the marker-delta function.

i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Occupied bandwidth – power bandwidth (99%) measurement procedure

The following procedure shall be used for measuring (99 %) power bandwidth

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.

d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.


e) Set the detection mode to peak, and the trace mode to max hold..

f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


Test setup:

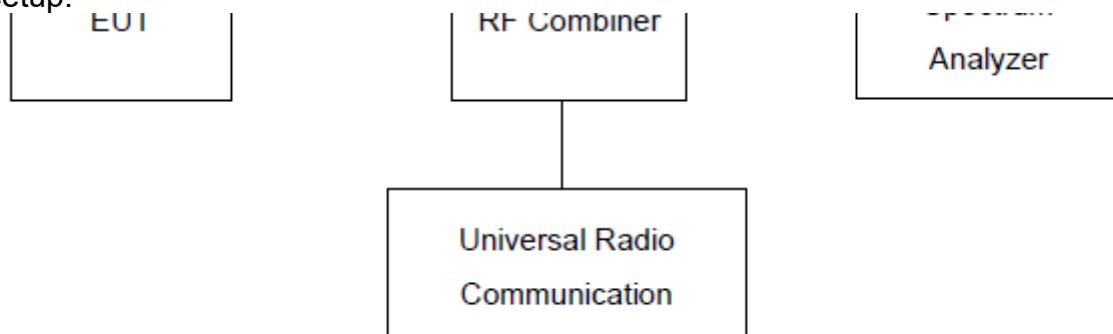


Measurement Result:

Band	Channel	Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)	Limit(kHz)	Verdict
Band2	9262	4.1650	4.712	---	PASS
Band2	9400	4.1748	4.716	---	PASS
Band2	9538	4.1715	4.726	---	PASS
Band4	1312	4.1608	4.699	---	PASS
Band4	1413	4.1629	4.702	---	PASS
Band4	1513	4.1610	4.707	---	PASS
Band5	4132	4.1684	4.698	---	PASS
Band5	4182	4.1984	4.969	---	PASS
Band5	4233	4.1752	4.692	---	PASS


Test Graphs:

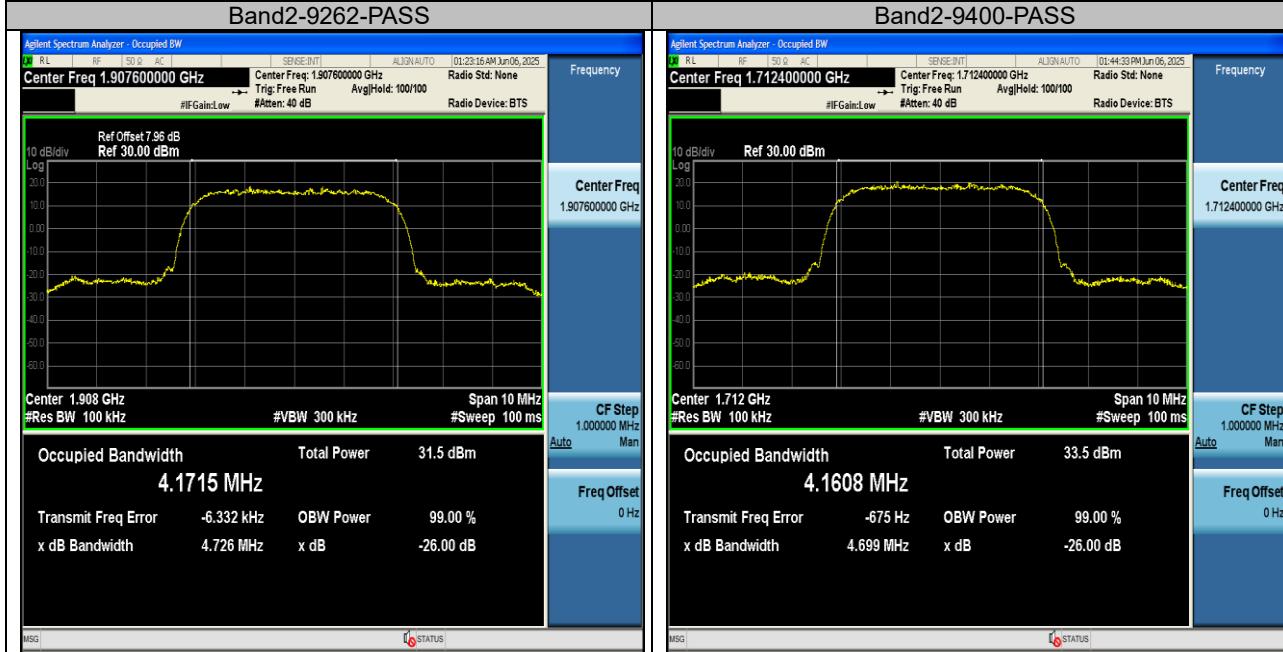

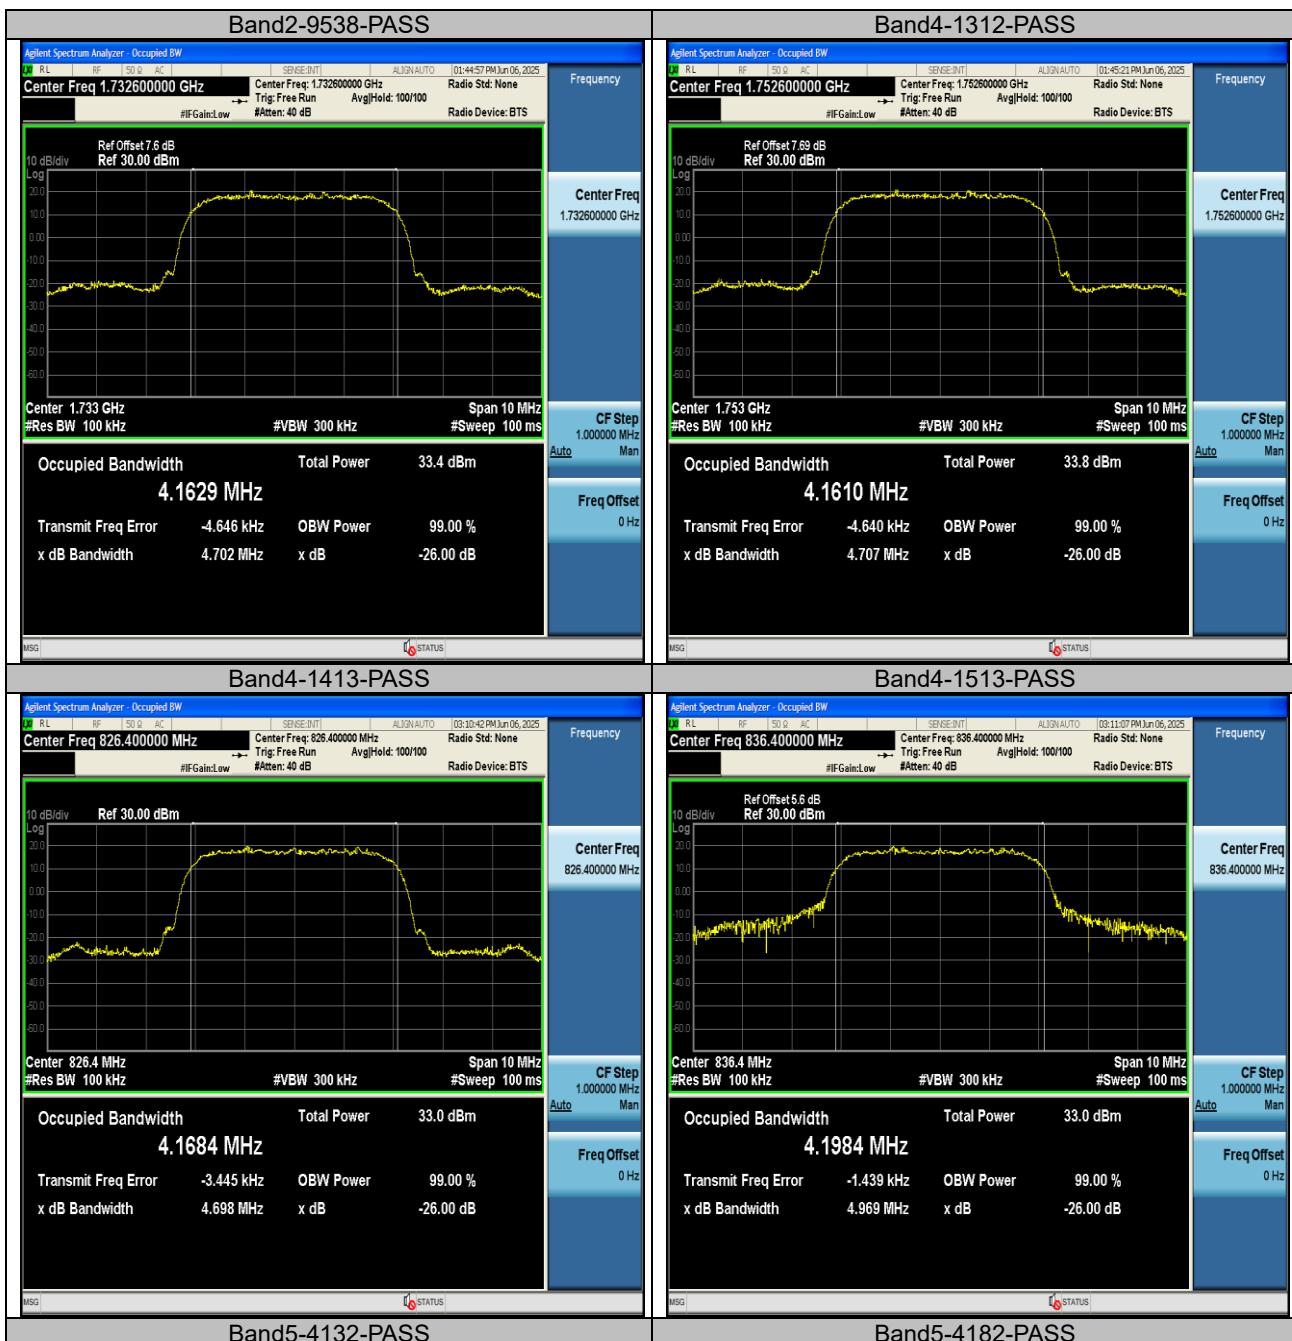



Report No.: PTC25051316801E-FC06

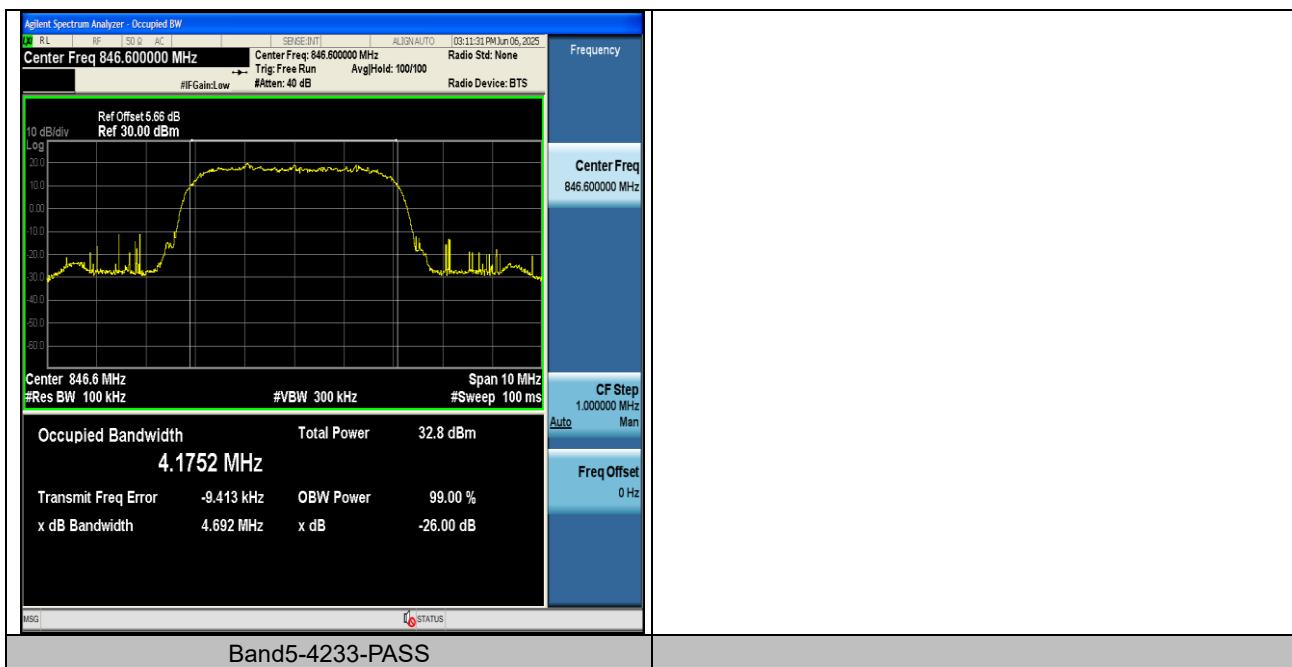

9. Band Edge


Test Limit:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified. See section 4.

Test procedure:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test setup:

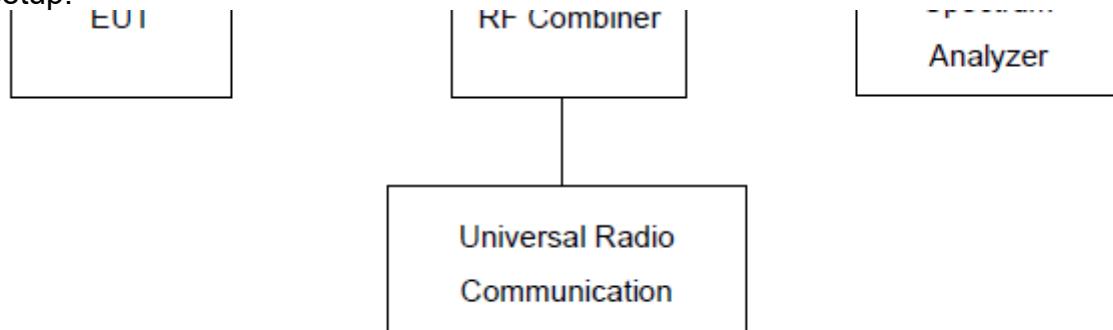




Measurement Result:

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-27.71	-13	PASS
Band2	9538	1910.00	-28.56	-13	PASS
Band4	1312	1709.89	-26.60	-13	PASS
Band4	1513	1755.12	-27.00	-13	PASS
Band5	4132	823.87	-27.43	-13	PASS
Band5	4233	849.12	-28.69	-13	PASS



Test Graphs:

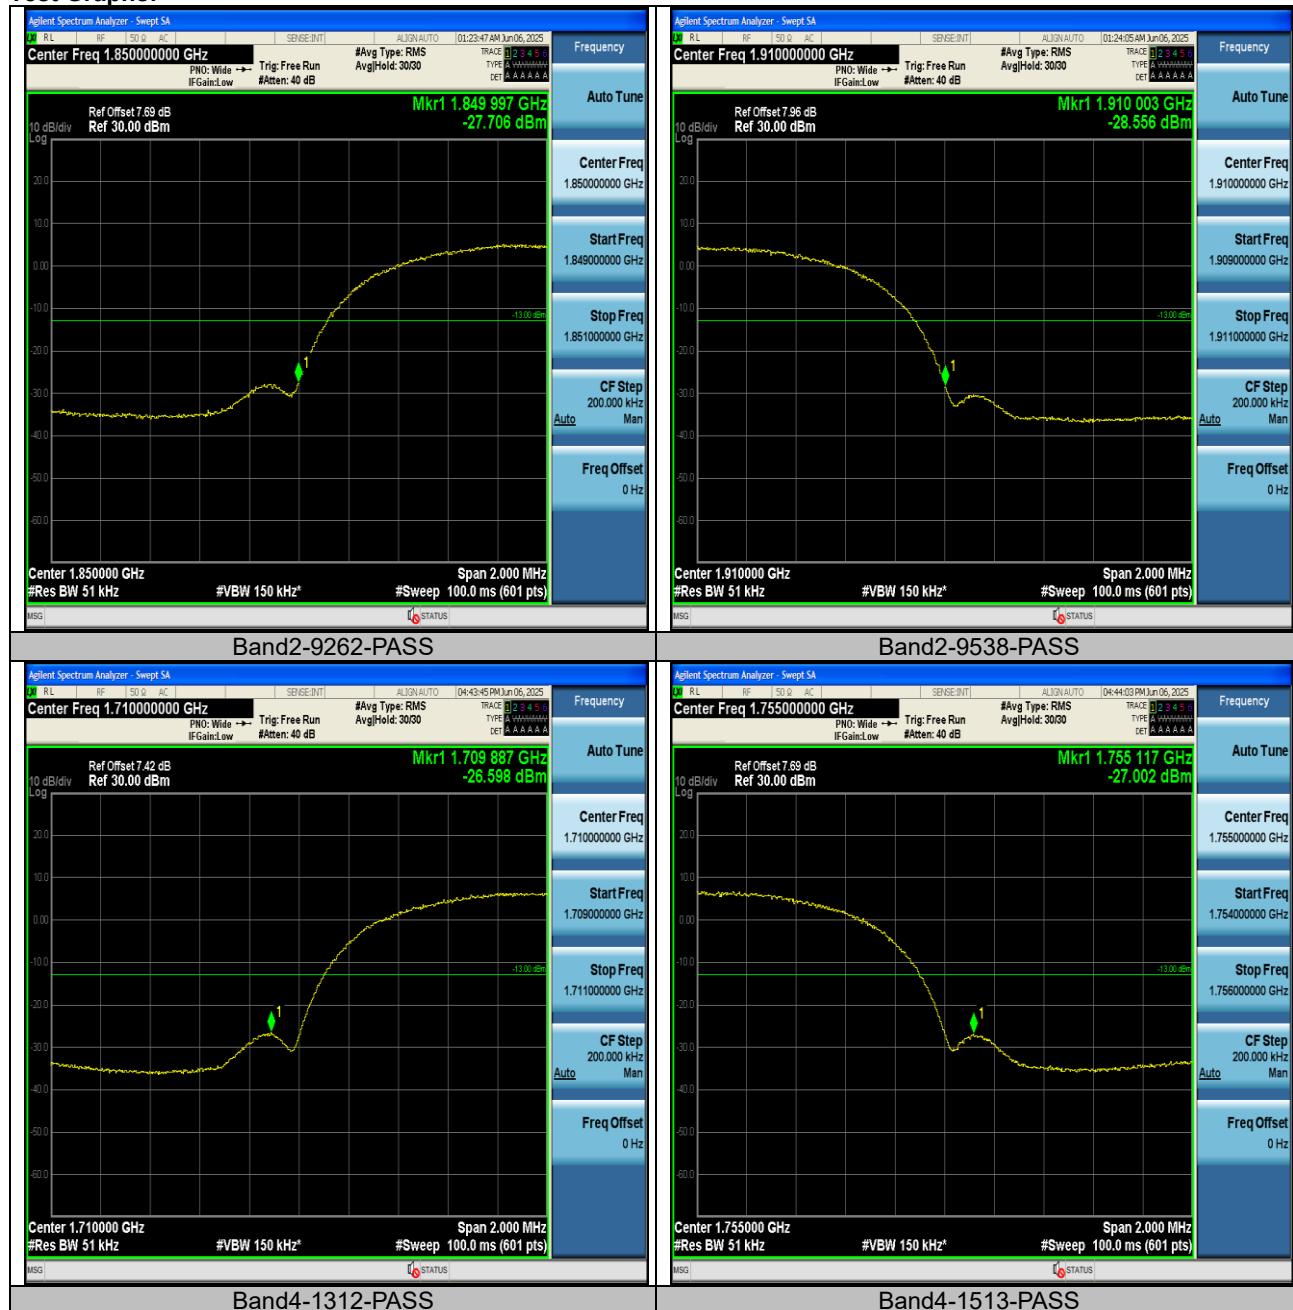



10. Frequency Stability


Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

Test setup:

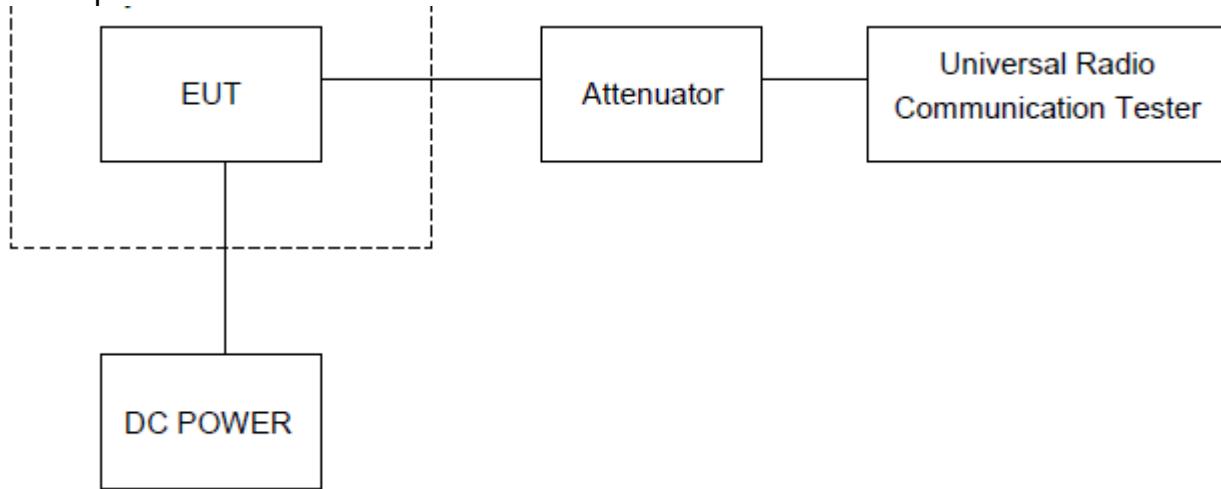

10.1. Measurement Result (Worst)

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	VL	NT	-14.75	-0.007963	±2.5	PASS
Band2	9262	VN	NT	-13.94	-0.007525	±2.5	PASS
Band2	9262	VH	NT	-11.11	-0.005998	±2.5	PASS
Band2	9400	VL	NT	-15.79	-0.008772	±2.5	PASS
Band2	9400	VN	NT	-13.01	-0.007228	±2.5	PASS
Band2	9400	VH	NT	-12.00	-0.006667	±2.5	PASS
Band2	9538	VL	NT	-8.54	-0.004477	±2.5	PASS
Band2	9538	VN	NT	-8.36	-0.004382	±2.5	PASS
Band2	9538	VH	NT	-11.49	-0.006023	±2.5	PASS
Band4	1312	VL	NT	-12.71	-0.007422	±2.5	PASS
Band4	1312	VN	NT	-8.79	-0.005133	±2.5	PASS
Band4	1312	VH	NT	-10.04	-0.005863	±2.5	PASS
Band4	1413	VL	NT	-11.58	-0.006684	±2.5	PASS
Band4	1413	VN	NT	-7.51	-0.004335	±2.5	PASS
Band4	1413	VH	NT	-14.66	-0.008461	±2.5	PASS
Band4	1513	VL	NT	-7.63	-0.004354	±2.5	PASS
Band4	1513	VN	NT	-5.60	-0.003195	±2.5	PASS
Band4	1513	VH	NT	-8.29	-0.00473	±2.5	PASS
Band5	4132	VL	NT	-12.38	-0.014981	±2.5	PASS
Band5	4132	VN	NT	-10.02	-0.012125	±2.5	PASS
Band5	4132	VH	NT	-10.62	-0.012851	±2.5	PASS
Band5	4182	VL	NT	-6.89	-0.008238	±2.5	PASS
Band5	4182	VN	NT	-1.61	-0.001925	±2.5	PASS
Band5	4182	VH	NT	-4.98	-0.005954	±2.5	PASS
Band5	4233	VL	NT	-3.89	-0.004595	±2.5	PASS
Band5	4233	VN	NT	-6.35	-0.007501	±2.5	PASS
Band5	4233	VH	NT	-9.81	-0.011588	±2.5	PASS


Temperature							
Band	Channel	Voltage (Vdc)	Temperatur e (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	NV	-30	-16.56	-0.008940	±2.5	PASS
Band2	9262	NV	-20	-11.14	-0.006014	±2.5	PASS
Band2	9262	NV	0	-14.29	-0.007714	±2.5	PASS
Band2	9262	NV	10	-9.09	-0.004907	±2.5	PASS
Band2	9262	NV	20	-7.84	-0.004232	±2.5	PASS
Band2	9400	NV	-30	-13.86	-0.007700	±2.5	PASS
Band2	9400	NV	-20	-11.40	-0.006333	±2.5	PASS
Band2	9400	NV	0	-14.03	-0.007794	±2.5	PASS
Band2	9400	NV	10	-11.26	-0.006256	±2.5	PASS
Band2	9400	NV	20	-11.79	-0.006550	±2.5	PASS
Band2	9538	NV	-30	-12.21	#REF!	±2.5	PASS
Band2	9538	NV	-20	-9.98	-0.005232	±2.5	PASS
Band2	9538	NV	0	-8.23	-0.004314	±2.5	PASS
Band2	9538	NV	10	-11.43	-0.005992	±2.5	PASS
Band2	9538	NV	20	-13.06	-0.006846	±2.5	PASS
Band4	1312	NV	-30	-11.08	-0.006470	±2.5	PASS
Band4	1312	NV	-20	-9.88	-0.005770	±2.5	PASS
Band4	1312	NV	0	-12.99	-0.007586	±2.5	PASS
Band4	1312	NV	10	-13.42	-0.007837	±2.5	PASS
Band4	1312	NV	20	-11.13	-0.006500	±2.5	PASS
Band4	1413	NV	-30	-7.99	-0.004612	±2.5	PASS
Band4	1413	NV	-20	-9.85	-0.005685	±2.5	PASS
Band4	1413	NV	0	-10.85	-0.006262	±2.5	PASS
Band4	1413	NV	10	-8.12	-0.004687	±2.5	PASS
Band4	1413	NV	20	-12.63	-0.007290	±2.5	PASS
Band4	1513	NV	-30	-10.13	-0.005780	±2.5	PASS
Band4	1513	NV	-20	-11.58	-0.006607	±2.5	PASS
Band4	1513	NV	0	-9.13	-0.005209	±2.5	PASS
Band4	1513	NV	10	-11.51	-0.006567	±2.5	PASS
Band4	1513	NV	20	-8.15	-0.004650	±2.5	PASS
Band5	4132	NV	-30	-12.71	-0.015380	±2.5	PASS
Band5	4132	NV	-20	-4.02	-0.004864	±2.5	PASS
Band5	4132	NV	0	-7.86	-0.009511	±2.5	PASS
Band5	4132	NV	10	-8.79	-0.010636	±2.5	PASS
Band5	4132	NV	20	-9.17	-0.011096	±2.5	PASS
Band5	4182	NV	-30	-4.55	-0.005440	±2.5	PASS
Band5	4182	NV	-20	-8.24	-0.009852	±2.5	PASS
Band5	4182	NV	0	-3.69	-0.004412	±2.5	PASS
Band5	4182	NV	10	-8.09	-0.009672	±2.5	PASS
Band5	4182	NV	20	-6.71	-0.008022	±2.5	PASS
Band5	4233	NV	-30	-7.69	-0.009083	±2.5	PASS
Band5	4233	NV	-20	-5.61	-0.006627	±2.5	PASS
Band5	4233	NV	0	-8.31	-0.009816	±2.5	PASS
Band5	4233	NV	10	-9.57	-0.011304	±2.5	PASS
Band5	4233	NV	20	-8.72	-0.010300	±2.5	PASS

11. Peak-to-Average Ratio (PAR)

Test Limit:

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB .

Test setup:

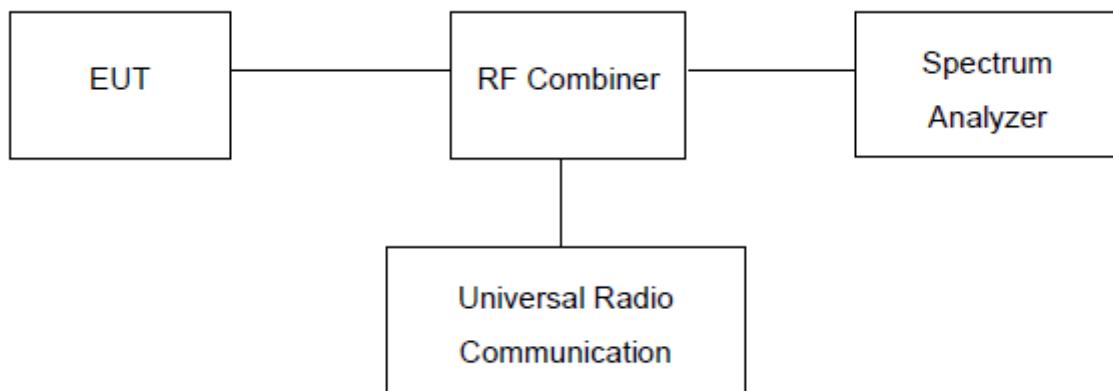

Test Procedure:

Use spectrum to measure the total peak power and record as P_{pk} . Use spectrum to measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR(dB)} = P_{pk}(\text{dBm}) - P_{Avg}(\text{dBm}).$$


Record the maximum PAPR level associated with a probability of 0.1%.


**Measurement Result:**

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band2	9262	2.95	13	PASS
Band2	9400	2.82	13	PASS
Band2	9538	2.89	13	PASS
Band4	1312	2.93	13	PASS
Band4	1413	2.95	13	PASS
Band4	1513	2.92	13	PASS
Band5	4132	3.05	13	PASS
Band5	4182	3	13	PASS
Band5	4233	3.05	13	PASS




Test Graphs:

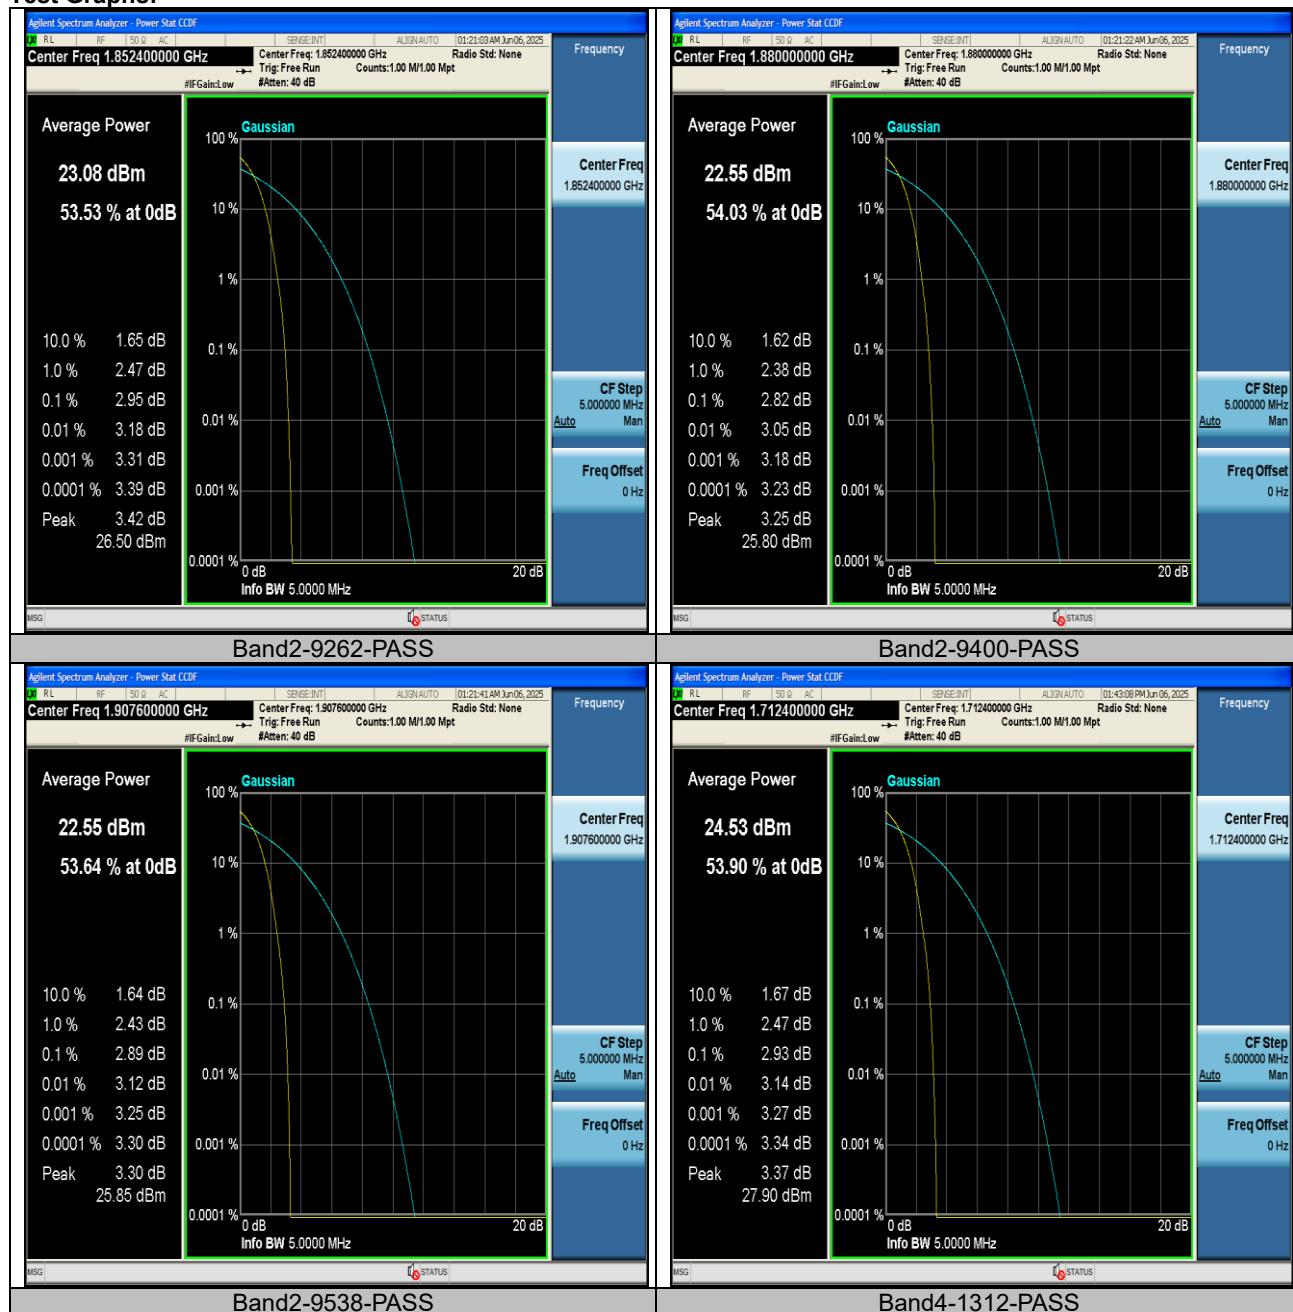

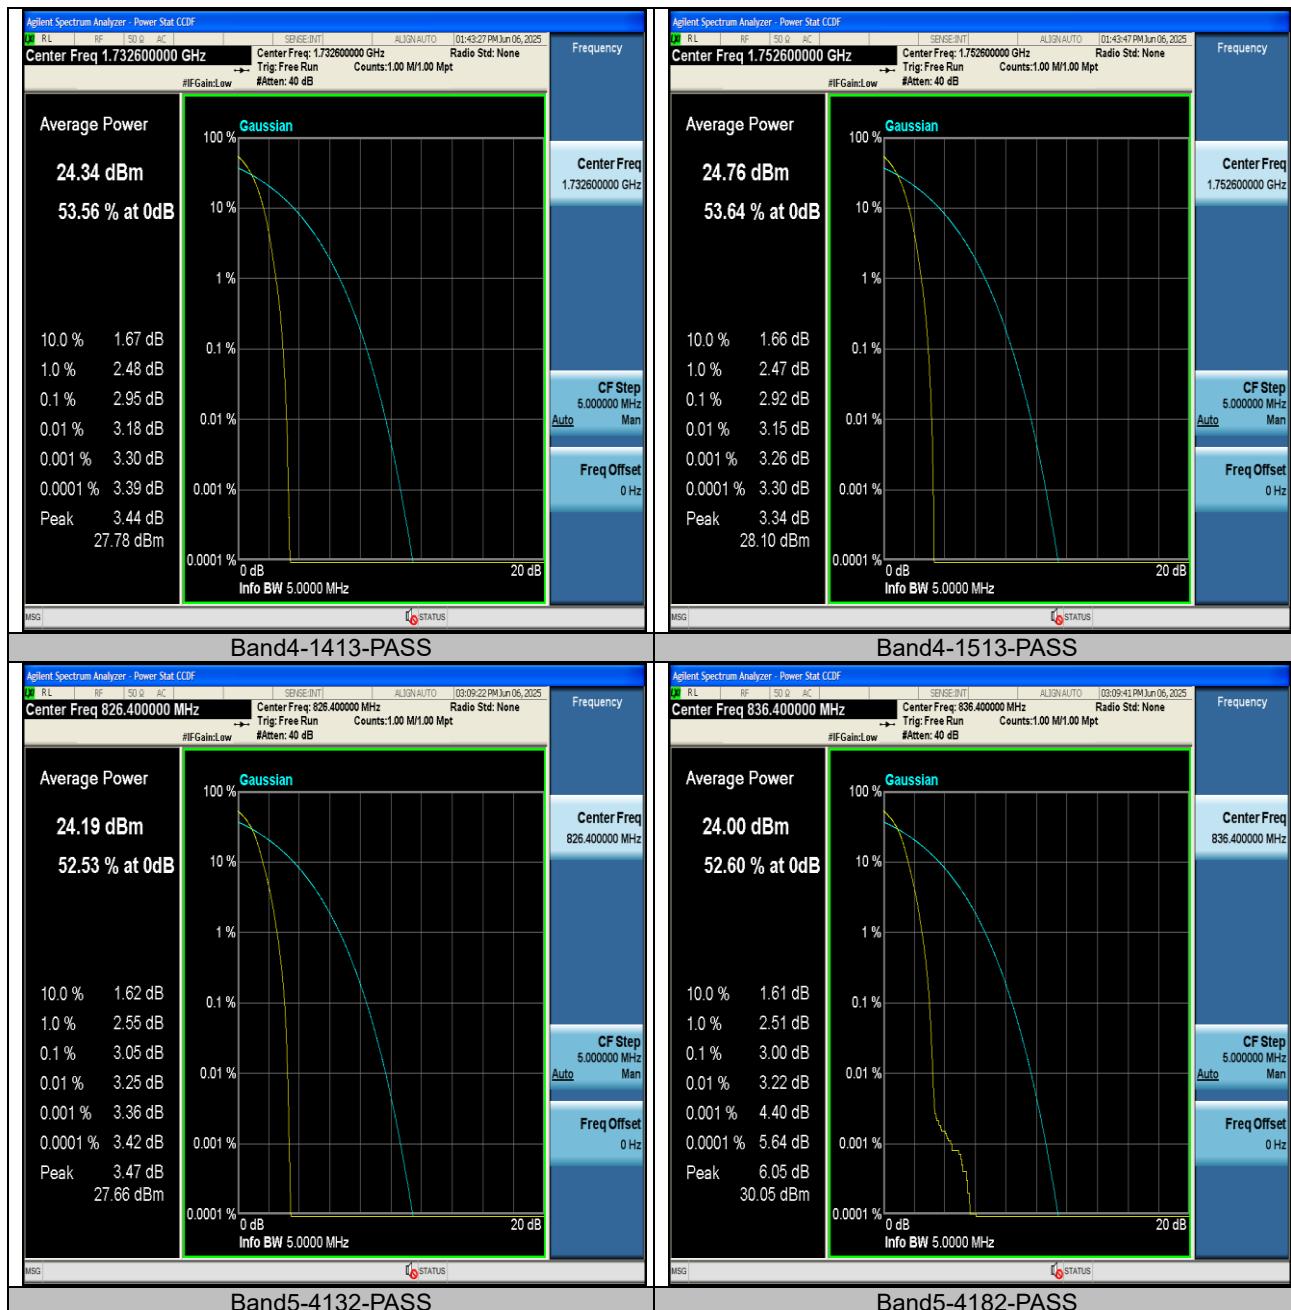



Report No.: PTC25051316801E-FC06

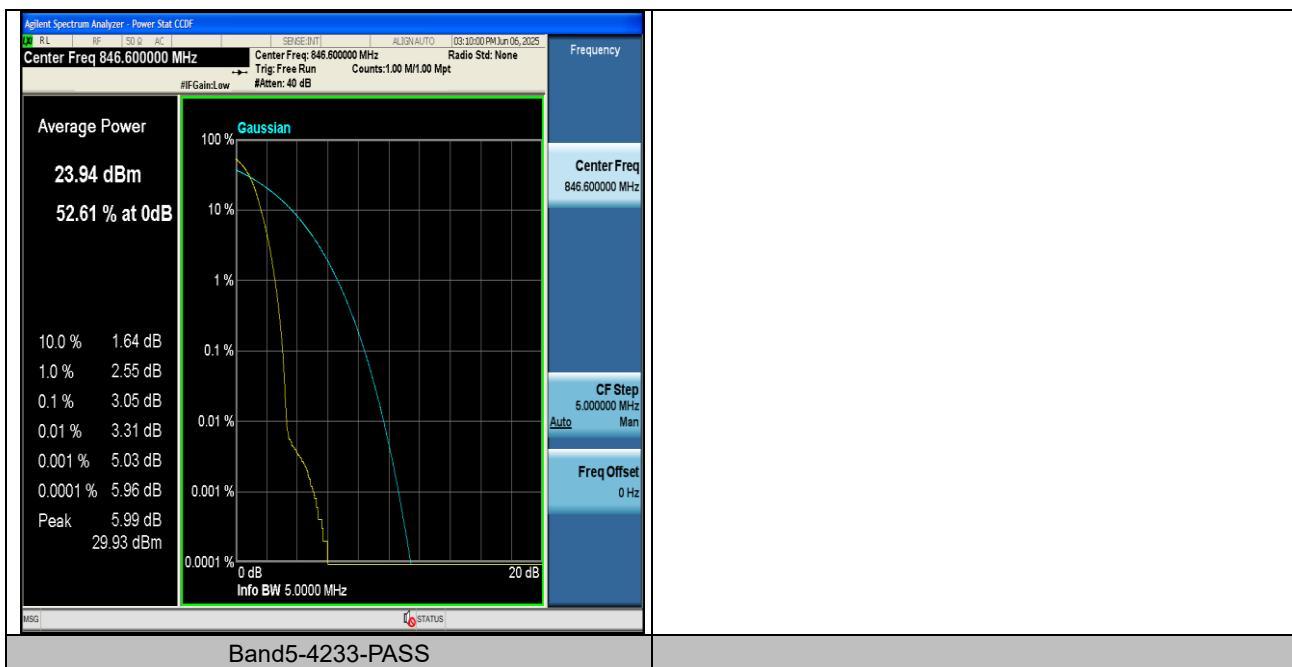



Report No.: PTC25051316801E-FC06

12 APPENDIX I -- TEST SETUP PHOTOGRAPH

Refer to "Test Setup Photos".



Report No.: PTC25051316801E-FC06

13 APPENDIX II -- EUT PHOTOGRAPH

Refer to "External Photos" and "Internal Photos".

*****THE END REPORT*****