



EMC TEST REPORT

Report No.: 20250517G12696X-W1

Product Name: IX2 AIR Series Wireless Thermal Camera for Smart Devices

FCC ID: 2BPTH-IX207DFT

Main Model No. : IX2 AIR-07DFT

Series Model No. : IX2 ABC-DEFGH(A=A-Z, B=A-Z, C=A-Z, D=0-9, E=0-9, F=A-Z, G=A-Z, H=A-Z)

Applicant: Raythink Technology Co., Ltd.

Address: No.5, Wanshoushan Road, Yantai, Shandong, P.R.China

Received Date: 2025.05.29

Dates of Testing: 2025.06.13-2025.06.16

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Report Query E-Mail: manager@ccic-set.com

Feedback E-Mail: integrity@ccic-set.com

Report Query Tel: 0755-26627338

Feedback Tel: 0755-86185963

This test report consists of **20** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : IX2 AIR Series Wireless Thermal Camera for Smart Devices

Model No. : IX2 AIR-07DFT

Applicant..... : Raythink Technology Co., Ltd.

Applicant Address : No.5, Wanshoushan Road, Yantai, Shandong, P.R.China

Manufacturer..... : Raythink Technology Co., Ltd.

Manufacturer Address : No.5, Wanshoushan Road, Yantai, Shandong, P.R.China

Test Standards : 47 CFR Part 15 Subpart B

Test Result..... : PASS

Tested by : Deng Shanfei

Deng Shanfei, Test Engineer

2025.06.17

Reviewed by : Sun Jiaohui

Sun Jiaohui, Senior Engineer

2025.06.17

Approved by : Chris You

Chris You, Manager

2025.06.17

**TABLE OF CONTENTS**

1. General information.....	4
1.1 EUT Description	4
1.2 Test Standards and Results	5
1.3 Facilities and Accreditations	6
1.3.1 Facilities.....	6
1.3.2 Test Environment Conditions	6
1.3.3 Measurement Uncertainty	7
2. Test conditions setting.....	8
2.1 Test Peripherals.....	8
2.2 Test Mode.....	8
2.3 Test Setup and Equipments List.....	9
2.3.1 Conducted Emission	9
2.3.2 Radiated Emission	10
3. 47 CFR Part 15B Requirements	12
3.1 Conducted Emission	12
3.1.1 Requirement.....	12
3.1.2 Test Description	12
3.1.3 Test Result.....	12
3.2 Radiated Emission	15
3.2.1 Requirement.....	15
3.2.2 Test Description	16
3.2.3 Test Result.....	16

Change History		
Issue	Date	Reason for change
1.0	2025.06.17	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name	IX2 AIR Series Wireless Thermal Camera for Smart Devices
Power supply	Built-in 1050mAh lithium battery (DC 3.8V)

Note 1: The EUT is a IX2 AIR Series Wireless Thermal Camera for Smart Devices;

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: The product IX2 AIR Series Wireless Thermal Camera for Smart Devices, main model is IX2 AIR-07DFT, the additional models are IX2 ABC-DEFGH (A=A-Z, B=A-Z, C=A-Z, D=0-9, E=0-9, F=A-Z, G=A-Z, H=A-Z). The different between lens size, color matching, sales area, etc. All models have the same technical construction including circuit diagram, PCB Layout, components and component layout, etc. The different not affect the test results.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, CLASS B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

☒ CCIC-SET Lab 1

Address: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283.

ISED Registration: 11185A, CAB number: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

☐ CCIC-SET Lab 4

Address: No.125, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan City, Guangdong Province, China

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%



Atmospheric Pressure (kPa):	86kPa-106kPa
-----------------------------	--------------

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Adapter	/	VC56JBCH	/	/
Notebook	Lenovo	ThinkPad E14 Gen 2	/	/

Support Cable:

Description	Shield Type	Ferrite Core	Length
/	/	/	/

2.2 Test Mode

Note 4: The EUT is a IX2 AIR Series Wireless Thermal Camera for Smart Devices; It could support the following operating mode and frequency band: Bluetooth; 2.4G/5G WIFI;

Note 5: The EUT have the following typical setups during the test:

Setup1: Bluetooth + Adapter + Charger;

Setup2: Bluetooth + Battery;

Setup3: 2.4G WIFI + Adapter + Charger;

Setup4: 2.4G WIFI + Battery;

Setup5: 5G WIFI + Adapter + Charger;

Setup6: 5G WIFI + Battery;


Setup7: EUT + PC Notebook + DATA;

Note 6: All the patterns have been tested and only the worst results are recorded in the report.

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

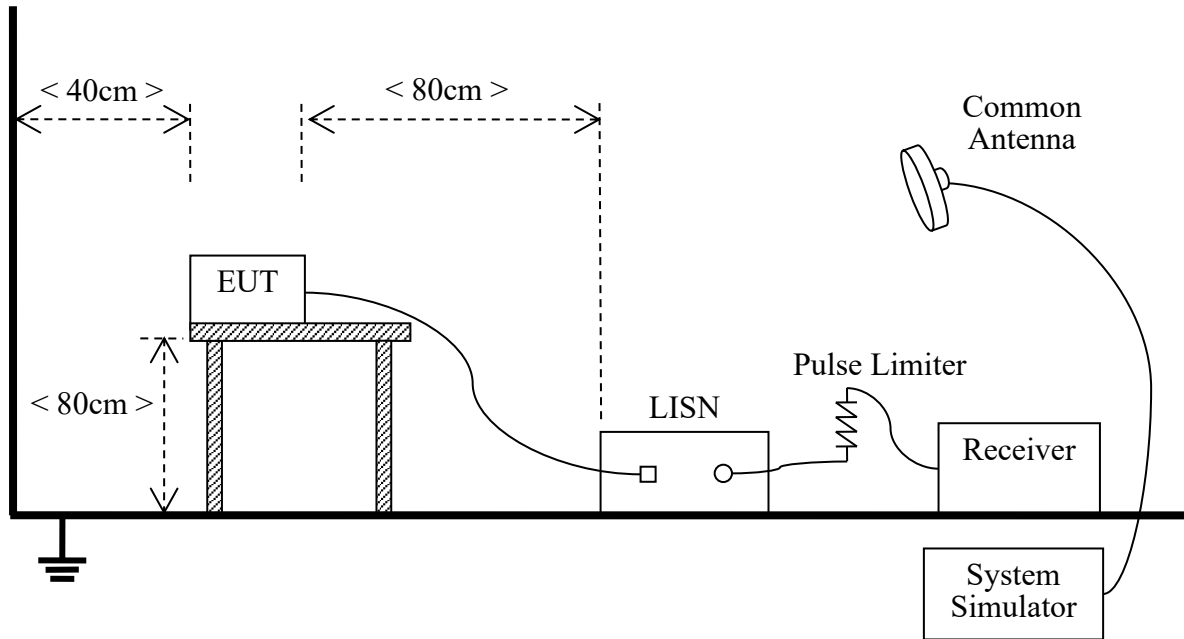

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2025.06.03	2026.06.02
LISN	Afj Instruments	ESH2-Z5	A0304221	2024.08.22	2025.08.21
Cable	MATCHING PAD	W7	/	2024.08.02	2025.08.01


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

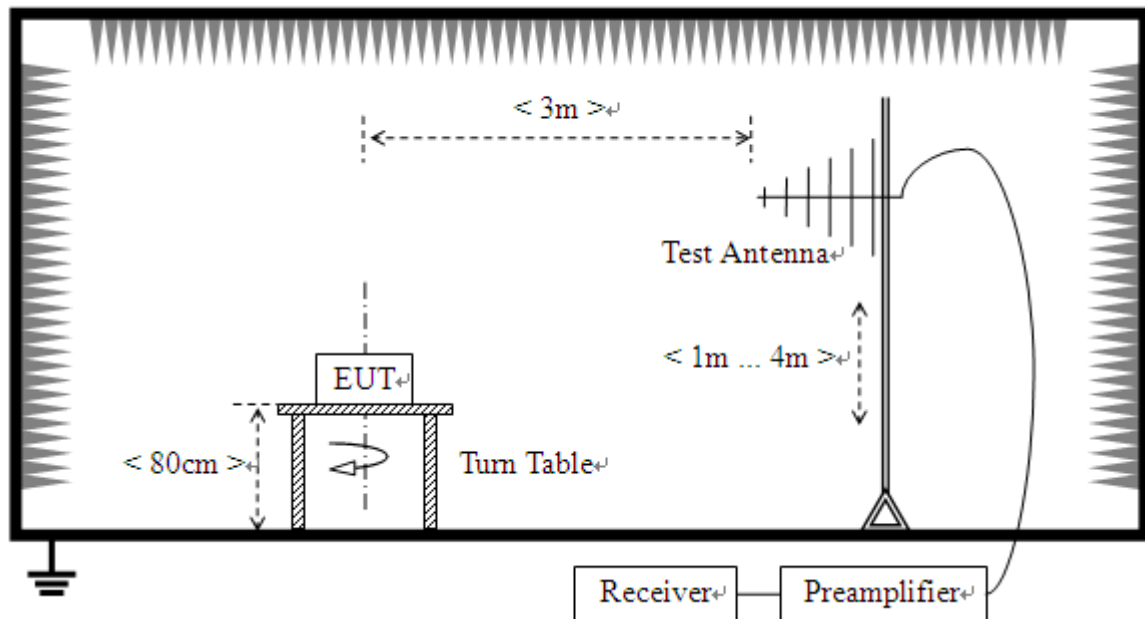

- 2) For radiated emissions above 1GHz

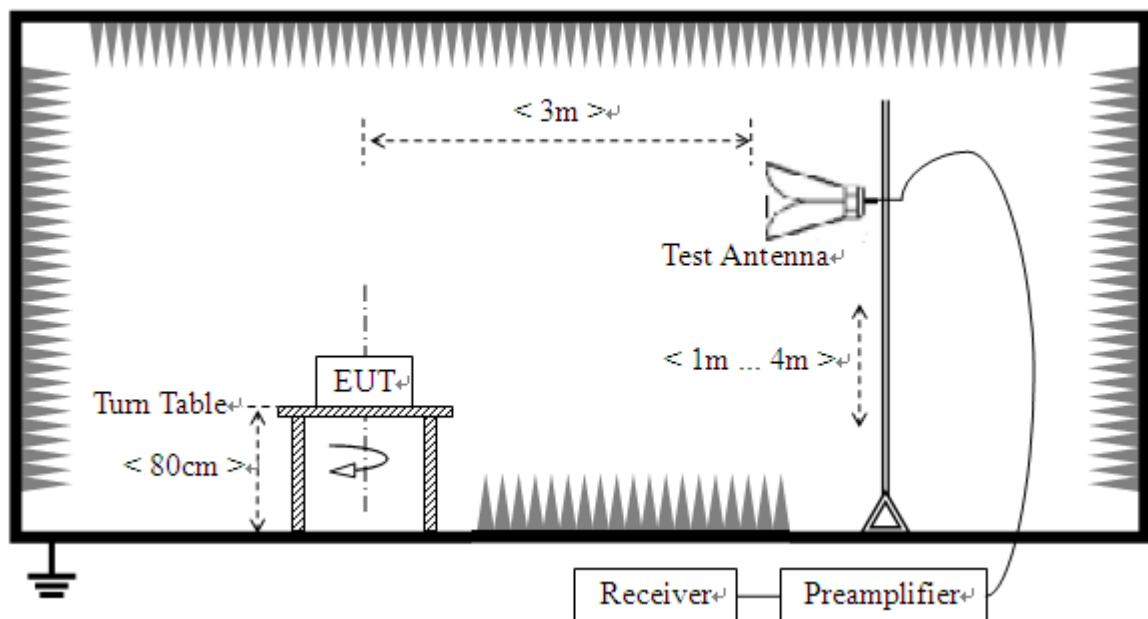

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2025.01.13	2026.01.12
Broadband Ant.	ETC	MCTD2786	A240204135	2025.01.05	2026.01.04
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2024.02.28	2027.02.27
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2025.04.25	2026.04.24
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2023.08.02	2026.08.01
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2024.04.02	2027.04.01

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC, 50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Test voltage and frequency (120V AC, 60Hz)


A. Mains terminal disturbance voltage, L phase, Setup 1

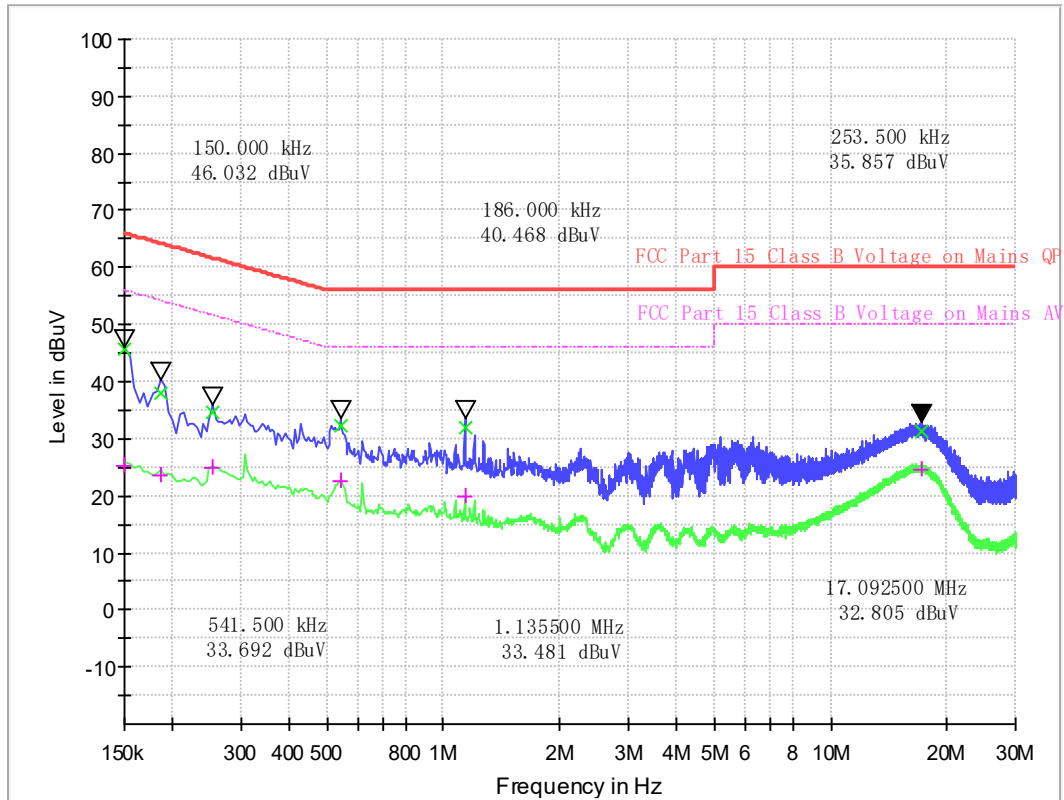

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	Limit - QPK (dB μ V)	Margin - QPK (dB)	CAverage (dB μ V)	Limit - AV (dB μ V)	Margin - AV (dB)
0.150000	45.61	66.00	20.39	25.42	56.00	30.58
0.186000	38.02	64.21	26.19	23.49	54.21	30.72
0.253500	34.71	61.64	26.93	24.87	51.64	26.77
0.541500	32.30	56.00	23.70	22.59	46.00	23.41
1.135500	32.09	56.00	23.91	20.05	46.00	25.95
17.092500	31.34	60.00	28.66	24.54	50.00	25.46

B. Mains terminal disturbance voltage, N phase, Setup 1

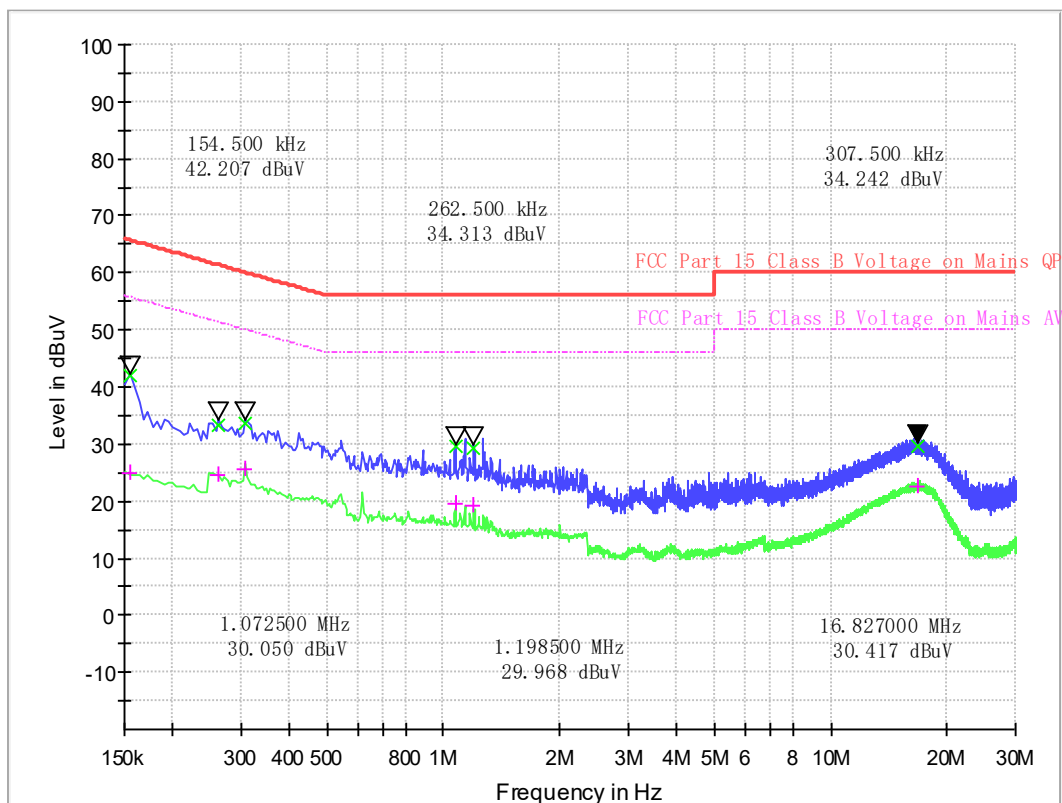

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	Limit - QPK (dB μ V)	Margin - QPK (dB)	CAverage (dB μ V)	Limit - AV (dB μ V)	Margin - AV (dB)
0.154500	41.87	65.75	23.88	24.81	55.75	30.95
0.262500	33.41	61.35	27.94	24.45	51.35	26.90
0.307500	33.49	60.04	26.54	25.73	50.04	24.31
1.072500	29.75	56.00	26.25	19.41	46.00	26.59
1.198500	29.39	56.00	26.61	19.19	46.00	26.81
16.827000	29.75	60.00	30.25	22.65	50.00	27.35

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G: QP detector RBW 120 kHz, VBW 300 kHz.

For Above 1G: PK detector RBW 1MHz, VBW 3MHz for PK value; AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.


3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


A. Radiation disturbances, antenna polarization: Vertical, Setup 1

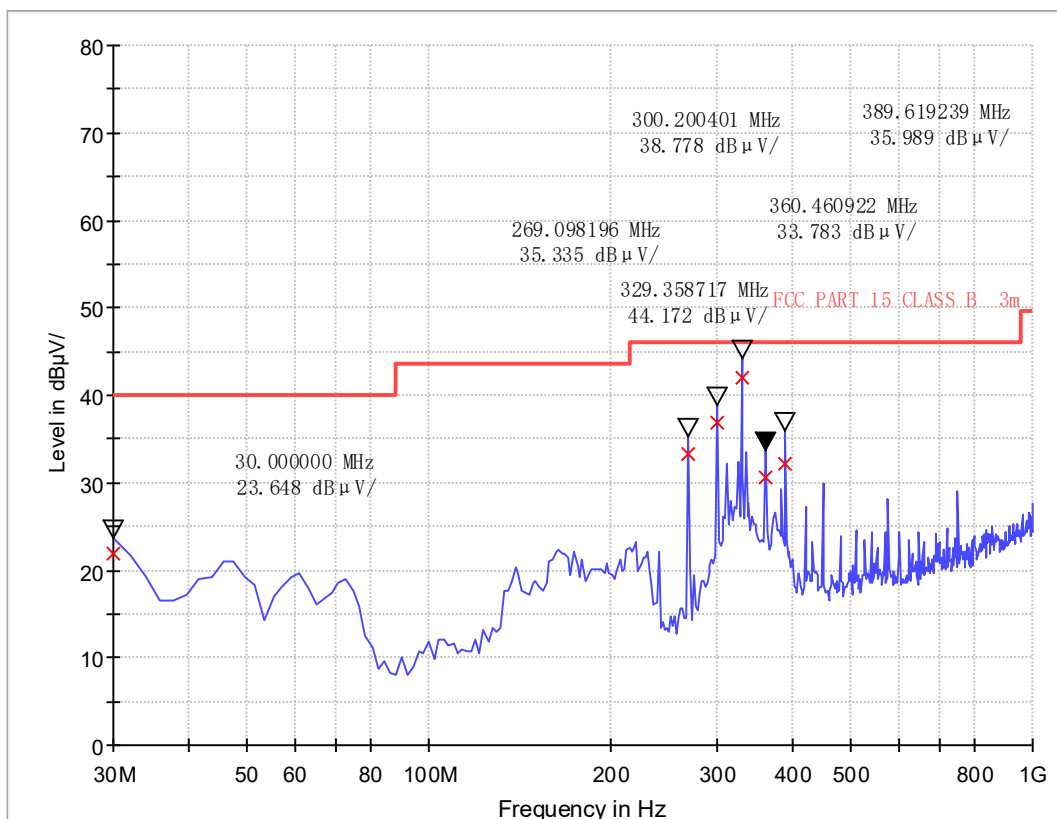

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (m)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
30.00	21.88	120.000	1.00	40.0	18.12	Vertical	Pass
269.08	33.28	120.000	1.00	46.0	12.72	Vertical	Pass
300.20	36.79	120.000	1.00	46.0	9.21	Vertical	Pass
329.36	42.08	120.000	1.00	46.0	3.92	Vertical	Pass
360.48	30.67	120.000	1.00	46.0	15.33	Vertical	Pass
389.60	32.17	120.000	1.00	46.0	13.83	Vertical	Pass


B. Radiation disturbances, antenna polarization: Horizontal, Setup 1

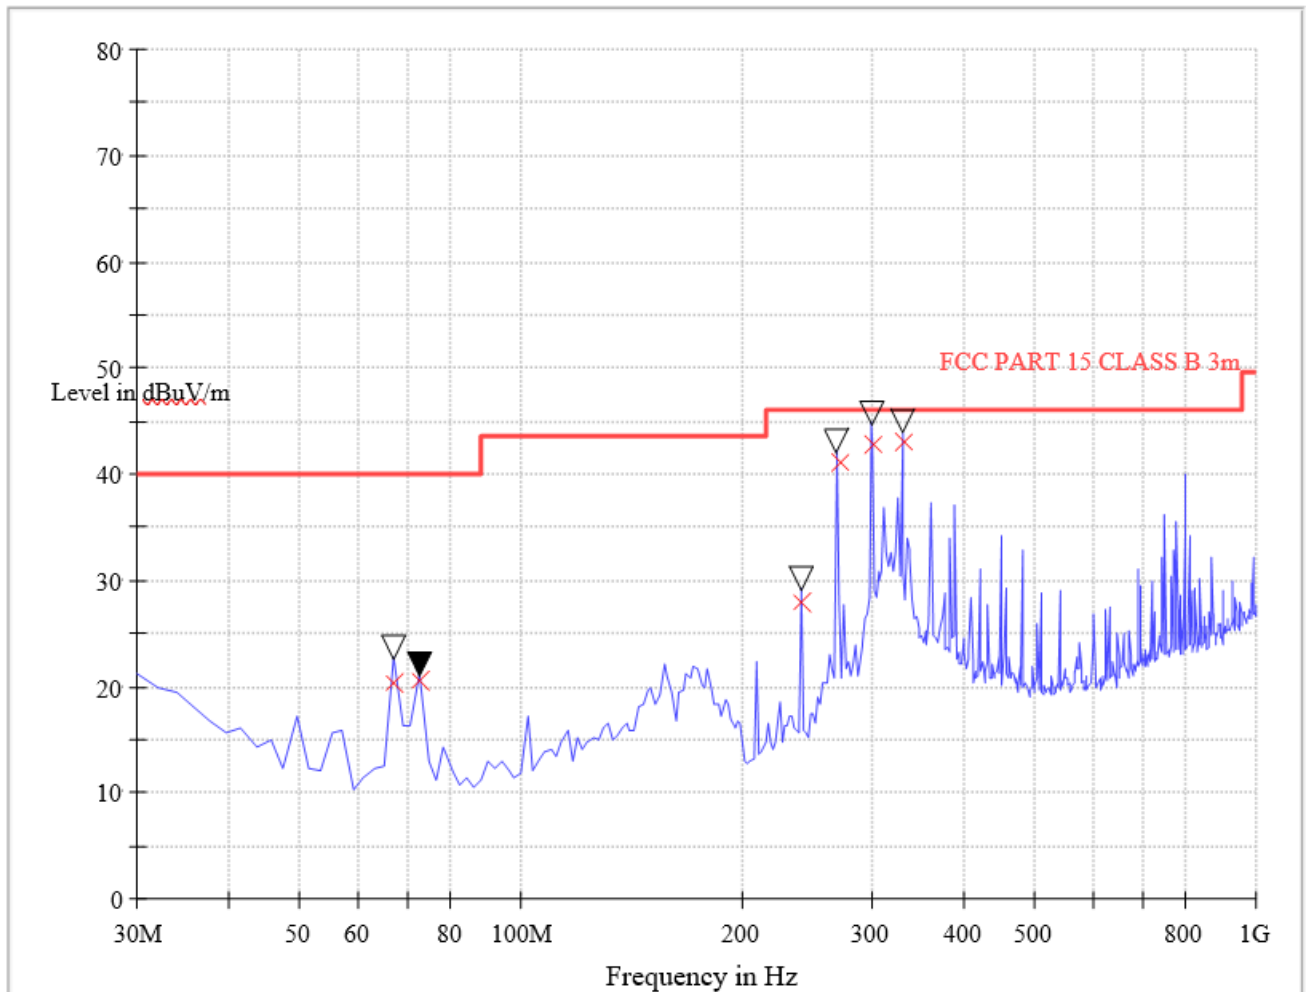

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (m)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
66.92	20.40	120.000	1.00	40.0	19.6	Horizontal	Pass
72.76	20.50	120.000	1.00	40.0	19.5	Horizontal	Pass
239.92	27.90	120.000	1.00	46.0	18.1	Horizontal	Pass
270.00	41.80	120.000	1.00	46.0	4.2	Horizontal	Pass
300.00	43.10	120.000	1.00	46.0	2.9	Horizontal	Pass
330.00	43.40	120.000	1.00	46.0	2.6	Horizontal	Pass


A. Radiation disturbances, antenna polarization: Vertical, Setup 1

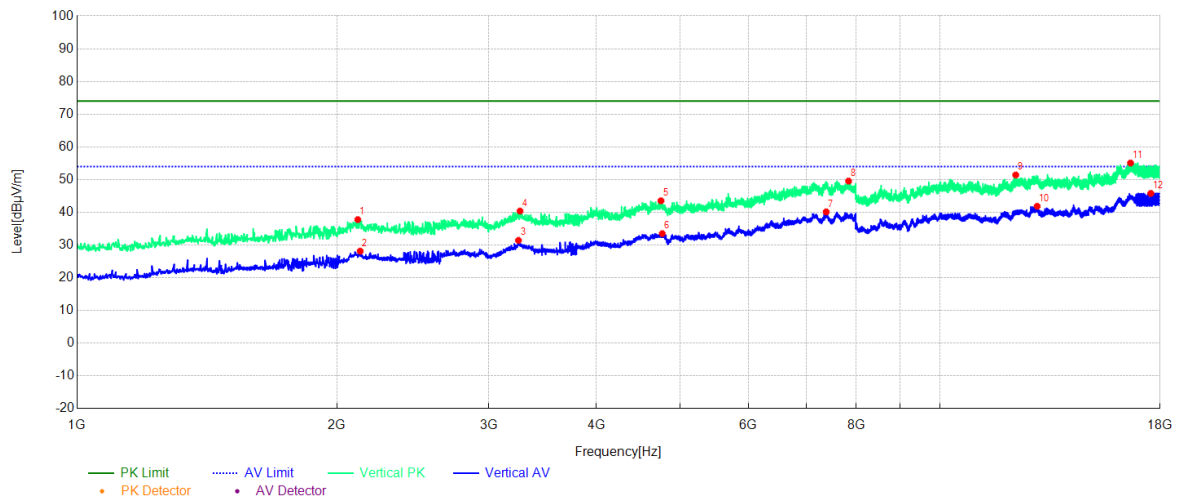

(Plot M: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dBμV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	2115.31	37.77	-11.77	74.00	36.23	PK	106	163	Vertical
2	2128.91	28.14	-11.97	54.00	25.86	AV	102	337	Vertical
3	3247.62	31.43	-7.84	54.00	22.57	AV	107	234	Vertical
4	3261.23	40.39	-7.96	74.00	33.61	PK	105	216	Vertical
5	4750.58	43.53	-4.89	74.00	30.47	PK	103	72	Vertical
6	4767.58	33.50	-4.97	54.00	20.50	AV	106	193	Vertical
7	7384.14	40.14	1.21	54.00	13.86	AV	101	268	Vertical
8	7838.08	49.55	0.55	74.00	24.45	PK	104	22	Vertical
9	12244.92	51.40	4.64	74.00	22.60	PK	109	264	Vertical
10	12965.80	41.84	5.27	54.00	12.16	AV	108	136	Vertical
11	16634.76	55.07	9.08	74.00	18.93	PK	102	218	Vertical
12	17561.36	45.78	12.11	54.00	8.22	AV	105	174	Vertical

B. Radiation disturbances, antenna polarization: Horizontal, Setup1

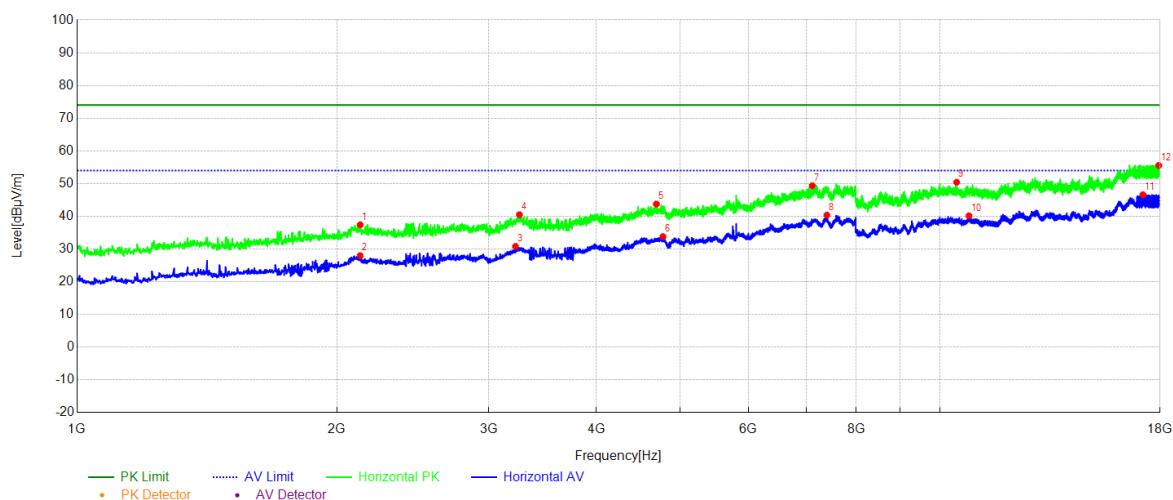

(Plot N: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dBμV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	2128.91	37.40	-11.97	74.00	36.60	PK	103	96	Horizontal
2	2128.91	27.99	-11.97	54.00	26.01	AV	108	323	Horizontal
3	3222.12	30.80	-8.59	54.00	23.20	AV	104	258	Horizontal
4	3256.13	40.49	-7.87	74.00	33.51	PK	102	114	Horizontal
5	4692.77	43.74	-5.41	74.00	30.26	PK	109	42	Horizontal
6	4776.08	33.79	-5.01	54.00	20.21	AV	106	327	Horizontal
7	7113.81	49.34	0.06	74.00	24.66	PK	107	146	Horizontal
8	7397.74	40.38	1.32	54.00	13.62	AV	103	35	Horizontal
9	10458.05	50.42	3.38	74.00	23.58	PK	105	121	Horizontal
10	10808.28	40.15	3.96	54.00	13.85	AV	106	54	Horizontal
11	17192.42	46.59	11.30	54.00	7.41	AV	101	337	Horizontal
12	17938.79	55.56	13.20	74.00	18.44	PK	104	35	Horizontal

-----End of Report-----