

# Test Report

**Product:** Wireless carplay adapter

**Trade Mark:** N/A

**Model Number:** KY-4232

**FCC ID:** 2BPTS-KY-4232

## Prepared for

Dongguan Kinspeed Technology co., Ltd.

Room 608, Building 5, No. 9 Yuhu Road, Fenggang Town, Dongguan City,  
Guangdong Province

## Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan  
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,  
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION</b>	<b>5</b>
1.1	DESCRIPTION OF EUT .....	5
1.2	OPERATION CHANNEL LIST .....	6
1.3	TEST MODE.....	6
1.4	TEST SETUP .....	7
1.5	ANCILLARY EQUIPMENT .....	7
<b>2</b>	<b>SUMMARY OF TEST RESULT</b> .....	<b>8</b>
<b>3</b>	<b>TEST FACILITIES AND ACCREDITATIONS</b> .....	<b>9</b>
3.1	TEST LABORATORY .....	9
3.2	ENVIRONMENTAL CONDITIONS .....	9
3.3	MEASUREMENT UNCERTAINTY .....	9
3.4	TEST SOFTWARE .....	10
<b>4</b>	<b>LIST OF TEST EQUIPMENT</b> .....	<b>11</b>
<b>5</b>	<b>TEST ITEM AND RESULTS</b> .....	<b>12</b>
5.1	DYNAMIC FREQUENCY SELECTION.....	12
5.1.1	<i>Limits</i> .....	12
5.1.2	<i>Test Procedures</i> .....	14
5.1.3	<i>Test Setup</i> .....	15
5.1.4	<i>Test Result</i> .....	16
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SETUP</b> .....	<b>20</b>

**TEST RESULT CERTIFICATION**

**Applicant's Name** ..... : Dongguan Kinspeed Technology co., Ltd.  
Address ..... : Room 608, Building 5, No. 9 Yuhu Road, Fenggang Town,  
Dongguan City, Guangdong Province

**Manufacturer's Name** ..... : Dongguan Kinspeed Technology co., Ltd.  
Address ..... : Room 608, Building 5, No. 9 Yuhu Road, Fenggang Town,  
Dongguan City, Guangdong Province

**Product description**

Product name ..... : Wireless carplay adapter

Model Number ..... : KY-4232

**Standards** ..... : FCC Part 15.407

IEEE/ANSI C63.10-2020

KDB 905462 D06 802.11 Channel Plans New Rules v02

Test procedure ..... : KDB 905462 D02 UNII DFS Compliance Procedures New Rules  
v02

KDB 905462 D04 Test Mode New Rules v01


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

**Date of Test**

Date (s) of performance of tests ..... : July 22, 2025~Aug. 06, 2025


Test Result ..... : **Pass**

**Testing Engineer** :




(Zoe Su)

**Technical Manager** :



(Ming Liu)

**Authorized Signatory** :



(Leo Su)

## Revision History

## 1 General Description

### 1.1 Description of EUT

Product name:	Wireless carplay adapter
Model name:	KY-4232
Series Model:	KY-4236, KY-4237, KY-4238, KY-4239, KY-4240, KY-4241, KY-4242, KY-4243, KY-4244
Different of series model:	Except for the model, appearance color, appearance shape, appearance materials, electronic accessories, all models have the same circuits and modules.
Frequency range:	U-NII-1: 5180 MHz to 5240 MHz U-NII-2A: 5260 MHz to 5320 MHz U-NII-2C: 5500 MHz to 5700 MHz U-NII-3: 5745 MHz to 5825 MHz
Modulation type:	IEEE 802.11a/n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Bit Rate of transmitter:	IEEE 802.11a: Up to 54 Mbps IEEE 802.11n-HT20/40: Up to MCS7 IEEE 802.11ac-VHT20/40: Up to MCS9
Channel bandwidth:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz IEEE 802.11n-HT40/ac-VHT40: 40 MHz
Antenna type:	PCB antenna
Antenna gain:	-0.35dBi
Max. output power:	U-NII-1: 14.21dBm U-NII-2A: 14.62dBm U-NII-2C: 13.14dBm U-NII-3: 17.72dBm
Hardware version:	V1.0
Software version:	V1.0
Battery:	N/A
Power supply:	Input: DC 5V/1A

## 1.2 Operation Channel List

For U-NII-2A:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
52	5260	54	5270	--	--
56	5280	62	5310	--	--
60	5300	--	--	--	--
64	5320	--	--	--	--
--	--	--	--	--	--

For U-NII-2C:

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
100	5500	102	5510	--	--
104	5520	110	5550	--	--
108	5540	118	5590	--	--
112	5560	126	5630	--	--
116	5580	134	5670	--	--
120	5600	--	--		
124	5620	--	--	--	--
128	5640	--	--	--	--
132	5660	--	--	--	--
136	5680	--	--	--	--
140	5700	--	--	--	--
--	--	--	--	--	--

## 1.3 Test Mode

For 802.11a/n (HT20)/ac (VHT20)

U-NII-2A(5250 - 5350 MHz)			U-NII-2C (5470 - 5725 MHz)		
Channel Number	Channel Number	Channel Number	Channel Number	Channel	Frequency (MHz)
52	Low	5260	100	Low	5500
56	Mid	5280	120	Mid	5600
64	High	5320	140	High	5700

For 802.11n (HT40)/ac (VHT40)

U-NII-2A(5250 - 5350 MHz)			U-NII-2C (5470 - 5725 MHz)		
Channel	Channel	Channel	Channel Number	Channel	Frequency (MHz)
54	Low	5270	102	Low	5510
62	High	5310	110	Mid	5550
/	/	/	134	High	5670

## 1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

## 1.5 Ancillary Equipment

Equipment	Model	S/N	FCC ID	Manufacturer
Laptop	BDR-WDH	A3RQPM242 0004454	/	Honor Terminal Co., Ltd.
Adapter	CD289	35810	/	Ugreen Group Limited
Wireless Home Router	FAST5280	/	VW3FAST 5280	/

## 2 Summary of Test Result

No.	Standard Section	Test Item	Result	Remark
1	15.407(h)	Non-Occupancy PeriodDFS Detection Threshold	Pass	
2	15.407(h)	Channel Availability Check Time	N/A	
3	15.407(h)	U-NII Detection Bandwidth	N/A	
4	15.407(h)	Channel Closing Transmission Time	N/A	
5	15.407(h)	Channel Move Time	Pass	
6	15.407(h)	Statistical Performance Check	N/A	

### 3 Test Facilities and Accreditations

#### 3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

#### 3.3 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	$2 \times 10^{-5}$	
RF power, conducted	$\pm 0.57$ dB	
Conducted emission(150kHz~30MHz)	$\pm 2.5$ dB	
Radiated emission(9kHz-30MHz)	$\pm 2.5$ dB	
Radiated emission(30MHz~1GHz)	$\pm 4.2$ dB	
Radiated emission (above 1GHz)	$\pm 4.7$ dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	$\pm 1$ degree	

Humidity	± 5 %	
----------	-------	--

### 3.4 Test Software

Software name	Manufacturer	Model	Version
RF Test System	MWRF	MTS 8310	2.0.0.0

## 4 List of Test Equipment

RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaig Signal Generator	Agilent	N5181A	MY47070421	2025-05-07	2026-05-06
2	HB-E042	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	132108	2025-05-08	2026-05-07
3	HB-E043	MXG Anaig Signal Generator	Agilent	N5182A	US46240335	2025-05-08	2026-05-07
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2025-05-07	2026-05-06
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	2025-05-08	2026-05-07
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1S	N/A	2025-05-09	2026-05-08

**Note:**

1. The calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).
2. The instrument RF Control Box, numbered HB-E045, contains power meter.

## 5 Test Item And Results

### 5.1 Dynamic Frequency Selection

#### 5.1.1 Limits

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid cochannel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHzbands.1

Within the context of the operation of the DFS function, a U-NII device will operate in either MasterMode or Client Mode. U-NII devices operating in Client Mode can only operate in a networkcontrolled by a U-NII device operating in Master Mode.2Tables 1 and 2 shown below summarize the information contained in sections 5.1.1 and 5.1.2.

**Table 1: Applicability of DFS Requirements Prior to Use of a Channe**

Requirement	Operational Mode		
	Master	ClientWithout RadarDetection	Client With Radar
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel AvailabilityCheck Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiplebandwidth modes	Master Device or Client withRadar Detection	Client Without Radar Detection
U-NII Detection Bandwidth andStatistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and ChanneClosing Transmission Time	Test using widest BW mode available	Test using the widest BW modeavailable for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Master Devices**

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 5350 MHz and 5470 5725 MHz bands, DFS is not required in the 5150 5250 MHz or 5725 5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NI devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (n-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

**Client Devices**

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

**DFS technical requirements specifications****DFS Detection Thresholds**

Table 3 below provides the DFS Detection Thresholds for Master Devices as well as Client Devices incorporating In-Service Monitoring.

NOTE: For devices that support multiple Nominal Channel Bandwidths, the Channel Availability Check

**Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection**

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	62 dBm
EIRP $<$ 200 milliwatt that do not meet the powerspectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

**Table 4: DFS Response Requirement Values**

Parameter	Value
Non-occupancy period	Minimum 30 minutcs
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U.NII 99% transmissionpower bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### 5.1.2 Test Procedures

In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during In-Service Monitoring  
 -Channel Closing Transmission Time

-Channel Move Time

- Non-Occupancy Period

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating

Channel of the U.NII device (In- Service Monitoring).

- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without DFS), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time  $T_0$  the Radar Waveform generator sends a Burst of pulses for one of the Radar Type 0 in Table 5 at levels defined in Table 3, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/error(s). Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for a duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs. Figure 17 illustrates Channel Closing Transmission Time.
- e) When operating as a Master Device, monitor the UUT for more than 30 minutes following instant  $T_2$  to verify that the UUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.
- f) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps
- a) to f).

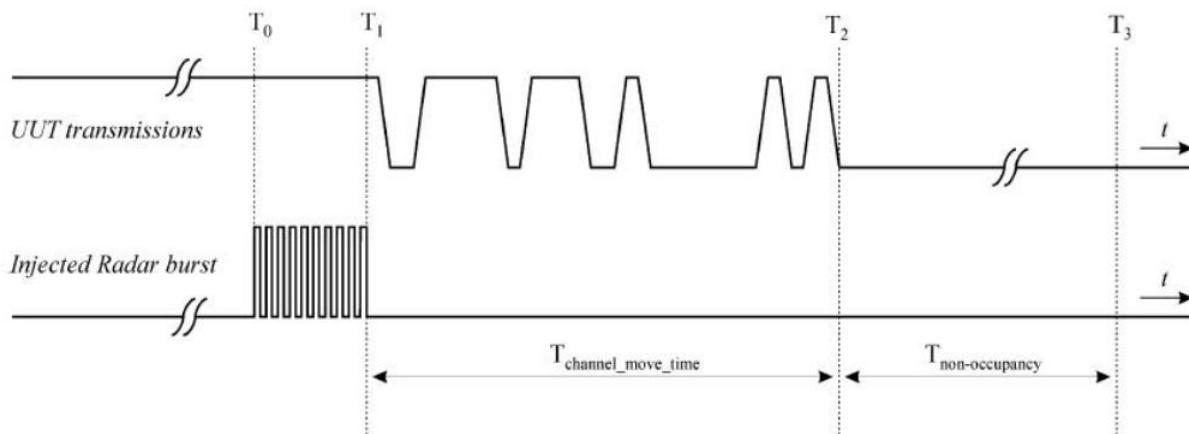


Figure 17: Example of Channel Closing Transmission Time & Channel Closing Time

### 5.1.3 Test Setup


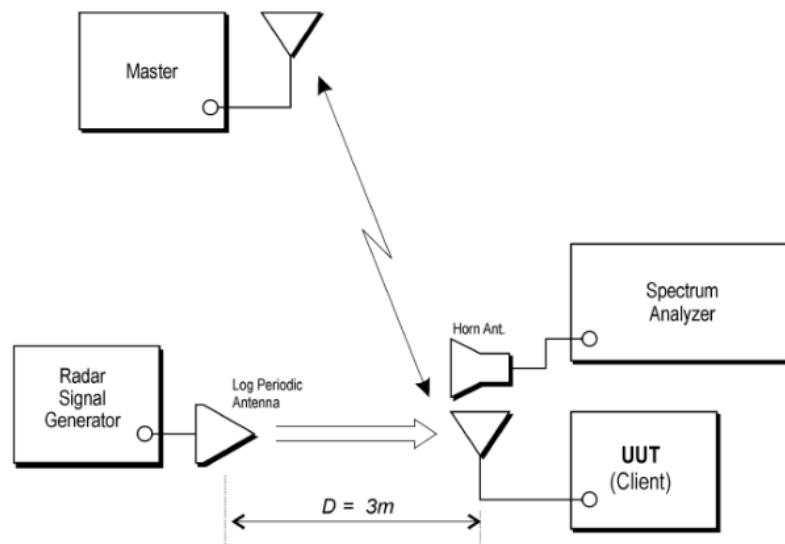


Figure 7: Example Radiated Setup where UUT is a Client and radar Test Waveforms are injected into the Client

#### 5.1.4 Test Result

Radar Waveform calibration Plot

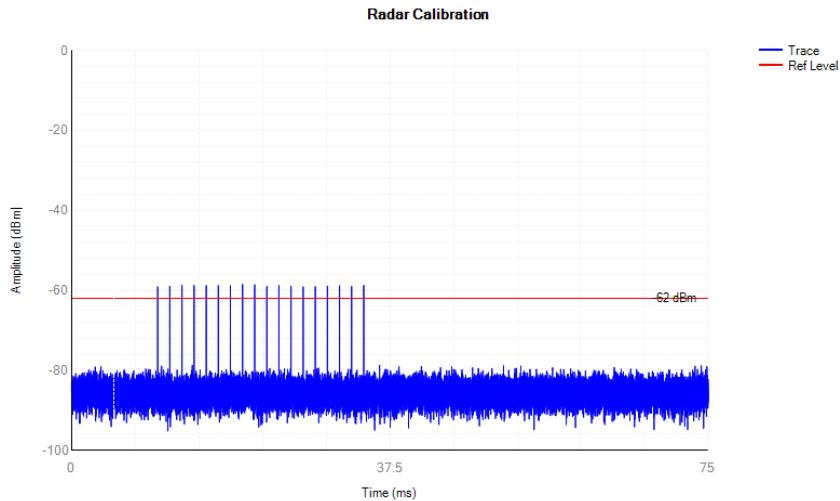


Channel Shutdown


Mode	Channel number	Center frequency	Channel MoveTime (ms)	Limits (ms)	Channel Closing Transmission Time (ms)	Limits(ms)	Results
802.11n (HT40)	54	5270	100.1	10000	30	60	Pass
802.11n (HT40)					26		Pass

Note 1: We test all channels that need to be tested for DFS, recording only part of the test pattern and data. In this report, we have identified other parts that are compliant with FCC regulations.

802.11n channel 54 5270MHz

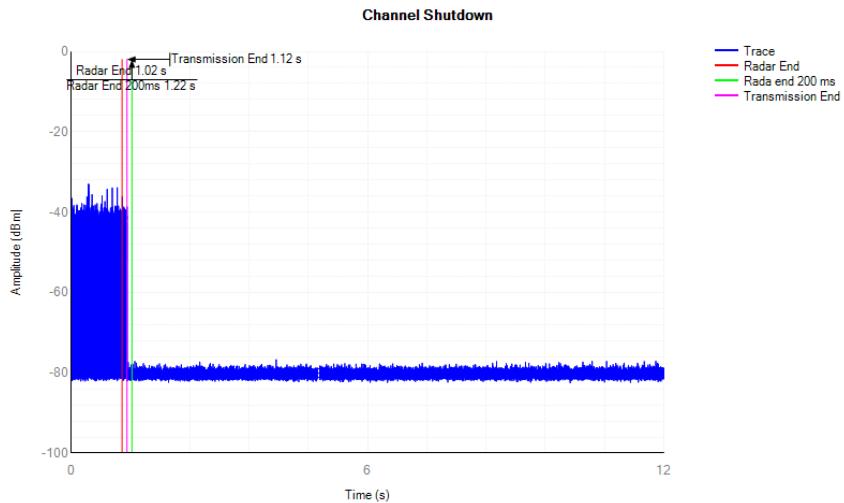

802.11n channel 102 5510MHz

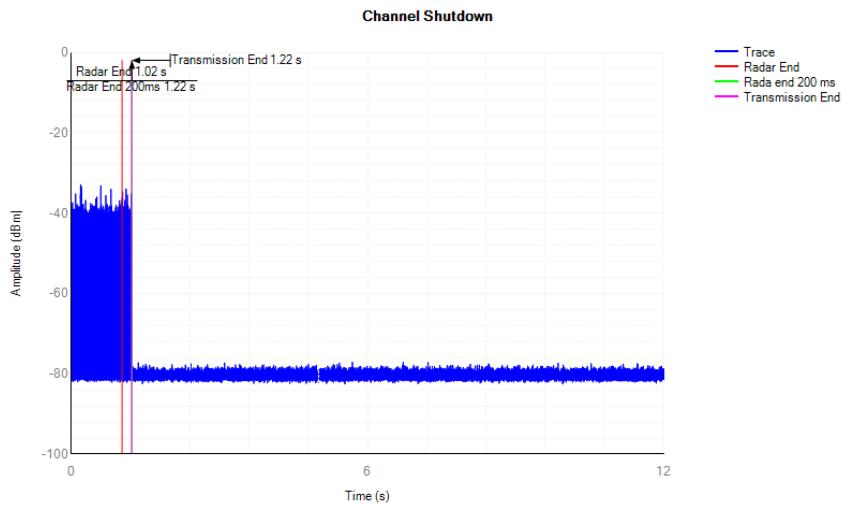


Non-Occupancy Period


Mode	Frequency	Bandwidth	Measured Value	Limit Requirements	Verdict
802.11n	5270MHz	40MHz	>30min	30min	Pass
802.11n	5510MHz	40MHz	>30min	30min	Pass

Note: All the mode have been tested and passed, only showed the worst mode in the report.


802.11n channel 54 5270MHz

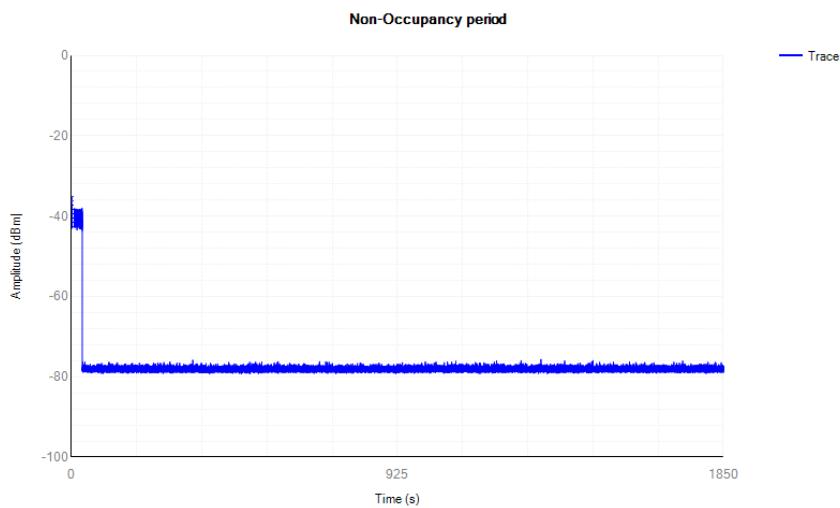

802.11n channel 102 5510MHz

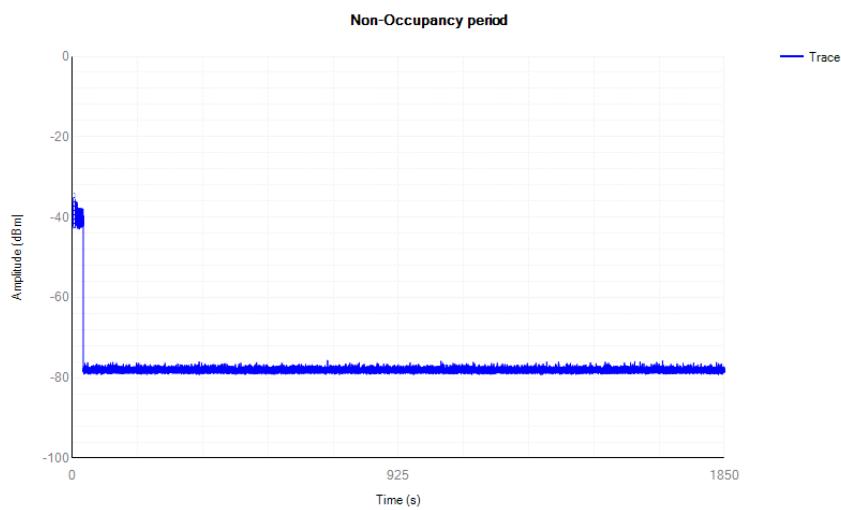

## 6 Photographs of the Test Setup

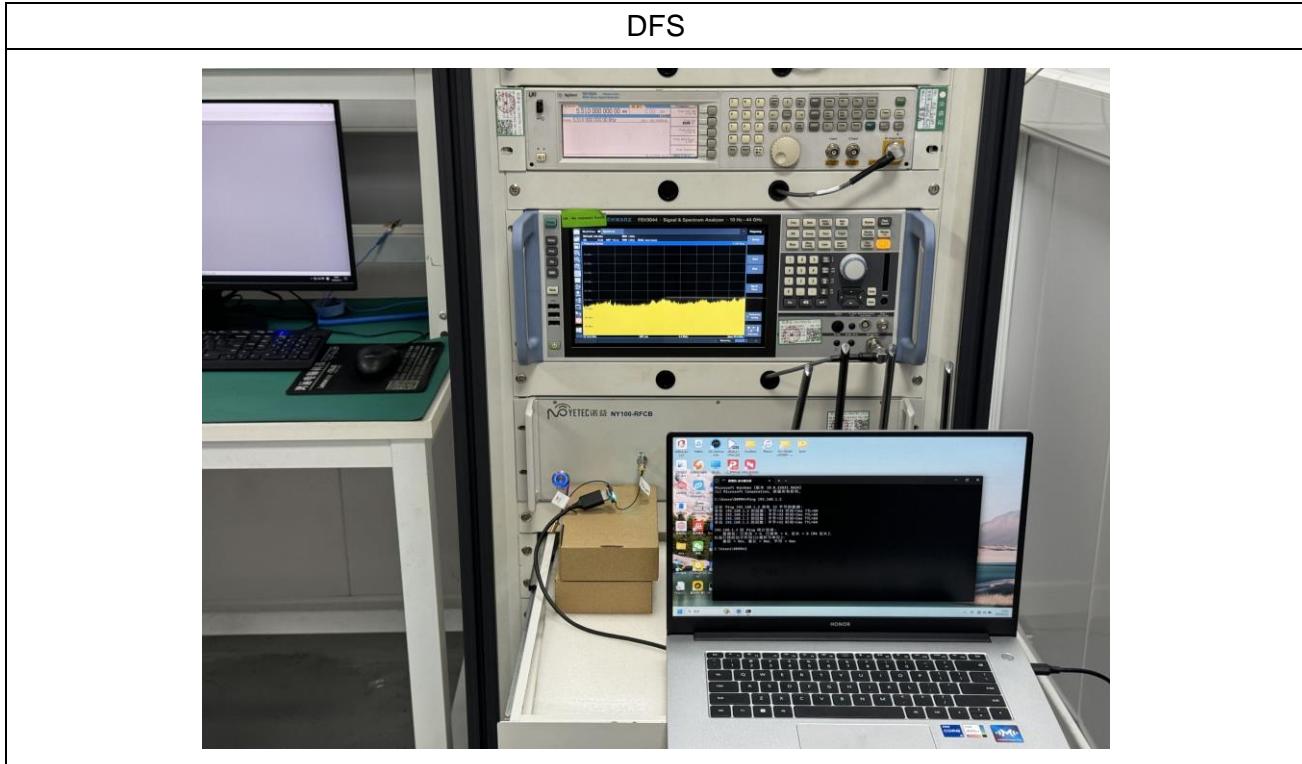

\*\*\*\*\* END OF REPORT \*\*\*\*\*