

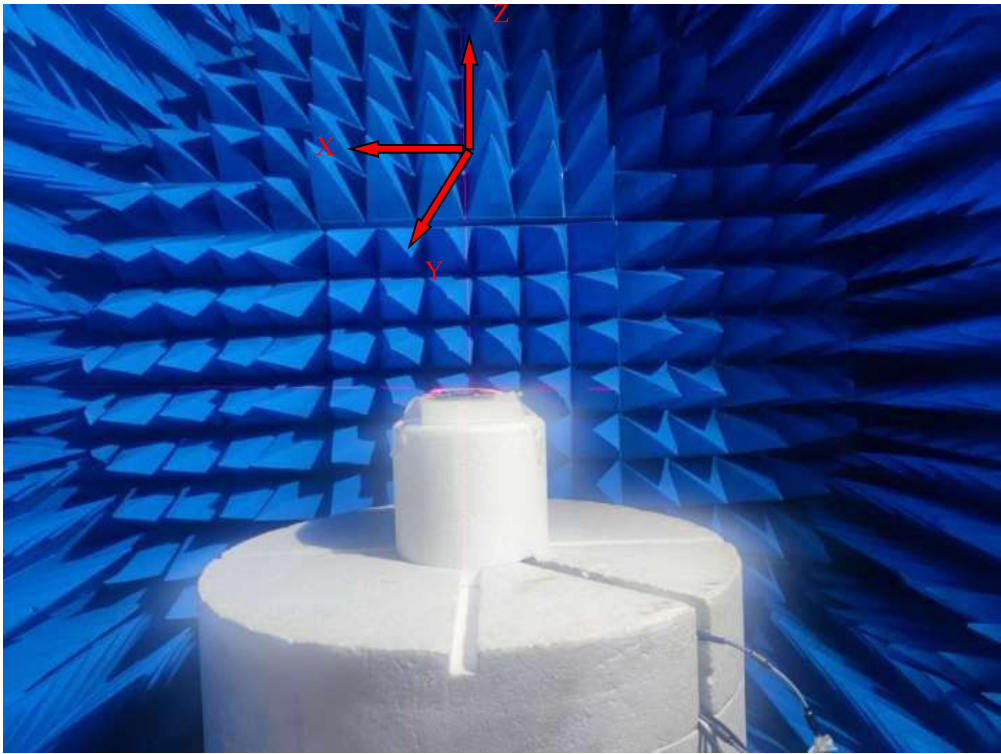


Antenna data sheet

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	> -4
VSWR	< 3.2
Impedance (Ω)	50 Ω
Antenna Type	PCB
Polarization	Linear
Manufacturer	Shenzhen Xinhong Xingye Multi layer Electronic Technology Co., Ltd
Add	Buliding B, Derun Changxing, No.1001, Shangxing West Industrial Zone, Xihuan, Road,ShajingTown,BaoanDistrict,ShenzhenCity

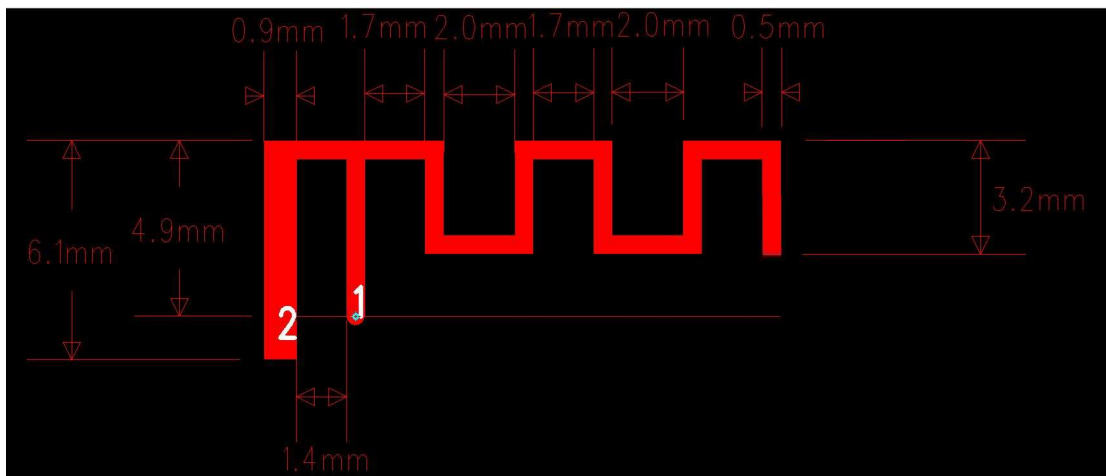

Dimension

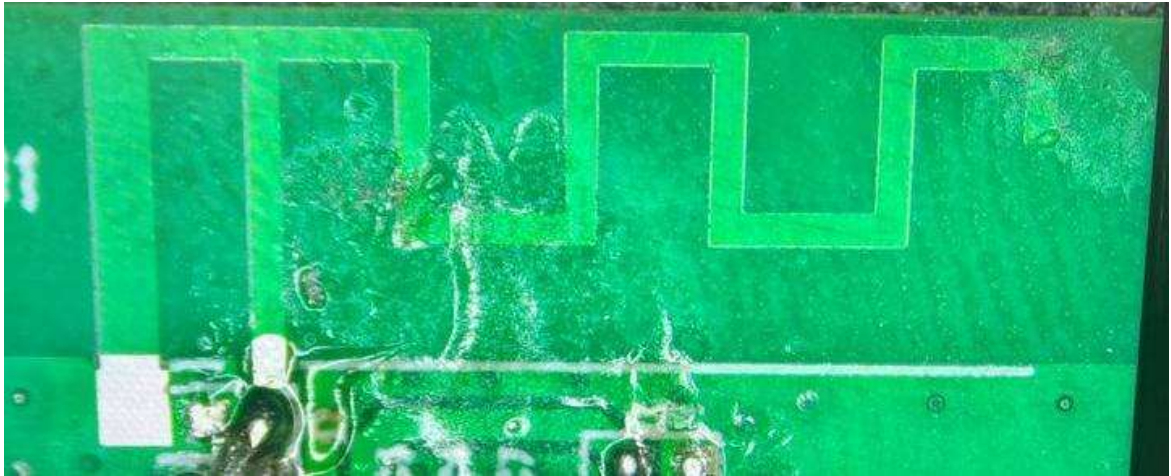


VSWR、Return Loss、smith




Antenna frequency and gain

Frequency (MHz)	Gain (dBi)	Efficiency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


2440MHz 2D-Theta Pattern

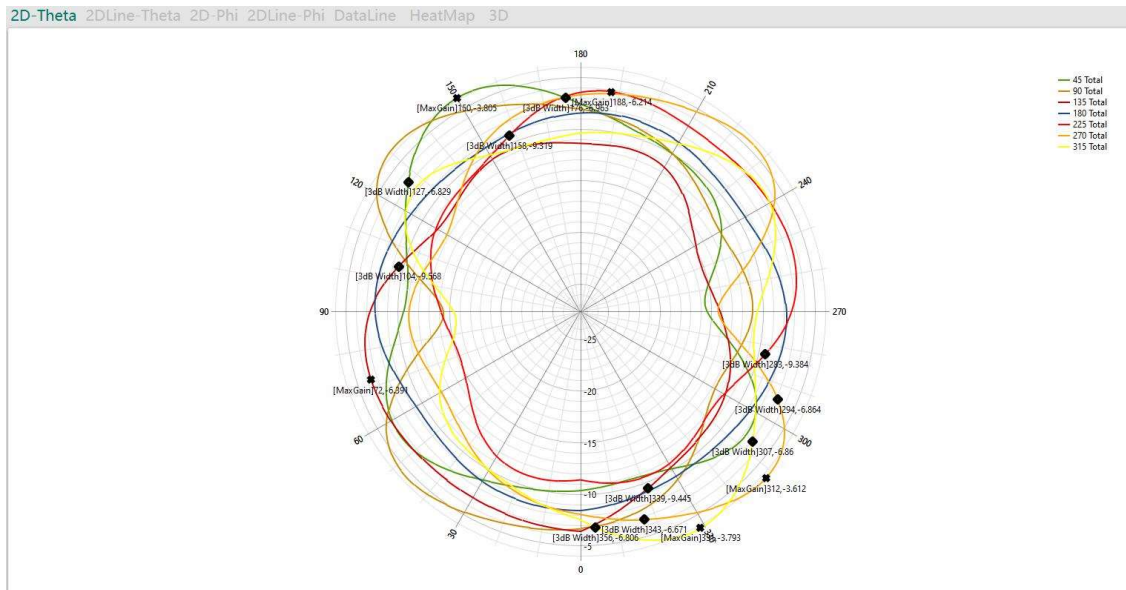


2440MHz 2D-Phi Pattern

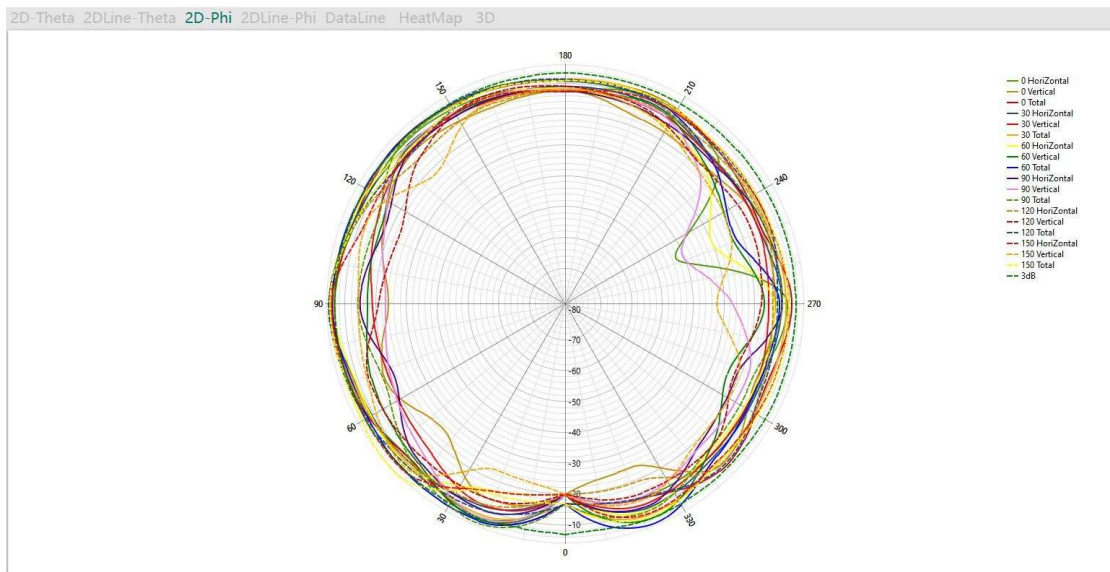

2440MHz 3D-Horizontal Pattern

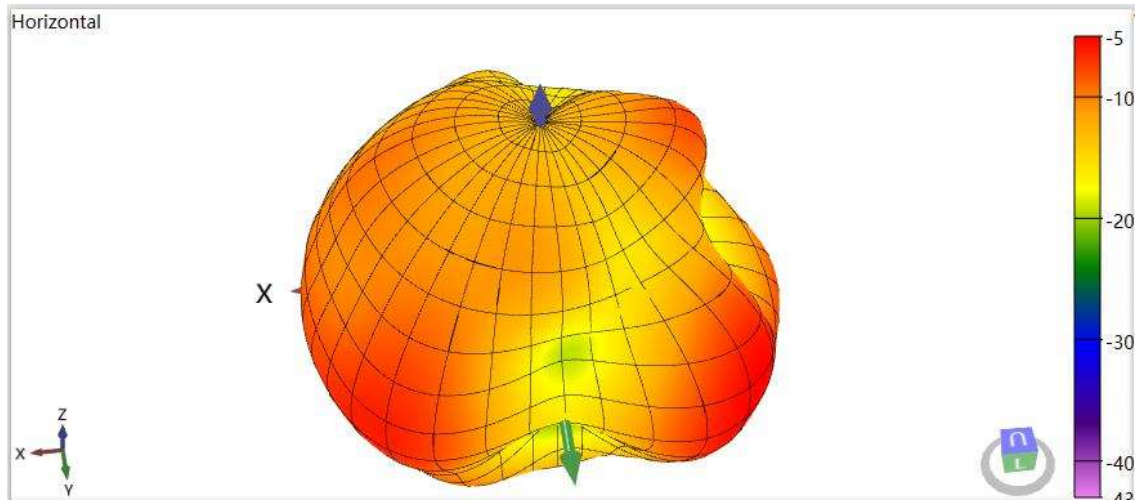

2440MHz 3D-Vertical Pattern

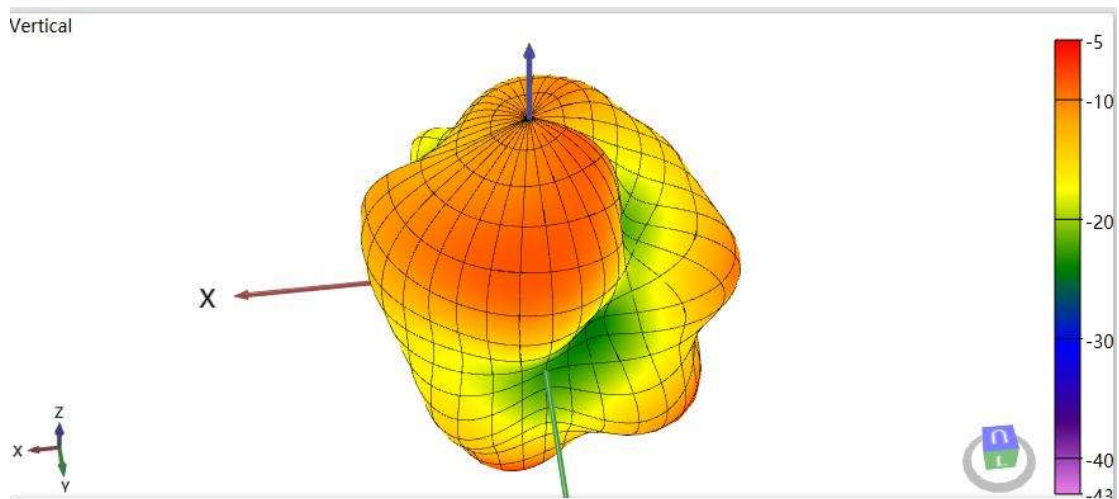

2440MHz 3D-Total Pattern

