

Test Report Prepared By:

Electronics Test Centre  
27 East Lake Hill  
Airdrie, Alberta  
Canada  
T4A 2K3

[sales@etc-mpbtech.com](mailto:sales@etc-mpbtech.com)  
<http://www/etc-mpb.com>

Telephone: 1-403-912-0037

ETC Report #: o22e25a186 Release 1

Report date: June 11, 2025

**EMC testing of the Orbital Sandblasting Deadman Transmitter in accordance with FCC Part 15.247 and ANSI C63.10: 2013 as referenced by FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02.**

**FCC ID: 2BPG-WDSTRS3**

Test Dates: April 30, 2025, May 1-5, 2025

Test Personnel: Imran Akram

Prepared for: **13887316 Canada Inc. O/A Orbital Sandblasting**  
11158 67 St NW  
Edmonton, Alberta, Canada  
T5B1K8  
Telephone: 1-780-263-4259



\_\_\_\_\_  
Imran Akram  
[iakram@etc-mpbtech.com](mailto:iakram@etc-mpbtech.com)  
EMC Technologist  
Electronics Test Centre (Airdrie)



\_\_\_\_\_  
Marc Rousseau  
[marc.rousseau@mpbc.ca](mailto:marc.rousseau@mpbc.ca)  
QA Manager  
Electronics Test Centre (Airdrie)

## REVISION RECORD

ISSUE	DATE	AUTHOR	REVISIONS
DRAFT 1	2025-06-04	I. Akram	Initial draft submitted for review.
DRAFT 2	2025-06-05	I. Akram	Added serial#, Model#, Antenna Info, update unit name and FCC ID
Release 1	2025-06-11	I. Akram	Sign Off

## TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope .....	5
1.2	Applicant .....	5
1.3	Test Sample Description.....	5
1.4	General Test Conditions .....	5
1.5	Reference Standards .....	6
1.6	Test Methodology.....	6
1.6.1	Variations in Test Methodology.....	6
1.6.2	Test Sample Verification, Configuration & Modifications .....	6
1.6.3	Uncertainty of Measurement: .....	6
2.0	TEST CONCLUSION	7
2.1	AC Main Power Line Conducted Emissions .....	8
2.1.1	Test Guidance: ANSI C63.4-2014, Clause 7.3.1 .....	8
2.1.2	Deviations From The Standard:.....	8
2.1.3	Test Equipment.....	9
2.1.5	Test Sample Verification, Configuration & Modifications .....	9
2.1.6	Conducted Emissions Data.....	10
2.2	6dB Bandwidth .....	12
2.2.1	Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 55807412	
2.2.2	Deviations From The Standard:.....	12
2.2.3	Test Equipment.....	12
2.2.4	Test Sample Verification, Configuration & Modifications .....	13
2.2.5	Channel Bandwidth Data: .....	13
2.3	Max Average Output Power .....	15
2.3.1	Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074 15	
2.3.2	Deviations From The Standard:.....	15
2.3.3	Test Equipment.....	16
2.3.4	Test Sample Verification, Configuration & Modifications .....	16
2.3.5	Max Average Output Power Data: .....	16
2.4	Band Edge Attenuation .....	19
2.4.1	Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074 .....	19
2.4.2	Deviations From The Standard:.....	19
2.4.3	Test Equipment.....	20
2.4.4	Test Sample Verification, Configuration & Modifications .....	20
2.4.5	Band Edge Data.....	20
2.5	Power Spectral Density.....	22
2.5.1	Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074 22	
2.5.2	Deviations From The Standard:.....	23
2.5.3	Test Equipment.....	23
2.5.4	Test Sample Verification, Configuration & Modifications .....	23
2.5.5	Average PSD Data.....	23

2.6	Conducted Spurious Emissions (Non-Restricted Band) .....	26
2.6.1	Test Guidance: ANSI C63.10-2013, Clause 6.7 .....	26
2.6.2	Deviations From The Standard:.....	26
2.6.3	Test Equipment.....	26
2.6.4	Test Sample Verification, Configuration & Modifications .....	26
2.6.5	Conducted Emissions Data: LoRa DTS.....	27
2.7	EUT Positioning Assessment.....	30
2.8	Radiated Spurious Emissions (within restricted band).....	31
2.8.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2 .....	32
2.8.2	Deviations From The Standard:.....	32
2.8.3	Test Equipment.....	32
2.8.4	Test Sample Verification, Configuration & Modifications .....	33
2.8.5	Radiated Emissions Data: LoRa DTS.....	34
2.9	Radiated Emissions (RX Mode).....	38
2.9.1	Test Guidance:.....	38
2.9.2	Deviations From The Standard:.....	38
2.9.3	Test Equipment.....	39
2.9.4	Test Sample Verification, Configuration & Modifications .....	39
2.9.5	Radiated Emissions Data:.....	40
2.10	AC Main Power Line Conducted Emissions .....	43
2.10.1	Test Guidance: ANSI C63.4-2014, Clause 7.3.1 .....	43
2.10.2	Deviations From The Standard:.....	43
2.10.3	Test Equipment.....	44
2.10.5	Test Sample Verification, Configuration & Modifications .....	44
2.10.6	Conducted Emissions Data.....	45
2.11	RF Exposure .....	47
3.0	TEST FACILITY	48
3.1	Location.....	48
3.2	Grounding Plan .....	48
3.3	Power Supply .....	48
	Appendix A – Test Setup Block Diagram	49

## **1.0 INTRODUCTION**

### **1.1 Scope**

The purpose of this report is to present the results of compliance testing performed in accordance with FCC part 15 subpart C, and ANSI C63.10-2013 to gain FCC new Authorization for Low-Power License-Exempt transmitters.

All test procedures, limits, criteria, and results described in this report apply solely to the tested variant of the Deadman Transmitter test sample, referred to herein as the EUT (Equipment Under Test).

The samples have been provided by the customer and were in good condition at the time of testing.

This report does not imply product endorsement by the Electronics Test Centre, A2LA, nor any Canadian Government agency.

### **1.2 Applicant**

This test report has been prepared for Orbital Sandblasting, located in Edmonton, Alberta, Canada.

### **1.3 Test Sample Description**

As provided to ETC (Airdrie) by Orbital Sandblasting:

<b>Product Name:</b>	Deadman Transmitter
<b>Radio</b>	LoRa
<b>Frequency Band</b>	902 – 928 MHz
<b>Frequency Range</b>	903 – 927 MHz
<b>Operating Mode</b>	500KHz DTS
<b>Max Transmit Power (Conducted)</b>	19.58 dBm (0.0908 W)
<b>Associated Antennas</b>	Molex Part#2111400100, Peak Gain:1 dBi , Radiation Pattern: Omnidirectional
<b>Model#</b>	WDS-3-Transmitter
<b>Serial#</b>	588423-10124-3.0 3524
<b>Power supply:</b>	Internal Battery
<b>Note:</b>	All three channels (LOW, MID, High) on each axis (X, Y & Z) are analyzed to determine the worse channel. Full emission scan is performed on worse channel at worse axis.

### **1.4 General Test Conditions**

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated. In order to meet the operational requirements during testing as per KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10-2013 clause 5.11 the device was programmed with a special firmware to transmit at a continuous transmit mode (100% duty cycle). Special firmware is strictly for testing purpose only and not available to end user. This special test case represents the worst-case duty cycle. For antenna port conducted emission SMA cable connected to the UFL antenna port connector at the output of the radio to provide direct access at the radio output to connect spectrum analyzer. During testing EUT is powered via fully charged internal battery.

The environmental conditions are recorded during each test, and are reported in the relevant sections of this document.

## 1.5 Reference Standards

Standards	Description
FCC, title 47 CFR § 15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
FCC, title 47 CFR § 15.207	Conducted limits for an intentional radiator that is designed to be connected to the public utility (AC) power line.
FCC, title 47 CFR § 15.107	Conducted limits for equipment that is designed to be connected to the public utility (AC) power line.
FCC, title 47 CFR § 15.209	Radiated emission limits; general requirements
FCC, title 47 CFR § 15.109	Radiated emission limits; from unintentional radiators digital devices.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio – Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules

## 1.6 Test Methodology

Test methods are specified in the Basic Standard as referenced and/or modified by the Product Standard in the part of Section 2 of this report associated with each particular test case. EUT is tested in RX mode to cover FCC part 15 Sub Part B (Digital Circuitry).

### 1.6.1 Variations in Test Methodology

Any variance in methodology or deviation from the reference Standard is documented in the part of Section 2 of this report associated with each particular Test Case.

### 1.6.2 Test Sample Verification, Configuration & Modifications

EUT setup, configuration, protocols for operation and monitoring of EUT functions, and any modifications performed in order to meet the requirements, are detailed in each Test Case of Section 2 of this report.

### 1.6.3 Uncertainty of Measurement:

The factors contributing to measurement uncertainty are identified and calculated in accordance with CISPR 16-4-2: 2011.

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Uncertainty
Radiated Emissions Level (9 KHz – 1 GHz)	$\pm 5.6$ dB
Radiated Emissions Level (1 GHz – 18 GHz)	$\pm 4.96$ dB
Uncertainty Conducted Power level	$\pm 0.5$ dB
Uncertainty Conducted Spurious emission level	$\pm 0.6$ dB
Uncertainty for Bandwidth test	$\pm 1.5$ %

## 2.0 TEST CONCLUSION

### STATEMENT OF COMPLIANCE

The customer equipment referred to in this report was found to comply with the requirements, as summarized below.

The EUT was subjected to the following tests. Compliance status is reported as **Compliant** or **Non-compliant**. **N/A** indicates the test was Not Applicable to the EUT.

The measurement uncertainty is not accounted for determination of the statement of compliance. The statement of compliance is based only on the measurement value recorded.

**Note:** Maintenance of compliance is the responsibility of the Manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the EUT with respect to the standards detailed in this test report.

The following table summarizes the tests performed in terms of the specification, class or performance criterion applied, and the EUT modification state.

Test Case	Test Type	Specification	Test Sample	Modifications	Config.	Result
2.1	AC Main Conducted Emission	FCC PT15.207	Deadman Transmitter	none	see § 2.1	<b>Compliant</b>
2.2	6dB Bandwidth	FCC PT15.247 (a, 2)	Deadman Transmitter	none	see § 2.2	<b>Compliant</b>
2.3	Max Average Output Power	FCC PT15.247(d)	Deadman Transmitter	none	see § 2.3	<b>Compliant</b>
2.4	Band Edge Attenuation	FCC PT15.247(d)	Deadman Transmitter	none	see § 2.4	<b>Compliant</b>
2.5	Power Spectral Density	FCC PT15.247(e)	Deadman Transmitter	none	see § 2.5	<b>Compliant</b>
2.6	Conducted Spurious Emissions (Non-Restricted Band)	FCC PT15.247(d)	Deadman Transmitter	none	see § 2.6	<b>Compliant</b>
2.7	EUT Position	ANSI C63.4	Deadman Transmitter	none	see § 2.7	<b>Assessed</b>
2.8	Radiated Spurious Emission (Restricted Band)	FCC PT15.205, FCC PT15.209 FCC PT15.247(d)	Deadman Transmitter	none	see § 2.8	<b>Compliant</b>
2.9	Radiated Emissions (RX Mode)	FCC PT15.109	Deadman Transmitter	none	see § 2.9	<b>Compliant</b>
2.10	AC Main Conducted Emissions (RX Mode)	FCC PT15.107	Deadman Transmitter	none	see § 2.10	<b>Compliant</b>
2.11	RF Exposure	15.247(i)	Deadman Transmitter	none	see § 2.11	<b>Exempt</b>

Refer to the test data for applicable test conditions.

## 2.1 AC Main Power Line Conducted Emissions

**Test Lab:** Electronics Test Centre, Airdrie

**EUT:** Deadman Transmitter

**Test Personnel:** Imran Akram

**Standard:** FCC Part 15.207

**Date:** 2025-05-05 (23.2°C, 15.6% RH)

**Basic Standard:** ANSI C63.10: 2013

**EUT status: Compliant**

**Specification:** FCC Part 15.207

Frequency (MHz)	Quasi-Peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50

**Criteria:** The conducted emissions produced by a device shall not exceed the limits as specified.

### 2.1.1 Test Guidance: ANSI C63.4-2014, Clause 7.3.1

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.

### 2.1.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.1.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	SWC 021	N/A	
EMI receiver	Agilent	N9038A	6130	2024-08-15	2025-08-15
LISN	Com-Power	LI-215A	6180	2024-08-28	2025-08-28
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2025-05-01	2026-05-01
Transient Limiter	Electro-Metrics	EM-7600	4454	2025-02-21	2026-02-21
Emission Cable	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4436	2025-02-21	2026-02-21

### 2.1.4 Test Sample Verification, Configuration & Modifications

The AC/DC adaptor model #XSC-05010005 was plugged into the EUT to charge the battery, which was then plugged into the LISN for measurement. Line voltage was 120 VAC, at 60 Hz.

The EUT met the requirements without modification.

#### Test setup diagram:

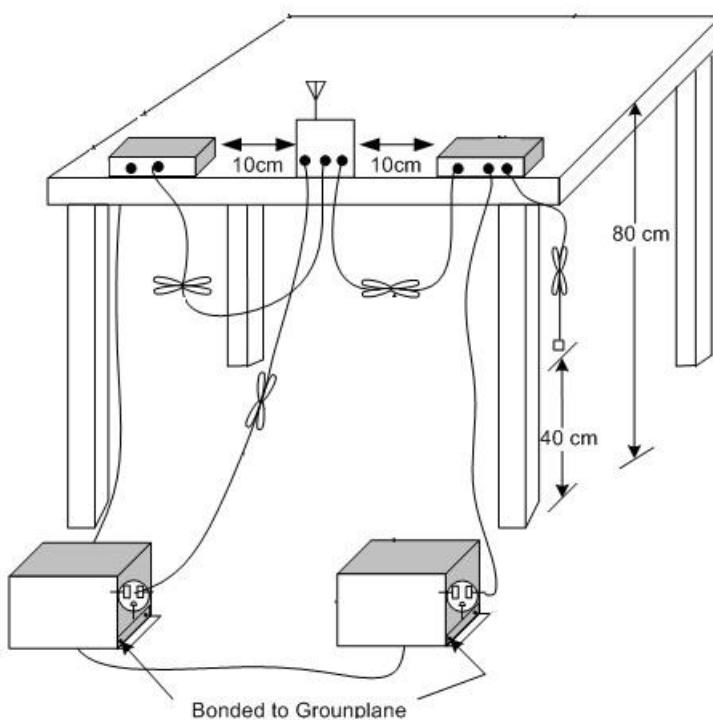

### 2.1.5 Conducted Emissions Data

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of limit at the frequency measured, and the Delta between the result and the limit.

Freq. Marker	Freq. (MHz)	Raw reading (dB $\mu$ V)	Det.	LISN Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Delta (dB)	L / N
1	0.593	35.21	AV	0	9.8	45.01	46.0	-0.99	L
1	0.594	34.01	AV	0	9.8	43.9	46.0	-2.1	N

**Meter Reading in dB $\mu$ V + LISN Factor in dB + Gain/Loss Factor in dB = Corrected Emission Strength in dB $\mu$ V.**


Notes:

When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.


QP = Quasi-Peak detector; AV = Average detector

**Negative values for Delta indicate compliance.**

## Plot of Conducted Emissions: Line

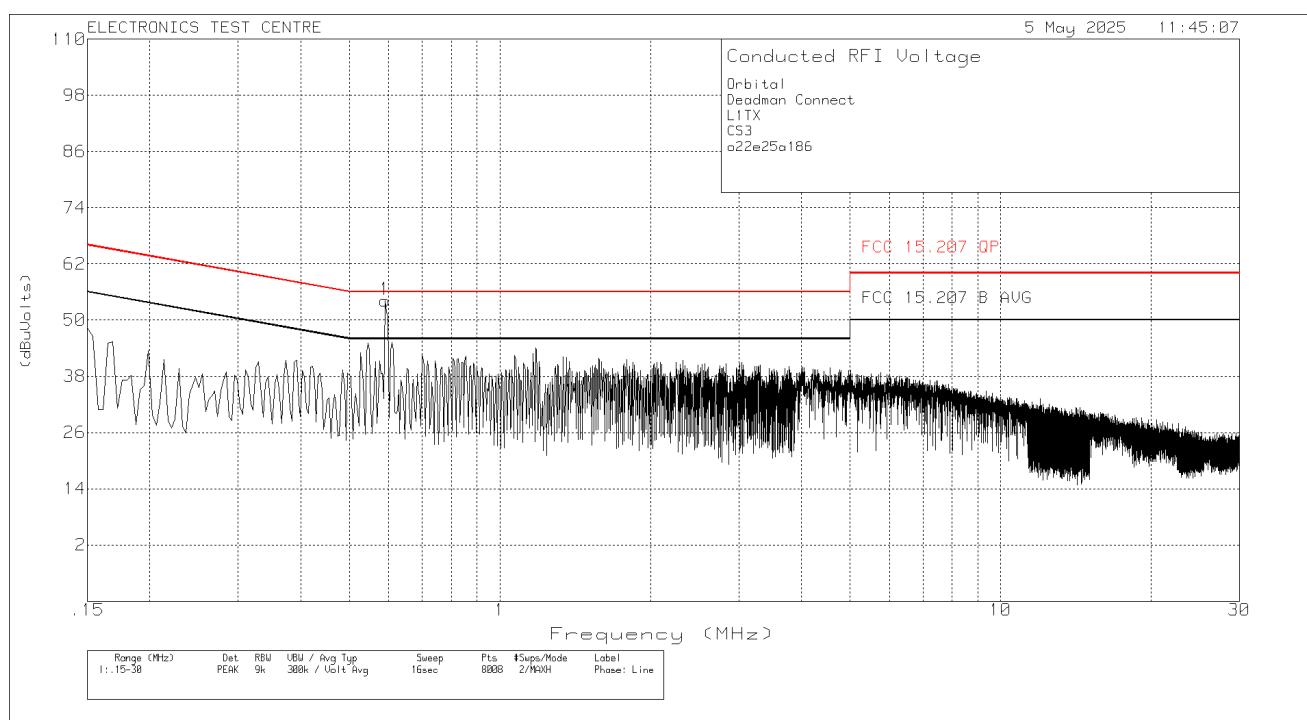

## Plot of Conducted Emissions: Neutral

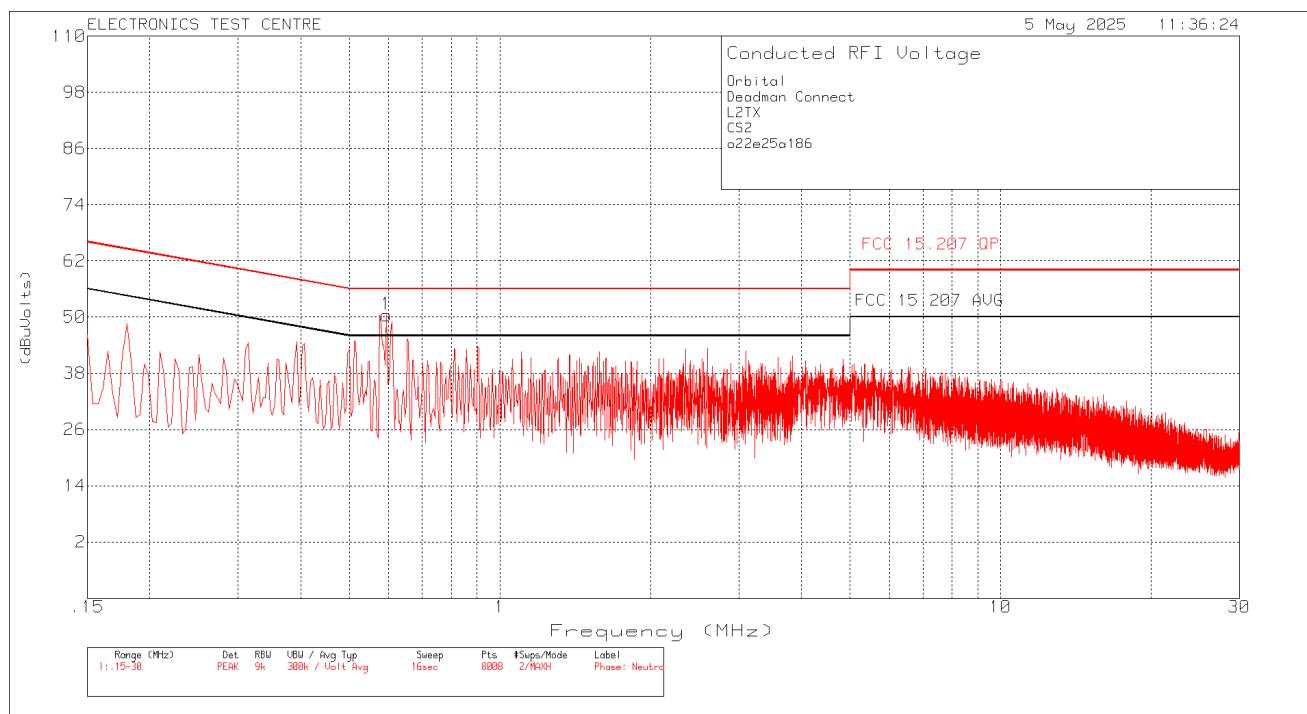

## 2.2 6dB Bandwidth

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Deadman Transmitter
<b>Test Personnel:</b> Imran Akram	<b>Standard:</b> FCC PART 15.247
<b>Date:</b> 2025-04-30 (24.2°C, 19.4% RH)	<b>Basic Standard:</b> ANSI C63.10-2013 FCC OET KDB 558074
<b>EUT status: Compliant</b>	

**Specification:** FCC Part 15.247 (a, 2), FCC 15.215 (c)

**Criteria:** Systems using digital modulation techniques may operate in the 902-928 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.2.1 Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting thereby allowing direct measurements, without the need for any further corrections.

For DTS the spectrum analyzer is set for a frequency span  $\geq$  (2 \* OBW),  $\leq$  (5 \* OBW), selected to clearly display the channel. The RBW is set to 100 kHz. The VBW is set to  $\geq$  (3 \* RBW). The Peak detector is used, with the trace set to Max Hold.

The automated 99% BW function of the spectrum analyzer is engaged, and the 6 dB OBW is measured using marker functions.

### 2.2.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.2.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Rohde & Schwarz	FSV13 (FW 3.70)	6996	2025-02-19	2026-02-19
Temp/Humidity	Extech	42270	5871	2025-05-01	2026-05-01
Attenuator (DC to 26 GHz)	Mini-Circuits	BW-S10-2W263+	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	W.L. GORE	PGR01R01036	7024	2025-01-09	2026-01-09
DC Blocker (9 KHz - 27 GHz)	Centric RF	C0927 SMA	6987	2025-01-19	2026-01-19


## 2.2.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

### Test setup diagrams for Occupied Bandwidth testing:


Conducted:




## 2.2.5 Channel Bandwidth Data:

Mode of operation	Channel	Freq. [MHz]	6 dB BW [kHz]	Limit BW [KHz]
LoRa 500 KHz (DTS)	Low	903	651.23	≥ 500
	Mid	915	643.36	
	High	927	643.36	


### Screen Captures from the spectrum analyzer: Low Channel

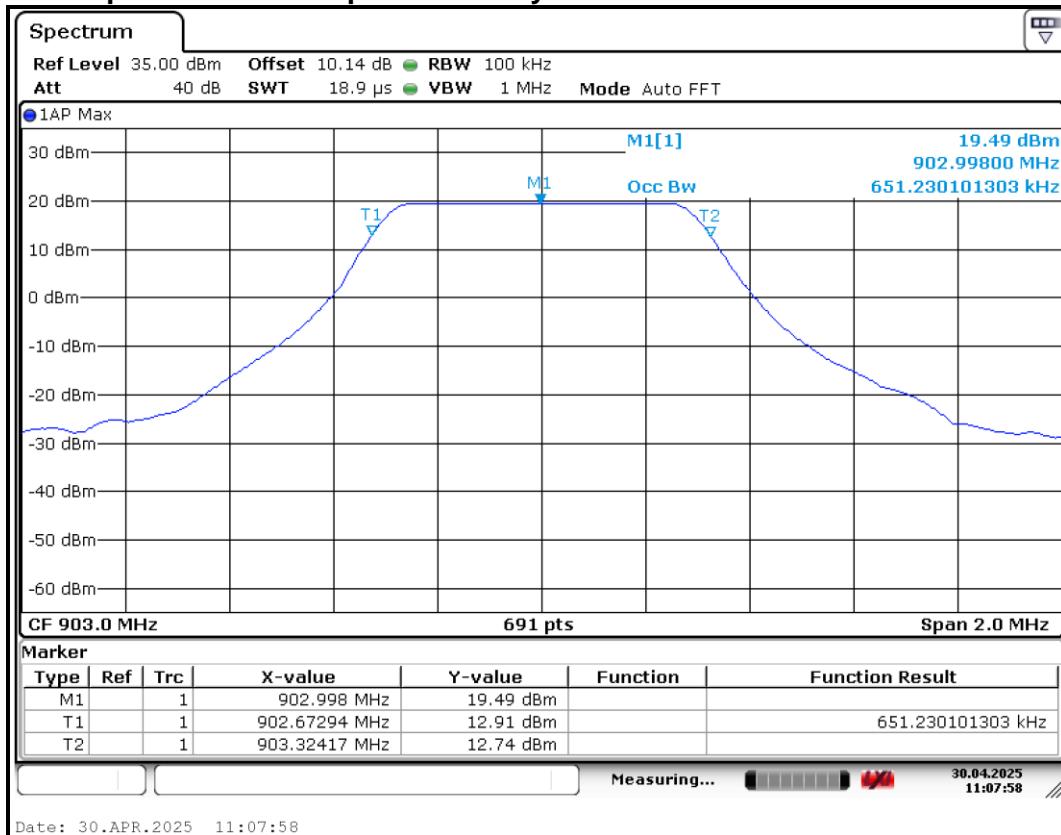

### Screen Captures from the spectrum analyzer: MID Channel

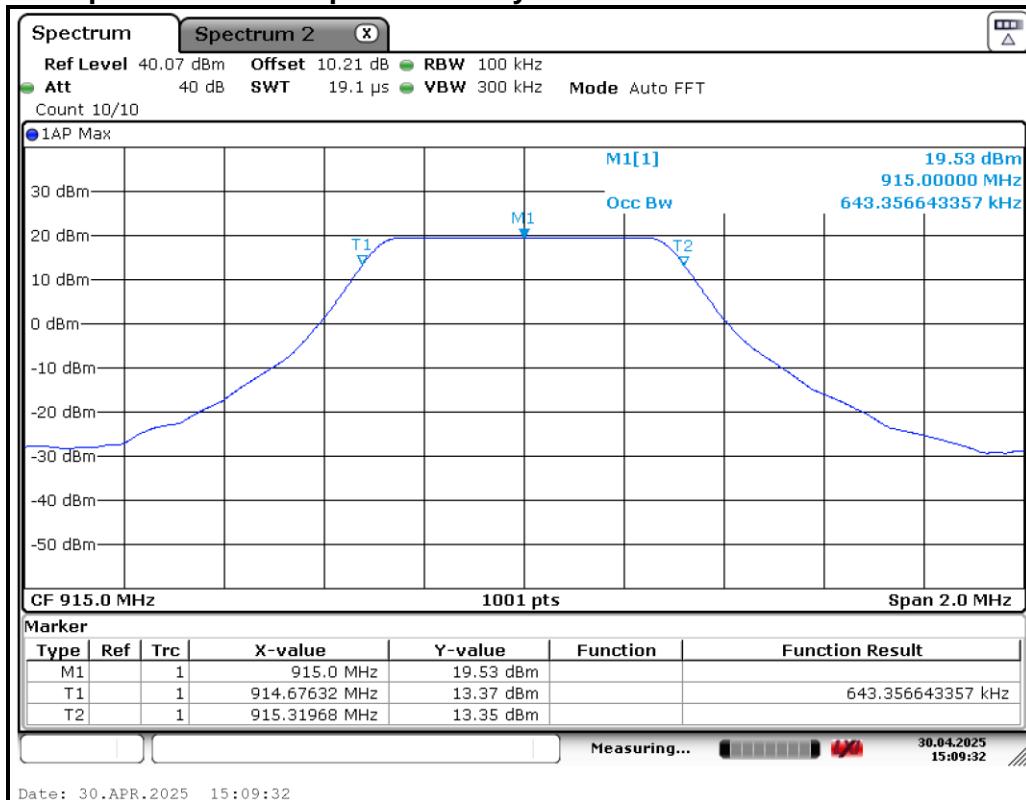

### Screen Captures from the spectrum analyzer: High Channel

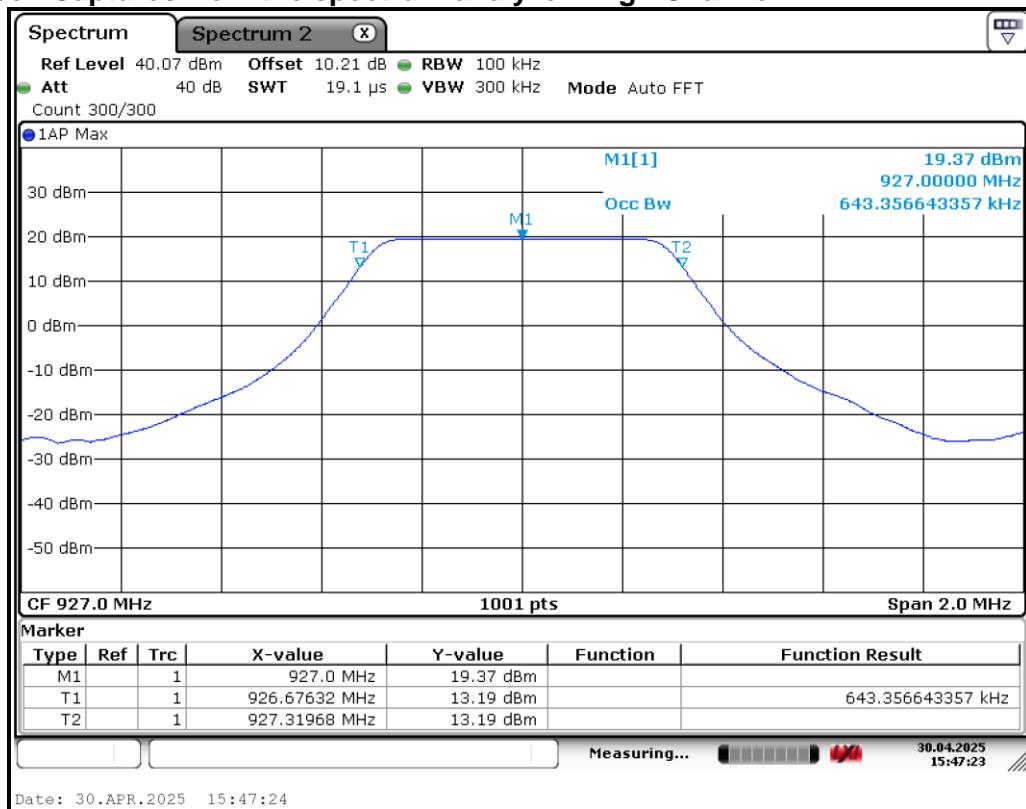

### 2.3 Max Average Output Power

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Deadman Transmitter
<b>Test Personnel:</b> Imran Akram	<b>Standard:</b> FCC PART 15.247
<b>Date:</b> 2025-04-30 (24.2°C, 19.4% RH)	<b>Basic Standard:</b> ANSI C63.10: 2013 FCC OET KDB 558074
<b>EUT status: Compliant</b>	

**Specification:** FCC Part 15.247(b, 3)

**Criteria (3)** For systems using digital modulation in the 902-928 MHz bands: 1 Watt.

#### 2.3.1 Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting thereby allowing direct measurements, without the need for any further corrections.

Output Power Method AVGSA-1 For LoRa DTS	
Span	≥ 1.5 times the OBW
RBW	1 – 5 % of the OBW, ≤ 1 MHz
VBW	≥ 3 x RBW
Number of Points in sweep	≥ 2 x Span / RBW
Sweep time	Auto
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle ≥98%)
Trace Average	100 traces in power Averaging (RMS)
Power measured	Integrated the spectrum across the OBW of the signal using the S/A band power measurement function, with band limit set equal to the OBW band edge.

#### 2.3.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.3.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Rohde & Schwarz	FSV13 (FW 3.70)	6996	2025-02-19	2026-02-19
Temp/Humidity	Extech	42270	5871	2025-05-01	2026-05-01
Attenuator (DC to 26 GHz)	Mini-Circuits	BW-S10-2W263+	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	W.L. GORE	PGR01R01036	7024	2025-01-09	2026-01-09
DC Blocker (9 KHz - 27 GHz)	Centric RF	C0927 SMA	6987	2025-01-19	2026-01-19


### 2.3.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

#### Test setup diagrams for Power testing:


Conducted:




### 2.3.5 Max Average Output Power Data:

Mode of operation	Channel	Freq. [MHz]	Max Average Power [dBm]	Limit Power [dBm]
LoRa 500 KHz (DTS)	Low	903	19.58	≤ 30 (1Watt)
	Mid	915	19.20	
	High	927	19.51	


### Screen Captures from the spectrum analyzer Low Channel

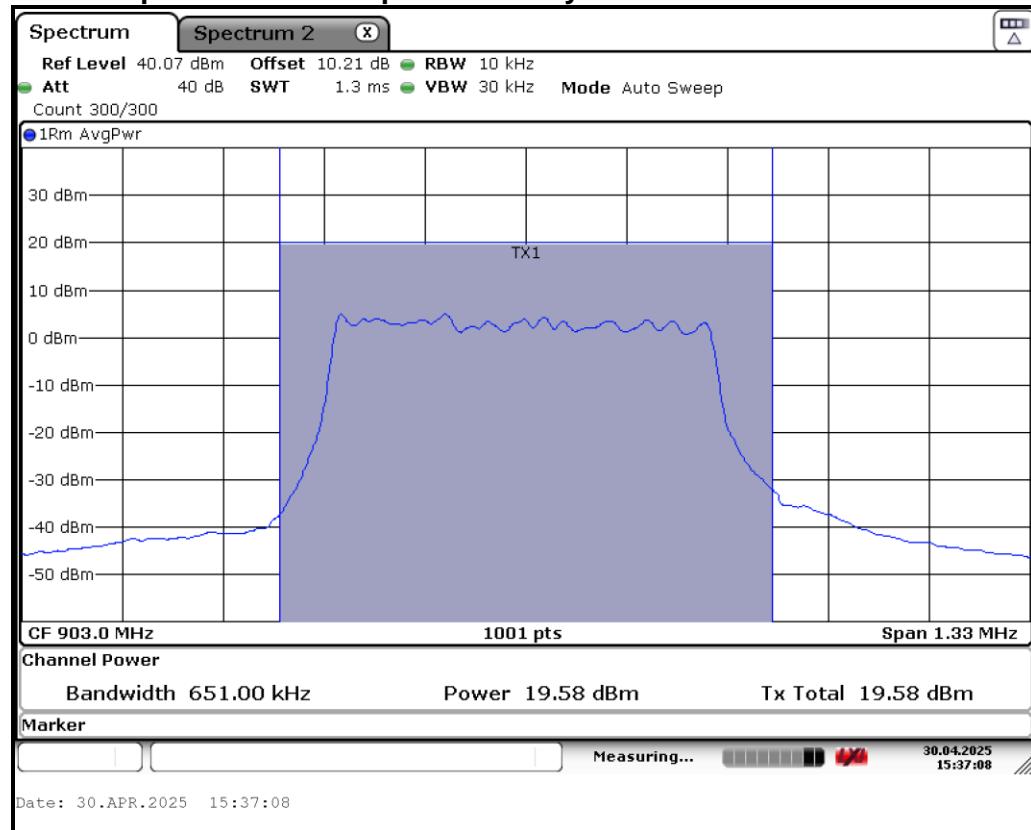

### Screen Captures from the spectrum analyzer: MID Channel

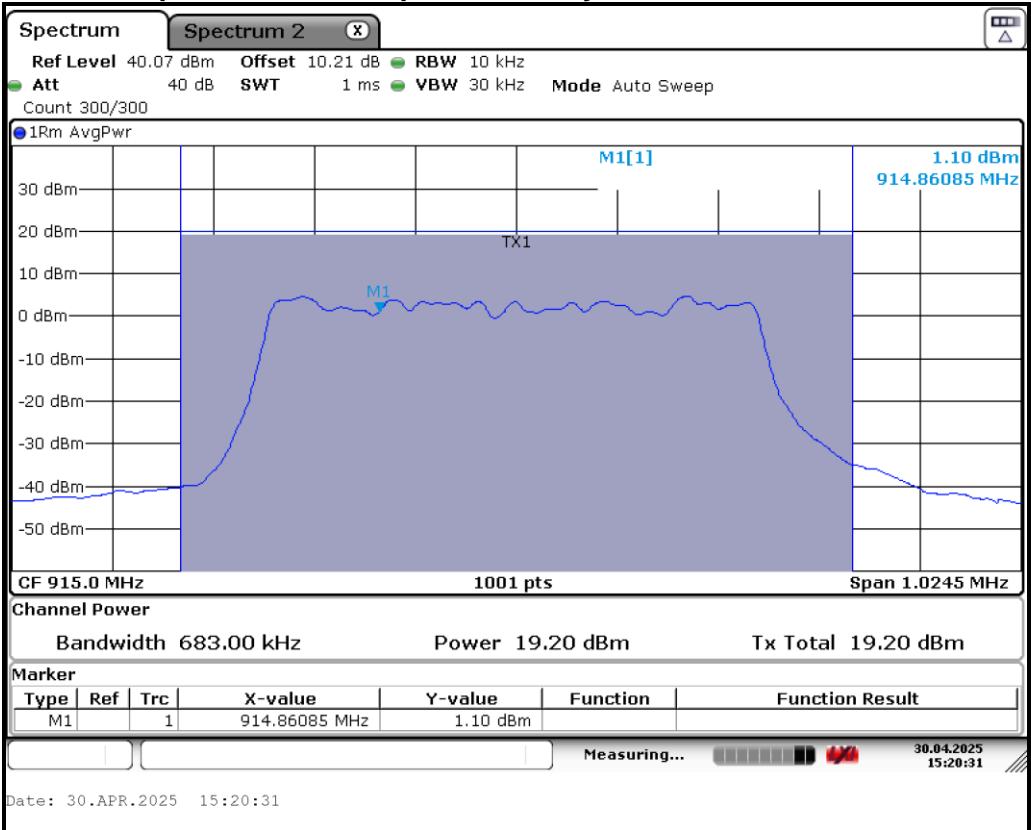

## Screen Captures from the spectrum analyzer: High Channel

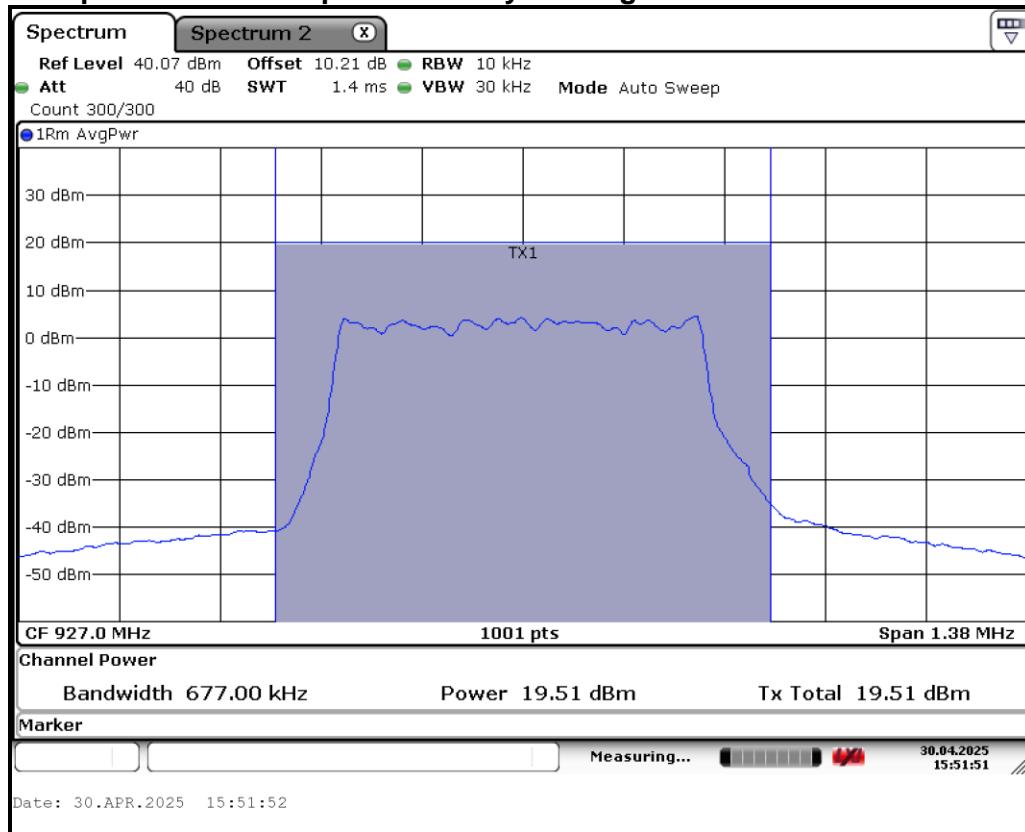

## 2.4 Band Edge Attenuation

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Deadman Transmitter
<b>Test Personnel:</b> Imran Akram	<b>Standard:</b> FCC PART 15.247
<b>Date:</b> 2025-04-30 (24.2°C, 19.4% RH)	<b>Basic Standard:</b> ANSI C63.10: 2013 <b>FCC OET KDB 558074</b>

### EUT status: Compliant

#### Specification: FCC Part 15.247(d)

**Criteria:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 2.4.1 Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074

This measurement is performed at the low and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting thereby allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is set for a frequency span to show the band edge and the nearest channel. The RBW is set to  $\geq$  100 kHz. The VBW is set to  $\geq$  (RBW \* 3). The Peak detector is used, with the trace set to Max Hold.

The attenuation is measured with the Marker Delta function.

#### 2.4.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.4.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Rohde & Schwarz	FSV13 (FW 3.70)	6996	2025-02-19	2026-02-19
Temp/Humidity	Extech	42270	5871	2025-05-01	2026-05-01
Attenuator (DC to 26 GHz)	Mini-Circuits	BW-S10-2W263+	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	W.L. GORE	PGR01R01036	7024	2025-01-09	2026-01-09
DC Blocker (9 KHz - 27 GHz)	Centric RF	C0927 SMA	6987	2025-01-19	2026-01-19


### 2.4.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

#### Test setup diagrams for Band Edge Attenuation testing:

Conducted:




### 2.4.5 Band Edge Data


#### Worse Case Data

Mode of operation	Channel	Attenuation at Band Edge	Attenuation Limit at Band Edge
Lora 500KHz (DTS)	903 MHz	48.78 dBc	$\geq 30$ dBc
	927 MHz	43.07 dBc	

Screen Capture from the spectrum analyzer: Lower Band Edge

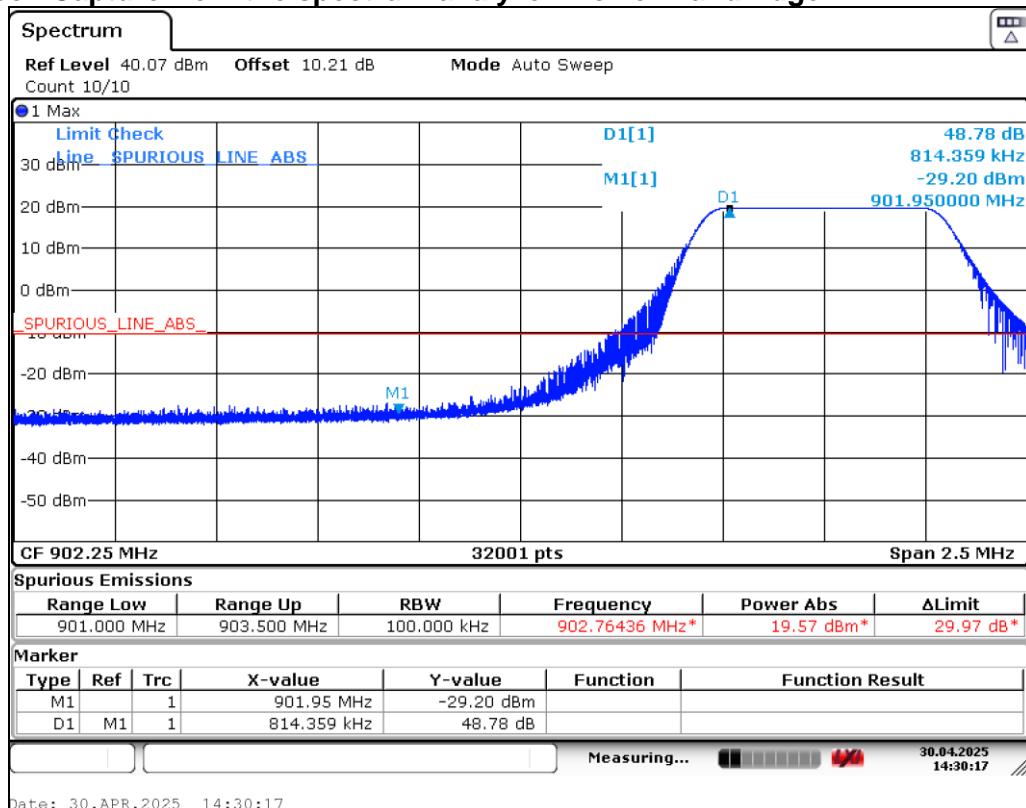

Screen Capture from the spectrum analyzer: Upper Band Edge

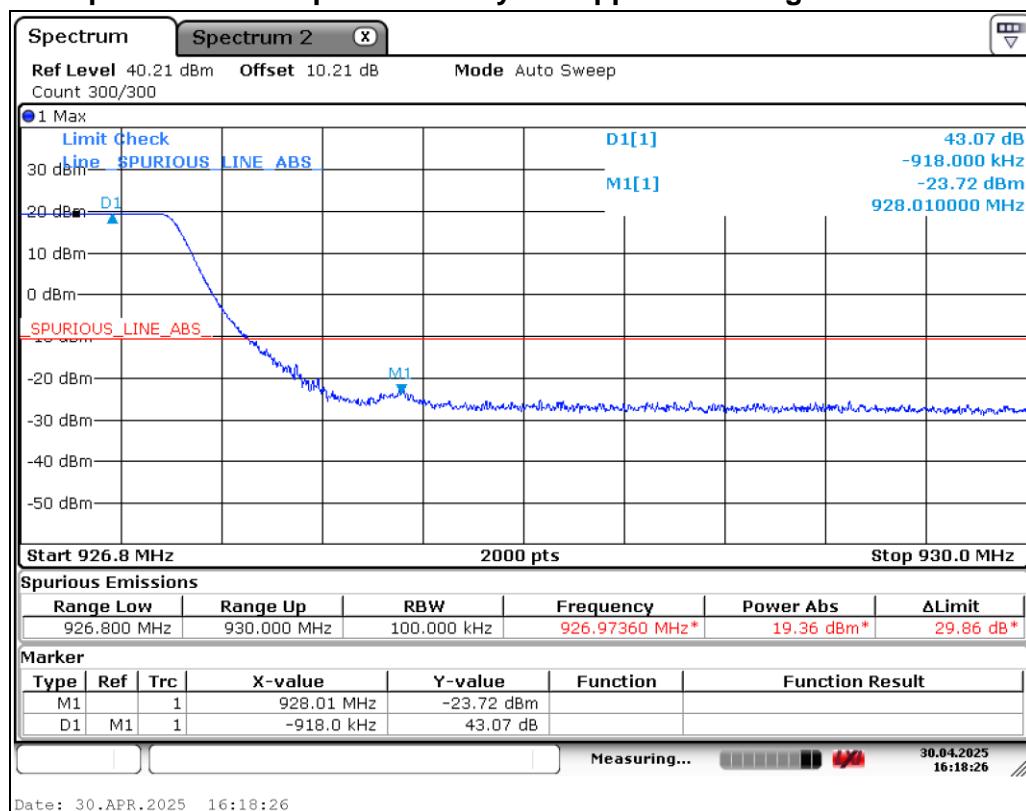

## 2.5 Power Spectral Density

Test Lab: Electronics Test Centre, Airdrie

EUT: Deadman Transmitter

Test Personnel: Imran Akram

Standard: FCC PART 15.247

Date: 2025-04-30 (24.2°C, 19.4% RH)

Basic Standard: ANSI C63.10: 2013

2025-05-01 (22.2°C, 19.1% RH)

**EUT status: Compliant**

**Specification: FCC Part 15.247(e)**

**Criteria** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 2.5.1 Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, in continuous transmission, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting thereby allowing direct measurements, without the need for any further corrections.

Method AVGPSD-1 For DTS	
Span	≥ 1.5 times the OBW
RBW	3 kHz ≤ RBW ≥ 100 kHz.
VBW	≥ 3 x RBW
Number of Points in sweep	≥ 2 x Span / RBW
Sweep time	auto couple
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle ≥98%)
Trace Average	Minimum 100 traces in power Averaging (RMS)
PSD measured	Use the peak marker function to determine the maximum amplitude level.
If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).	

### 2.5.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.5.3 Test Equipment

Testing was performed with this equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2024-08-11	2025-08-11
Signal Analyzer	Rohde & Schwarz	FSV13 (FW 3.70)	6996	2025-02-19	2026-02-19
Temp/Humidity	Extech	42270	5871	2025-05-01	2026-05-01
Attenuator (DC to 26 GHz)	Mini-Circuits	BW-S10-2W263+	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	W.L. GORE	PGR01R01036	7024	2025-01-09	2026-01-09
DC Blocker (9 KHz - 27 GHz)	Centric RF	C0927 SMA	6987	2025-01-19	2026-01-19

### 2.5.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

**Test setup diagrams for Power Spectral Density testing:**


**Conducted:**




### 2.5.5 Average PSD Data

Mode	Channel	Frequency (MHz)	Average PSD (dBm)	Limit
LoRa 500 KHz (DTS)	Low	903	0.52	$\leq 8 / 3\text{KHz}$
	Mid	915	-0.964	
	High	927	-0.32	


### Screen Capture from Spectrum Analyzer: Low Channel

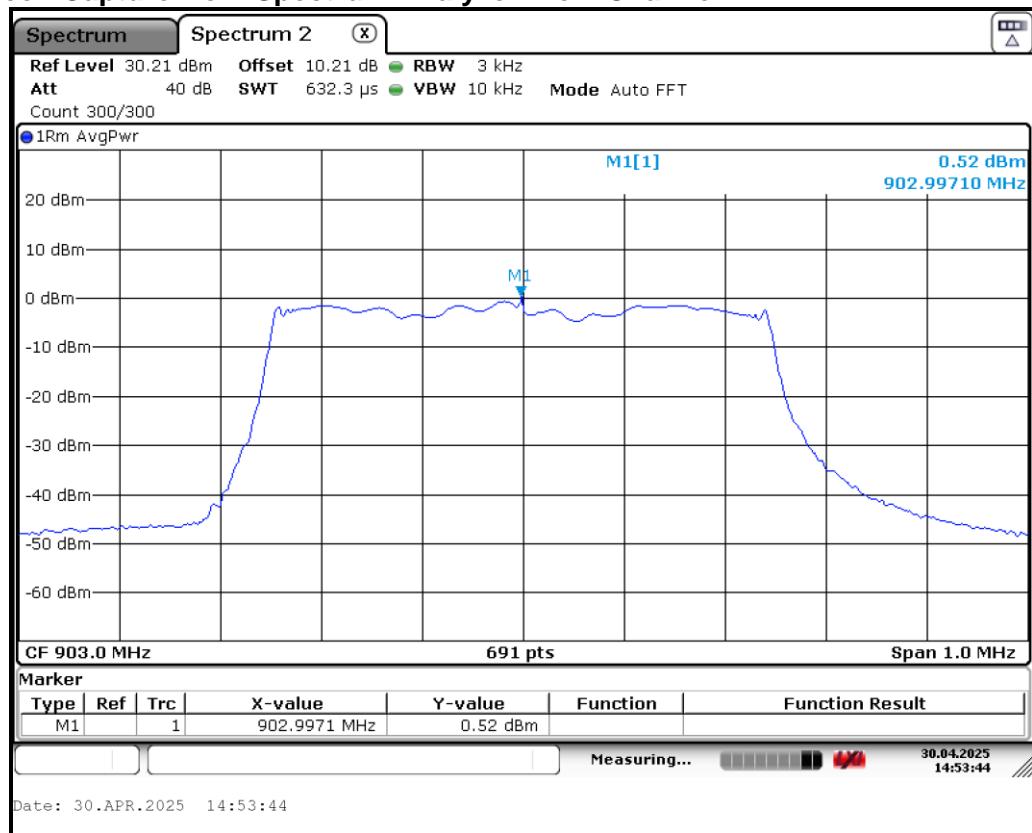

### Screen Capture from Spectrum Analyzer: Mid Channel

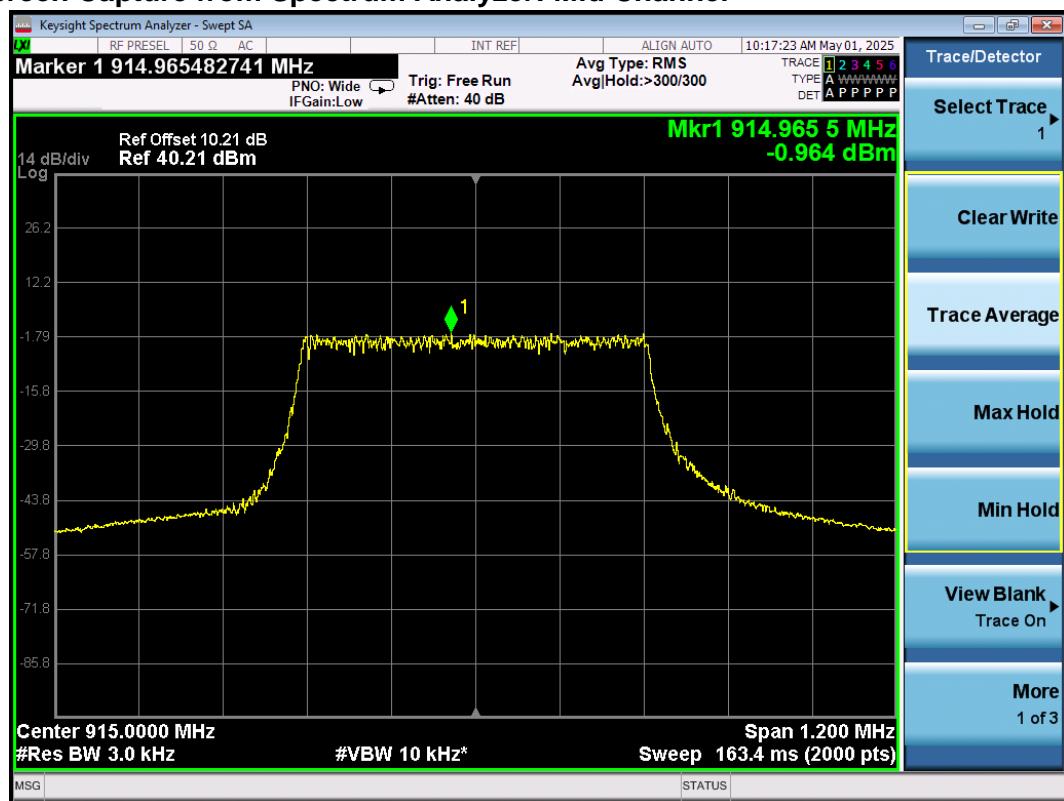

### Screen Capture from Spectrum Analyzer: High Channel

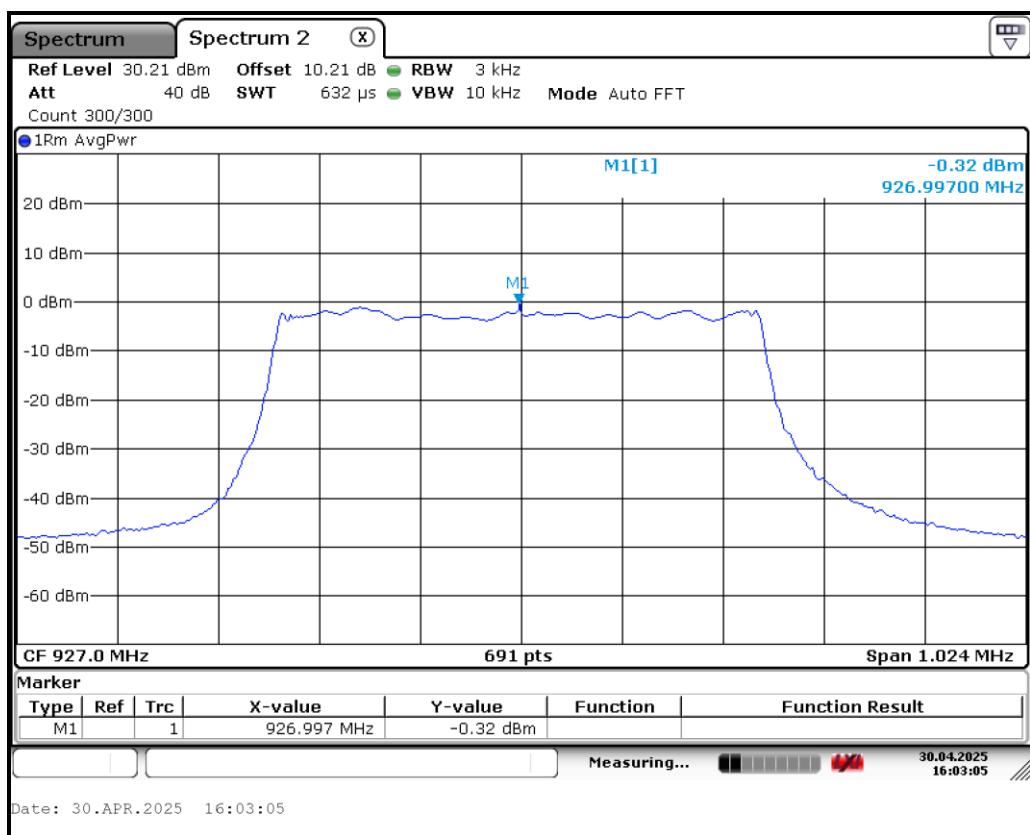

## 2.6 Conducted Spurious Emissions (Non-Restricted Band)

Test Lab: Electronics Test Centre, Airdrie

EUT: Deadman Transmitter

Test Personnel: Imran Akram

Standard: FCC PART 15.247

Date: 2025-04-30 (24.2°C, 19.4% RH)

Basic Standard: ANSI C63.4-2014

FCC OET KDB 558470 v04 DTS

**EUT status: Compliant**

**Specification: FCC Part 15.247(d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 2.6.1 Test Guidance: ANSI C63.10-2013, Clause 6.7

This measurement is performed at the low, mid and high frequencies, with modulation. The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting thereby allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is stepped through the spectrum in frequency spans selected to ensure acceptable frequency resolution. The RBW is set to 100 kHz. The VBW is set to  $\geq$  300 kHz. The Peak detector is used, with the trace set to Max Hold.

### 2.6.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.6.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
Signal Analyzer	Rohde & Schwarz	FSV13 (FW 3.70)	6996	2025-02-19	2026-02-19
Temp/Humidity	Extech	42270	5871	2025-05-01	2026-05-01
Attenuator (DC to 26 GHz)	Mini-Circuits	BW-S10-2W263+	6932	2022-12-10	2025-12-10
Coaxial Cables (RF)	W.L. GORE	PGR01R01036	7024	2025-01-09	2026-01-09
DC Blocker (9 KHz - 27 GHz)	Centric RF	C0927 SMA	6987	2025-01-19	2026-01-19

### 2.6.4 Test Sample Verification, Configuration & Modifications




The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.





**Test setup diagram for Conducted Spurious Emissions testing:**






**2.6.5 Conducted Emissions Data: LoRa DTS  
Low Channel**

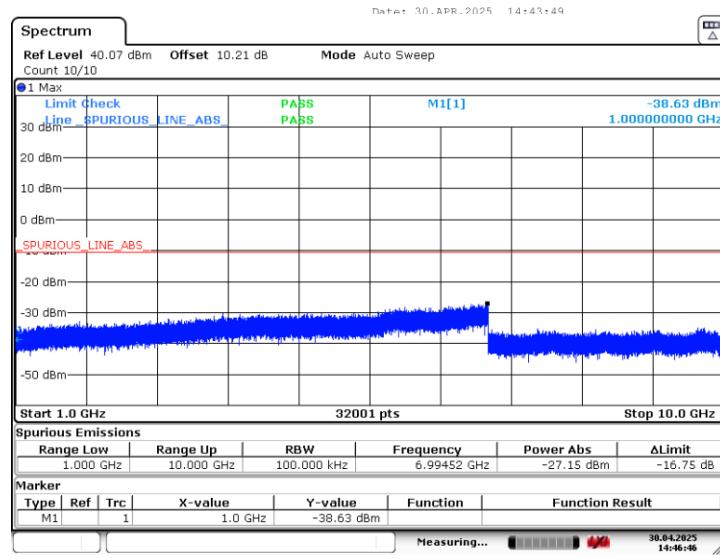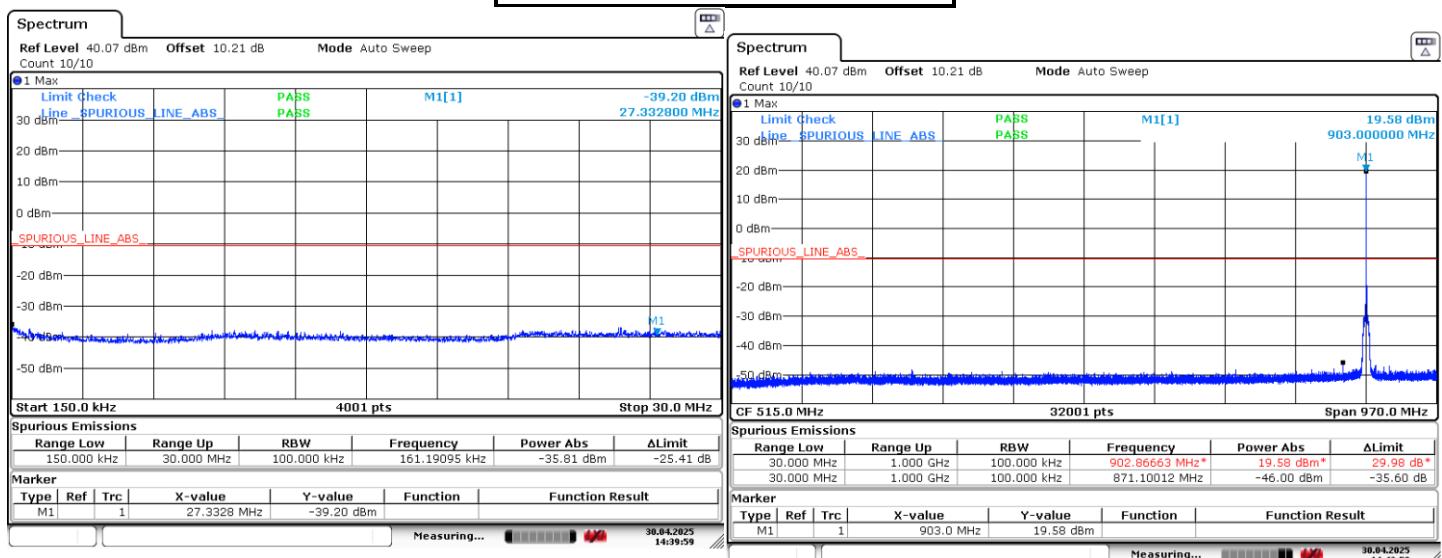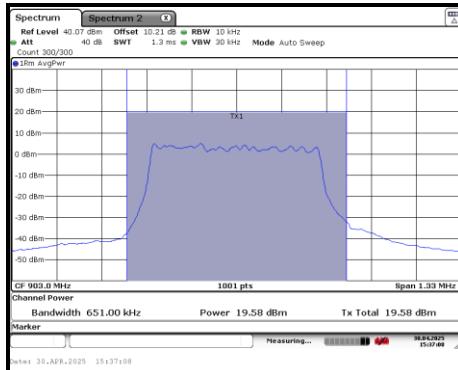

## MID Channel

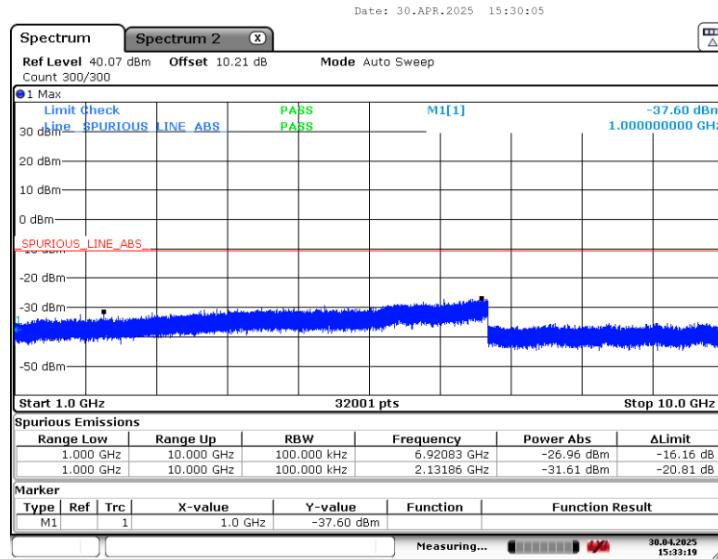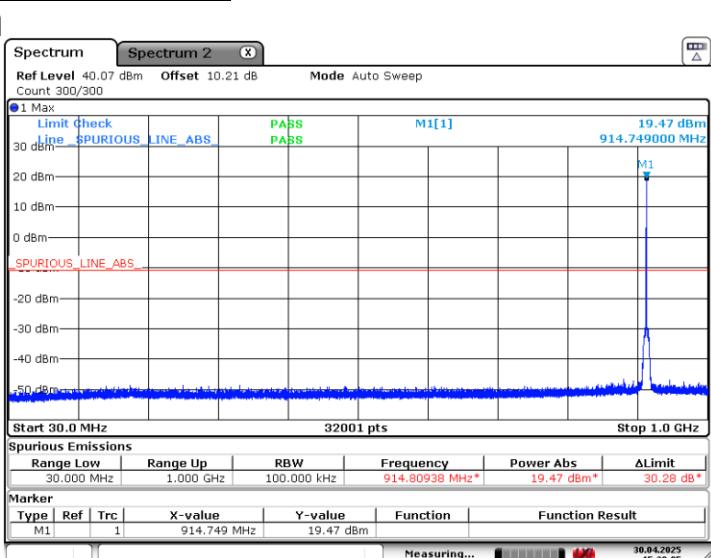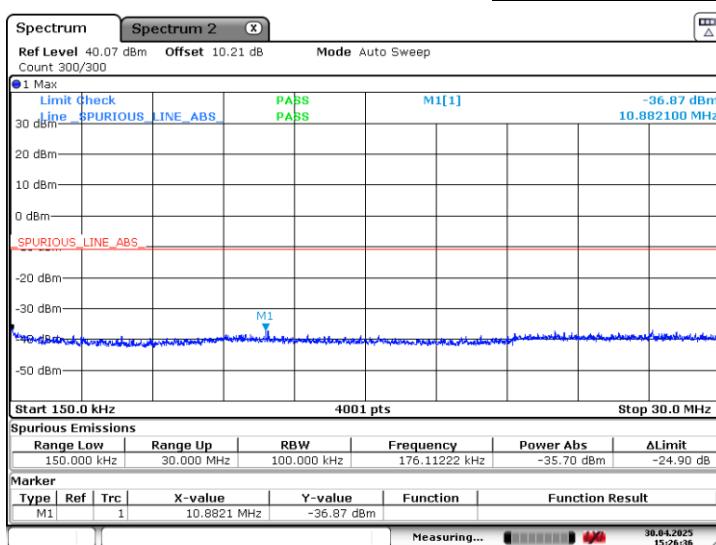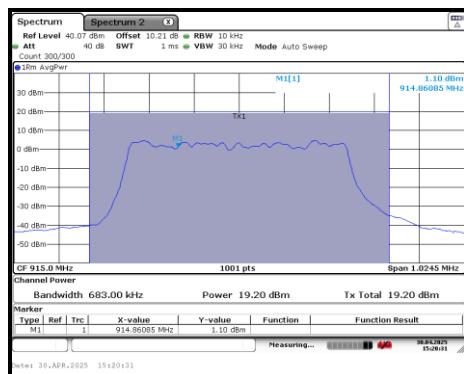

## High Channel

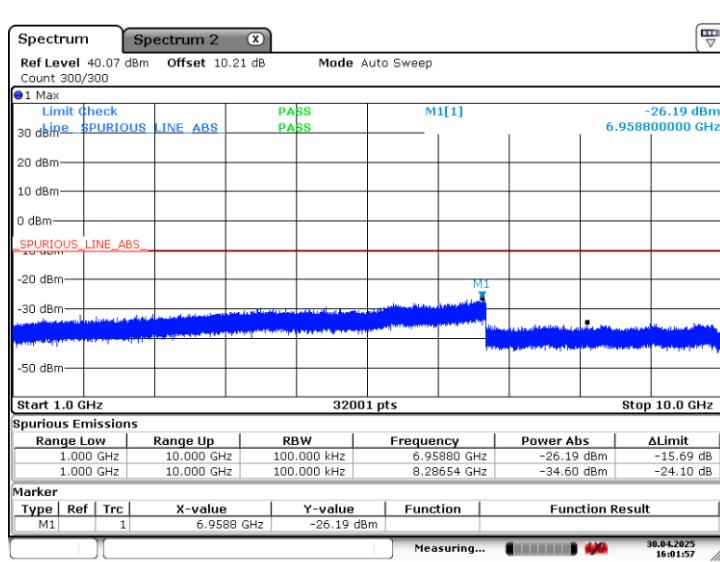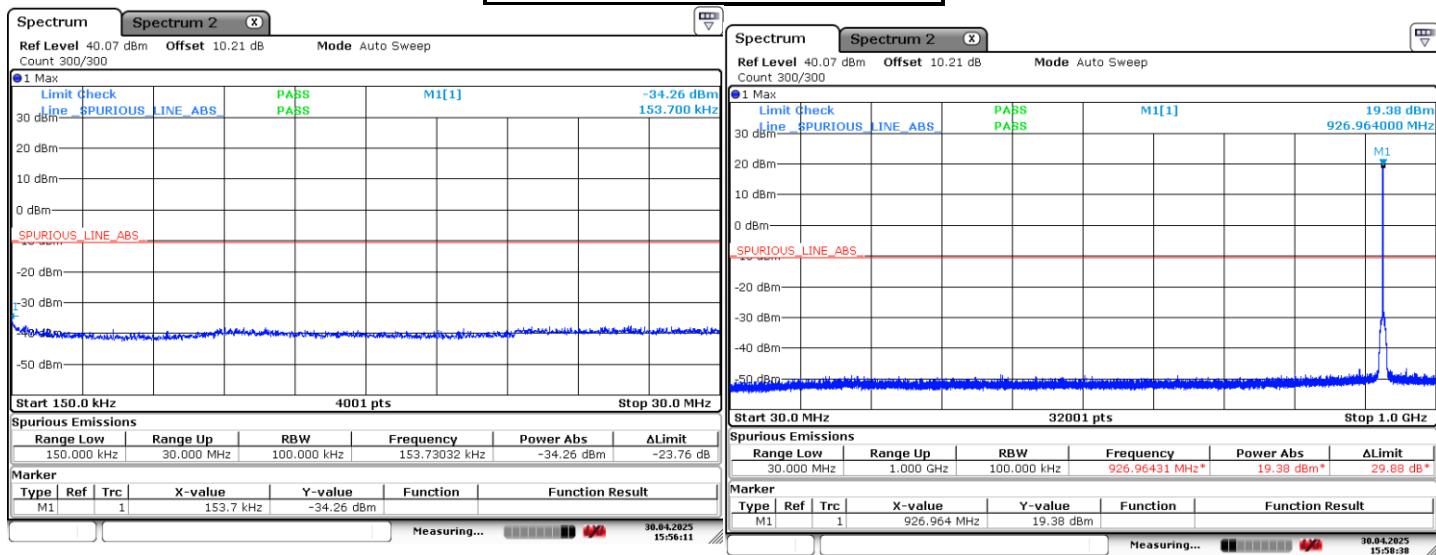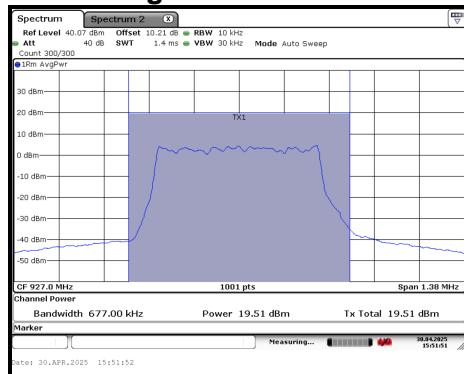

## 2.7 EUT Positioning Assessment


**Test Lab:** Electronics Test Centre, Airdrie  
**Test Personnel:** Brendan Van Hee, Imran Akram  
**Date:** 2025-05-01 (22.2°C, 19.17% RH)

**EUT:** Deadman Transmitter  
**Standard:** FCC PART 15.247  
**Basic Standard:** ANSI C63.4-2014

**Comments:** Z-Axis select as worse case

### Specification: ANSI C63.4-2014, Clause 6.3.2.1

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs (see Figure 6, Figure 7, and Figure 9). For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

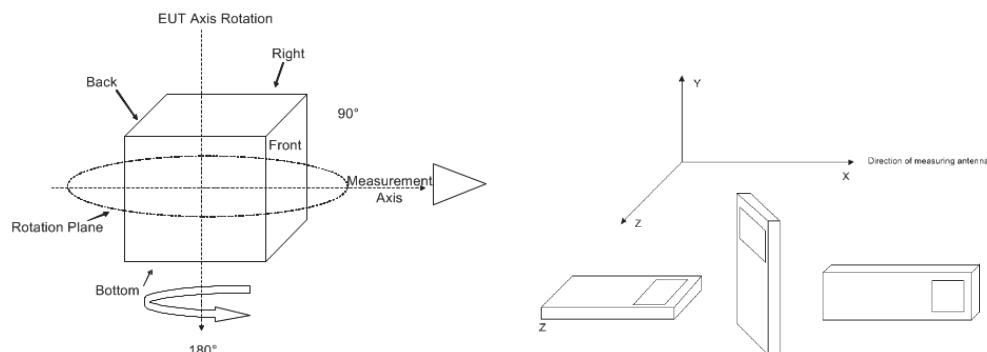

## 2.8 Radiated Spurious Emissions (within restricted band)

Test Lab: Electronics Test Centre, Airdrie	EUT: Deadman Transmitter
Test Personnel: Imran Akram	Standard: FCC PART 15.247/15.209
Date: 2025-05-1/2 (22.2°C, 19.1% RH)	Basic Standard: ANSI C63.10-2013
<b>EUT status: Compliant</b>	

### Specification: FCC PART 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Restricted Bands of Operation:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.00000 – 1710.00000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 – 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 – 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 – 4.1777500	12.290000 - 12.293000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 – 4.2077500	12.519750 - 12.520250	108.00000 - 121.94000	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 – 5.6830000	12.576750 - 12.577250	123.00000 - 138.00000	960.00000 – 1240.00000	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.360000 - 13.410000	149.90000 - 150.05000	1300.0000 – 1427.0000	3332.0000 – 3339.0000	10.600000 – 12.700000	Above 38.600000
6.2677500 - 6.2682500	16.420000 - 16.423000	156.52475 - 156.52525	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.250000 – 13.400000	
6.3117500 - 6.3122500	16.694750 - 16.695250	156.70000 - 156.90000	1645.5000 – 1646.5000	3500.0000 – 3600.0000	****	

█ US only

\*\* Canada 108 – 138 MHz

\*\*\* Canada 960 – 1427 MHz

\*\*\*\* Canada only

### 2.8.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz. The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discreet increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.8.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.8.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date (yyyy-mm-dd)	Cal. Due (yyyy-mm-dd)
EMC Software	UL	Ver. 9.5	SWC 021		N/A
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2024-08-15	2025-08-15
Loop Antenna (9kHz – 30MHz)	EMCO	6502	10868	2023-06-21	2025-06-21
Biconilog Antenna (30 – 1000 MHz)	AR	JB1	6905	2023-11-29	2025-11-29
DRG Horn (1000 – 18000 MHz)	EMCO	3115	19357	2022-10-05	2025-10-05
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2025-05-01	2026-05-01
Pre-Amplifier (30 – 1400 MHz)	HP	8447D	9291	2025-01-21	2026-01-21
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21-5P	4354	2025-01-21	2026-01-21
RE Cable below 1GHz	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4419	2025-01-21	2026-01-21
Re Cable Above 1 GHz	A.H. System Inc.	SAC-26G-8.23	6187	2025-01-21	2026-01-21
0.9GHz Notch Filter	Microtronics	BRM20784	6947	2025-01-21	2026-01-21

#### 2.8.4 Test Sample Verification, Configuration & Modifications


The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. LoRa radio is transmitting at Low channel.

The EUT met the requirements without modification.

#### Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):

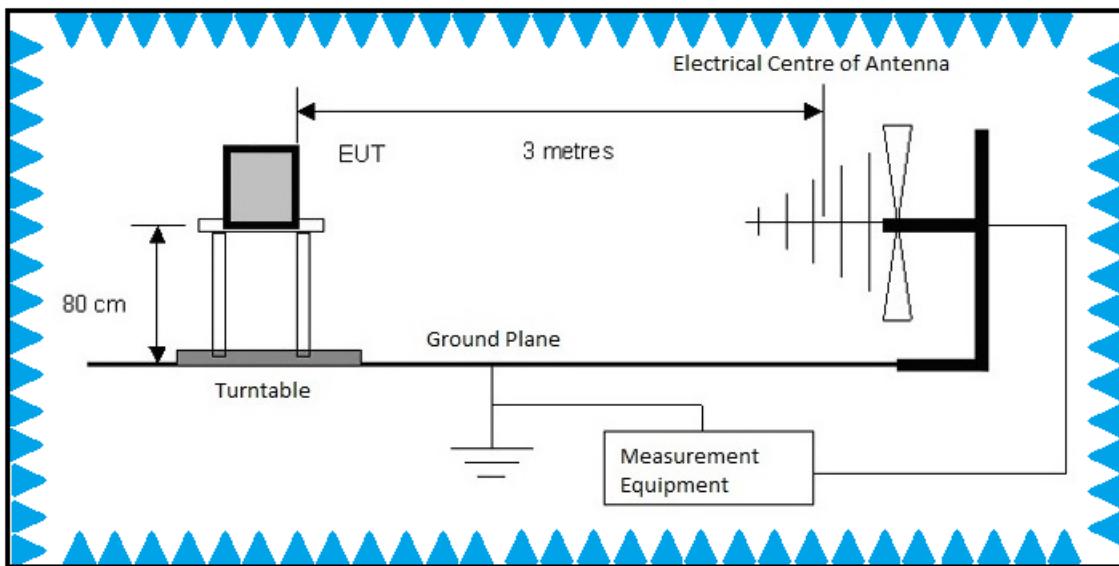

#### Test setup diagram for Radiated Spurious Emissions testing (above 1GHz):

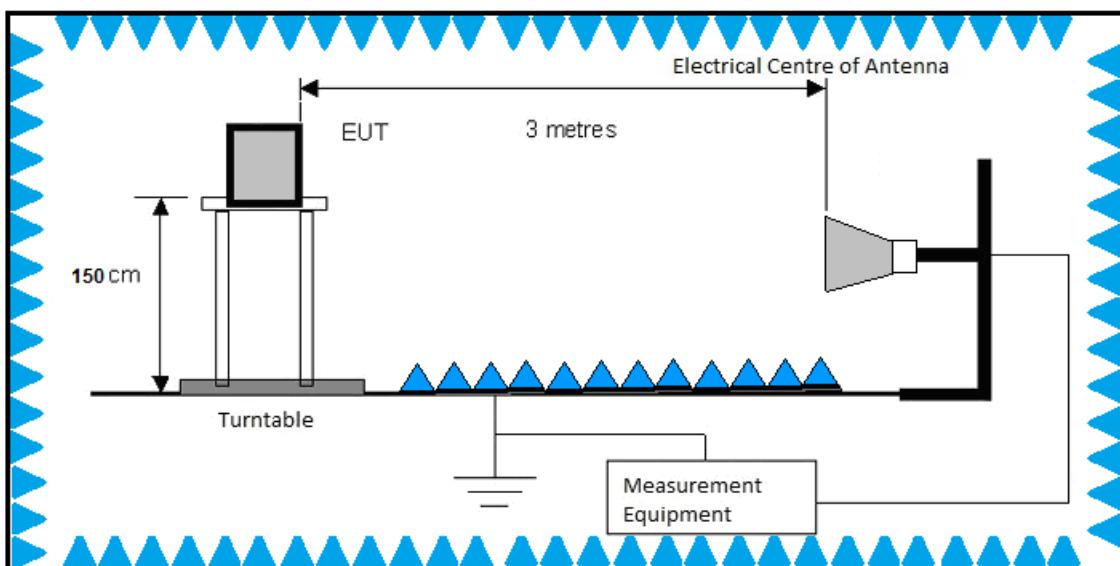

### 2.8.5 Radiated Emissions Data: LoRa DTS

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dB $\mu$ V + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dB $\mu$ V/m.**

**Delta = Field Strength – Limit**

**Notes:**

- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The LOW band channel 903.0 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 10.0 GHz.

**Negative values for Delta indicate compliance.**

Freq. Marker	Freq. [MHz]	Raw reading[ dB $\mu$ V]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dB $\mu$ V/m]	FCC 15.209 Limit [dB $\mu$ V/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
1	484.35	31.05	QP	21.8	-21.3	31.55	46.02	-14.02	5	100	Horizontal
2	362.43	35.59	QP	18.9	-21.9	32.59	46.02	-13.43	350	220	Vertical
3	817.37	28.54	QP	25.7	-19.3	34.94	46.02	-11.08	68	121	Vertical
1	*2709.5	56.38	AV	29.2	-33.4	51.18	54	-1.82	225	100	Horizontal
		61.22	PK			57.02	74	-16.98			
2	*2709.05	56.8	AV	29.2	-33.4	52.6	54	-1.38	295	101	Vertical
		63.28	PK			59.08	74	-14.92			
3	*8128.1	28.34	AV	36.4	-25.7	39.04	54	-14.96	237	206	Horizontal
		41.98	PK			52.68	74	-21.32			
4	*9028.3	31.43	AV	37.2	-25.0	43.63	54	-10.37	193	217	Horizontal
		45.99	PK			58.19	74	-15.81			
5	*8128.1	24.86	AV	36.4	-25.7	35.56	54	-18.44	221	217	Vertical
		39.46	PK			50.16	74	-23.84			
6	*9028.9	27.22	AV	37.2	-25.0	39.42	54	-14.58	349	243	Vertical
		41.64	PK			53.84	74	-20.16			

QP: Quasi-Peak Detector, PK: Peak Detector, AV: Average Detector


\* Spurious Emission in Restricted Band

## Plot of Radiated Emissions: Below 30 MHz


Emission is more than 20dB below the limit.

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


### Plot of Radiated Emissions: Horizontal polarization

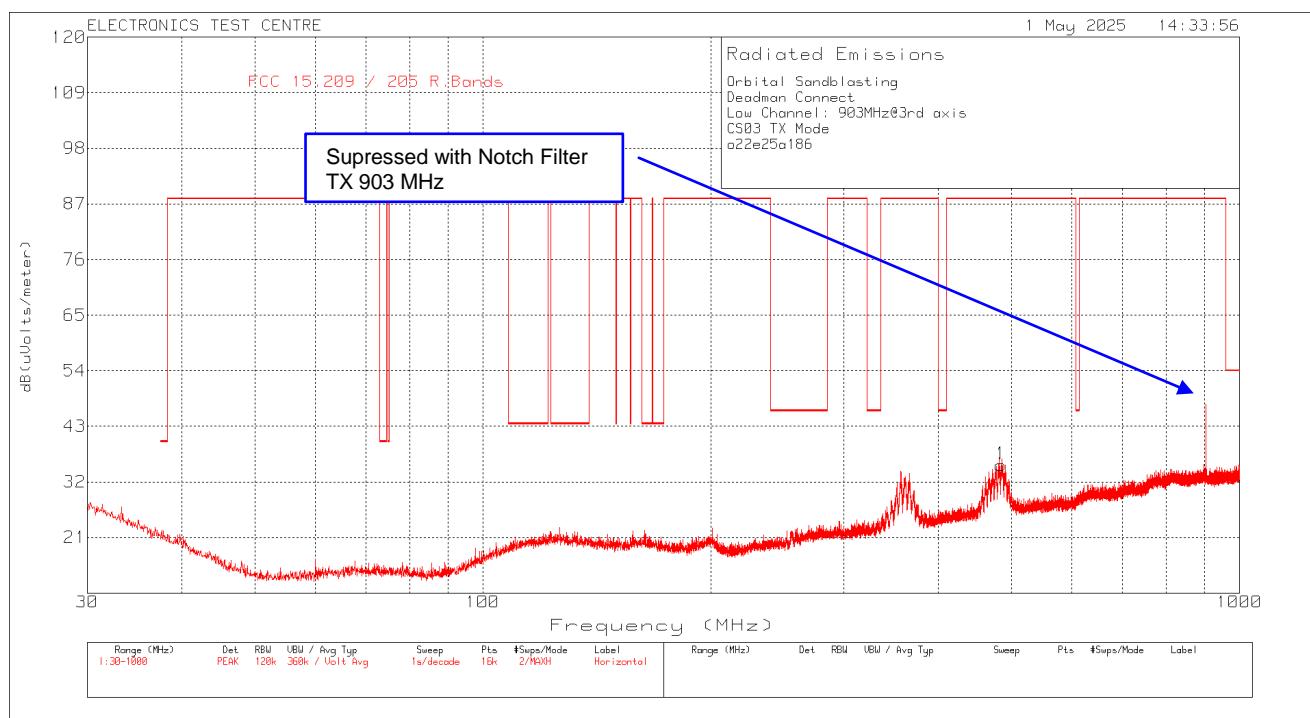


### Plot of Radiated Emissions: Vertical polarization

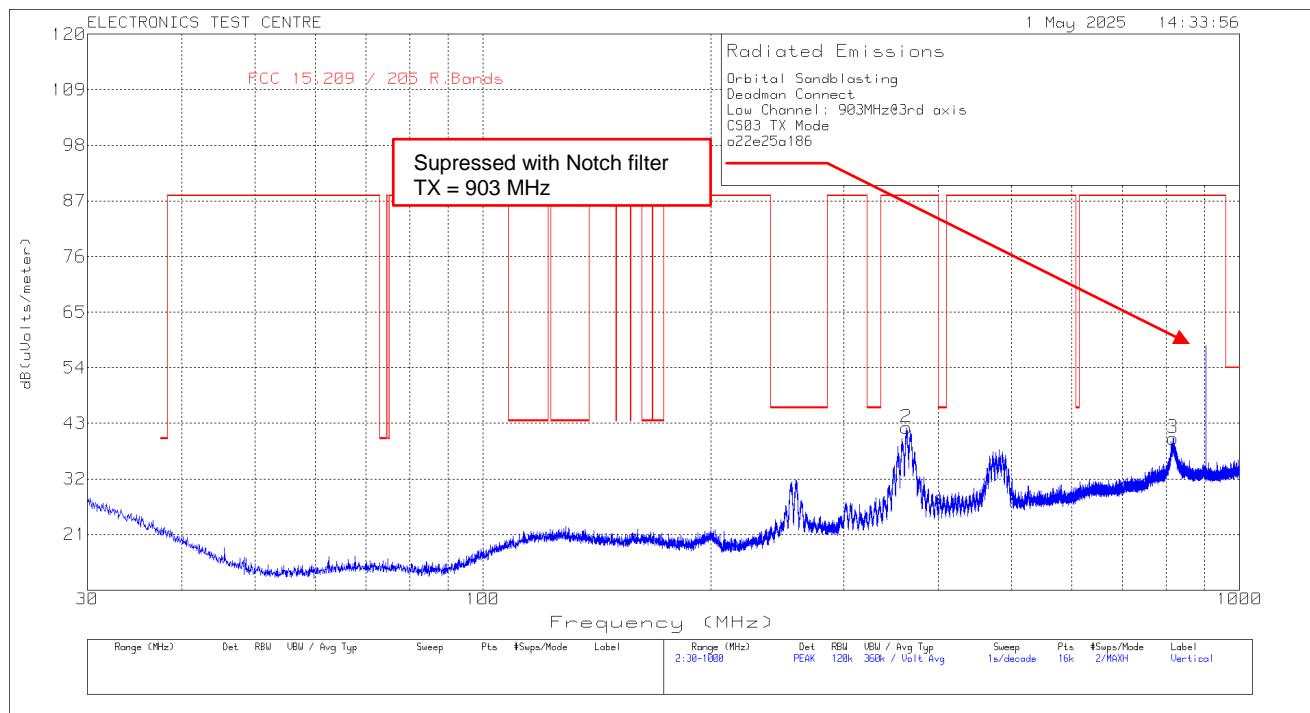

### Plot of Radiated Emissions: Horizontal polarization

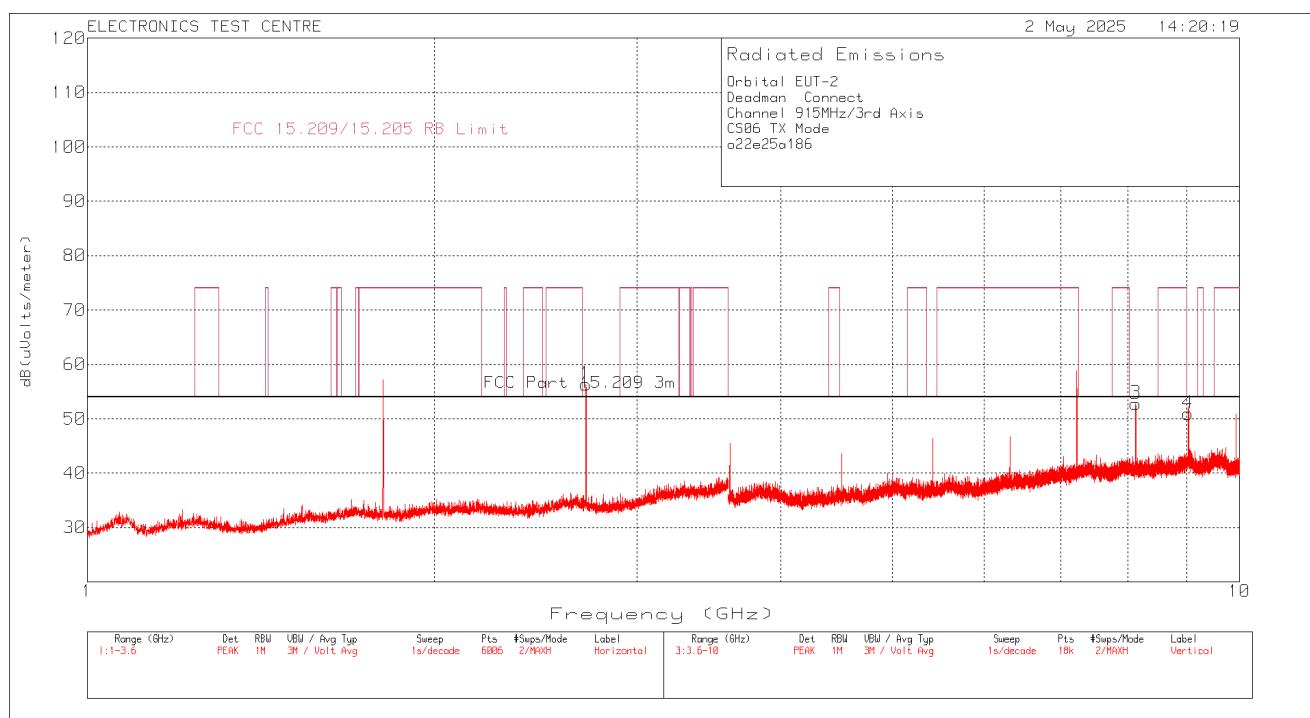

### Plot of Radiated Emissions: Vertical polarization

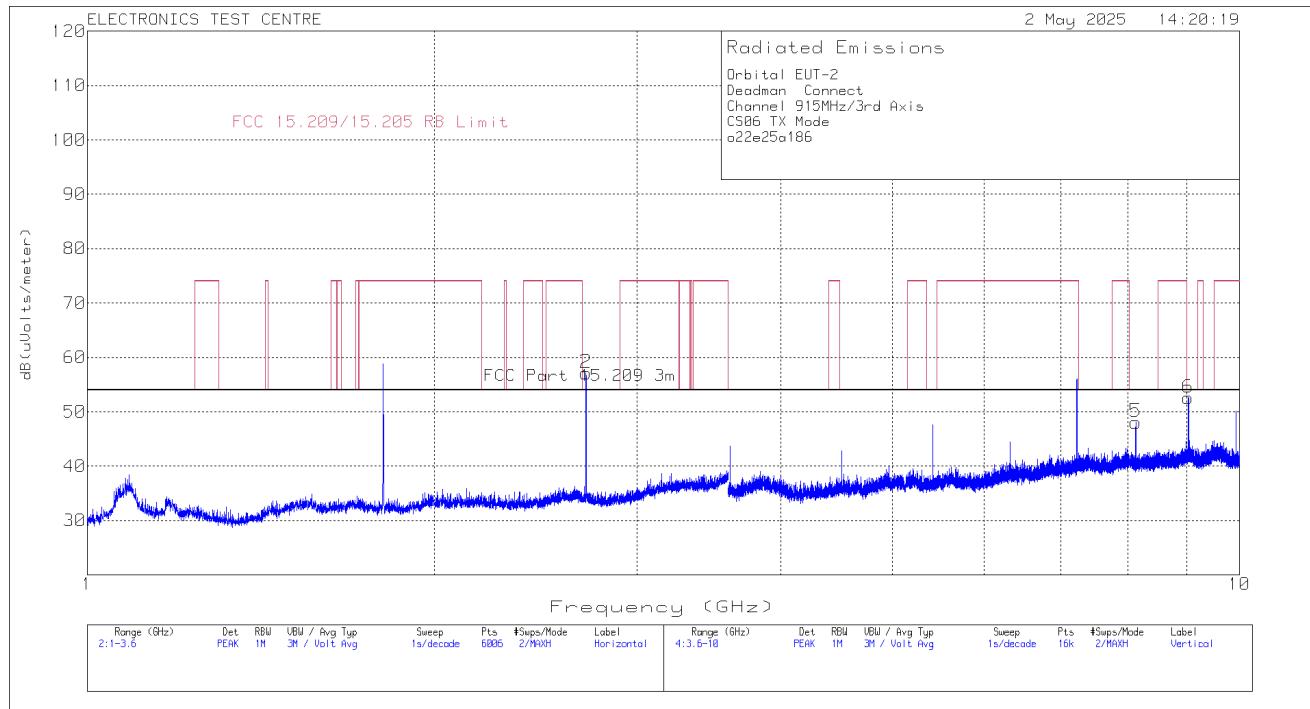

## 2.9 Radiated Emissions (RX Mode)

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Deadman Transmitter
<b>Test Personnel:</b> Imran Akram	<b>Standard:</b> FCC Part 15.109
<b>Date:</b> 2025-05-1/2 (20.1°C, 15.7% RH)	<b>Basic Standard:</b> ANSI C63.4: 2014
	<b>Class:</b> B
<b>EUT status: Compliant</b>	
Frequency (MHz)	FCC Part 15.109 Class B Limit (3m)
30 – 88	40 (dB $\mu$ V/m)
88 – 216	43.52 (dB $\mu$ V/m)
216 – 960	46.02 (dB $\mu$ V/m)
Above 960	53.98 (dB $\mu$ V/m)
<b>Criteria:</b> The radiated emissions produced by a device, measured at a distance of 3 meters, shall not exceed the limits as specified.	

### 2.9.1 Test Guidance:

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz.

The scan is performed at discreet increments of turntable azimuth and stepped antenna height, with peak detector and Max Hold function which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

After the pre-scan is completed, the frequencies of interest are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. This may produce a different reading than the pre scan trace. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.9.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.9.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date (yyyy-mm-dd)	Cal. Due (yyyy-mm-dd)
EMC Software	UL	Ver. 9.5	SWC 021	N/A	
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2024-08-15	2025-08-15
Biconilog Antenna (30 – 1000 MHz)	AR	JB1	6905	2023-11-29	2025-11-29
DRG Horn (1000 – 18000 MHz)	EMCO	3115	19357	2022-10-05	2025-10-05
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2025-05-01	2026-05-01
Pre-Amplifier (30 – 1400 MHz)	HP	8447D	9291	2025-01-21	2026-01-21
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21-5P	4354	2025-01-21	2026-01-21
RE Cable below 1GHz	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4419	2025-01-21	2026-01-21
Re Cable Above 1 GHz	A.H. System Inc.	SAC-26G-8.23	6187	2025-01-21	2026-01-21


### 2.9.4 Test Sample Verification, Configuration & Modifications

To cover the unintentional radiated emission. The EUT was configured in receive mode. Unit was placed at the center of turntable in semi-anechoic chamber 80cm above the ground plane and at a distance of 3m from the test receive antenna.

The EUT met the requirements without modification.

#### EUT RX configuration Block Diagram for Radiated Emissions testing:

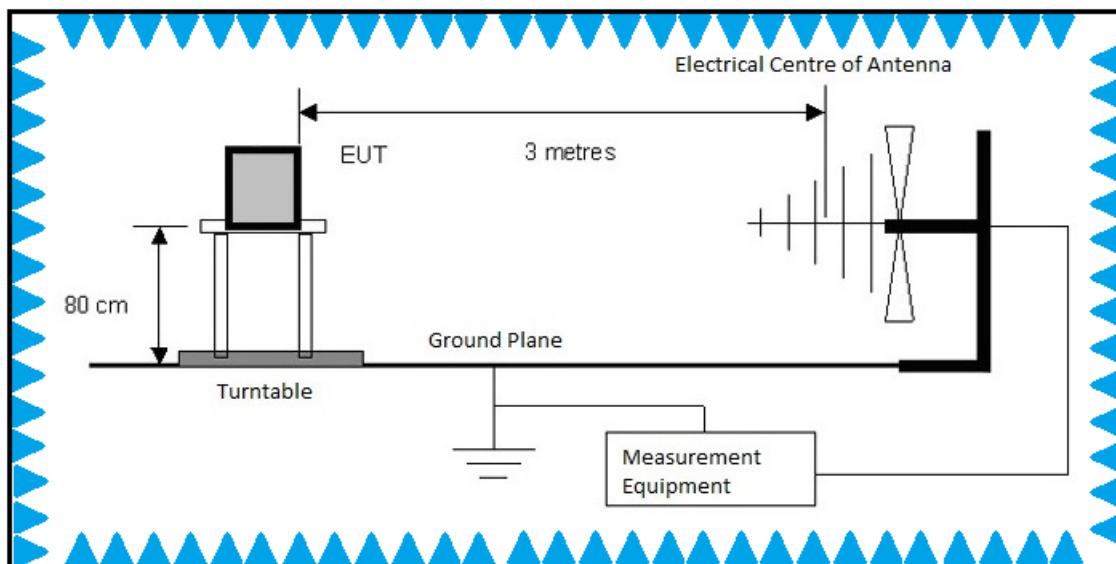

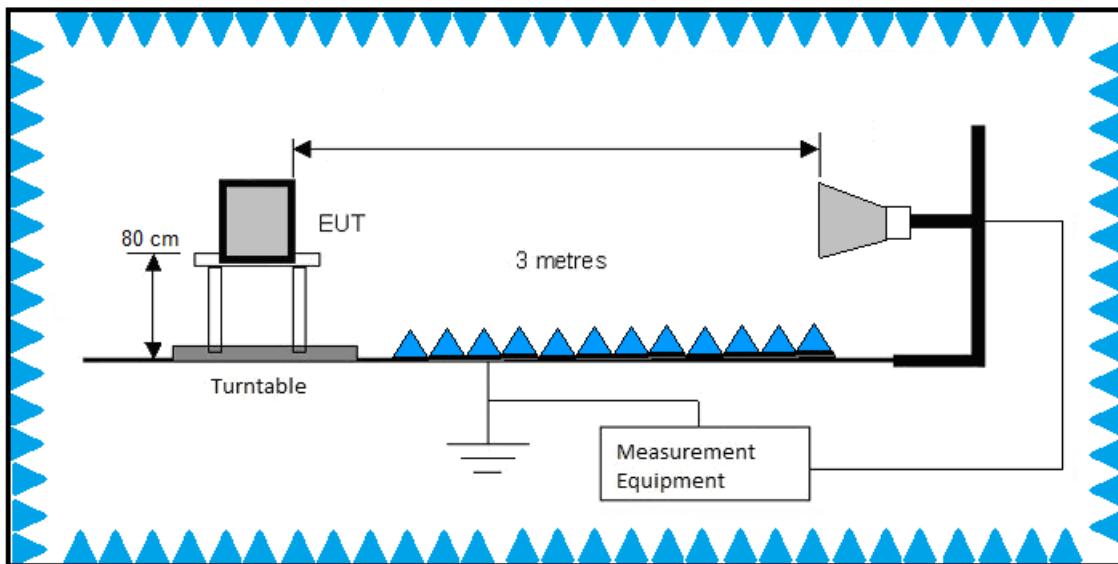


#### 2.9.5 Radiated Emissions Data:


Emission is more than 20 dB below the limit

Meter Reading in dB $\mu$ V + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dB $\mu$ V/m.


### Plot of Radiated Emissions: Horizontal polarization

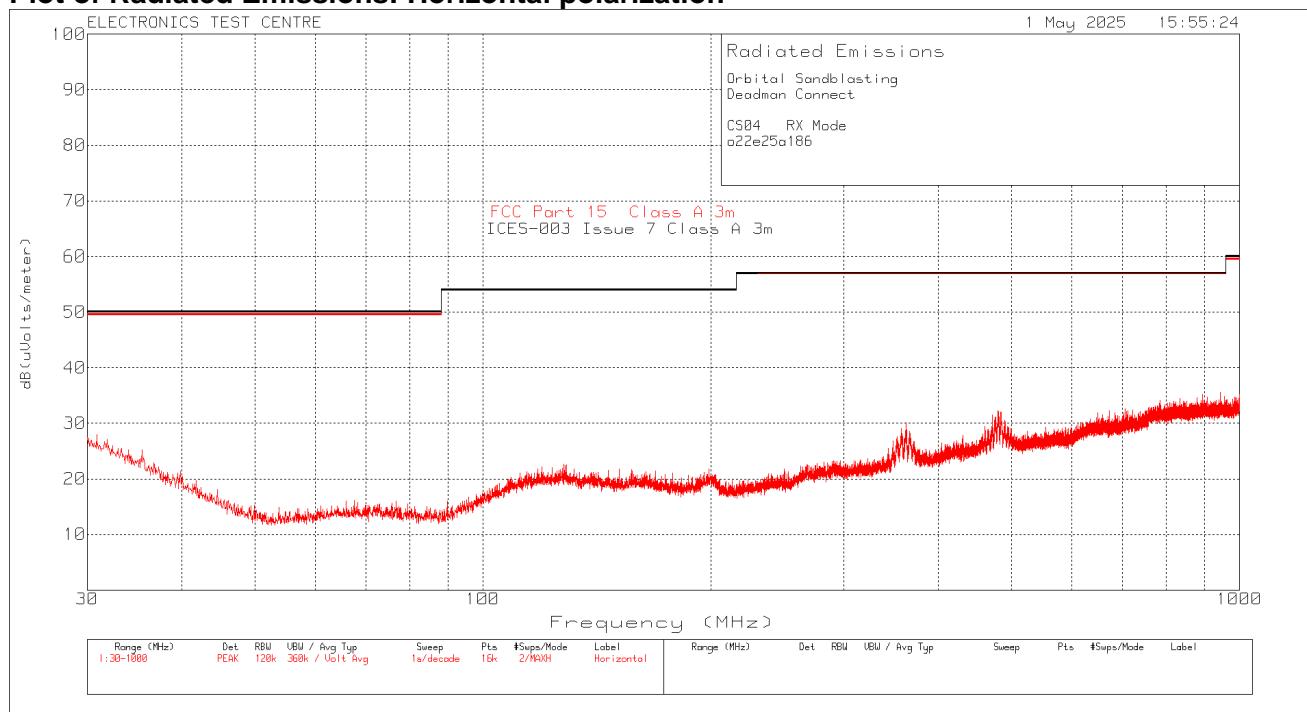


### Plot of Radiated Emissions: Vertical polarization

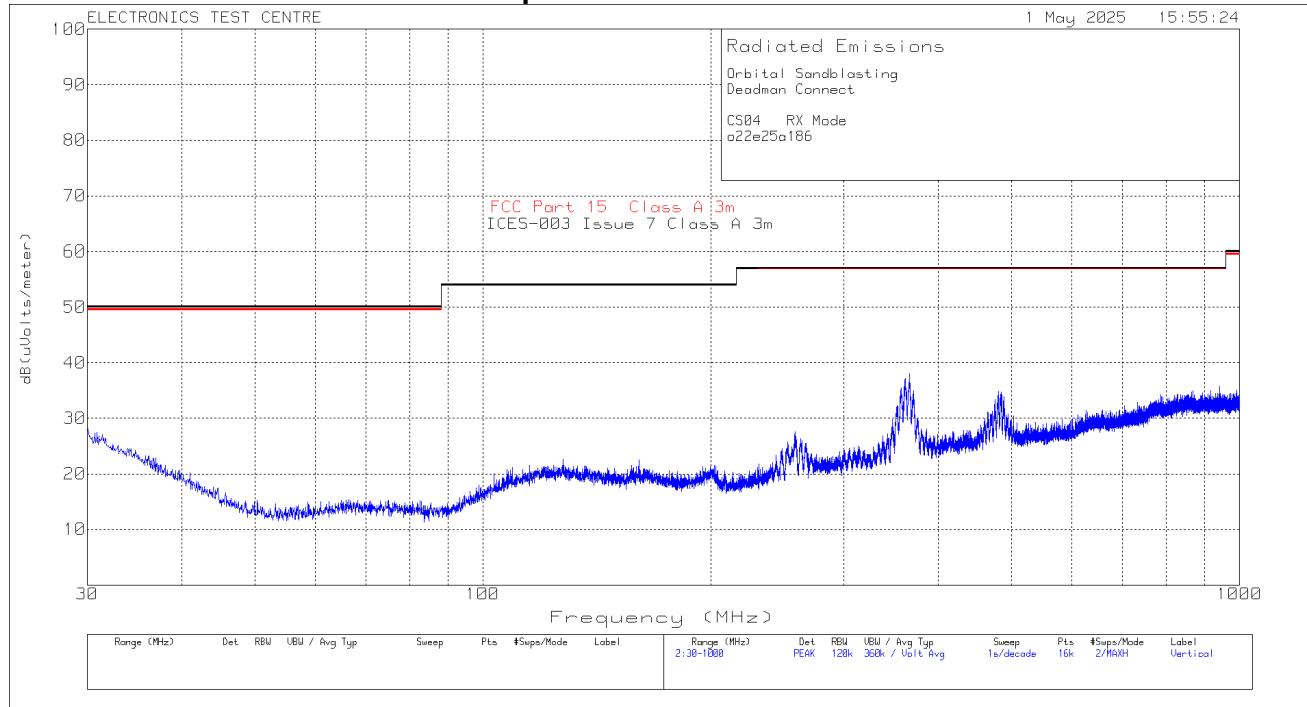

### Plot of Radiated Emissions: Horizontal polarization

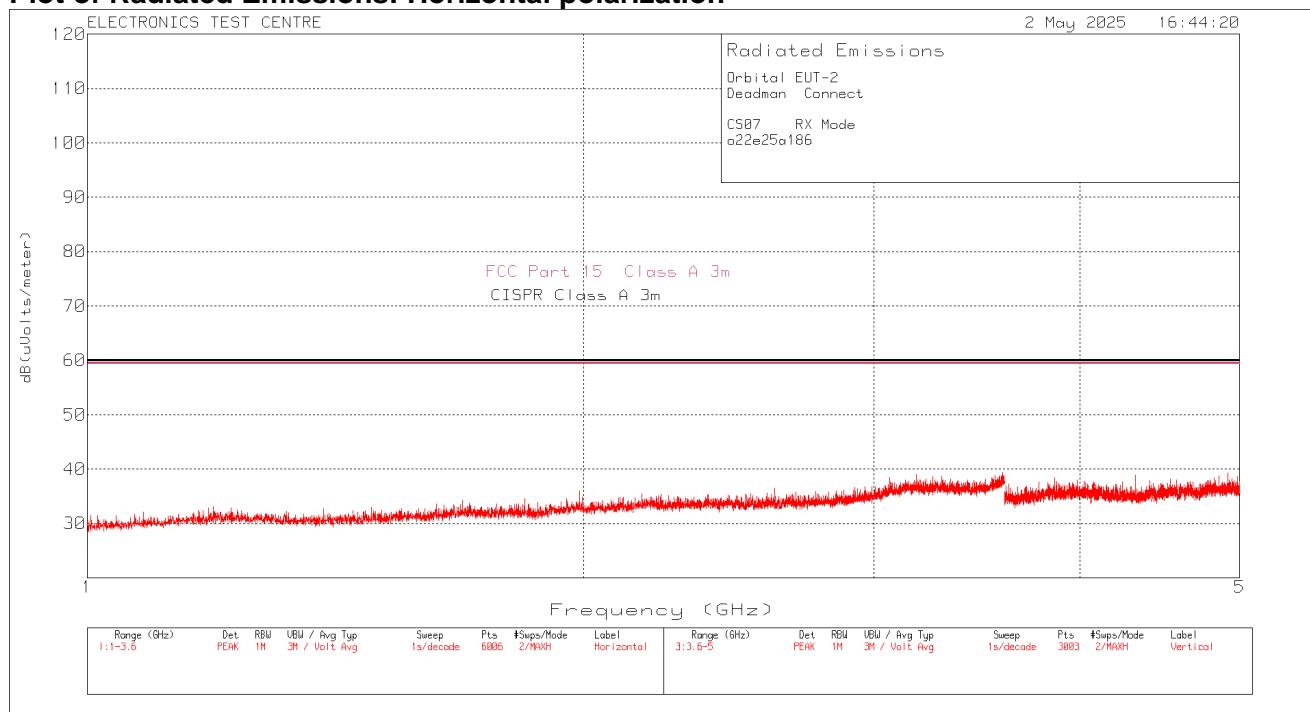

### Plot of Radiated Emissions: Vertical polarization

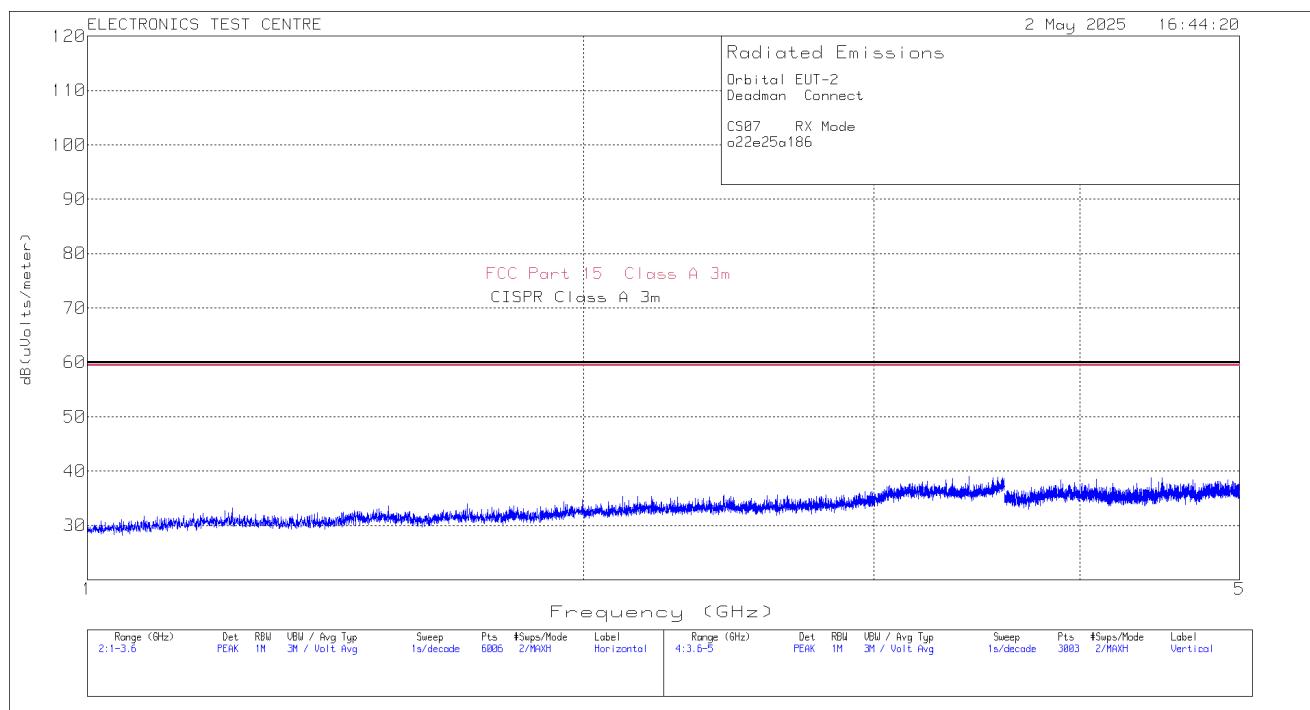

## 2.10 AC Main Power Line Conducted Emissions (RX Mode)

<b>Test Lab:</b> Electronics Test Centre, Airdrie	<b>EUT:</b> Deadman Transmitter
<b>Test Personnel:</b> Imran Akram	<b>Standard:</b> FCC Part 15.107
<b>Date:</b> 2025-05-05 (23.2°C, 15.6% RH)	<b>Basic Standard:</b> ANSI C63.4: 2014
<b>EUT status: Compliant</b>	

**Specification:** FCC Part 15.107

Frequency (MHz)	Quasi-Peak Class B Limit (dB $\mu$ V)	Average Class B Limit (dB $\mu$ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 – 30	60	50
<b>Criteria:</b> The conducted emissions produced by a device shall not exceed the limits as specified.		

### 2.10.1 Test Guidance: ANSI C63.4-2014, Clause 7.3.1

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.

### 2.10.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.10.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	SWC 021	N/A	
EMI receiver	Agilent	N9038A	6130	2024-08-15	2025-08-15
LISN	Com-Power	LI-215A	6180	2024-08-28	2025-08-28
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2025-05-01	2026-05-01
Transient Limiter	Electro-Metrics	EM-7600	4454	2025-02-21	2026-02-21
Emission Cable	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4436	2025-02-21	2026-02-21

### 2.10.4 Test Sample Verification, Configuration & Modifications

The AC/DC adaptor model #XSC-05010005 was plugged into the EUT to charge the batteries, which was then plugged into the LISN for measurement. Line voltage was 120 VAC, at 60 Hz.

The EUT met the requirements without modification.

#### Test setup diagram:

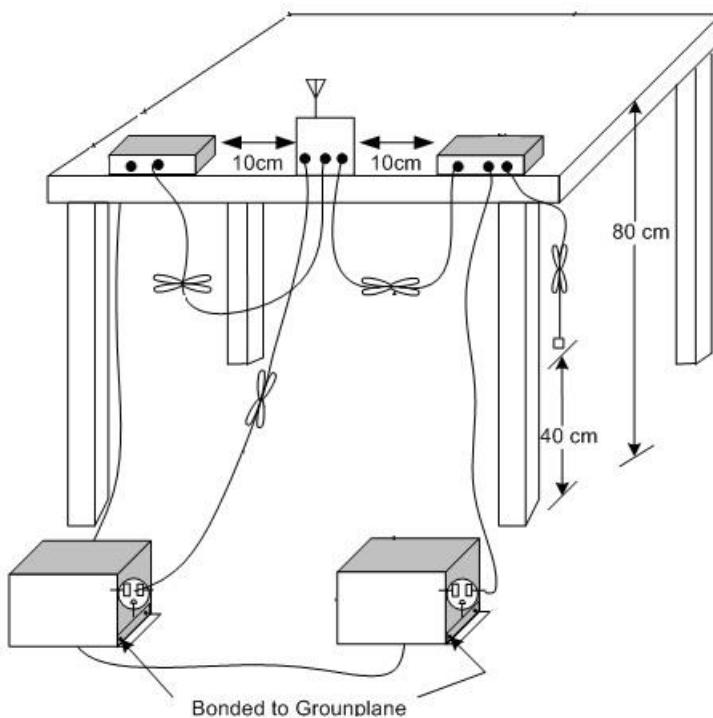

### 2.10.5 Conducted Emissions Data

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of limit at the frequency measured, and the Delta between the result and the limit.

Freq. Marker	Freq. (MHz)	Raw reading (dB $\mu$ V)	Det.	LISN Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dB $\mu$ V)	Average Class B Limit (dB $\mu$ V)	Delta (dB)	L / N
1	0.583	34.77	AV	0	9.8	44.57	46	-1.43	L
2	1.19	17.61	AV	0	9.8	27.41	46	-18.59	L
1	0.154	20.37	AV	0	9.8	30.17	55.8	-25.63	N
2	0.169	10.87	AV	0	9.8	20.67	55.03	-34.36	N
3	0.202	19.04	AV	0	9.8	28.84	53.52	-24.68	N
4	0.247	15.08	AV	0	9.8	24.88	51.86	-26.98	N
5	0.474	17.18	AV	0	9.8	26.98	46.44	-19.46	N
6	0.597	15.0	AV	0	9.8	24.8	46	-21.2	N

Meter Reading in dB $\mu$ V + LISN Factor in dB + Gain/Loss Factor in dB = Corrected Emission Strength in dB $\mu$ V.


Notes:

When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.


QP = Quasi-Peak detector; AV = Average detector

**Negative values for Delta indicate compliance.**

## Plot of Conducted Emissions: Line

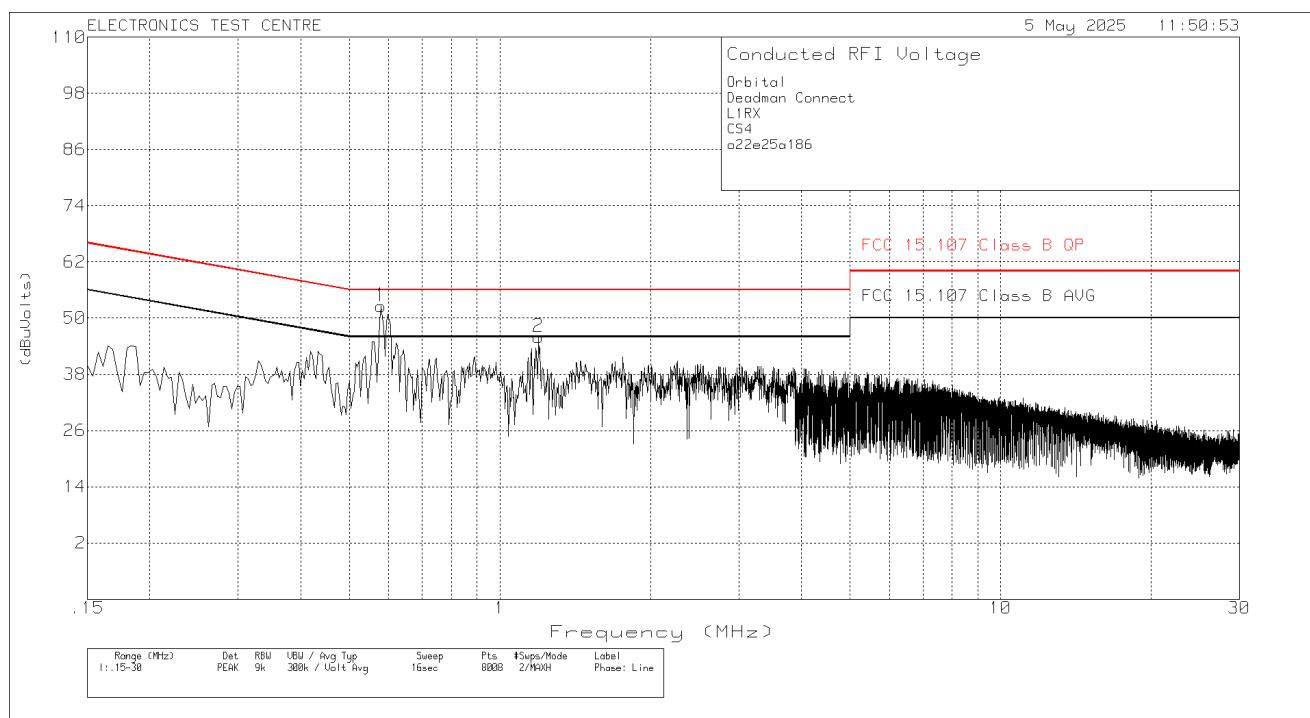

## Plot of Conducted Emissions: Neutral

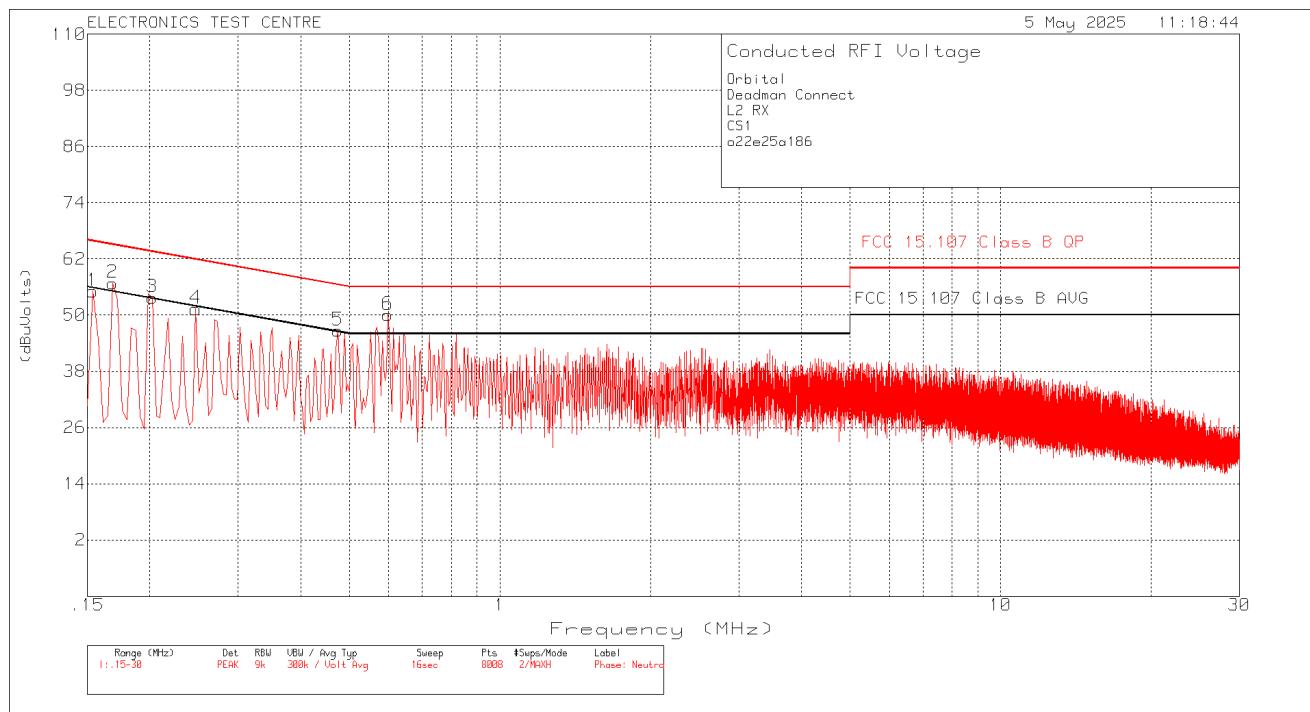

## 2.11 RF Exposure

Test Lab: Electronics Test Centre, Airdrie	EUT: Deadman Transmitter
Test Personnel:	Standard: FCC PART 15.247
Date:	

**EUT status: Exempt from SAR Evaluation**

**Compliant:** RF exposure assessment to be provided in a separate Exhibit.

### **3.0 TEST FACILITY**

#### **3.1 Location**

The Deadman Transmitter was tested at the Electronics Test Centre laboratory located in Airdrie, Alberta, Canada. The Radio Frequency Anechoic Chamber (RFAC), identified as Chamber 1, has a usable working space measuring 10.6 m long x 7.3 m wide x 6.5 m high.

Measurements taken at this site are accepted by Industry Canada as evidence of conformity per registration file # 2046A. This site is also listed with the FCC under Registration Number CA2046.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment located in the Control Room. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in the Control Room, consisting of two shielded vestibules joined together at the side of the main room. Cables are routed through bulkhead panels between the rooms and the test chamber as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

Either floor mounted or table-top equipment can be tested at this facility.


#### **3.2 Grounding Plan**

The Deadman Transmitter was placed at the center of the test chamber turntable on top of an 80-cm high polystyrene foam table below 1GHz and at 1.5m high polystyrene foam table above 1 GHz for transmits mode. No provision is made within the Deadman Transmitter for an earth ground connection.

#### **3.3 Power Supply**

For radiated emission and antenna port average power measurement input power was supplied via internal fully charged battery.

## Appendix A – Test Setup Block Diagram

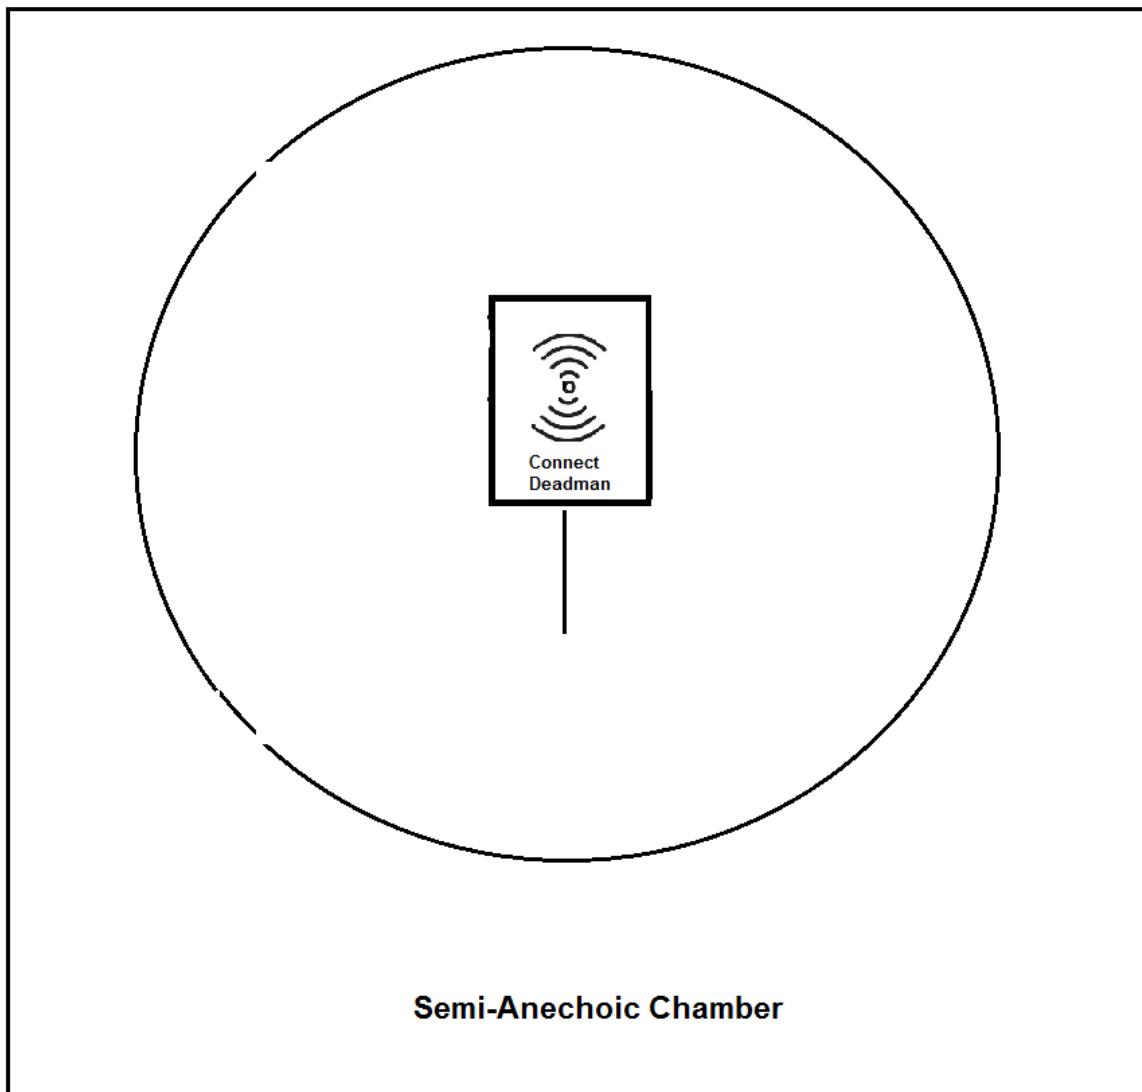

## End of Document