



No.:
FCCSZ2025-0043-RF5

TEST REPORT

FCC ID : 2BPWEX100

NAME OF SAMPLE : Car Infotainment System

APPLICANT : Tongxingzhe CyberAuto (Shenzhen) Co.,Ltd.

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Tongxingzhe CyberAuto (Shenzhen) Co.,Ltd. Address: National Engineering Laboratory Building A-13F, Shenzhen, 518000 Guangdong, China	
Manufacturer		Name: Tongxingzhe CyberAuto (Shenzhen) Co.,Ltd. Address: National Engineering Laboratory Building A-13F, Shenzhen, 518000 Guangdong, China	
Equipment Under Test		Product Name: Car Infotainment System Model Name: X100 Additional Model Name: N/A Brand Name: Auraai Serial NO.: N/A Sample NO.: 202505222034-5	
Date of Receipt.	May. 22, 2025	Date of Testing	May. 22, 2025 ~ Jul. 18, 2025
Test Specification		Test Result	
FCC Part 15, Subpart E, Section 15.407		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC Issue Date: Jul. 18, 2025	
Compiled by: Zhu Yulin Name Signature	Reviewed by: Mo Xianbiao Name Signature	Approved by: Dong Sanbi Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed		Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested	

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 TEST LOCATION	6
2 GENERAL INFORMATION	7
2.1 GENERAL PRODUCT INFORMATION	7
2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
2.3 DESCRIPTION OF SUPPORT UNITS	9
3 REQUIREMENTS AND PARAMETERS FOR DFS TEST	10
3.1 APPLICABILITY OF DFS REQUIREMENTS	10
3.2 DETECTION THRESHOLD VALUES	11
3.3 DFS RESPONSE REQUIREMENT VALUES	11
3.4 PARAMETERS OF DFS TEST SIGNALS	12
4 TEST RESULTS	13
4.1 TEST SETUP OF DFS	13
4.2 DFS DETECTION THRESHOLD	13
4.3 CHANNEL LOADING	14
4.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME	15
4.5 NON- OCCUPANCY PERIOD	16
5 PHOTOGRAPHS OF THE EUT	18



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0043-RF5	Original release	Jul. 18, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
FCC 15.407 KDB 905462 7.8.3	Channel Move Time	PASS
FCC 15.407 KDB 905462 7.8.3	Channel Closing Transmission Time	PASS
FCC 15.407 KDB 905462 7.8.3	Non-Occupancy Period and Client Beacon Test	PASS

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period and Client Beacon Test are required to be performed



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Antenna Port Conducted Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2026/4/22
#3Shielding room	MORI	443	N/A	3 year	2026/5/16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168587	1 year	2026/6/5
Analog signal Generator (100kHz ~ 40GHz)	Rohde&Schwarz	SMB 100A	181934	1 year	2026/4/22
Vector signal Generator (9kHz ~ 6GHz)	Rohde&Schwarz	SGT 100A	111724	1 year	2026/4/22
RF control unit(BT/WiFi)	Tonscend	JS0806-2-8CH	CS0300023	1 year	2026/4/22
10db attenuator	JUNKE	SMA-10-18-N	250312743	1 year	2026/6/6
Power splitter	Anritsu	K240CPOWERDIVIDER	012334	1 year	2026/6/6
Temperature and humidity meter	/	C193561457	C193561457	1 year	2026/4/28

1.2 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province 518110 P.R.China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT NAME	Car Infotainment System
BRAND NAME	Auraai
MODEL NAME	X100
ADDITIONAL MODEL NAME	N/A
POWER SUPPLY	DC 12V
OPERATING FREQUENCY	5260MHz ~ 5320MHz, 5500MHz ~ 5720MHz
ANTENNA TYPE (Remark 4/5)	External Antenna, with 3.82dBi gain
HARDWARE VERSION:	L880A_VER_G_210503_FR4
SOFTWARE VERSION:	V2.1.03
I/O PORTS	Refer to User's Manual
CABLE SUPPLIED	N/A
DEVICE TYPE	<input type="checkbox"/> Master <input checked="" type="checkbox"/> Client without radar detection <input type="checkbox"/> Client with radar detection
POWER ON TIME	Master: 61s
	EUT: 20s

Remark:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to report (Report NO.: FCCSZ2025-0031-EUT).
4. Please refer to the antenna report.
5. Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
6. The external antenna of this product cannot be removed without authorization.



2.2 OPERATING FREQUENCY OF EACH CHANNEL

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n(HT20), 802.11ac(VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260MHz	56	5280MHz
60	5300MHz	64	5320MHz

2 channels are provided for 802.11n(HT40), 802.11ac(VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270MHz	62	5310MHz

1 channels are provided for 802.11ac(VHT80):

CHANNEL	FREQUENCY
58	5290 MHz

FOR 5500 ~ 5700MHz

11 channels are provided for 802.11a, 802.11n(HT20) 802.11ac(VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500MHz	124	5620MHz
104	5520MHz	128	5640MHz
108	5540MHz	132	5660MHz
112	5560MHz	136	5680MHz
116	5580MHz	140	5700MHz
120	5600MHz		

5 channels are provided for 802.11n(HT40), 802.11ac(VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510MHz	126	5630MHz
110	5550MHz	134	5670MHz
118	5590MHz		

2 channels are provided for 802.11ac(VHT80):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530MHz	122	5610 MHz



2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

BANDWIDTH	CHANNEL	TEST TYPE AND LIMIT	
80MHz	CH58,CH106	Channel Move Time	
		Channel Closing Transmission Time	
		Non-Occupancy Period and Client Beacon Test	
Remark:			
This test was investigated for different bandwidth (20MHz, 40MHz, 80MHz). The following plots was worst case.			

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment						
NO	Description	Brand	Model No.	FCC ID	SN	Supplied by
1	Wireless router	LINKSYS	WRT3200ACM	Q87-WRT3200ACM	19811609801281	Lab
Support Cable						
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)
1	N/A	N/A	N/A	N/A	N/A	N/A



3 REQUIREMENTS AND PARAMETERS FOR DFS TEST

3.1 APPLICABILITY OF DFS REQUIREMENTS

APPLICABILITY OF DFS REQUIREMENTS PRIOR TO USE A CHANNEL

REQUIREMENT	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
Non-Occupancy Period	✓	✓	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

APPLICABILITY OF DFS REQUIREMENTS DURING NORMAL OPERATION

REQUIREMENT	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓



3.2 DETECTION THRESHOLD VALUES

DFS DETECTION THRESHOLDS FOR MASTER DEVICES AND CLIENT DEVICES WITH RADAR DETECTION

MAXIMUM TRANSMIT POWER	VALUE (SEE Note 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission wave forms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

3.3 DFS RESPONSE REQUIREMENT VALUES

PARAMETER	VALUE
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	100% of the UNII transmission power bandwidth. See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



3.4 PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test wave forms.

Short Pulse Radar Test Wave forms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A Test B	Roundup $\left\lceil \frac{1}{\frac{360}{19 \cdot 10^6}} \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

LONG PULSE RADAR TEST WAVEFORM


RADAR TYPE	PULSE WIDTH (μsec)	CHIRP WIDTH (MHz)	PRI (μsec)	NUMBER OF PULSES PER BURST	NUMBER OF BURSTS	MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION	MINIMUM NUMBER OF TRIALS
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

FREQUENCY HOPPING RADAR TEST WAVEFORM


RADAR TYPE	PULSE WIDTH (μsec)	PRI (μsec)	PULSES PER HOP	HOPPING RATE (kHz)	HOPPING SEQUENCE LENGTH (msec)	MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION	MINIMUM NUMBER OF TRIALS
6	1	333	9	0.333	300	70%	30

4 TEST RESULTS

4.1 TEST SETUP OF DFS

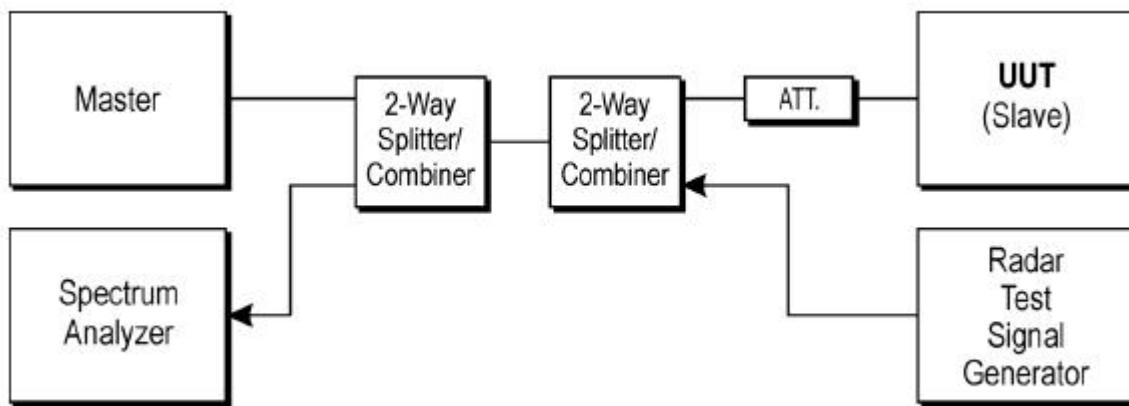


4.2 DFS DETECTION THRESHOLD

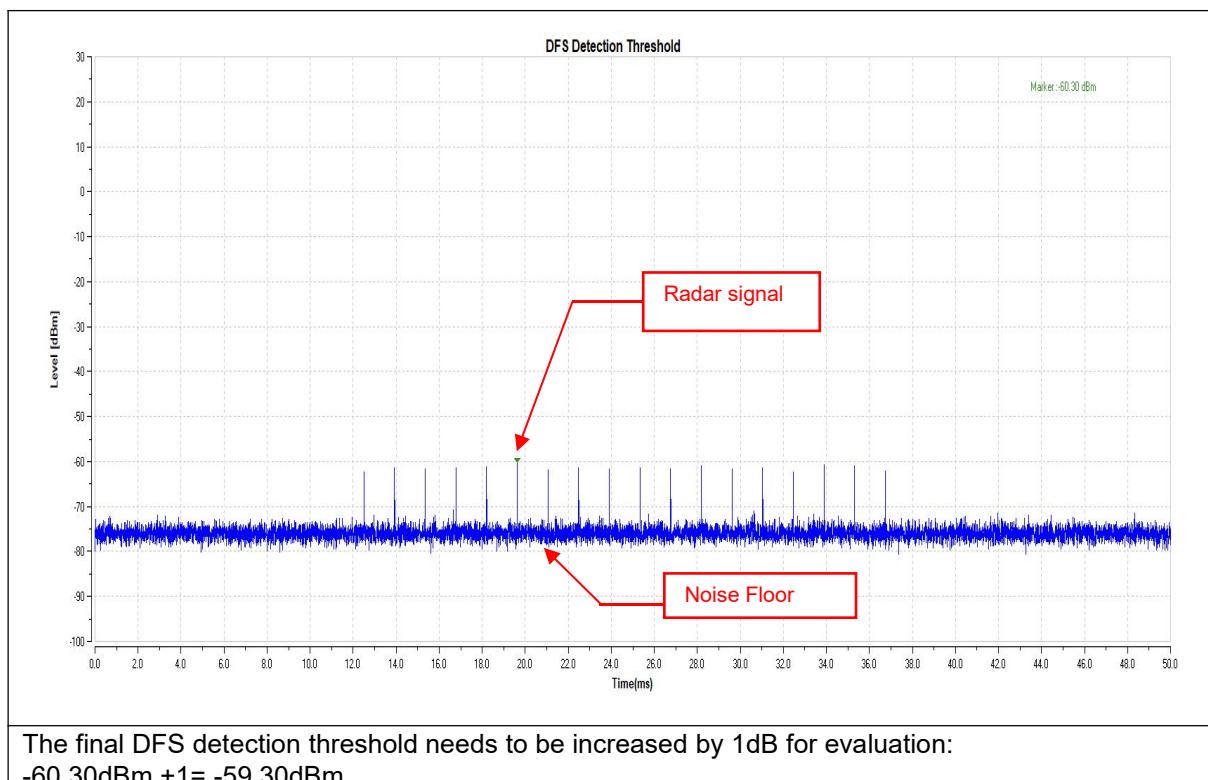

4.3 CHANNEL LOADING

The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) with radar signal, measured the channel shutdown. The slave transmitted the test data to master, the transmitted duty cycle is 35.2%.

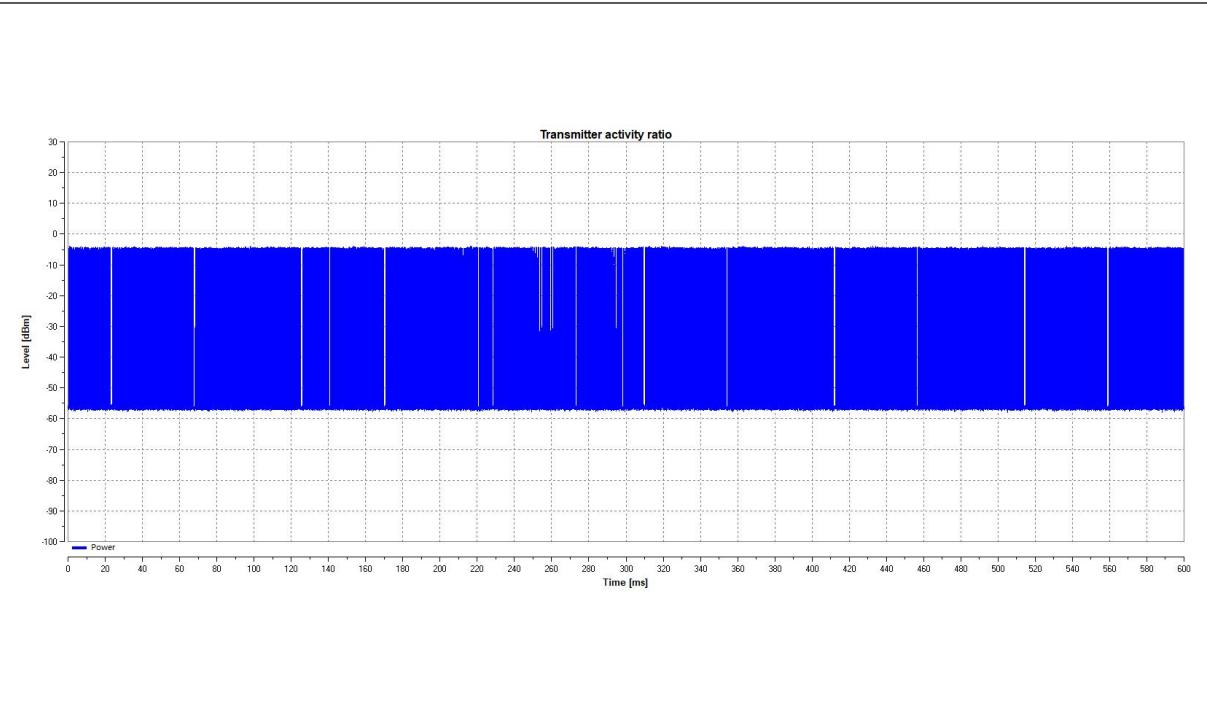


Note: Traffic signal: from slave transmit to master.


4.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME

Radar Signal 0

Channel	CH58-5290MHz		
Channel Move Time(ms)	498.6	Channel Closing Transmission Time(ms)	200+3.9

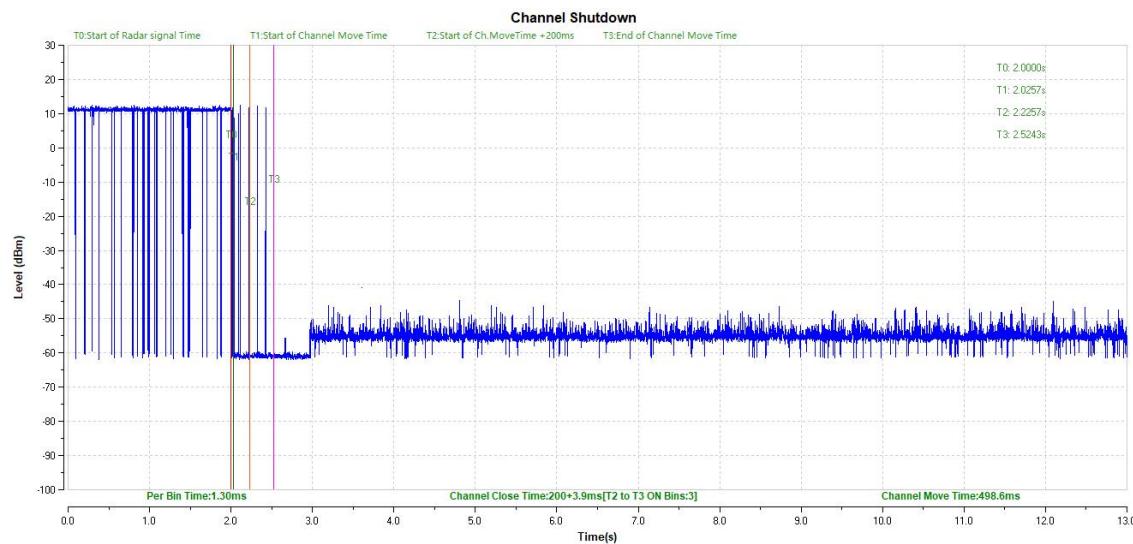

Channel	CH106-5530MHz		
Channel Move Time(ms)	443.2	Channel Closing Transmission Time(ms)	200+5.2

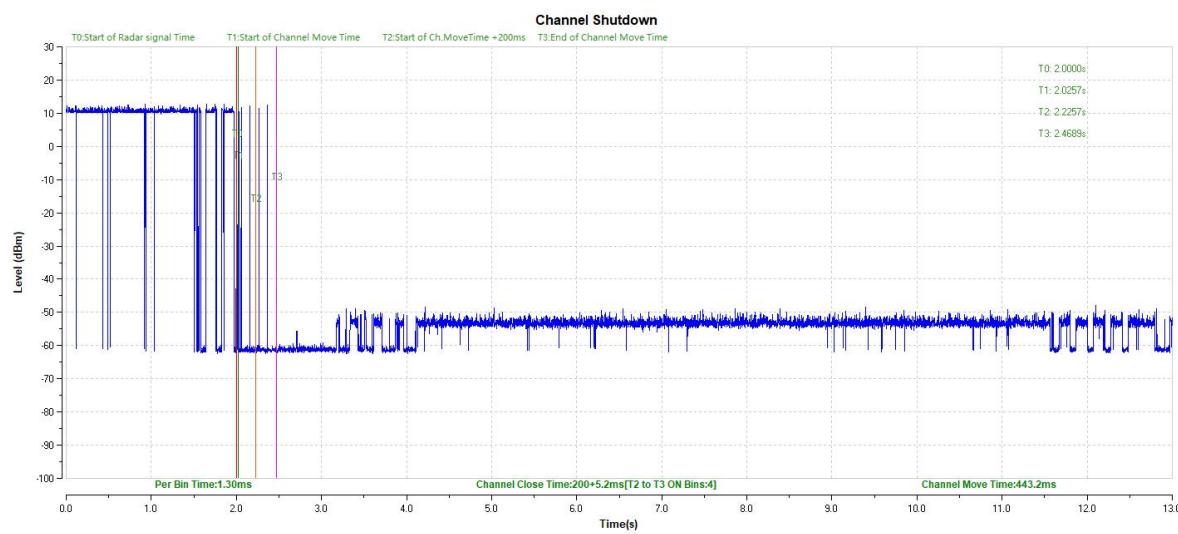


Note:

- 1.T0 denotes the Start of Radar Signal Time.
- 2.T1 denotes the Start of Channel Move Time.
- 3.T2 denotes the Start of Channel Move Time + 200ms.
- 4.T3 denotes the End of Channel Move Time.
- 5.Per Bin Time = Sweep time (13000ms) / Sweep Point Bins (10000) =1.3ms
- 6.CH58:Channel Closing Transmission Time(200 + 3.9ms) = 200+ ON Bins* Per Bin Time
- 7.CH106:Channel Closing Transmission Time(200 + 5.2ms) = 200+ ON Bins* Per Bin Time


4.5 NON- OCCUPANCY PERIOD

- 1) Test results demonstrating an associated client link is established with the master on a test frequency
- 2) The client and DFS-certified master device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.
- 3) The device transmits one type of radar as specified in the DFS Order.
- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
- 5)An analyzer plot that contains a single 30-minute sweep on the original test frequency.

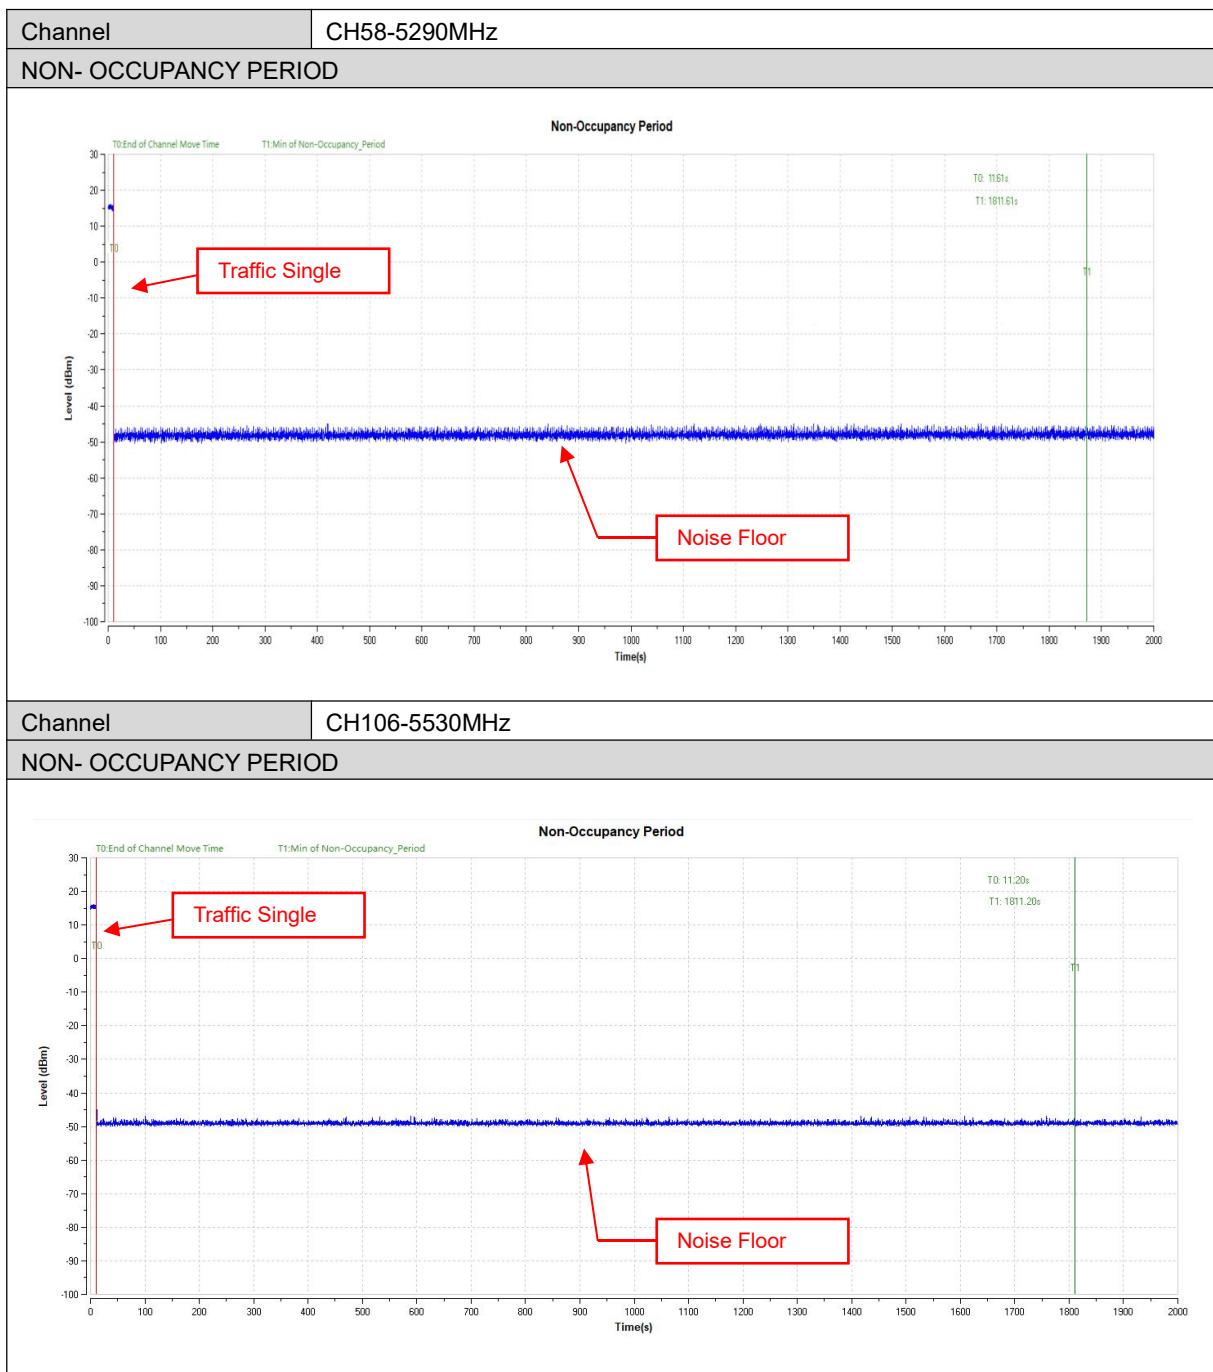

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up

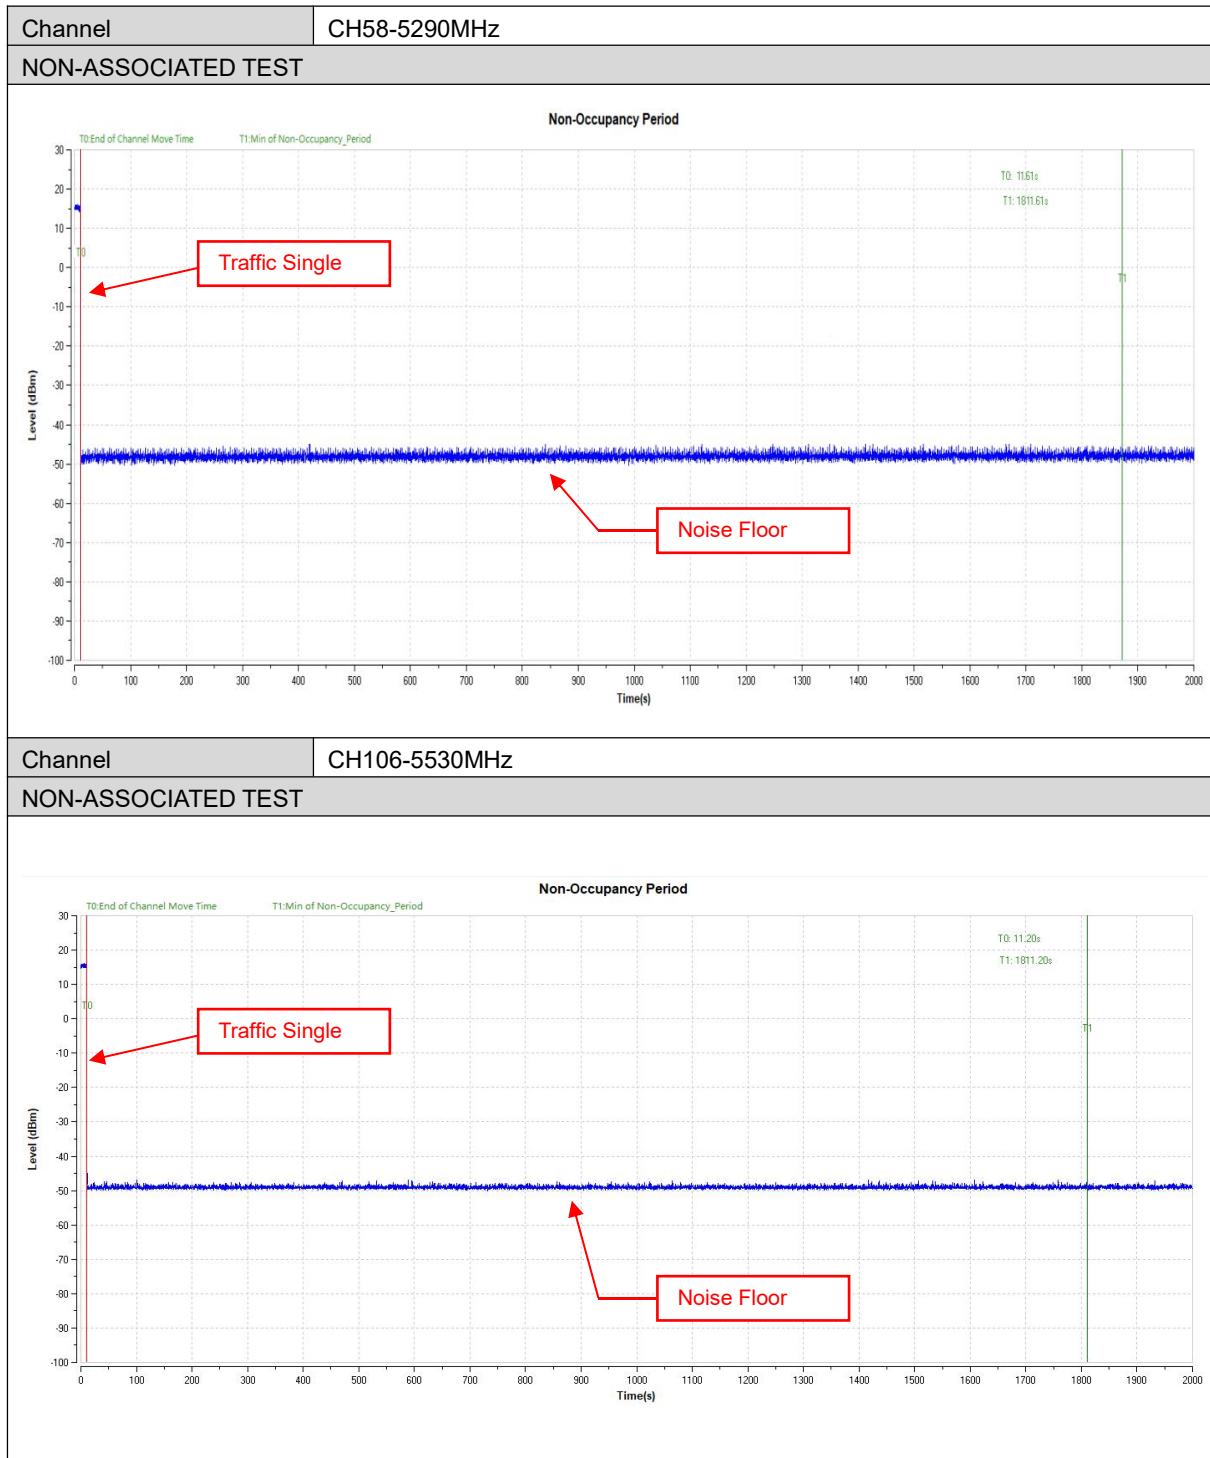



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of tester, reviewer and approver;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days;
- (6) Generally, commission test results apply to the samples as received. The sample information is provided by the customer and laboratory is not responsible for its authenticity;
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>