






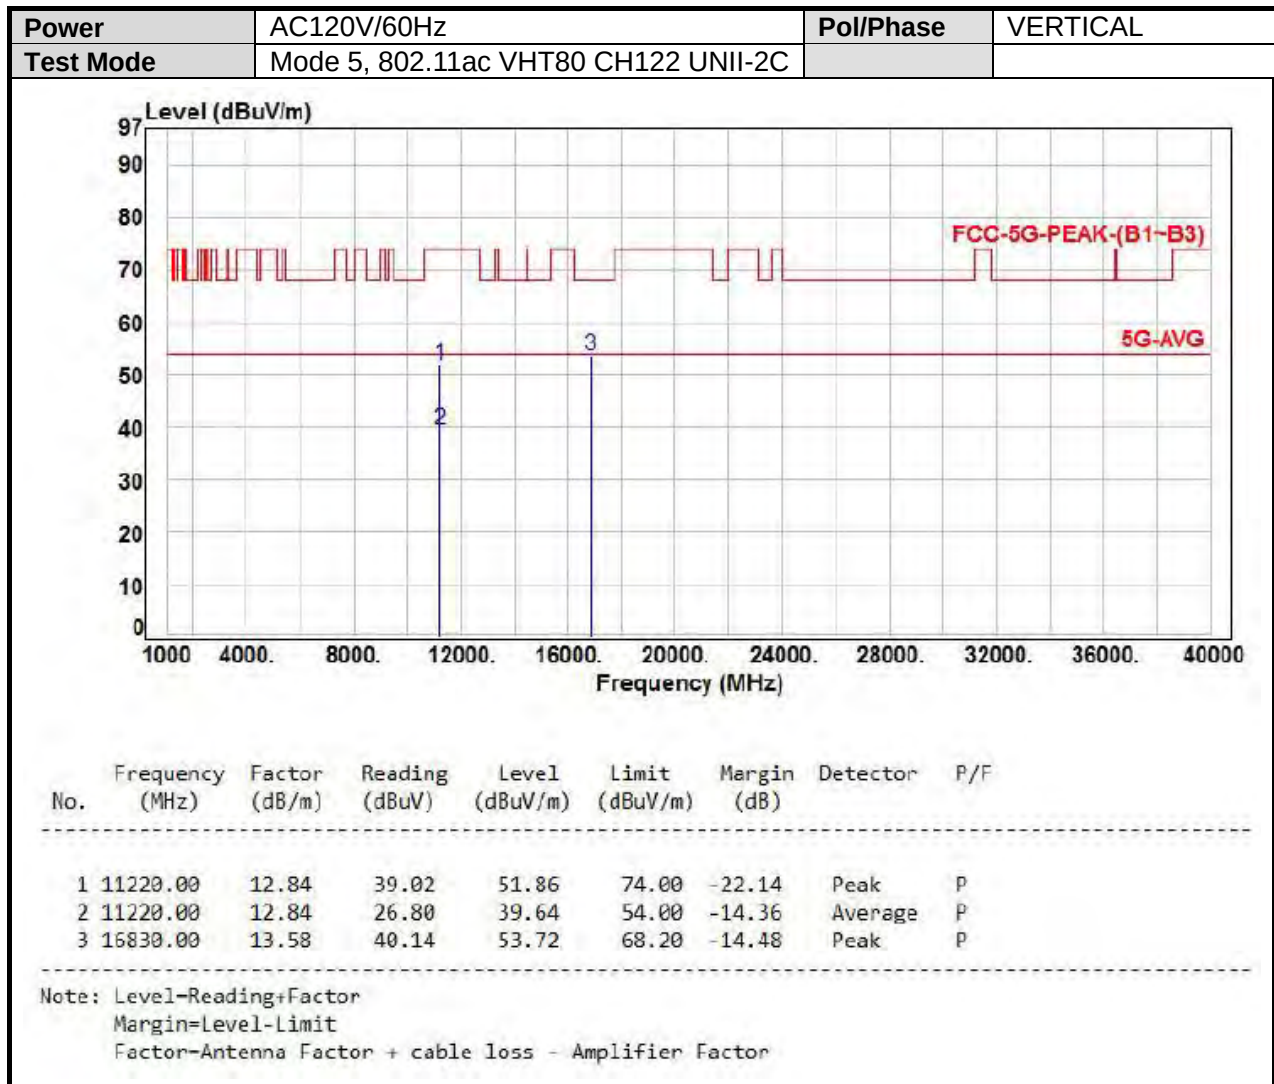


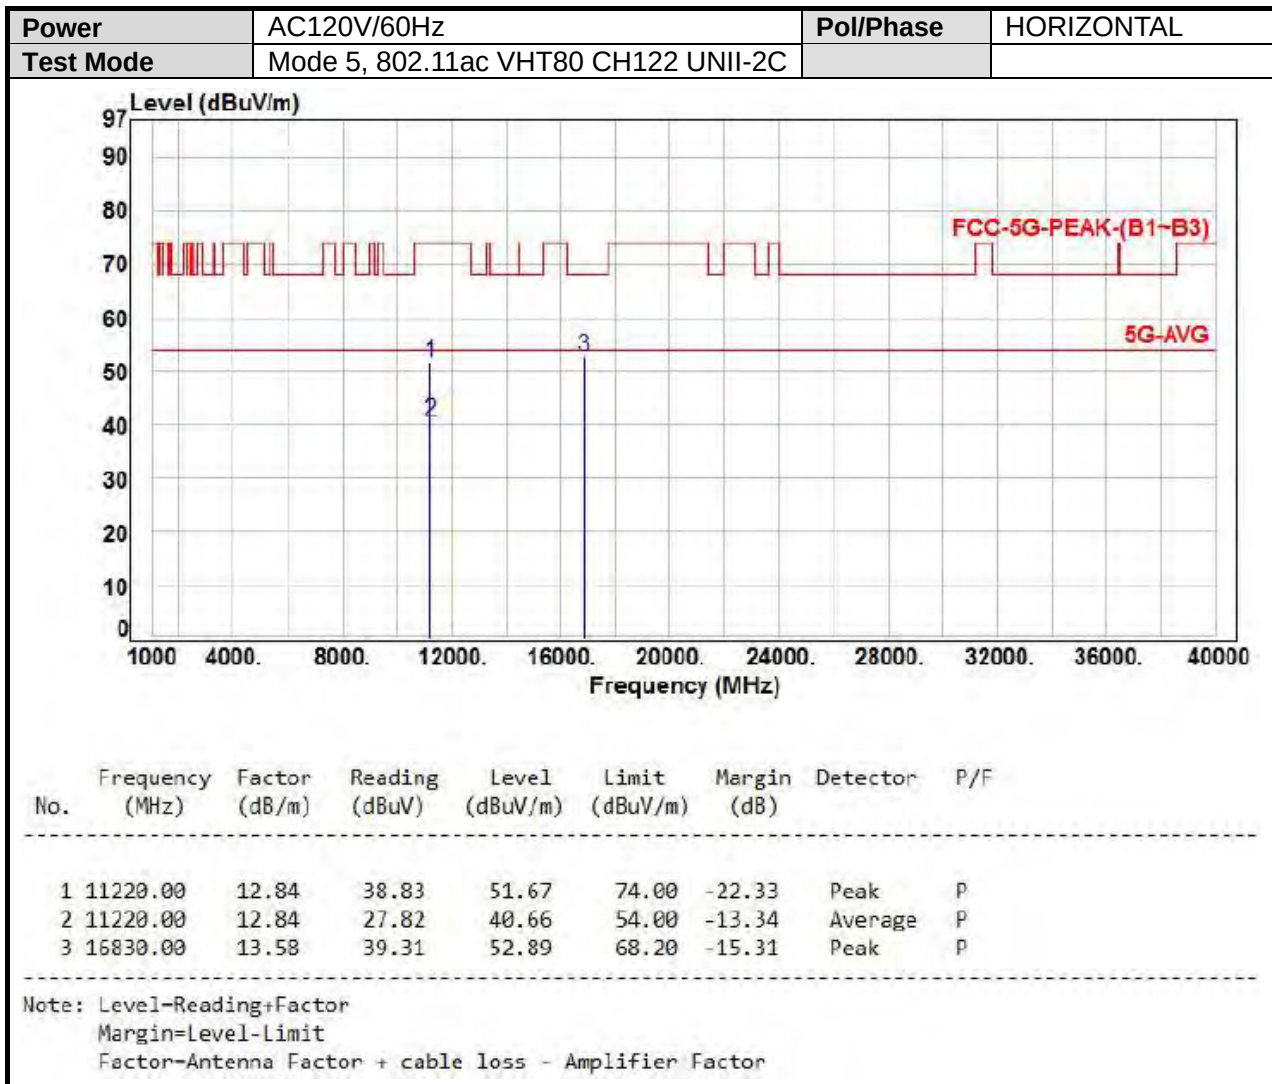


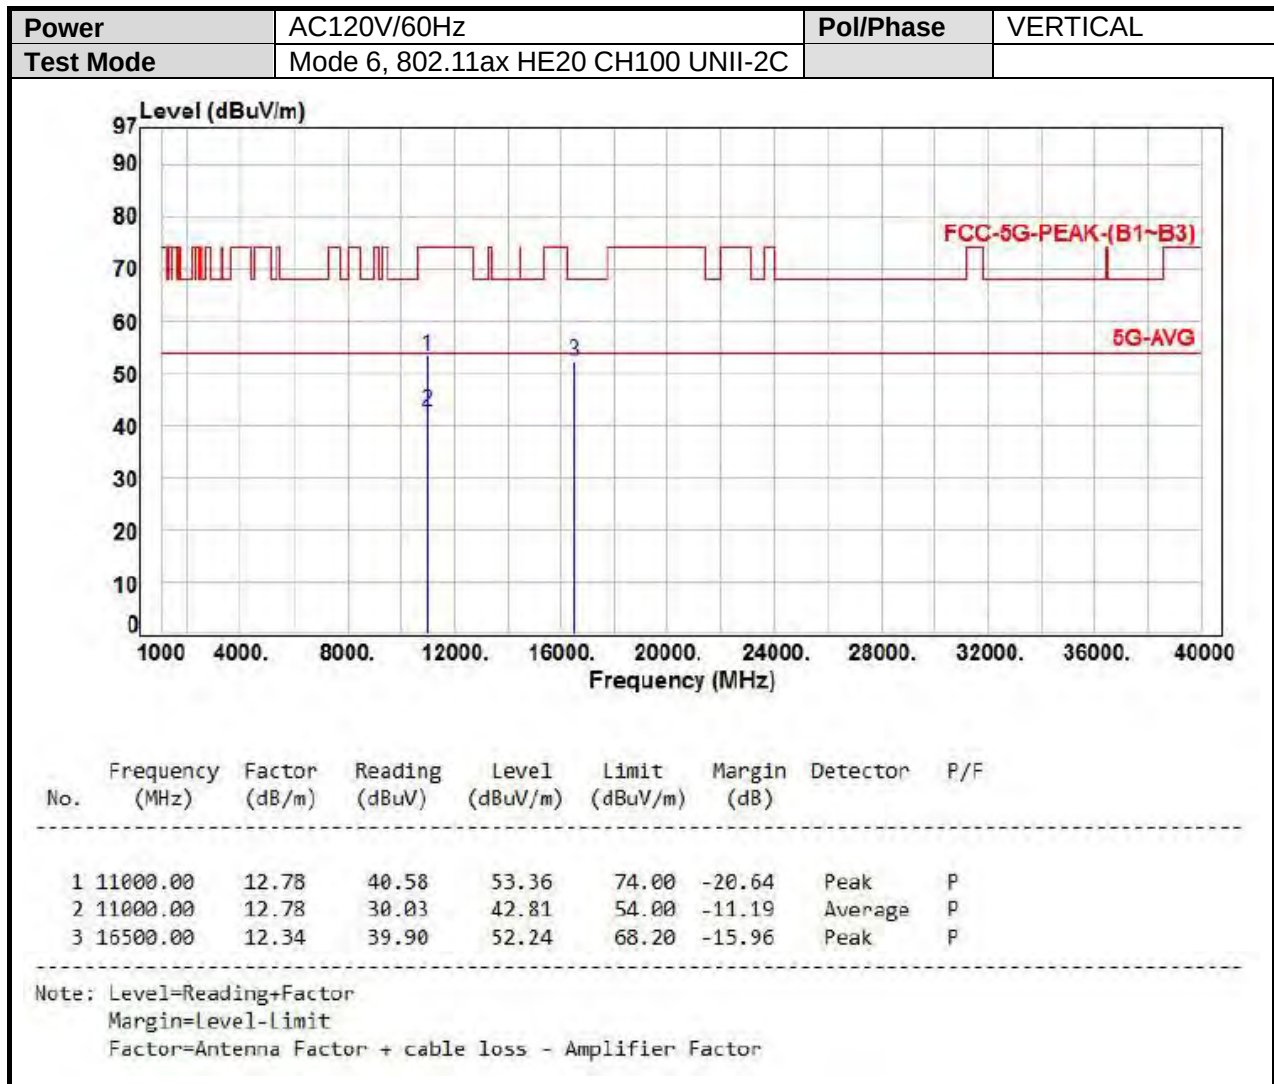


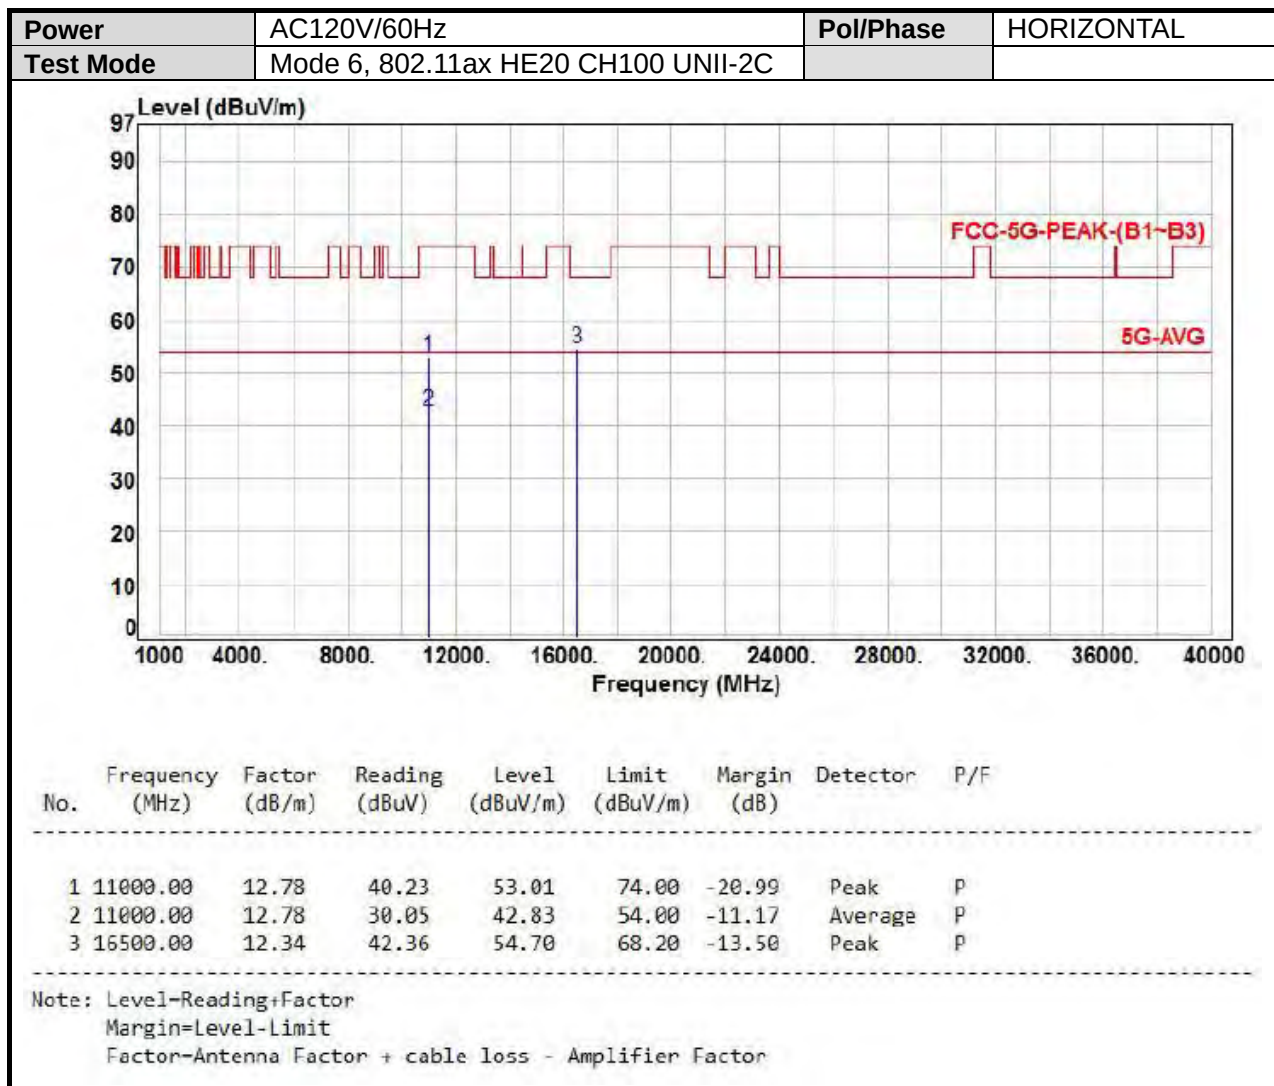


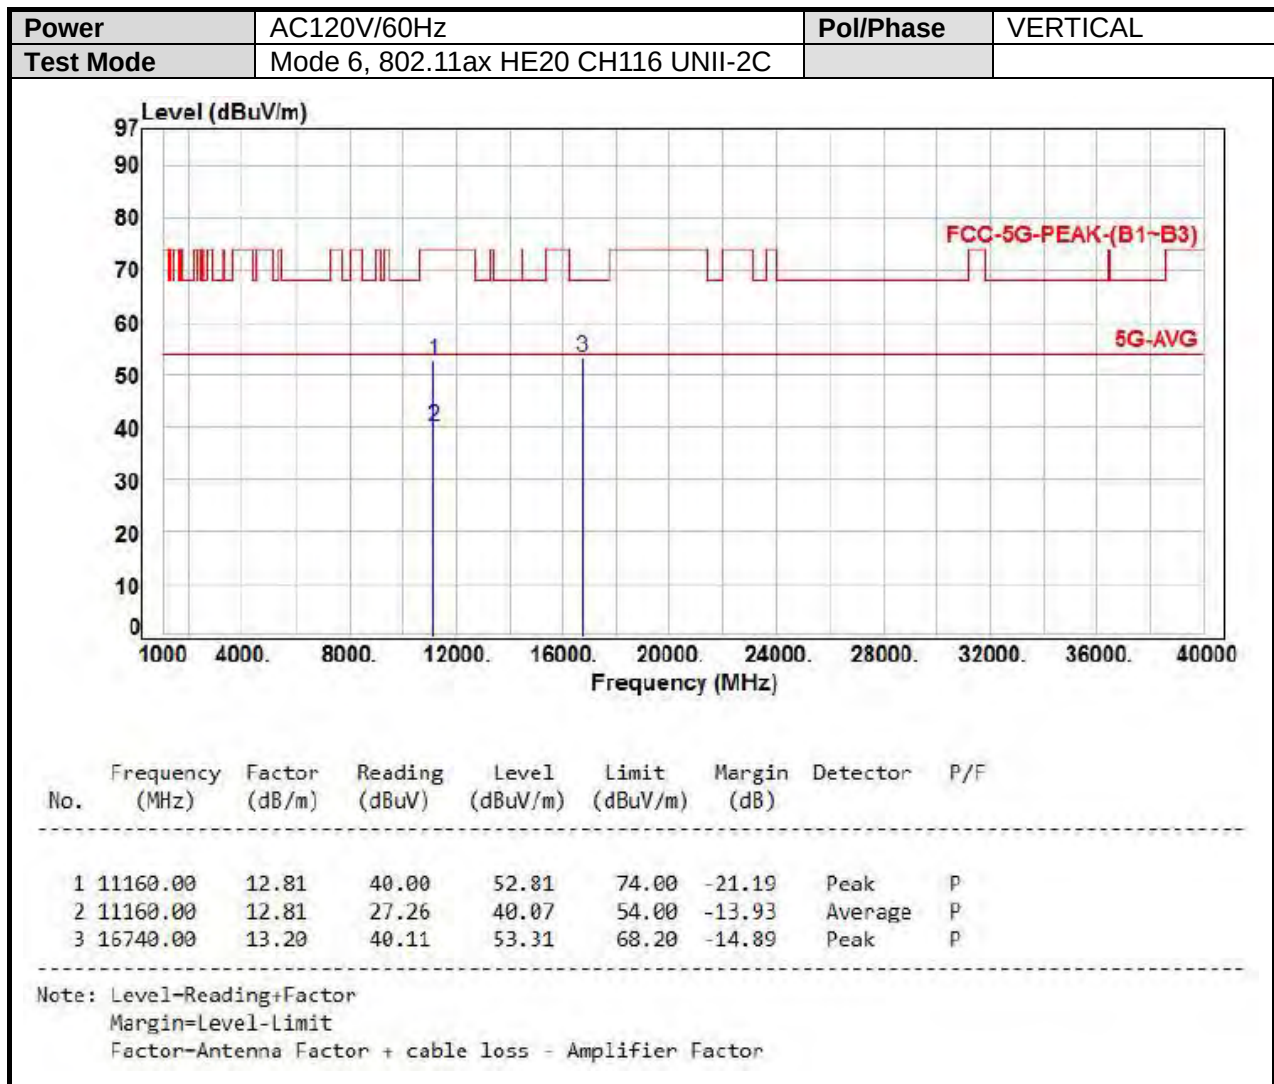


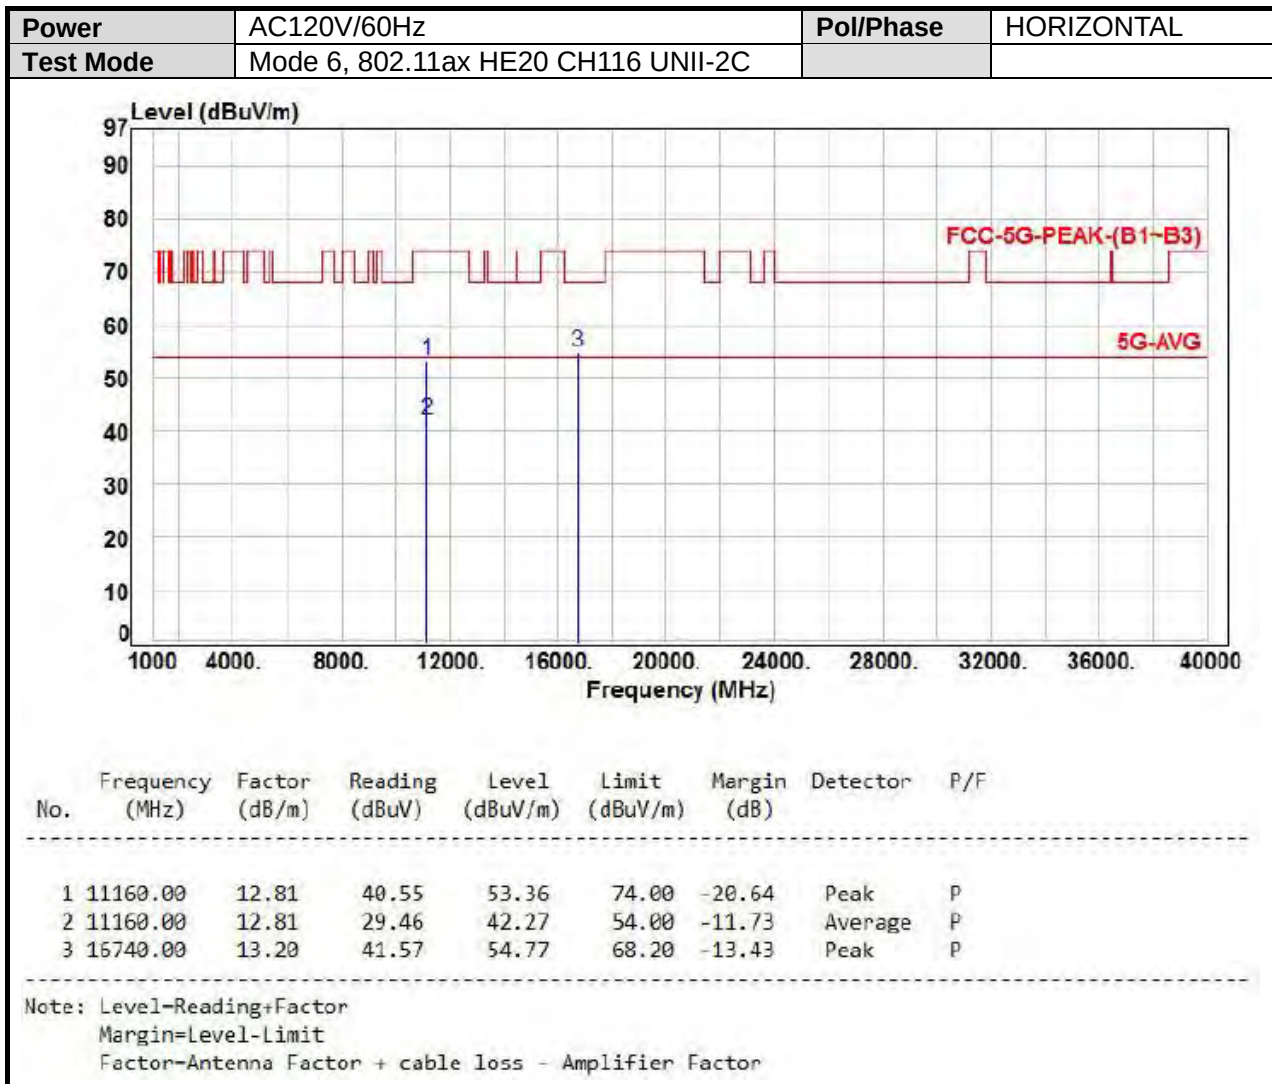


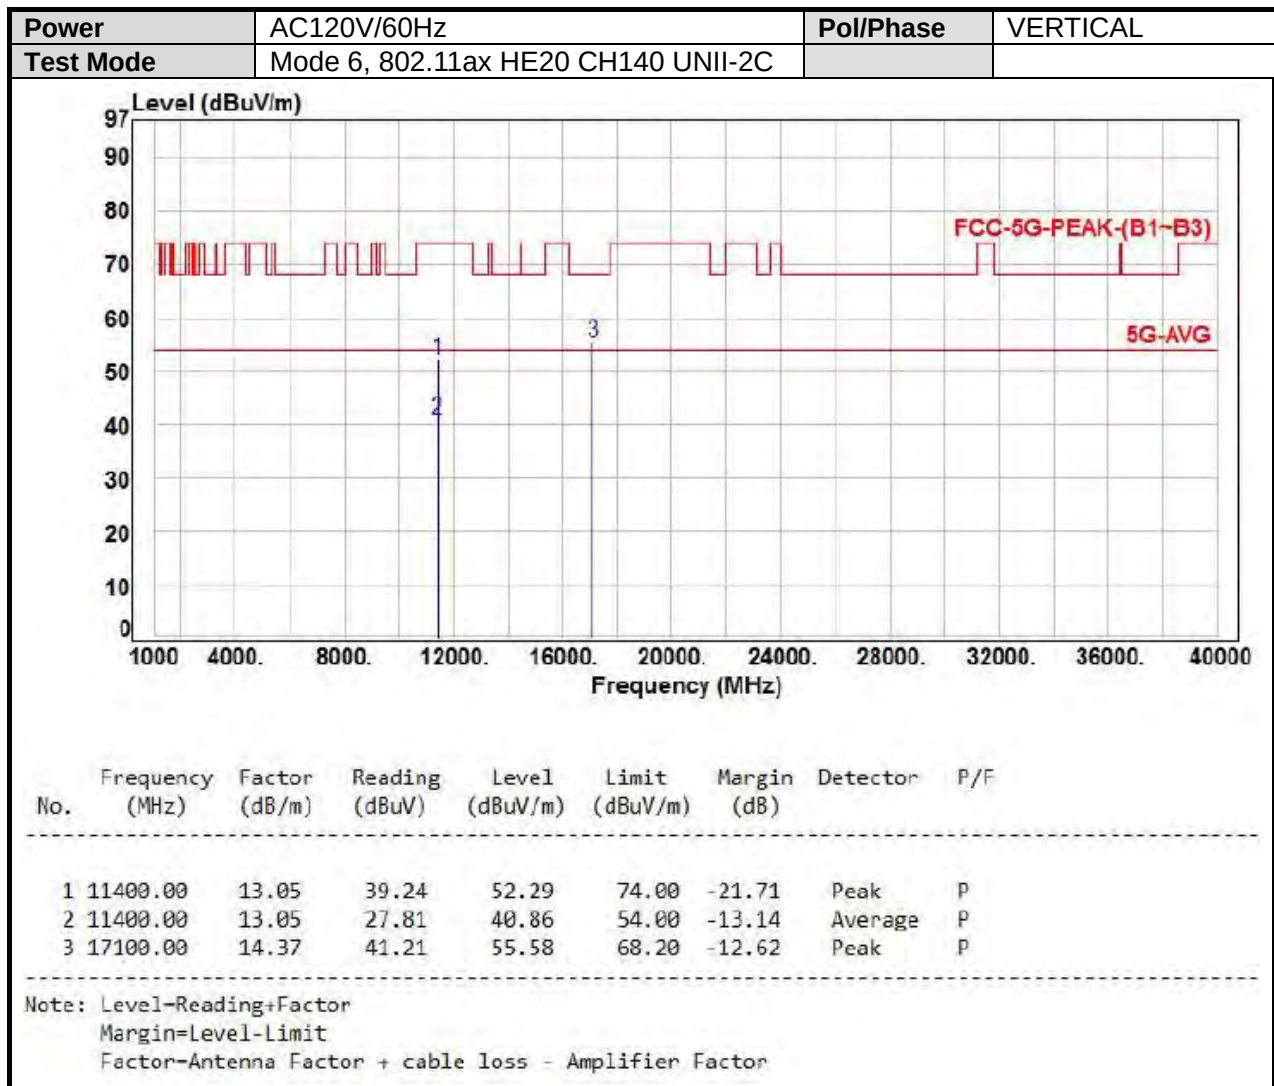


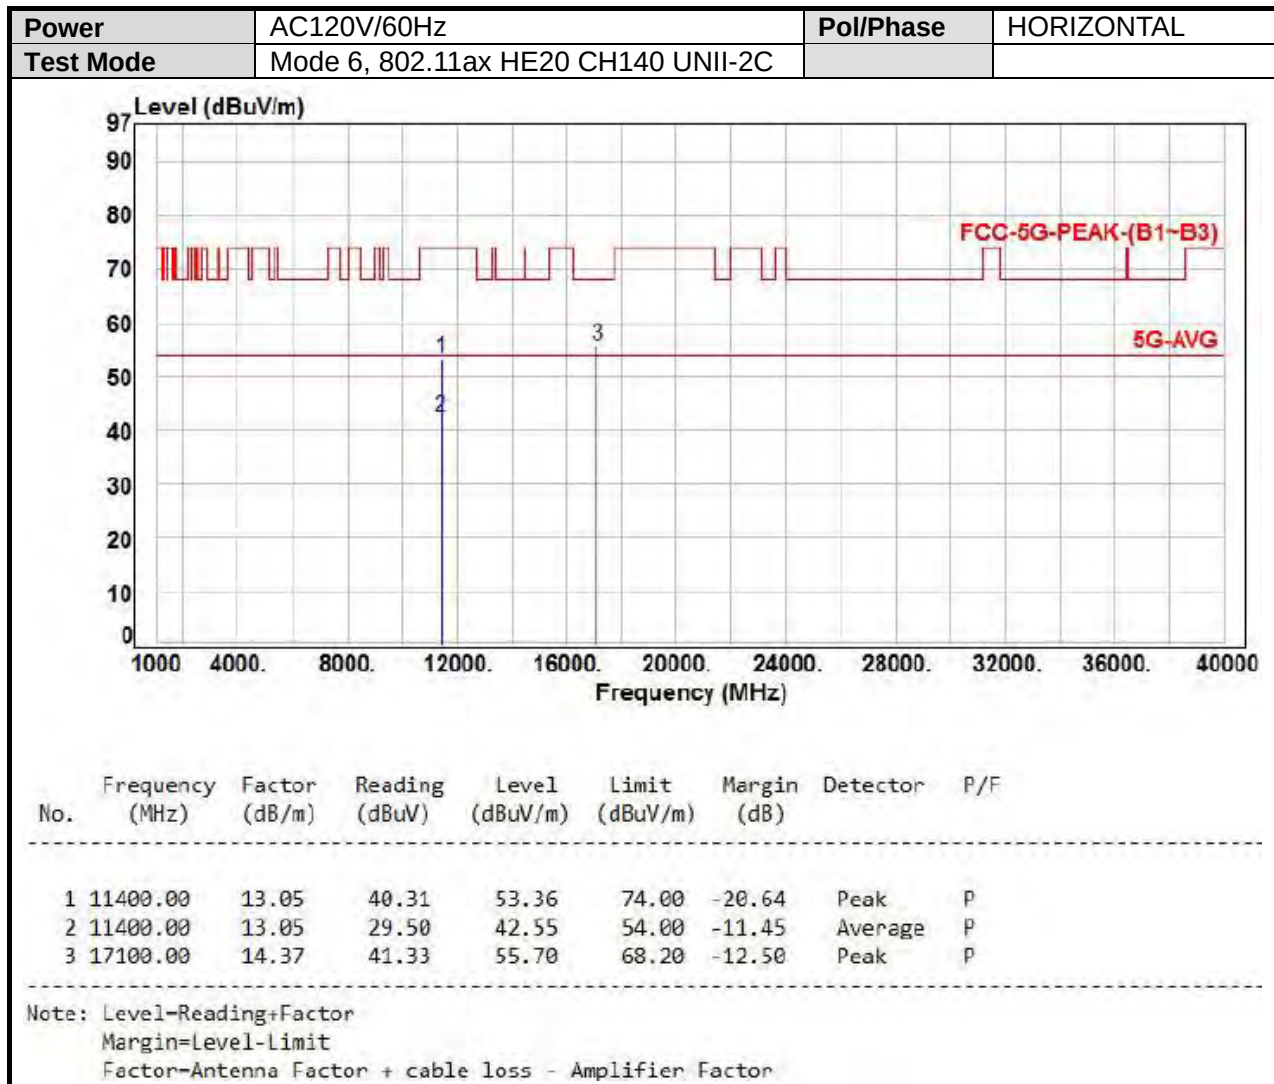


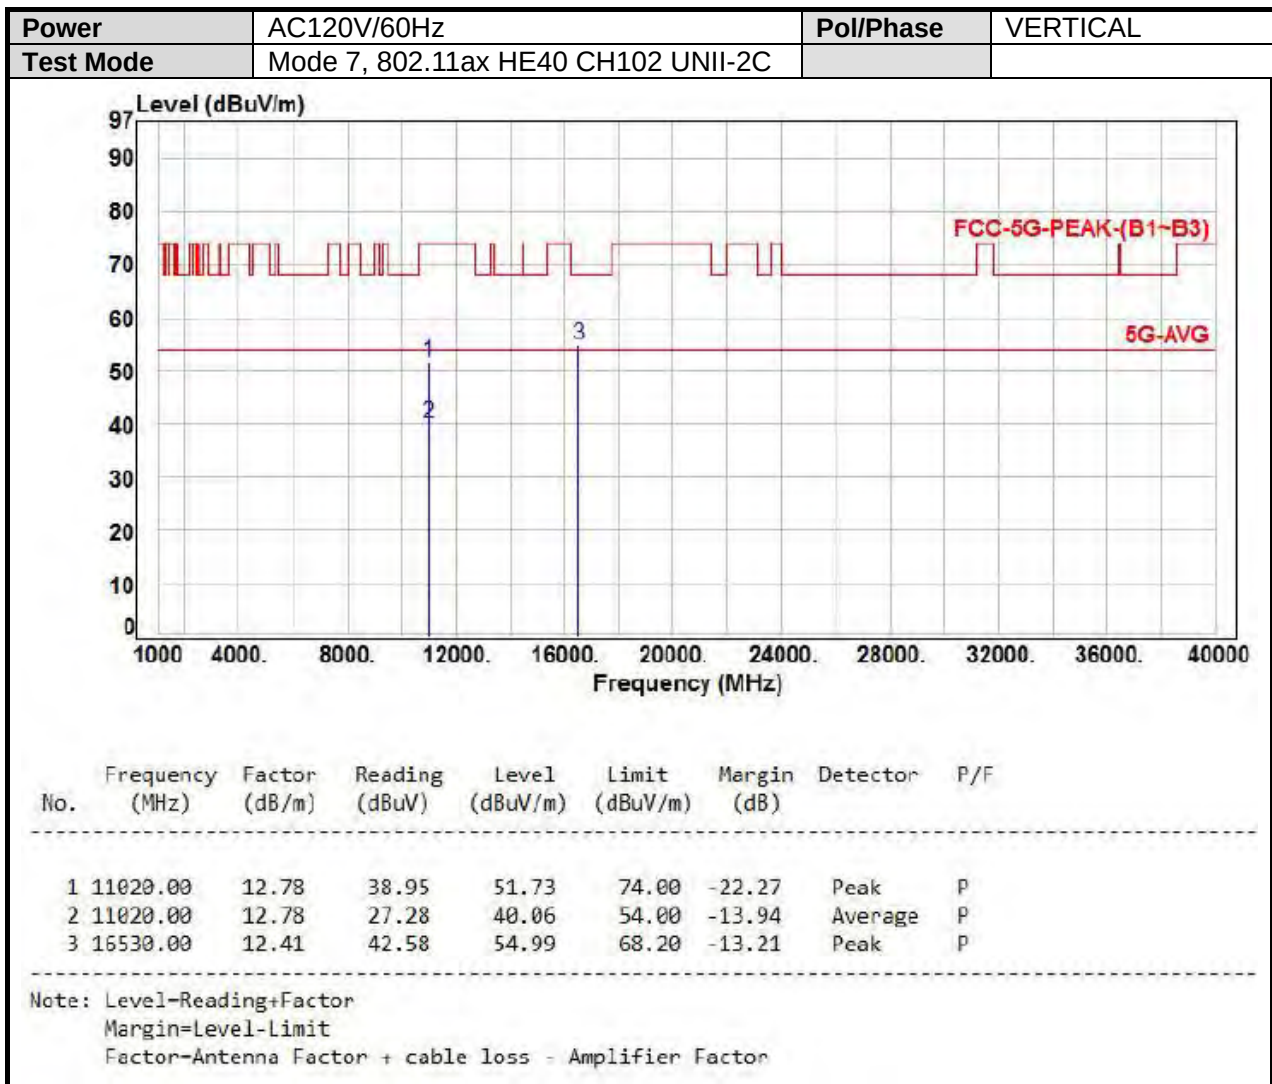


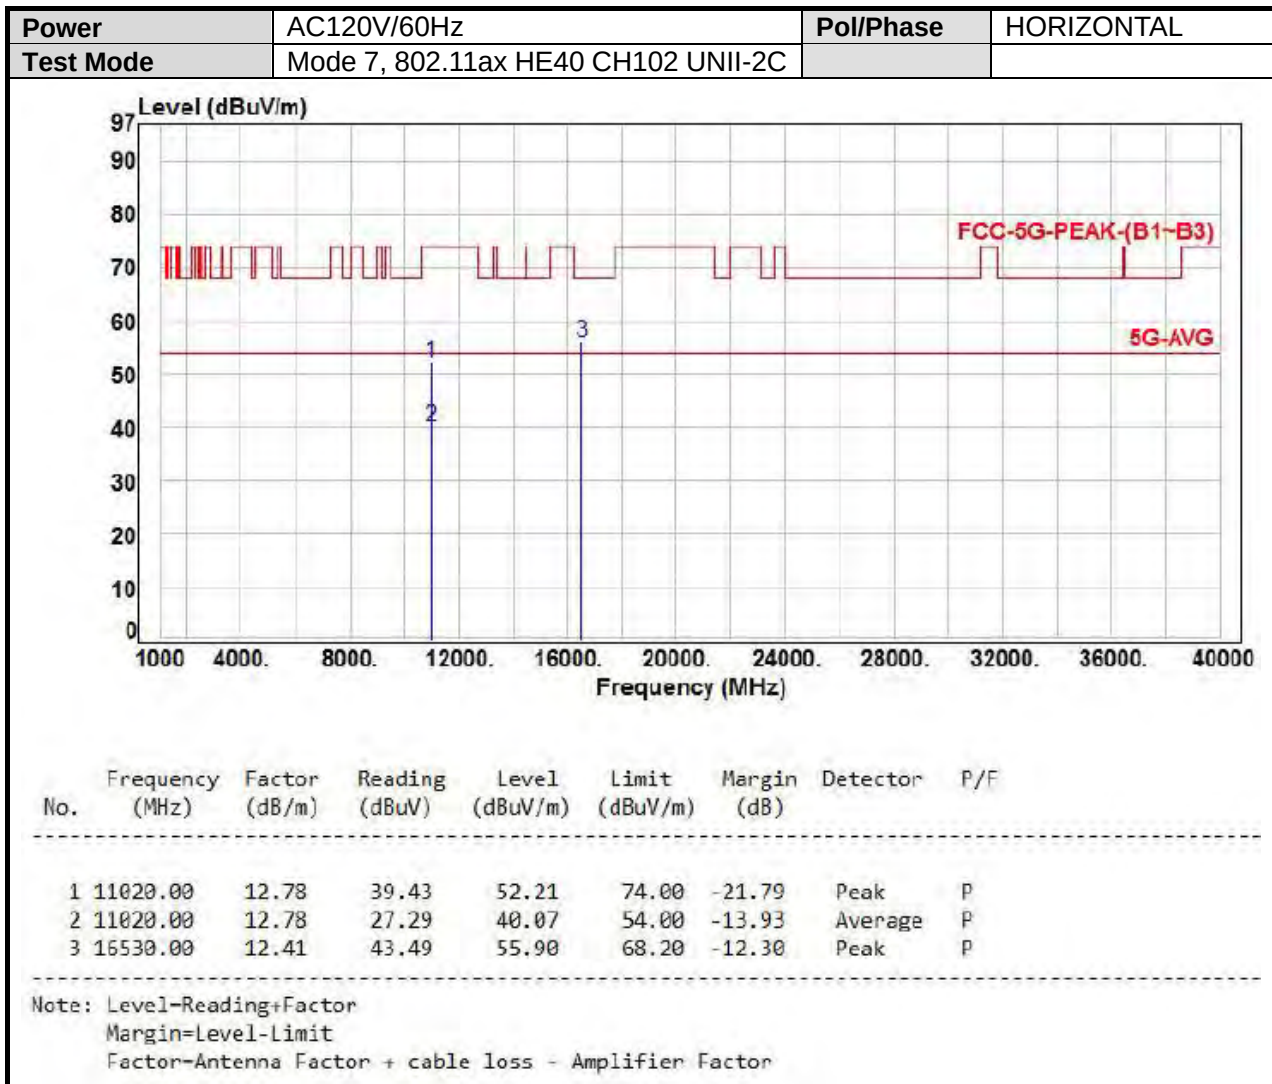


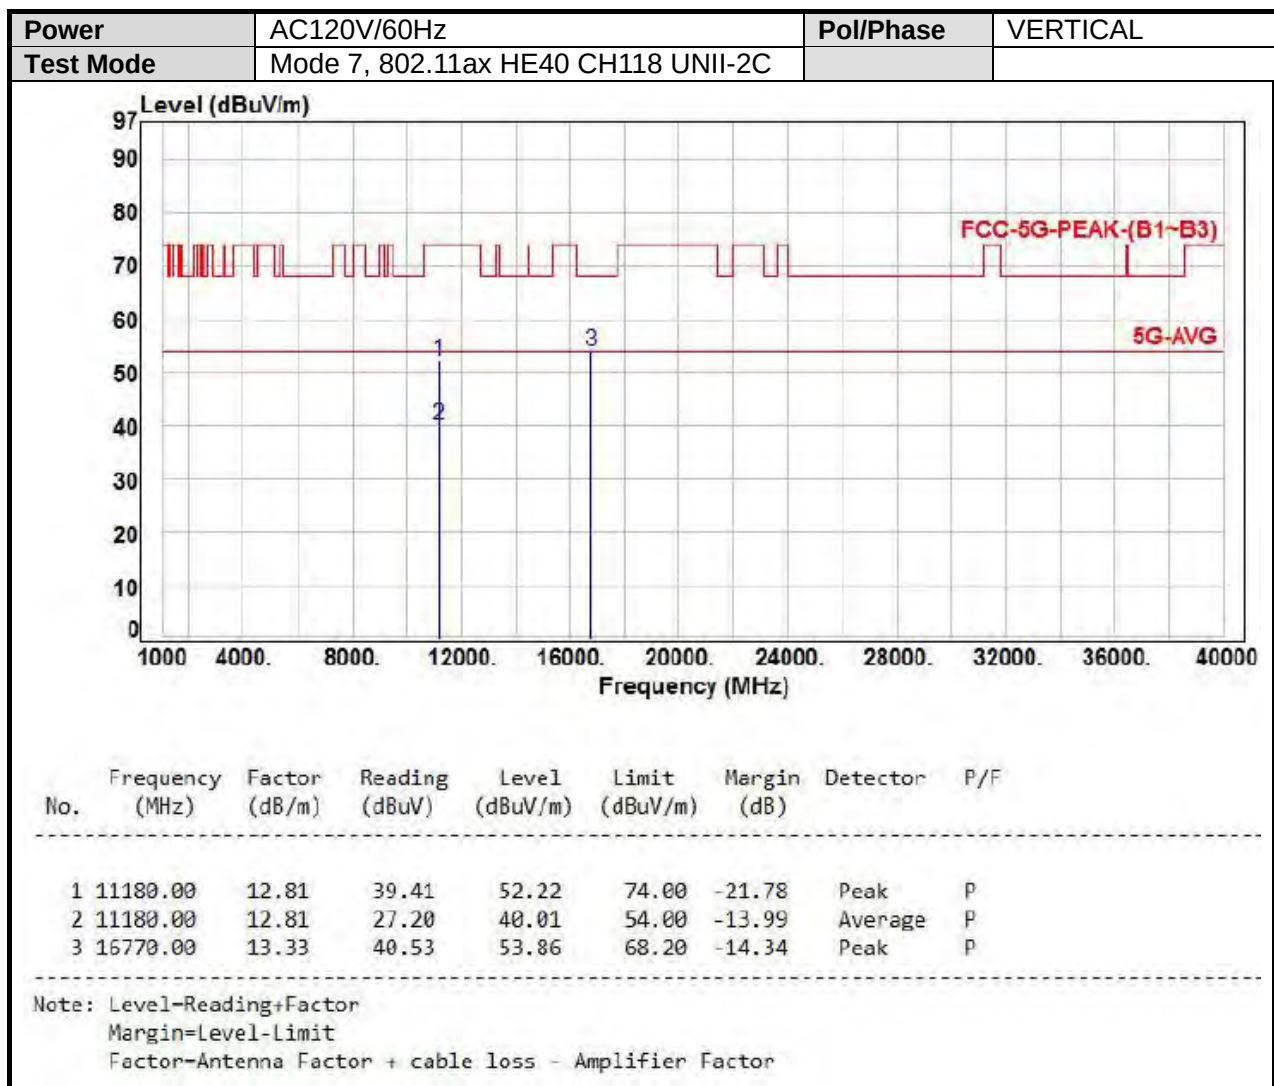


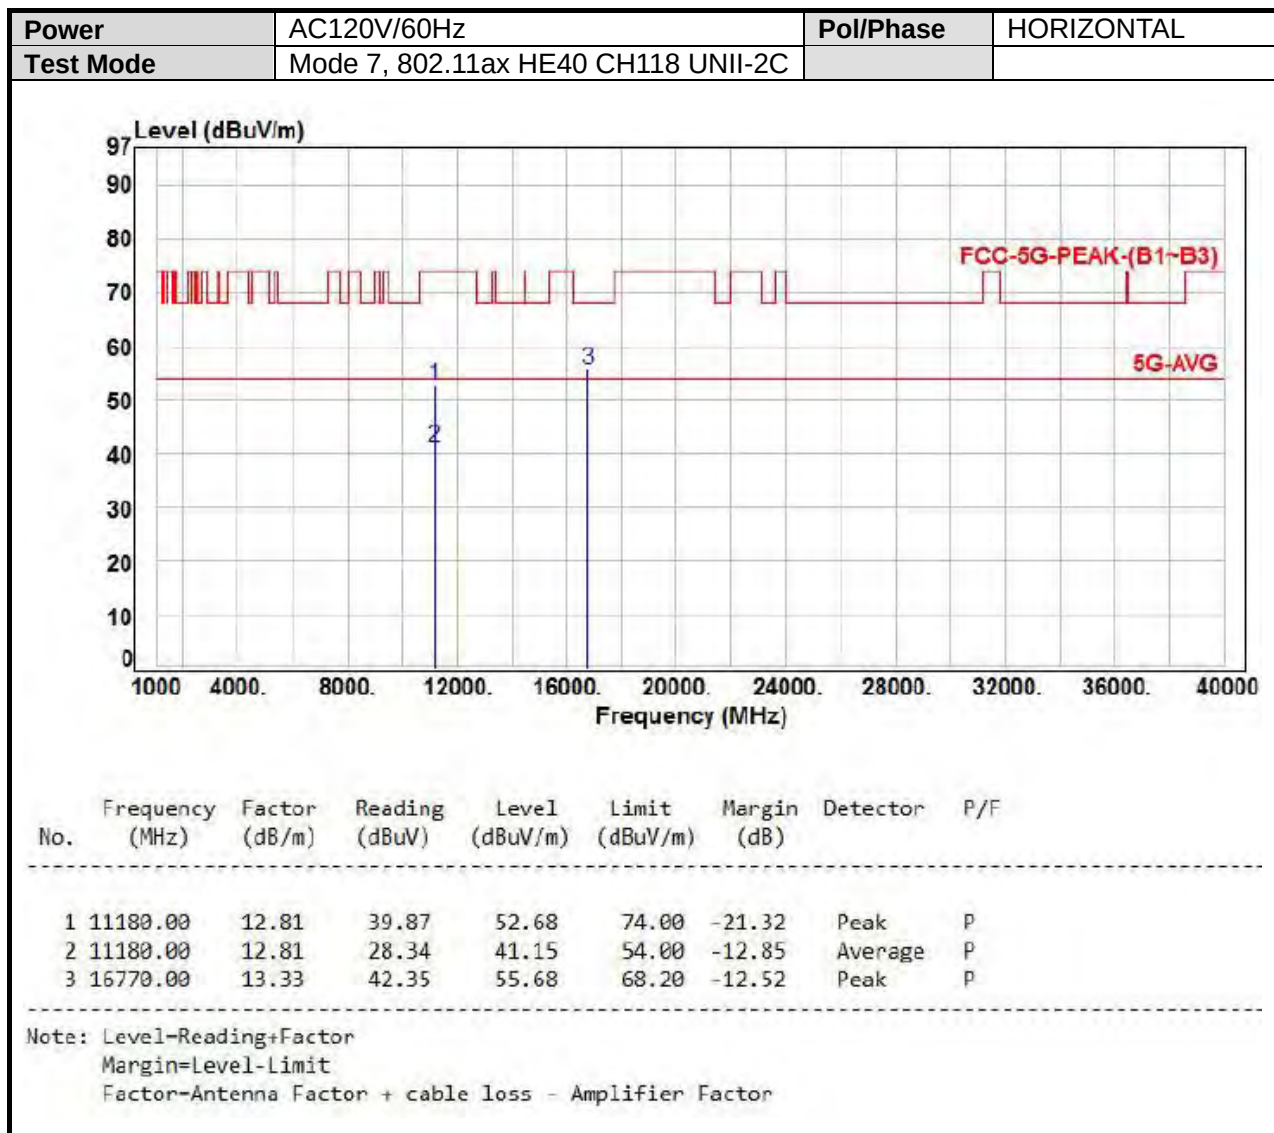


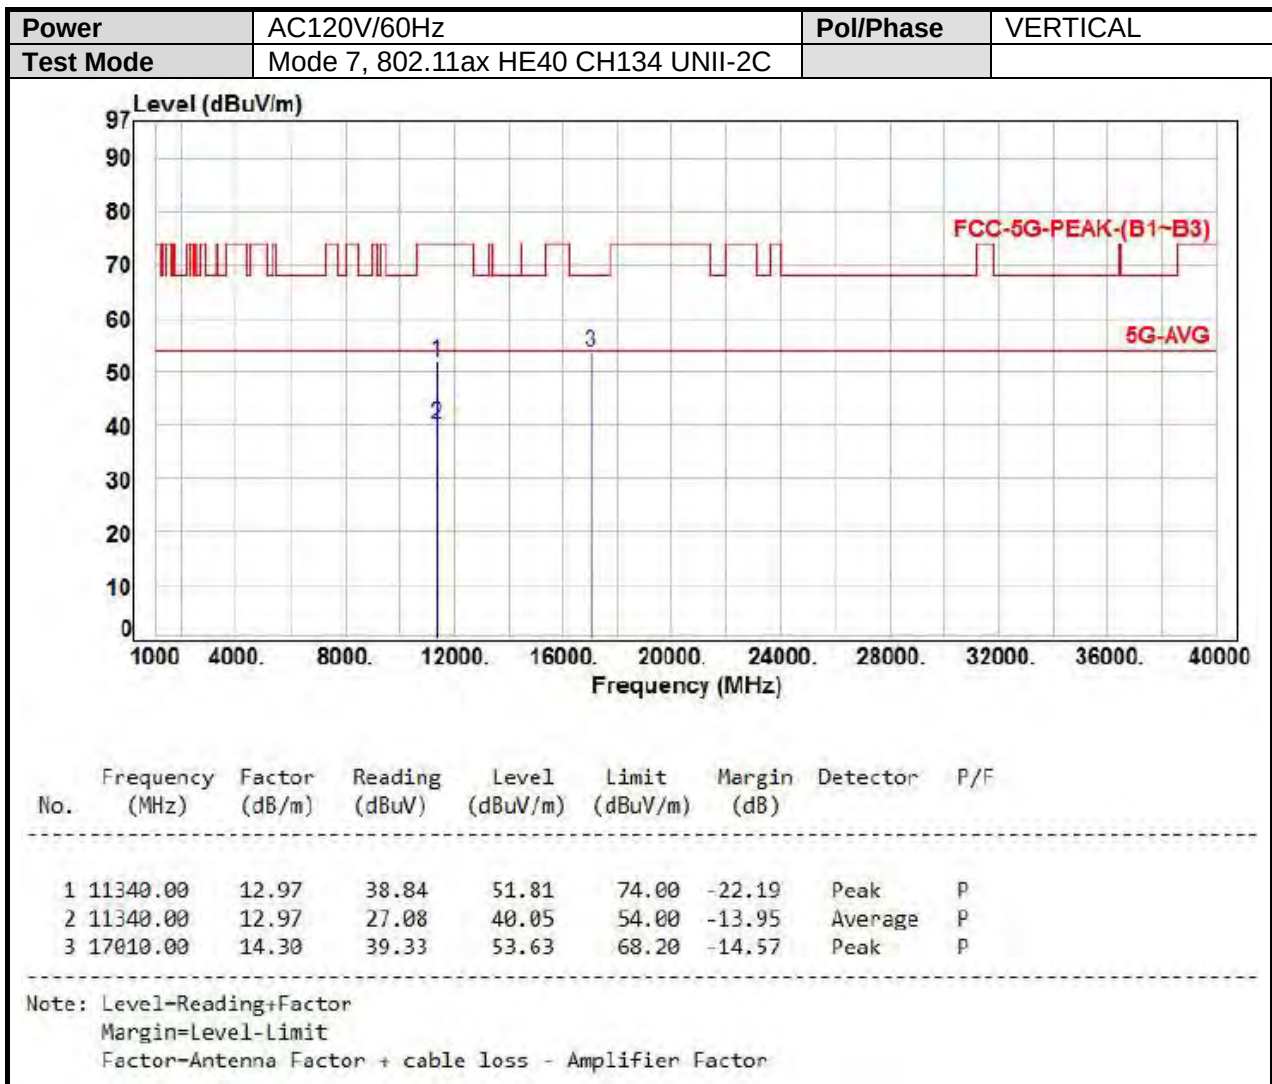


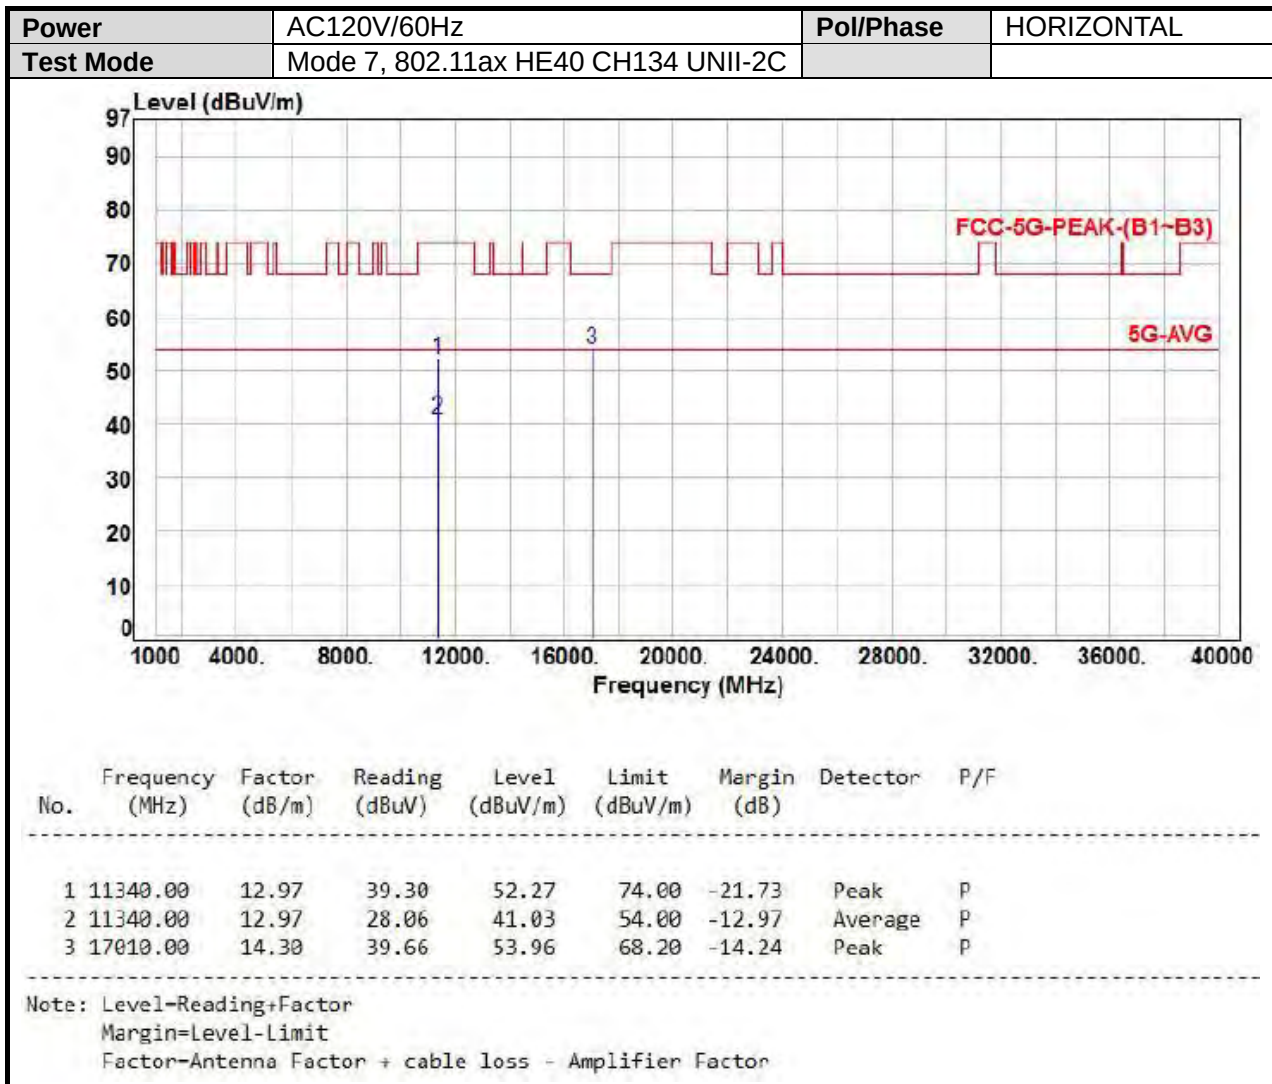

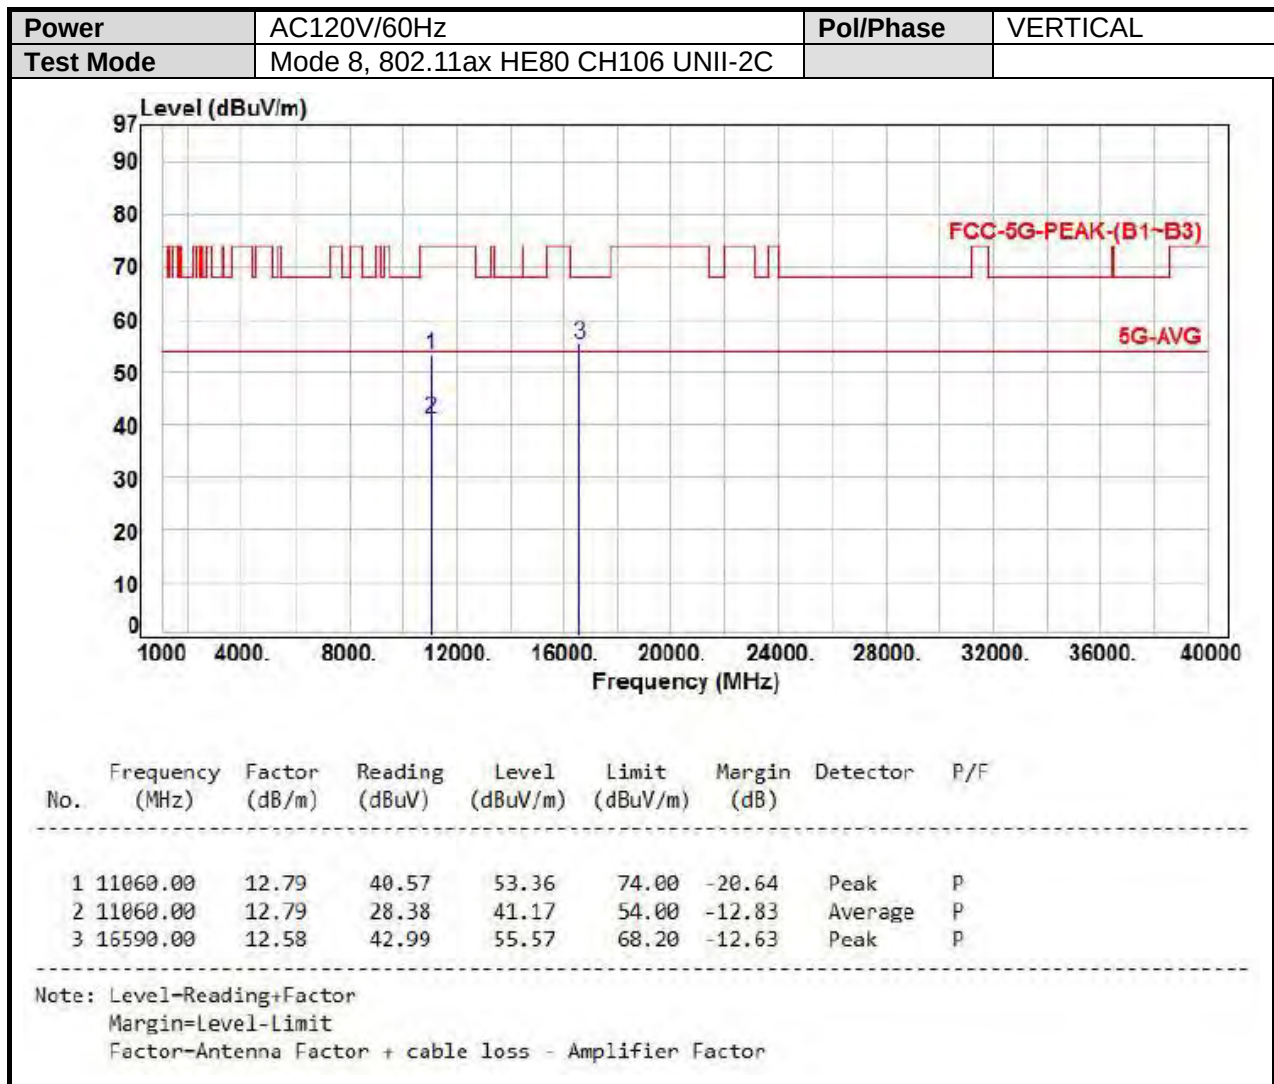

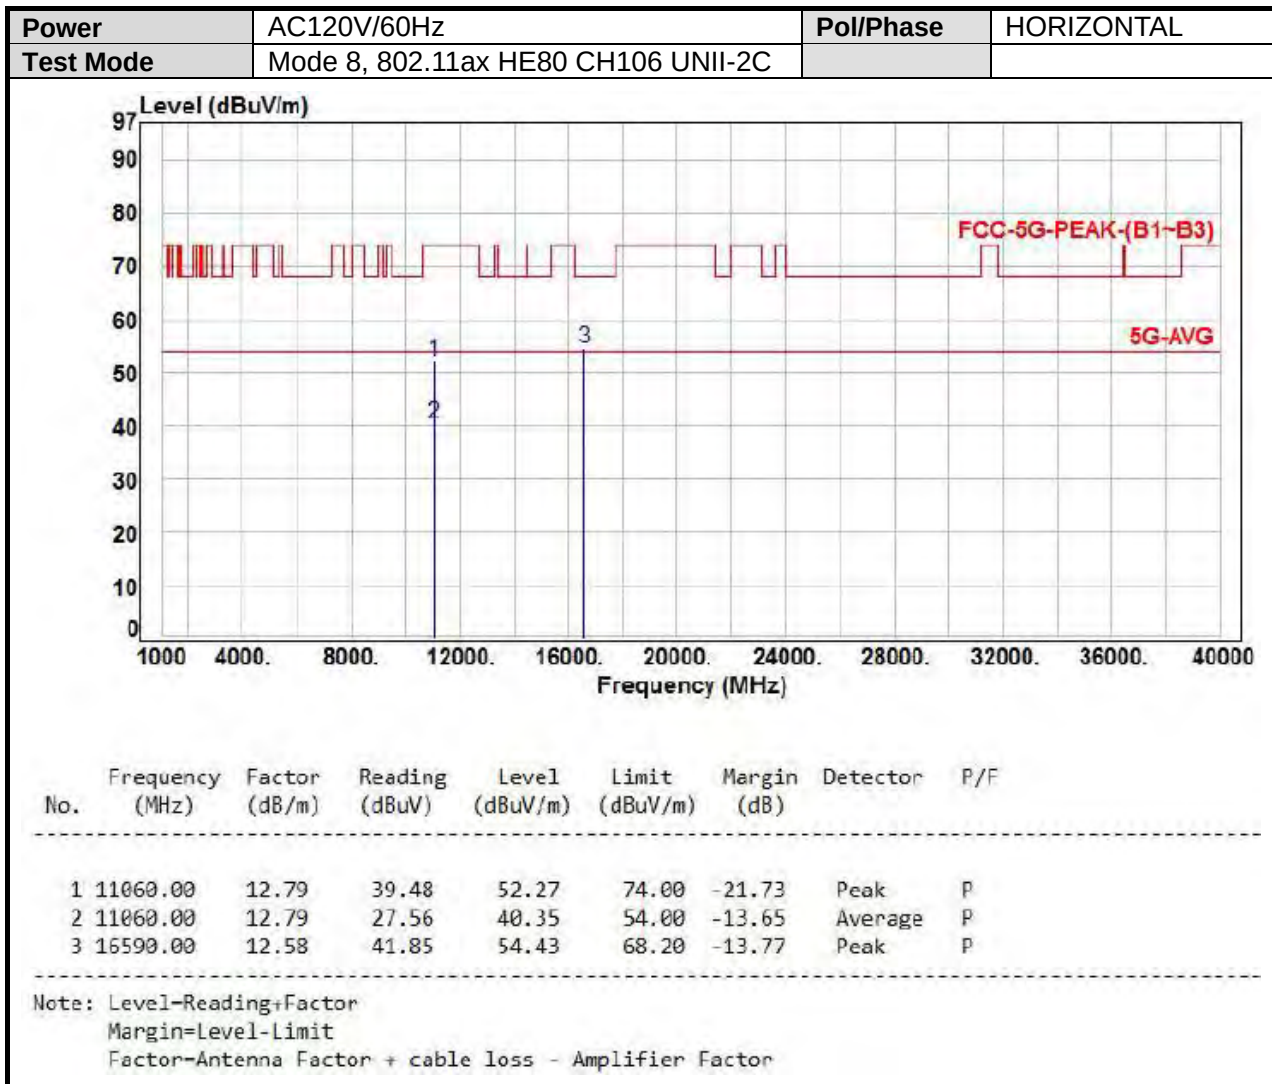

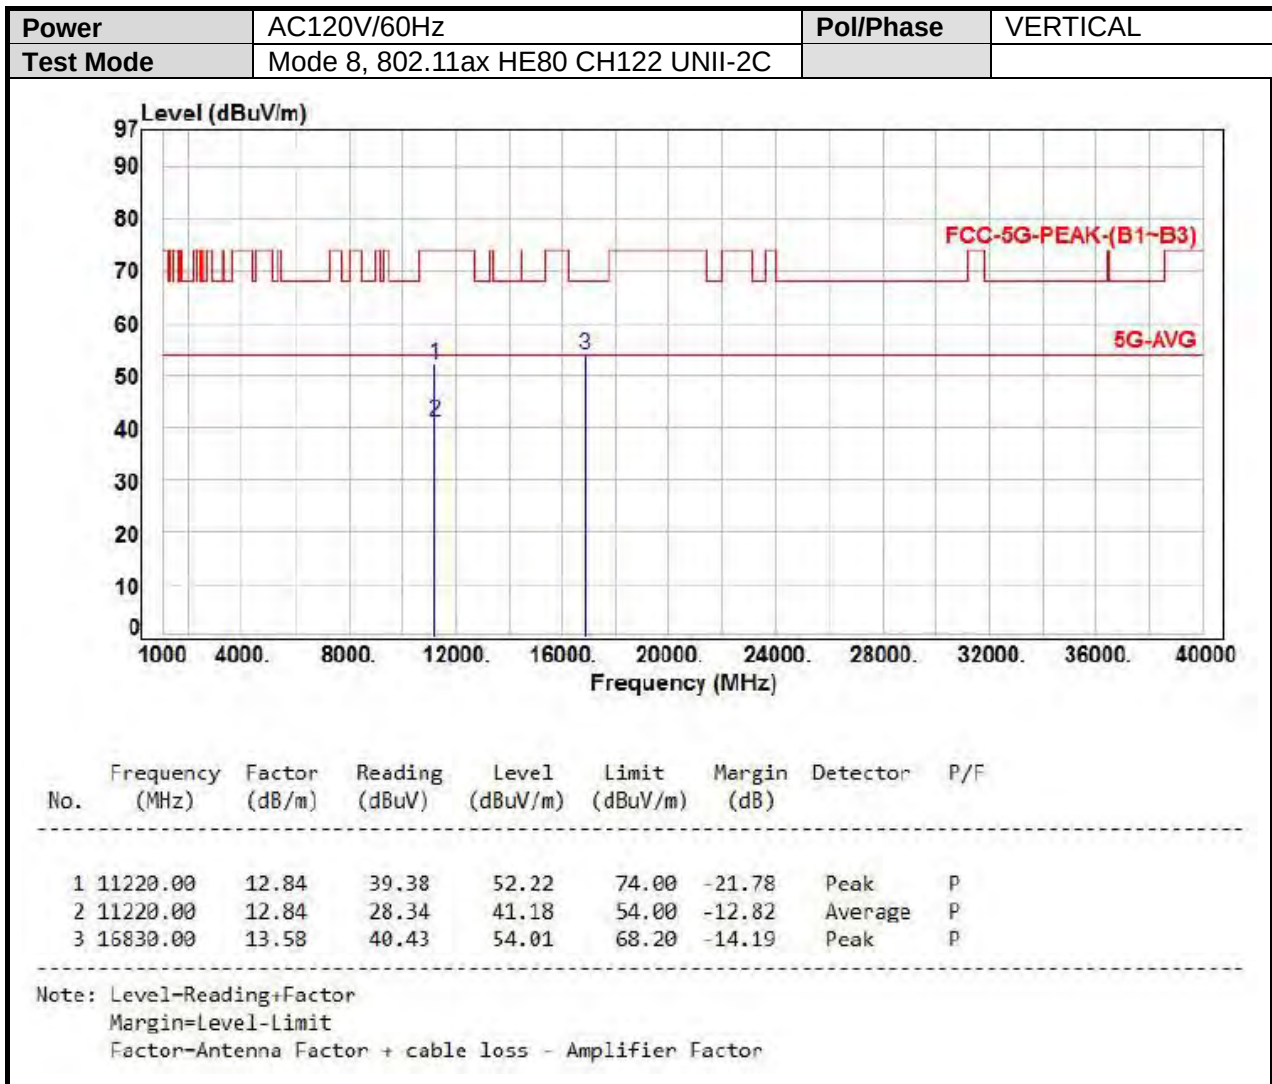


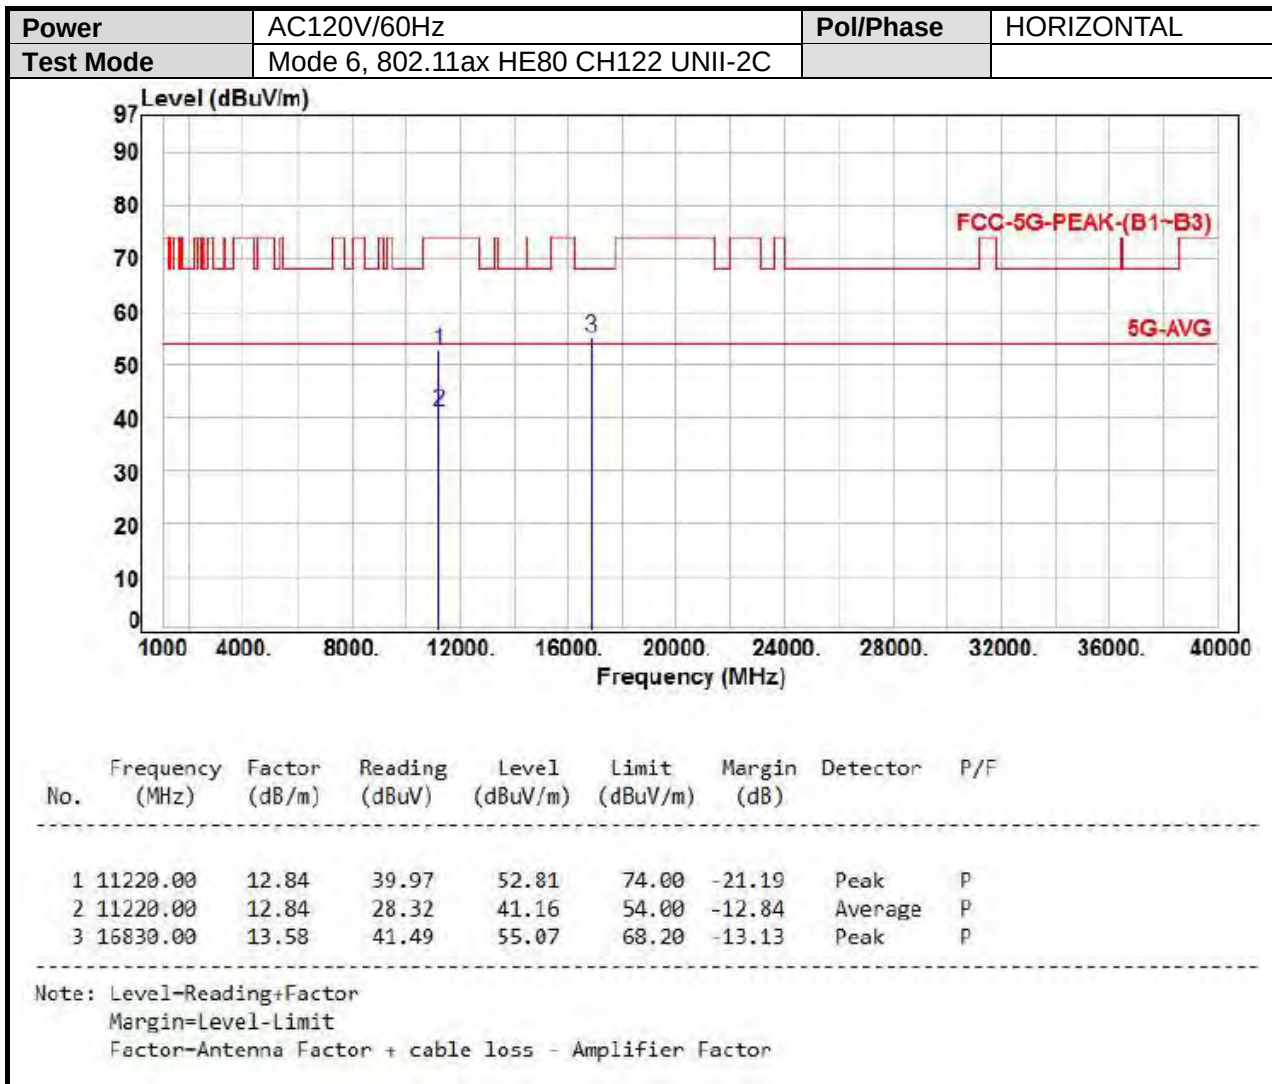






SISO-Ant B


UNII-3

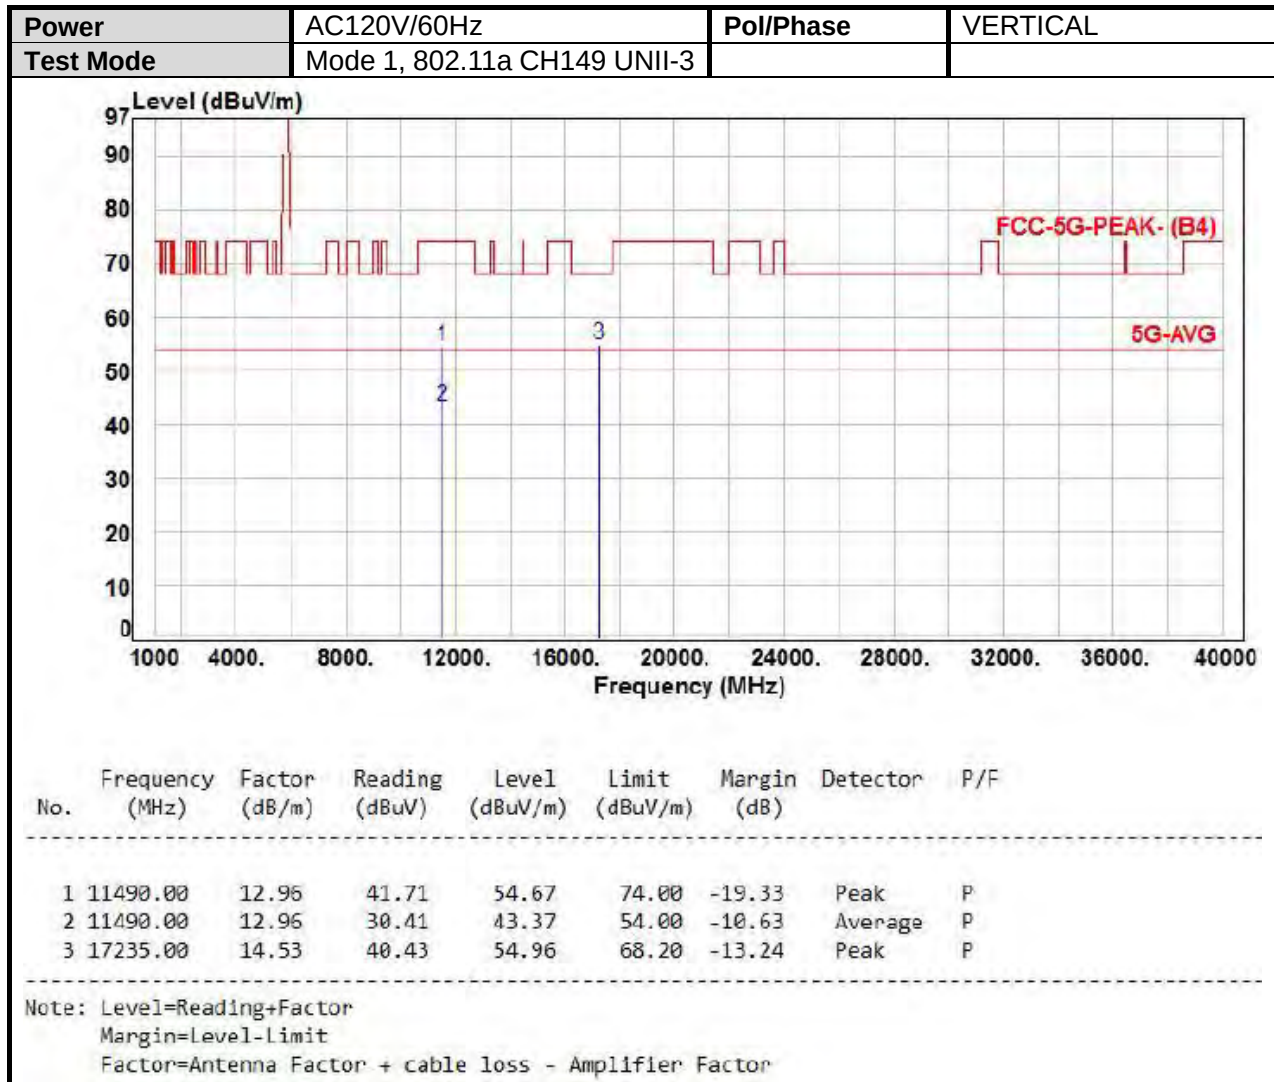


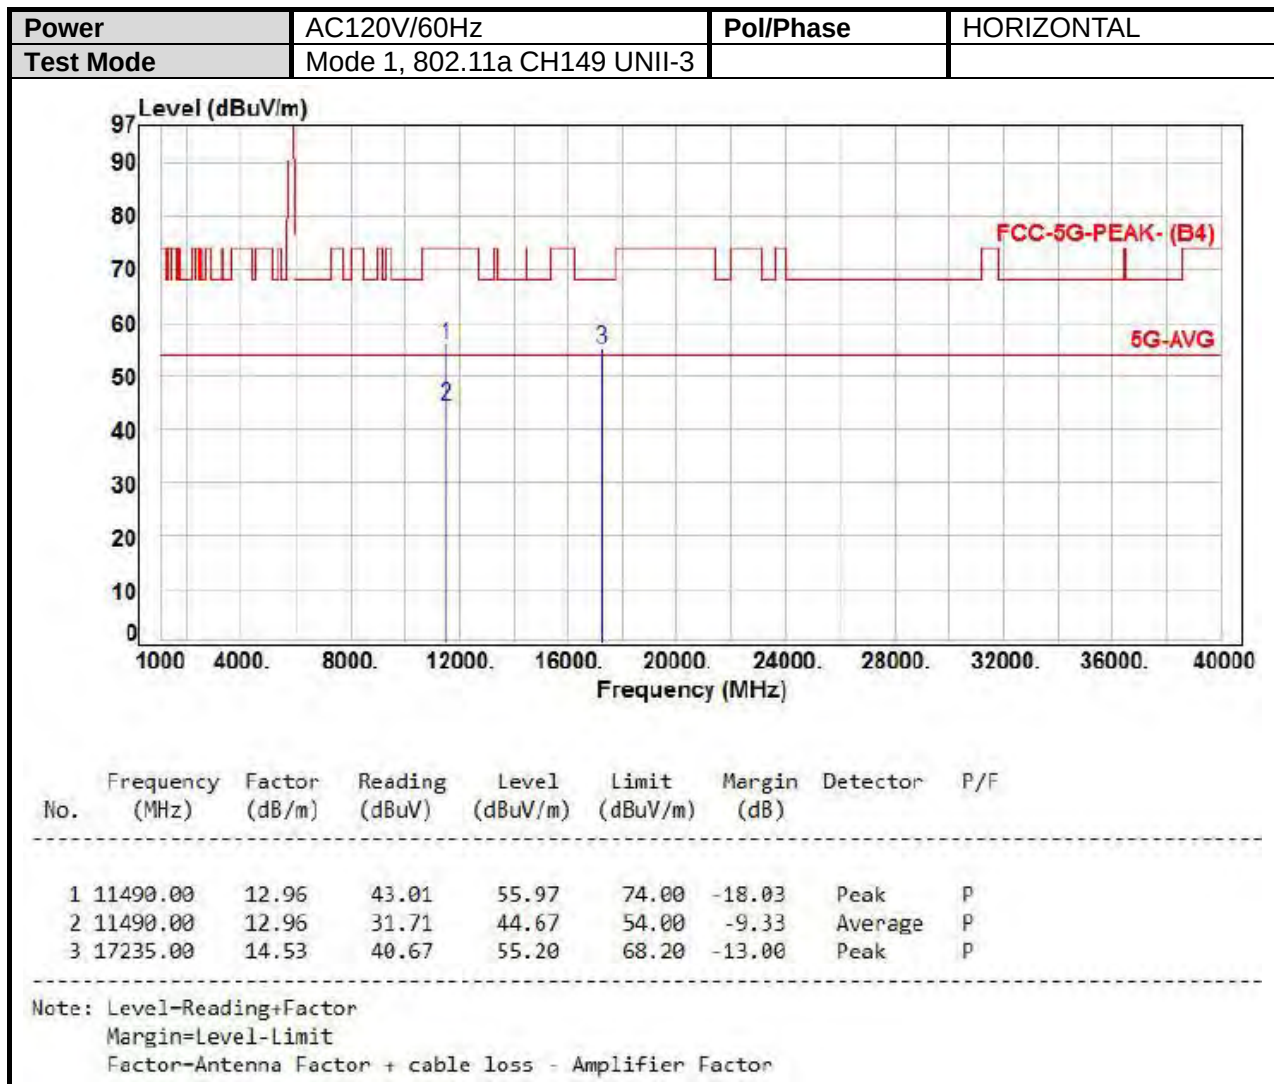

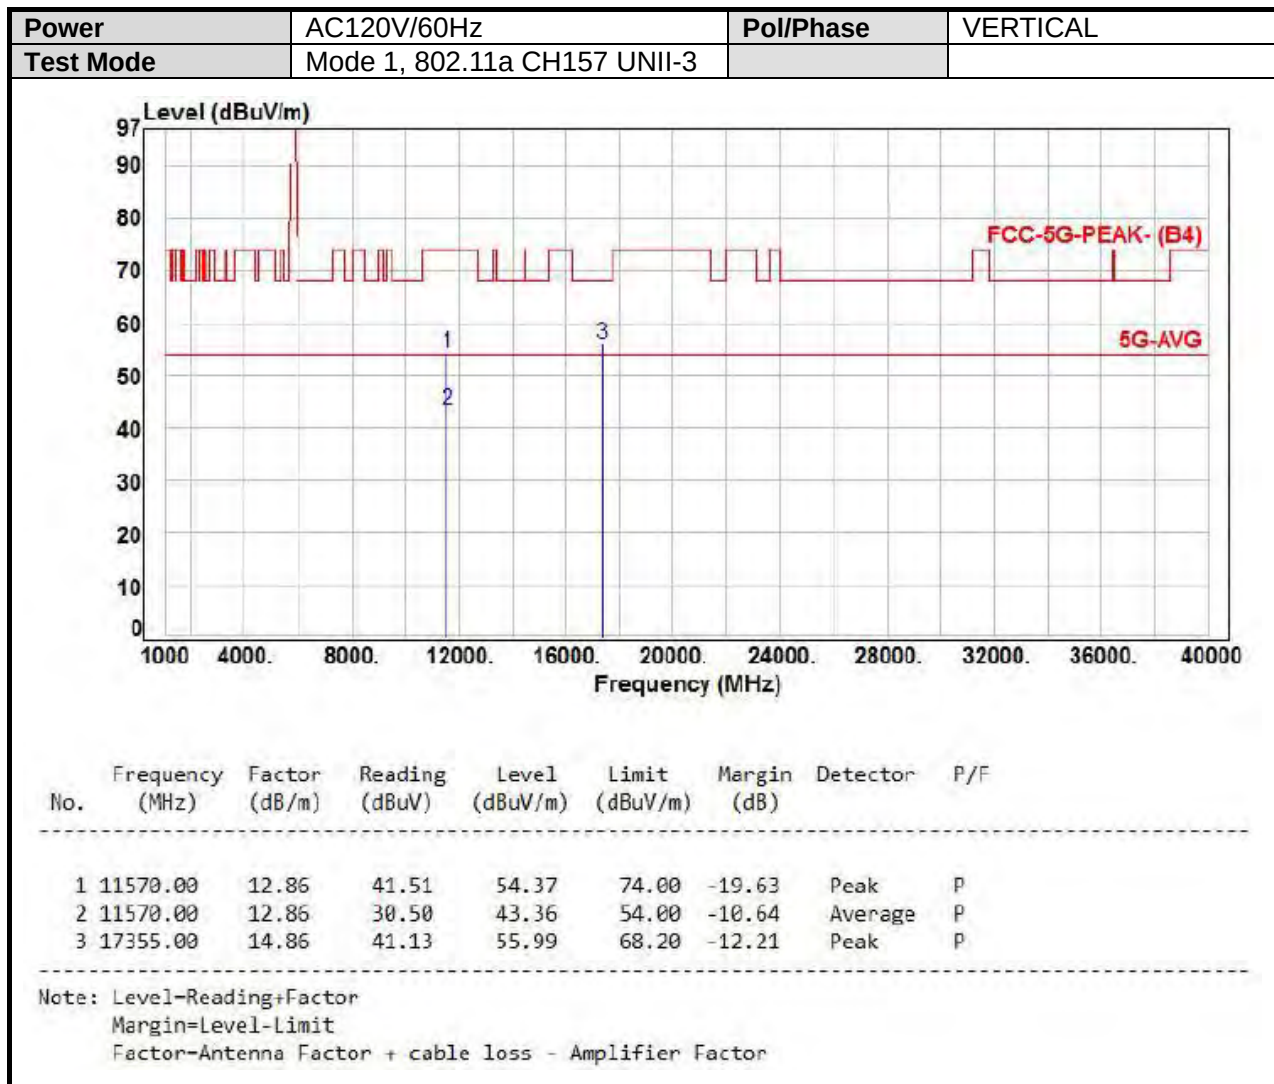

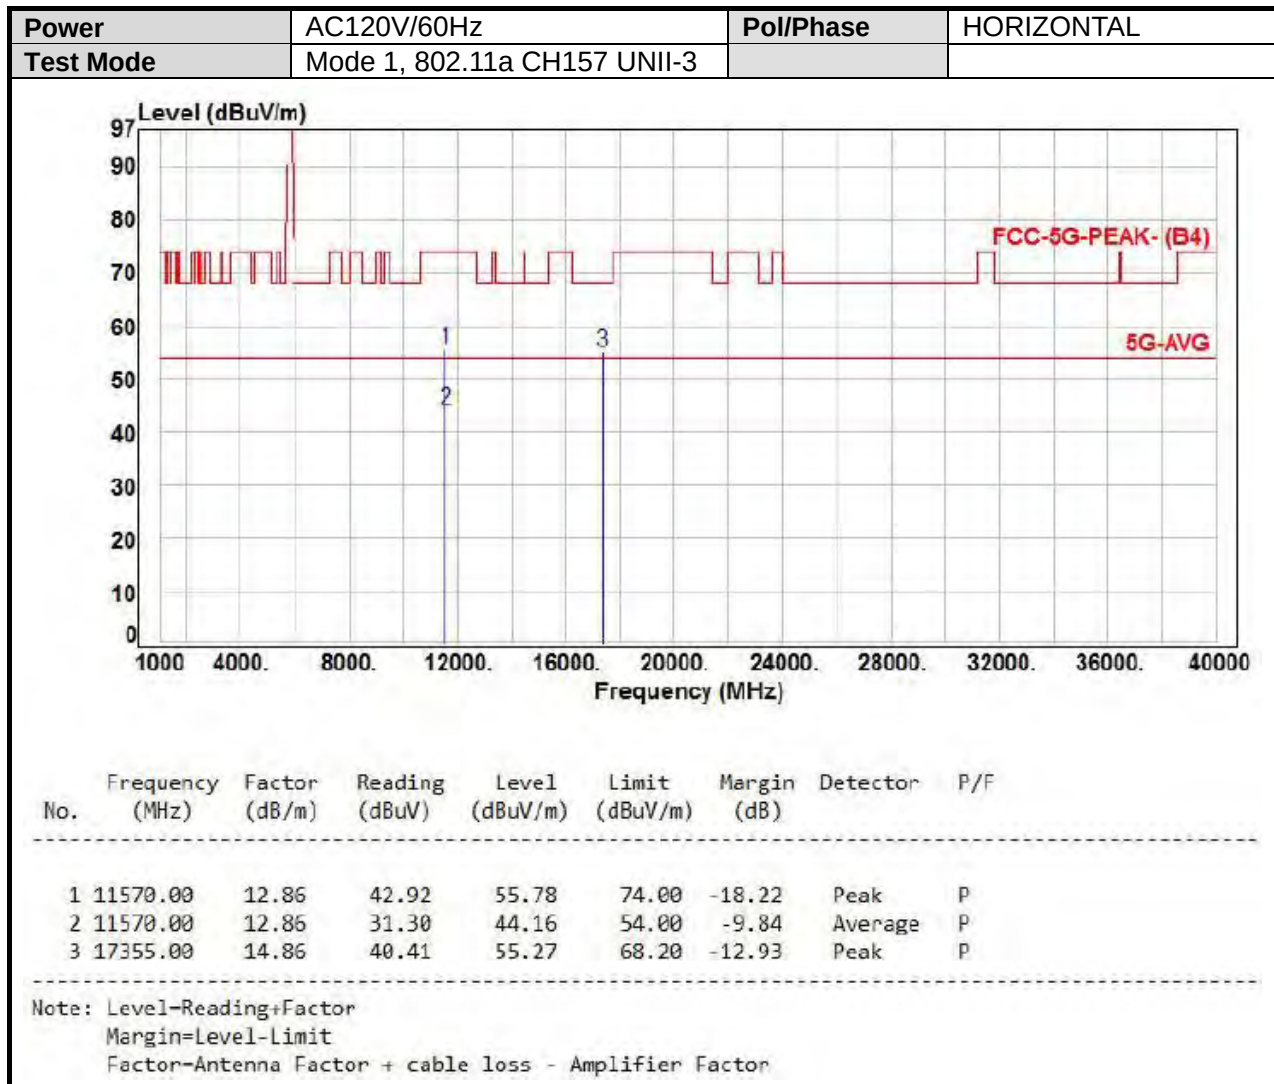


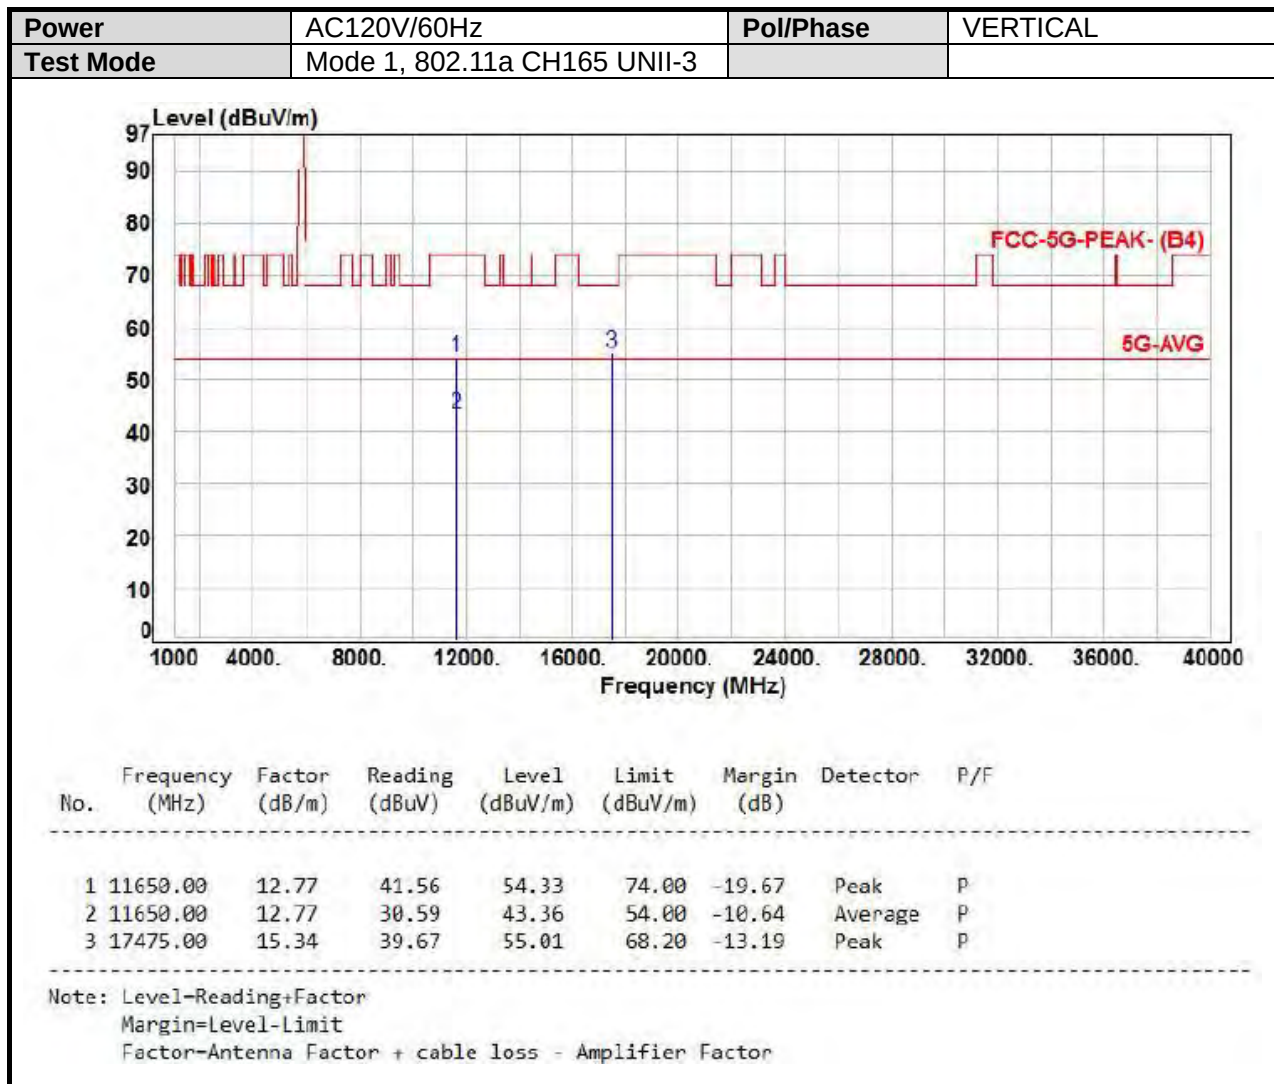


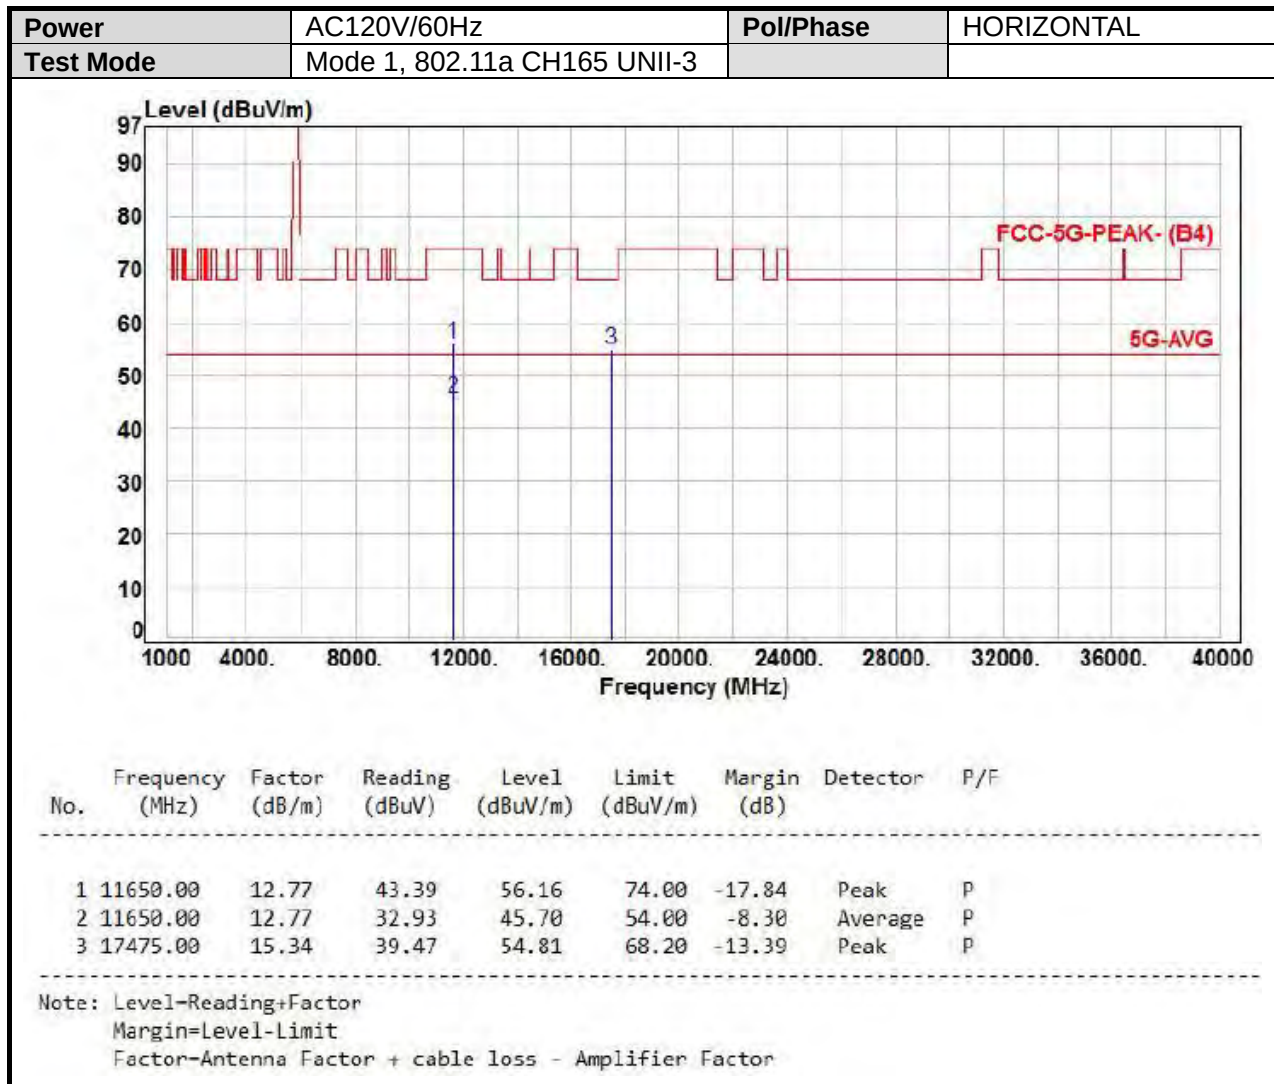






MIMO-UNII-3

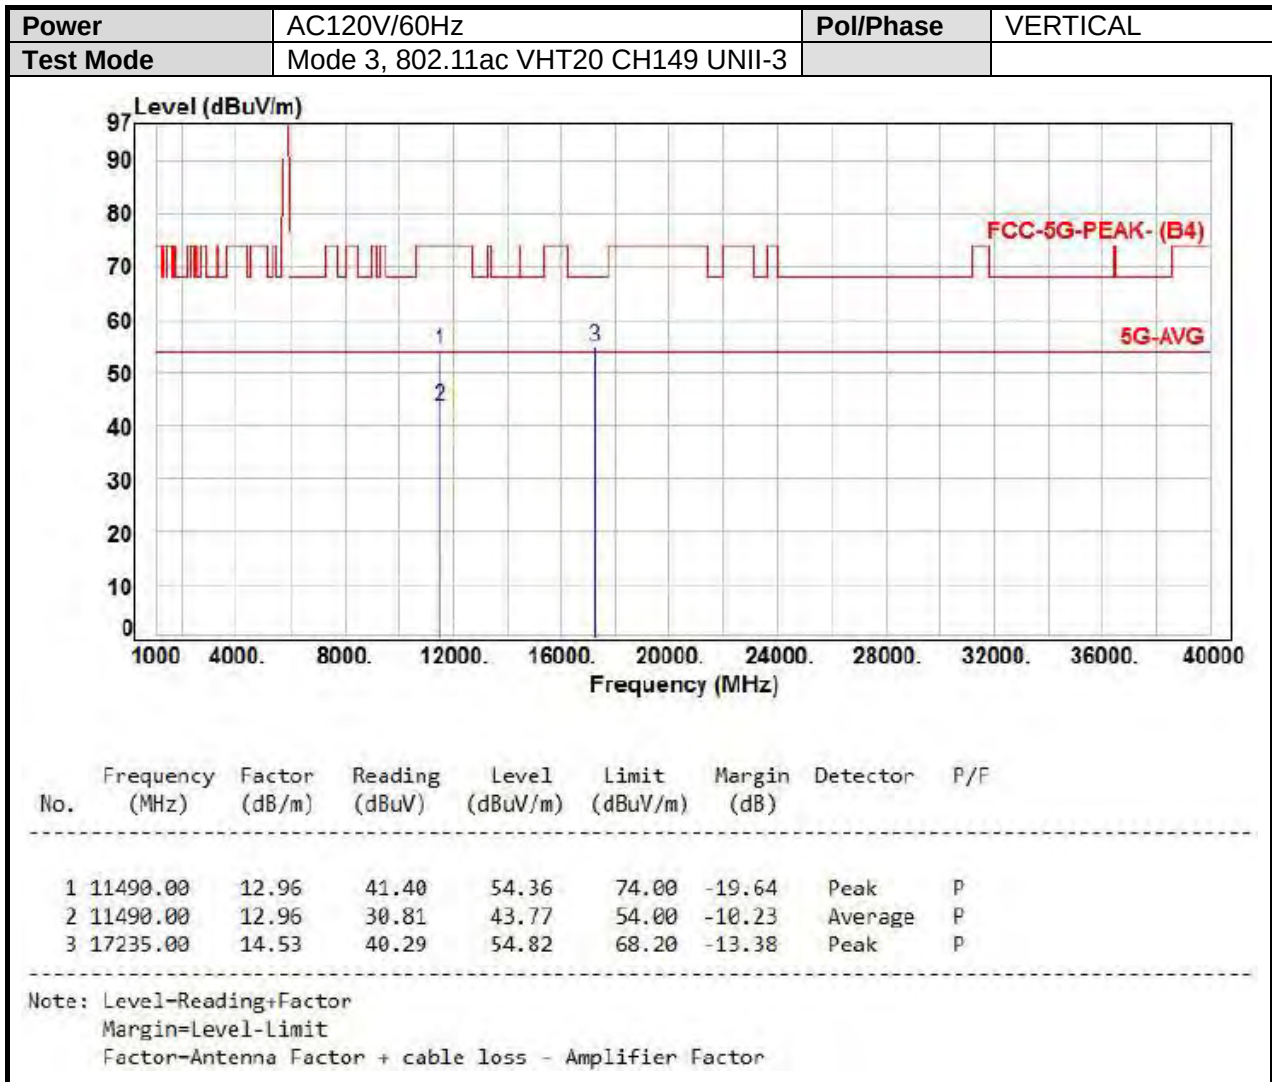


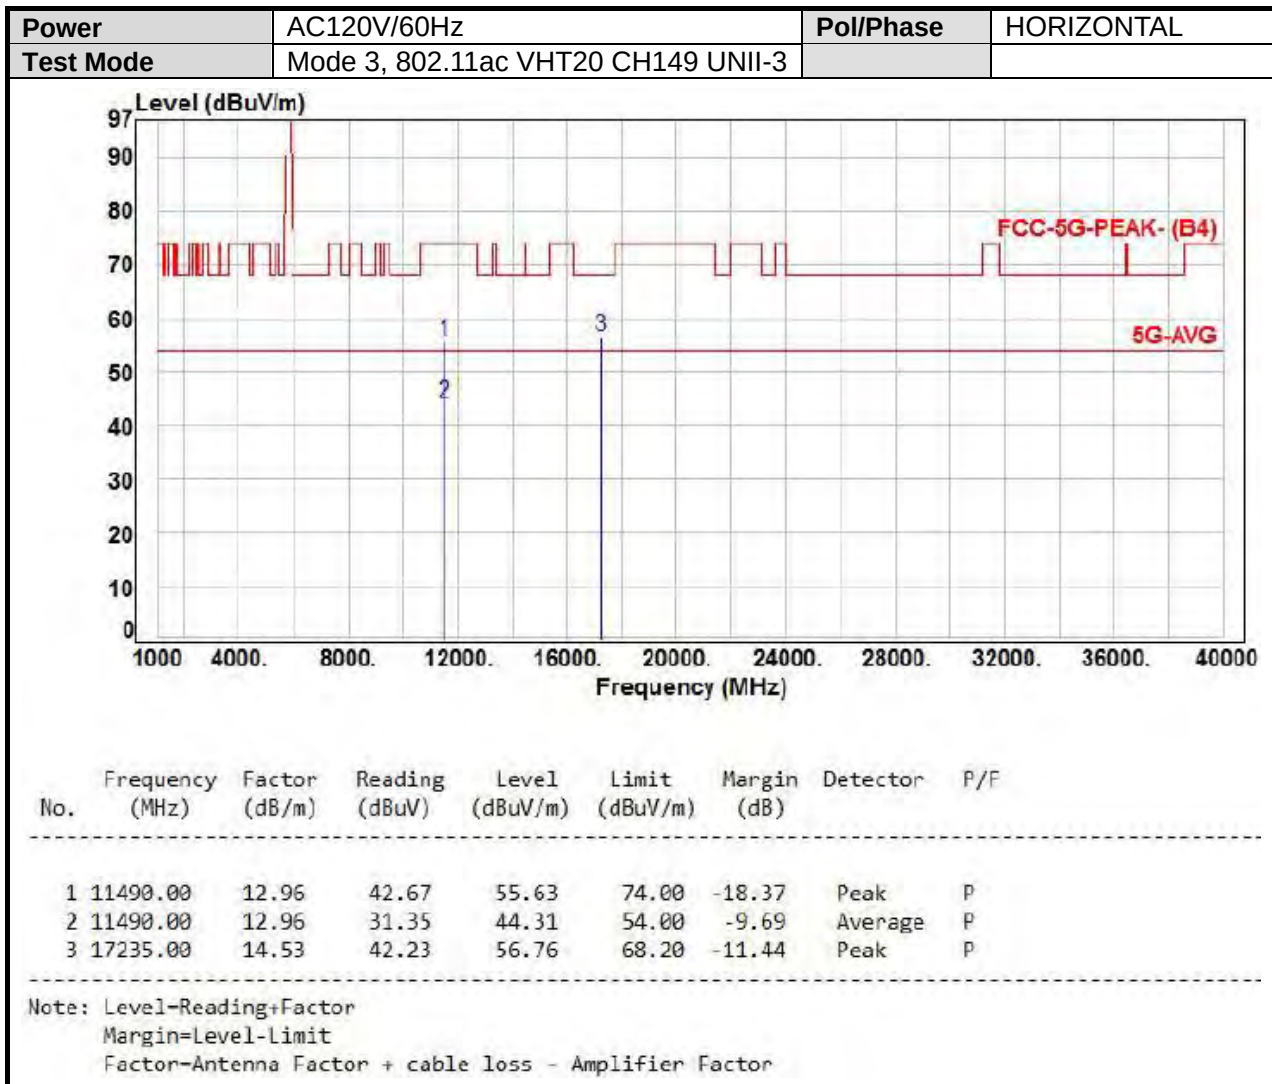


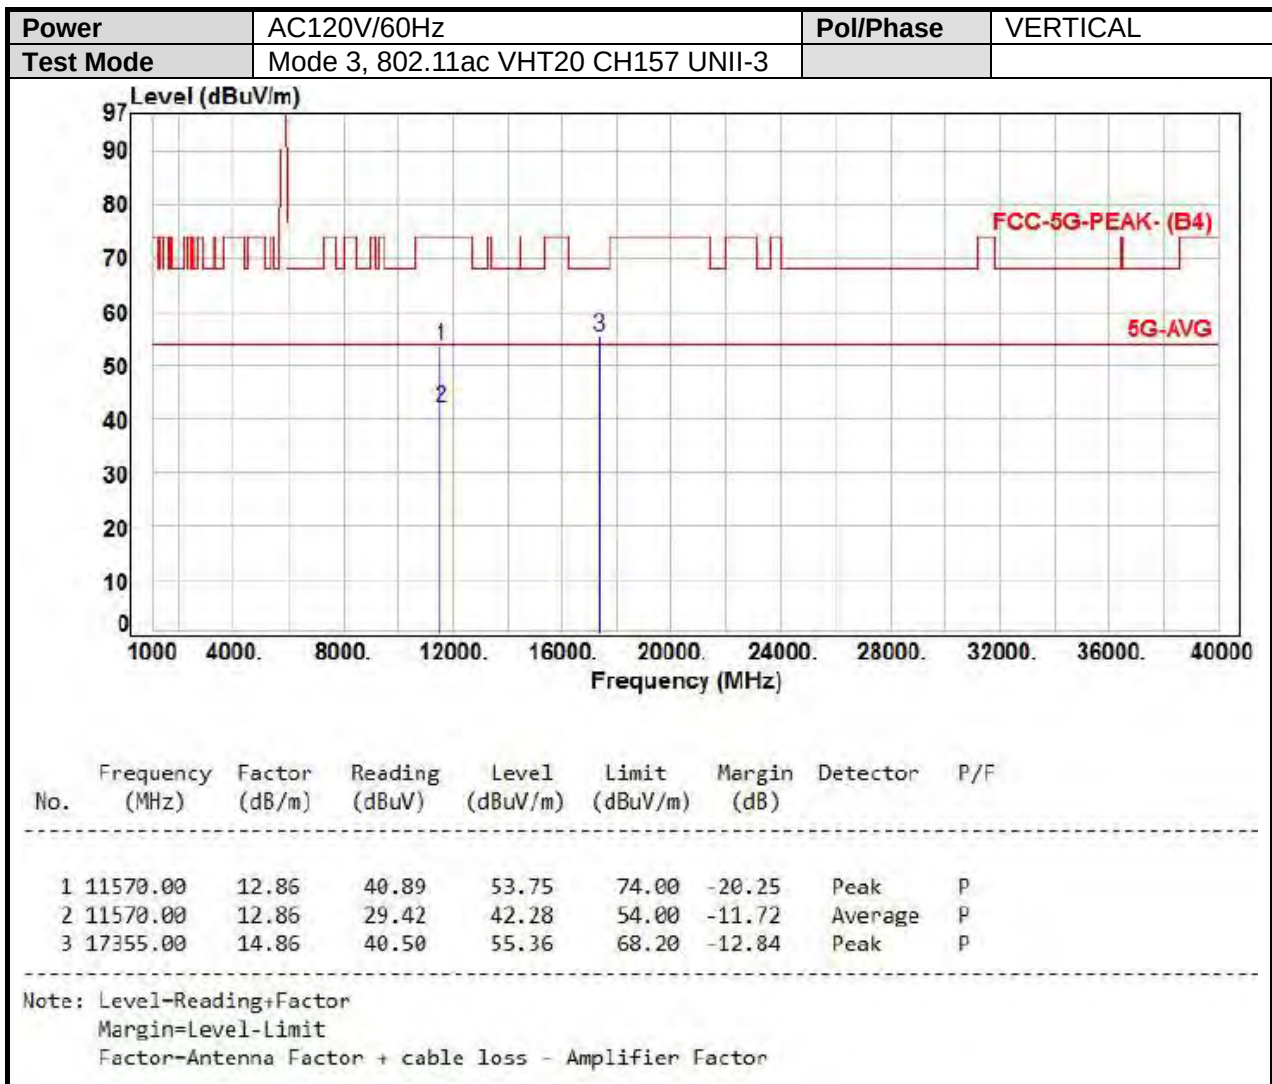


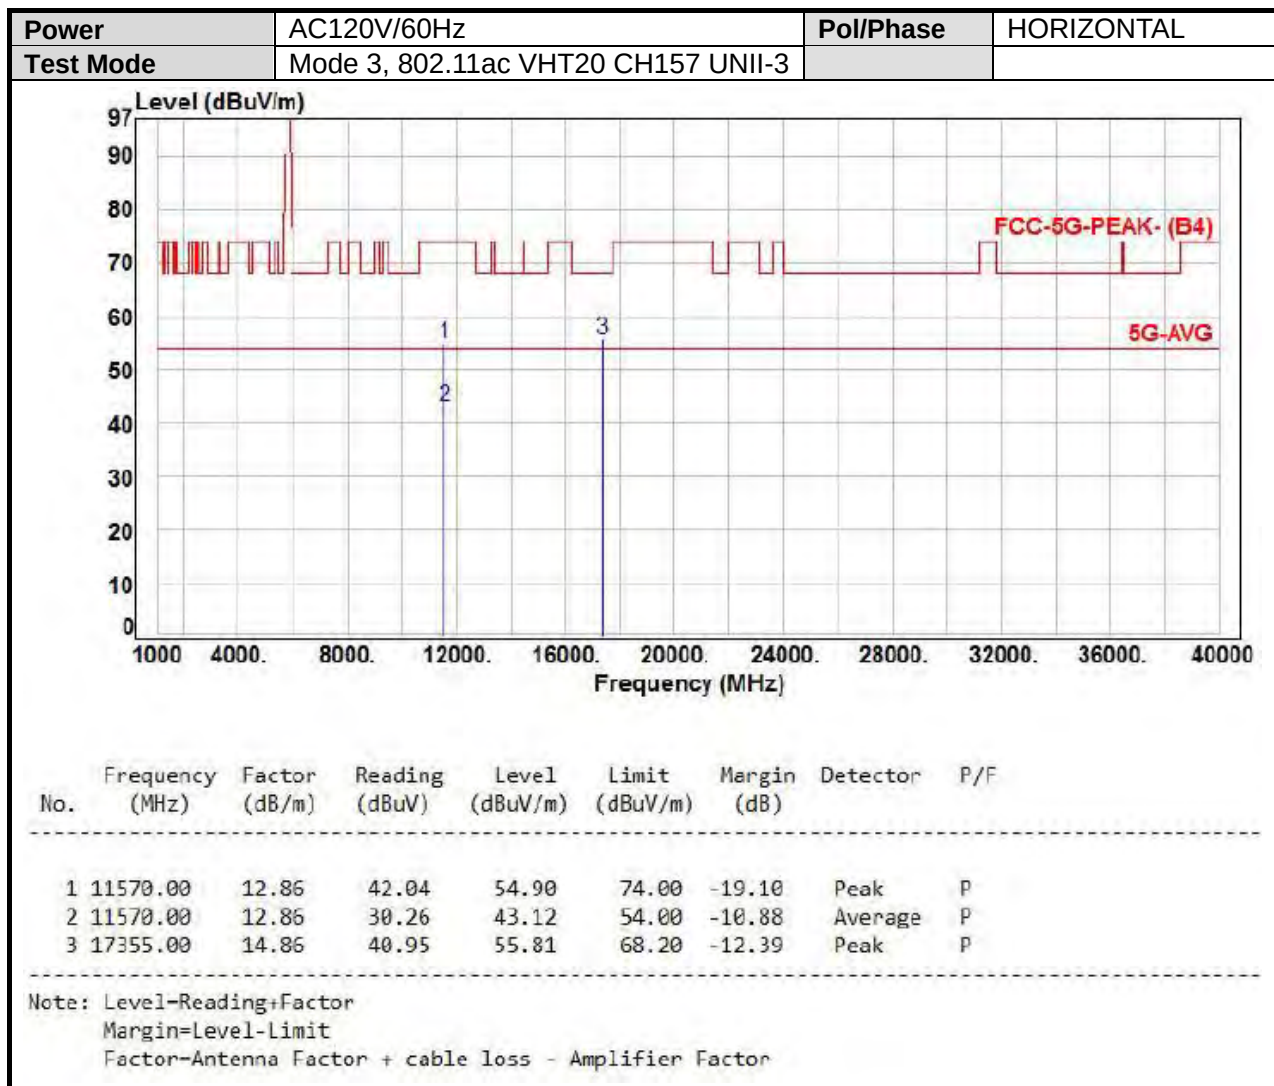


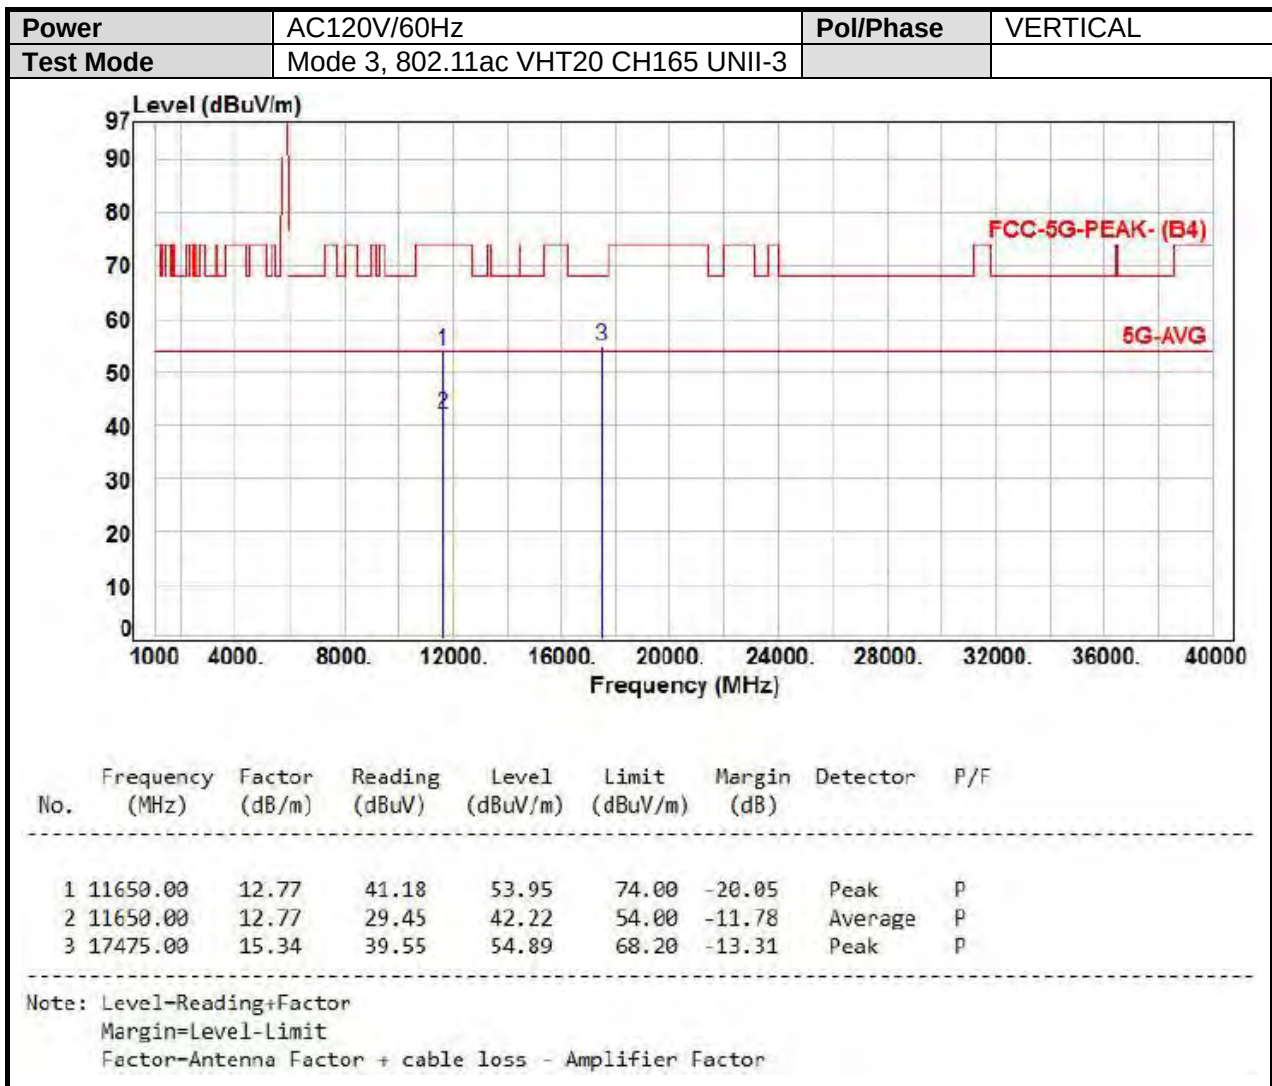


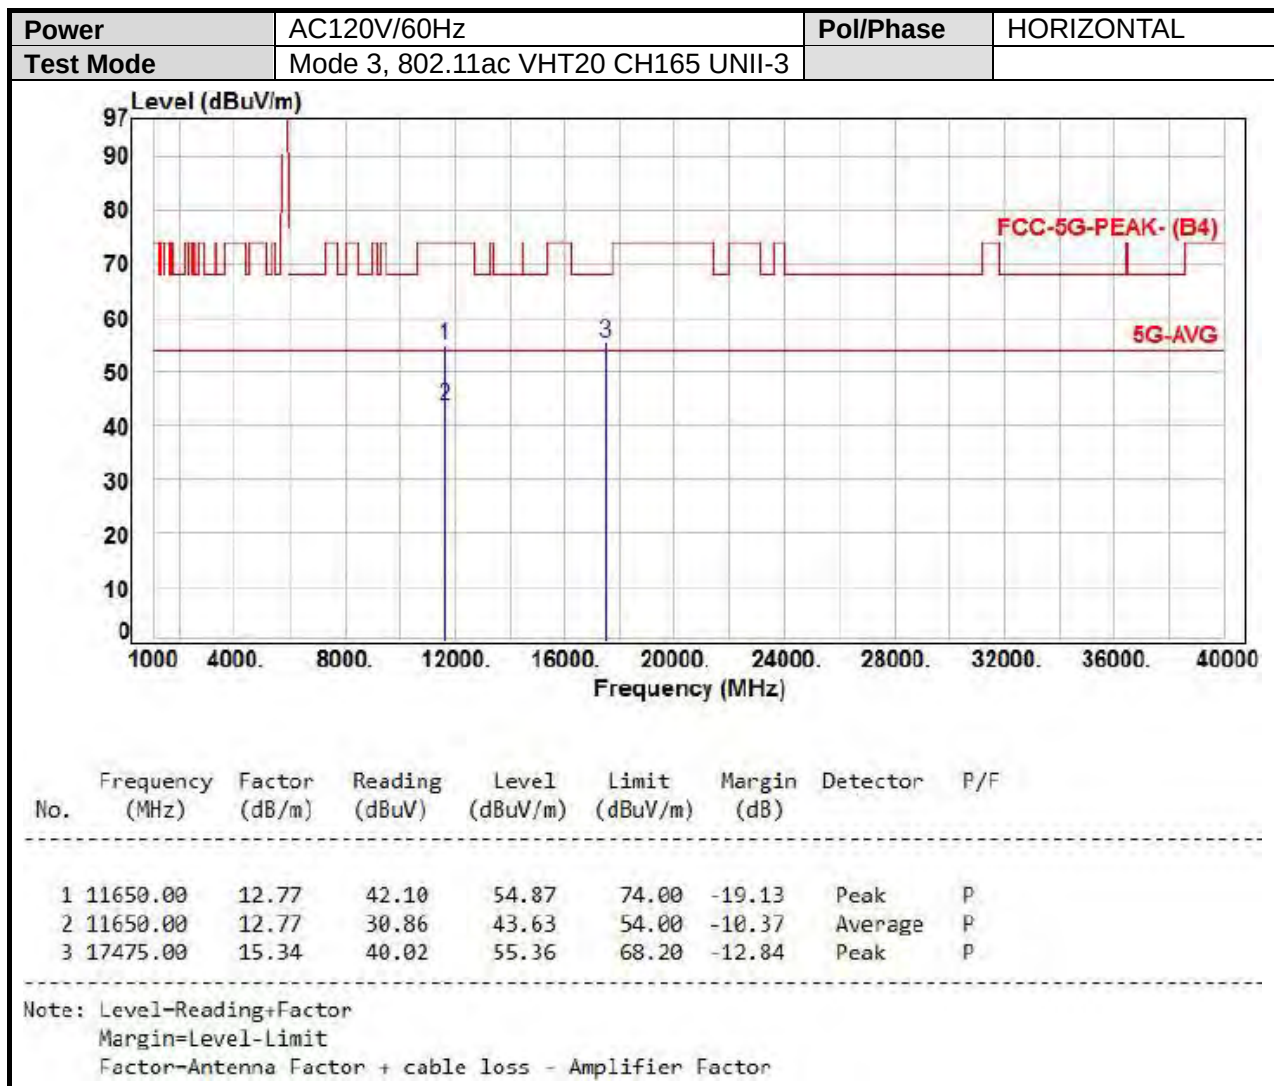


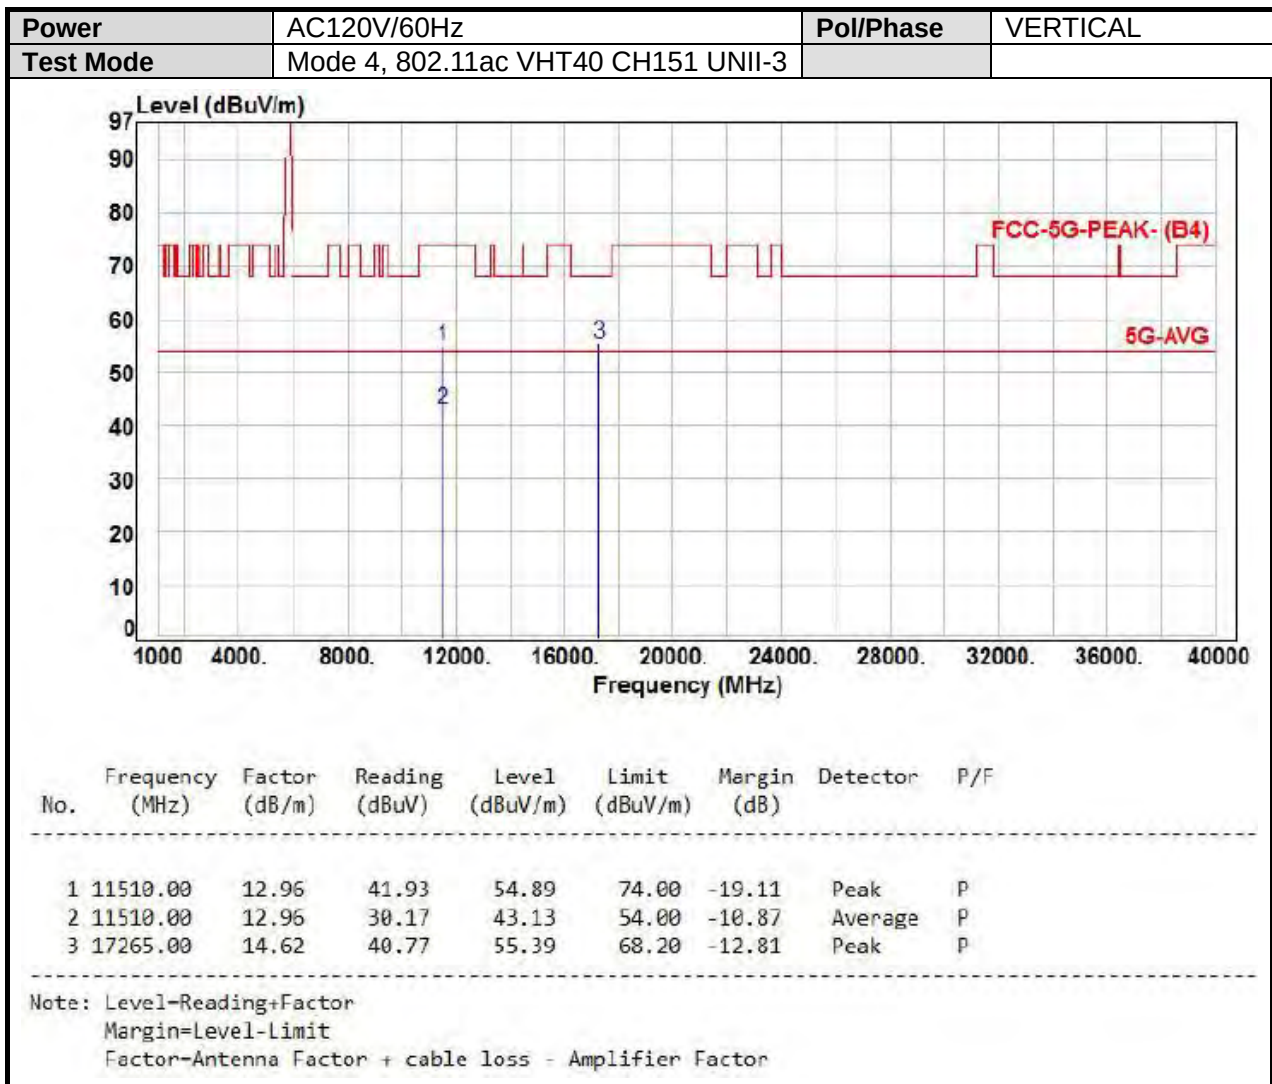


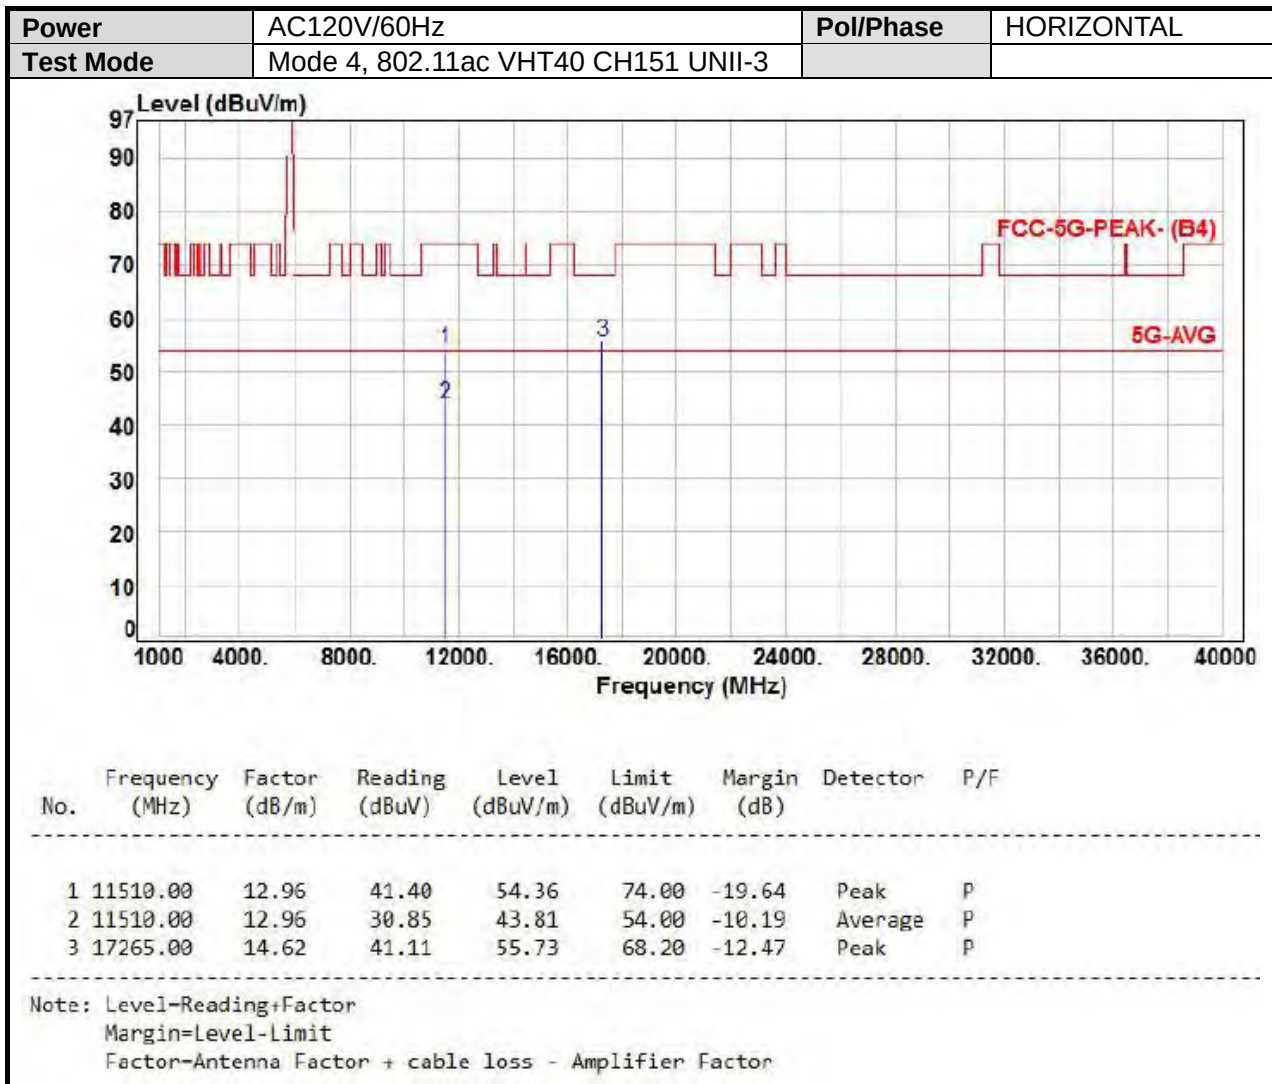


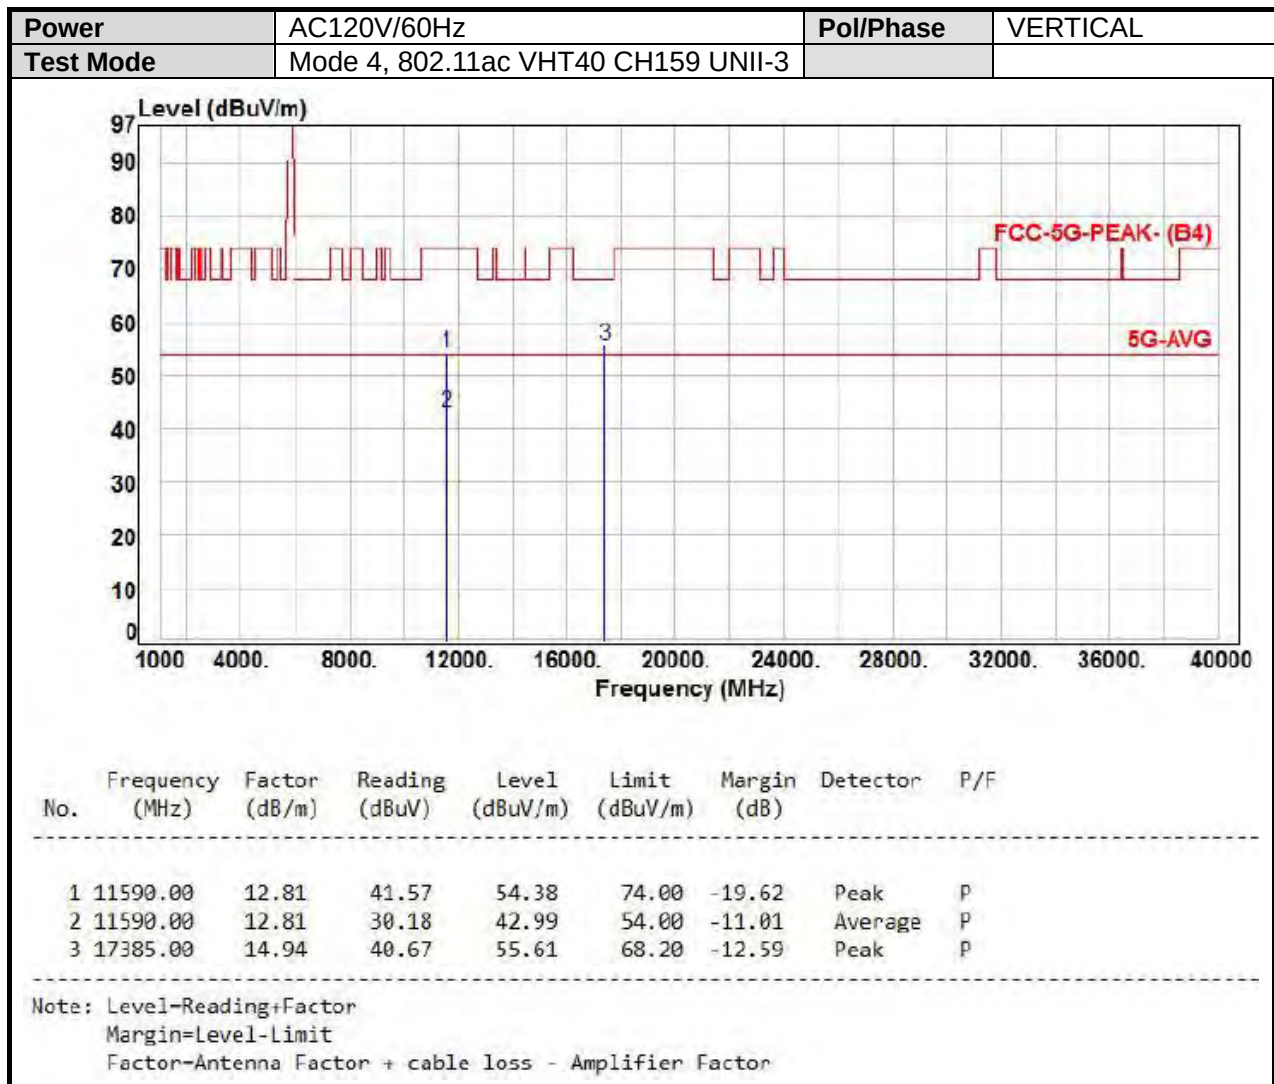


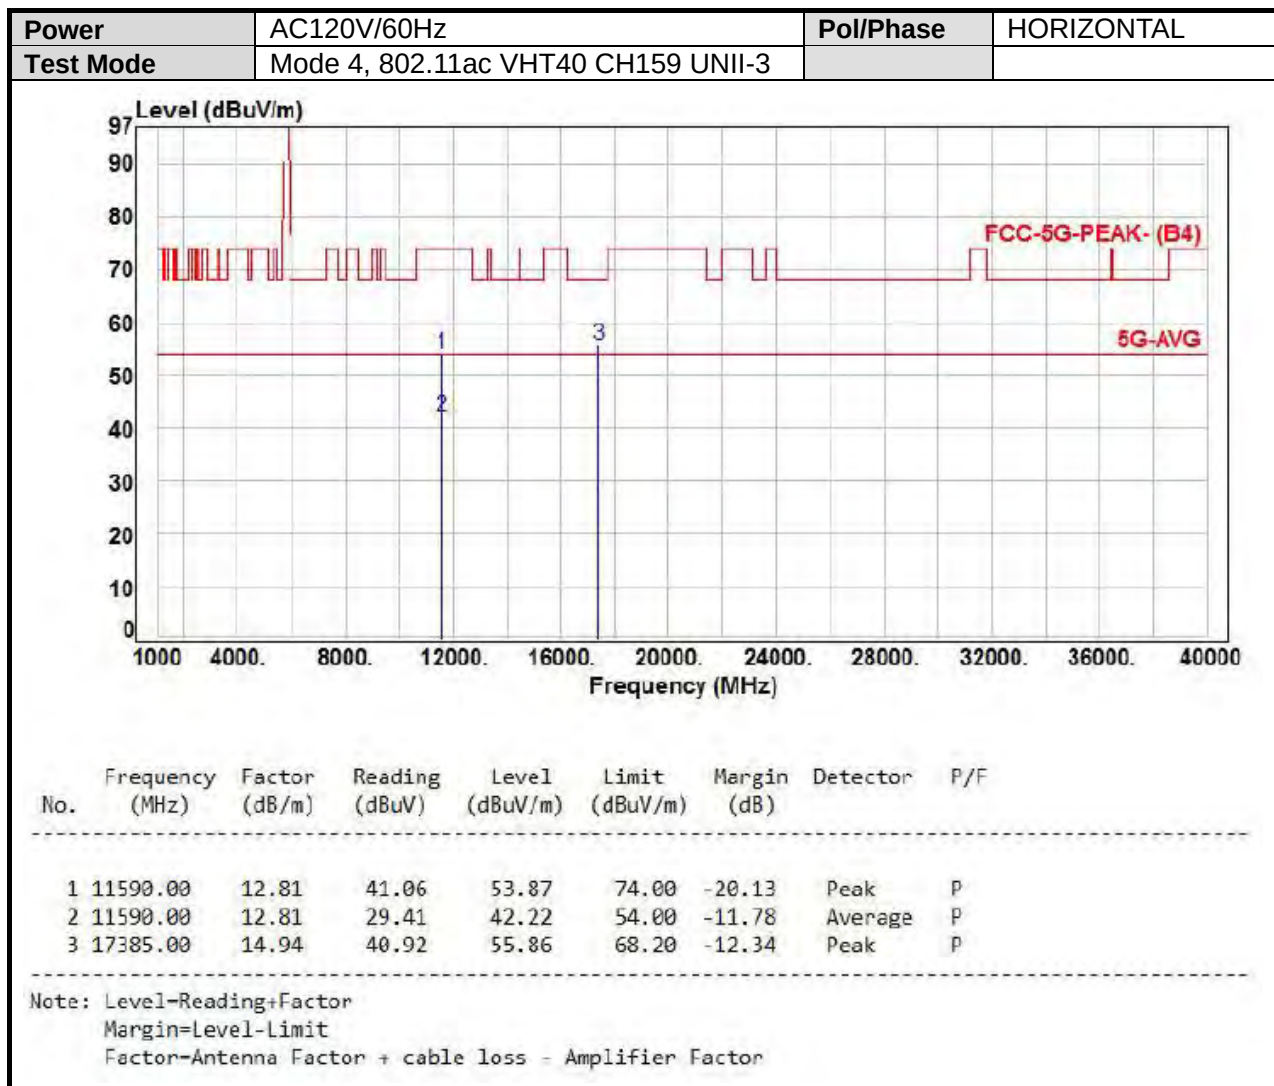


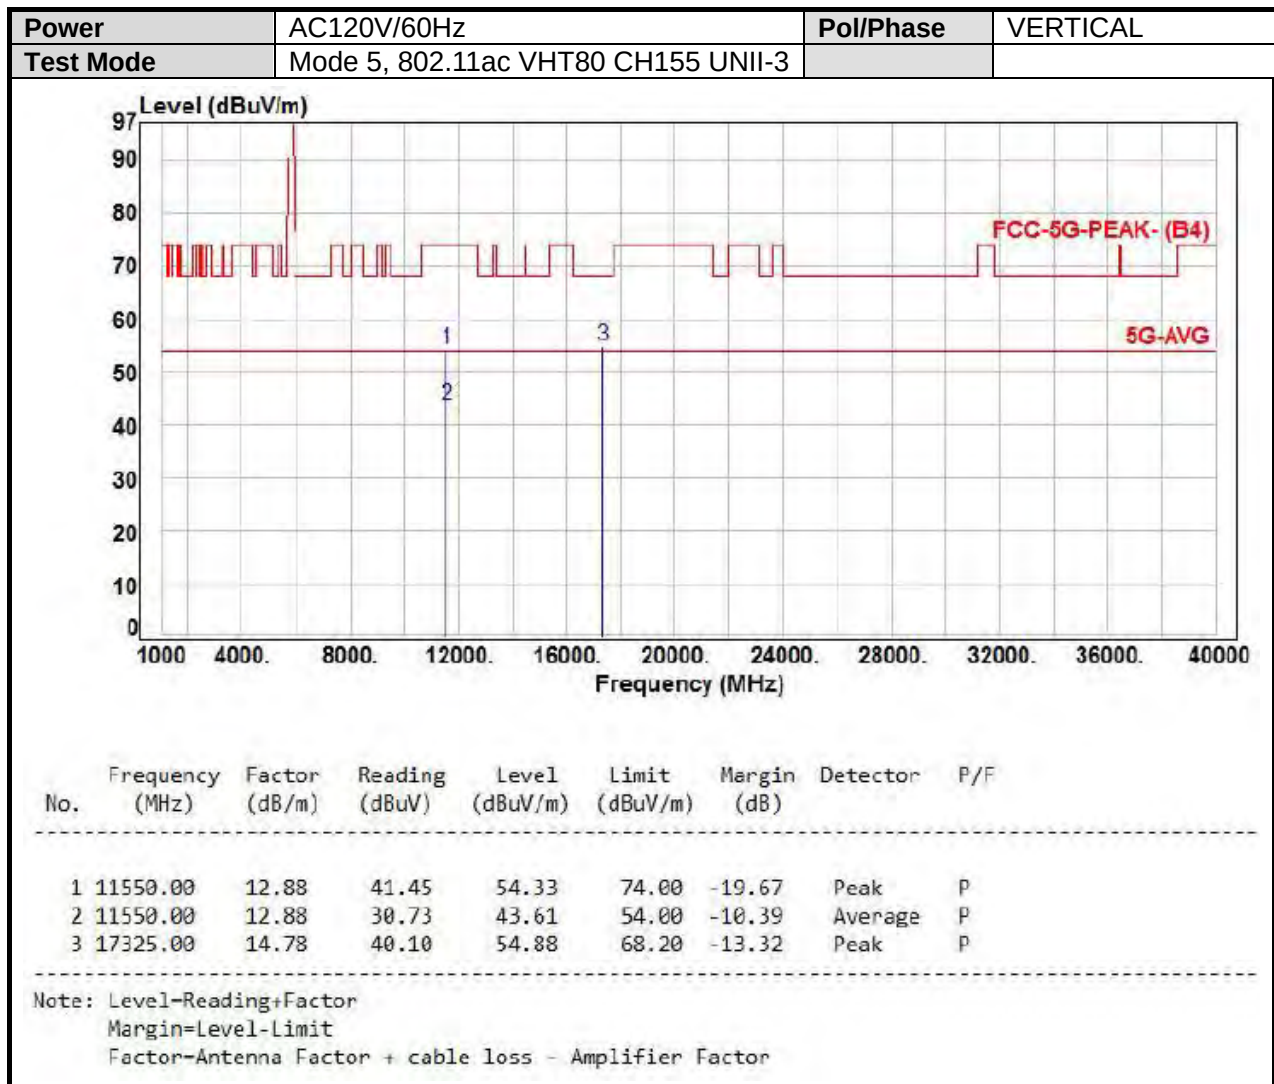


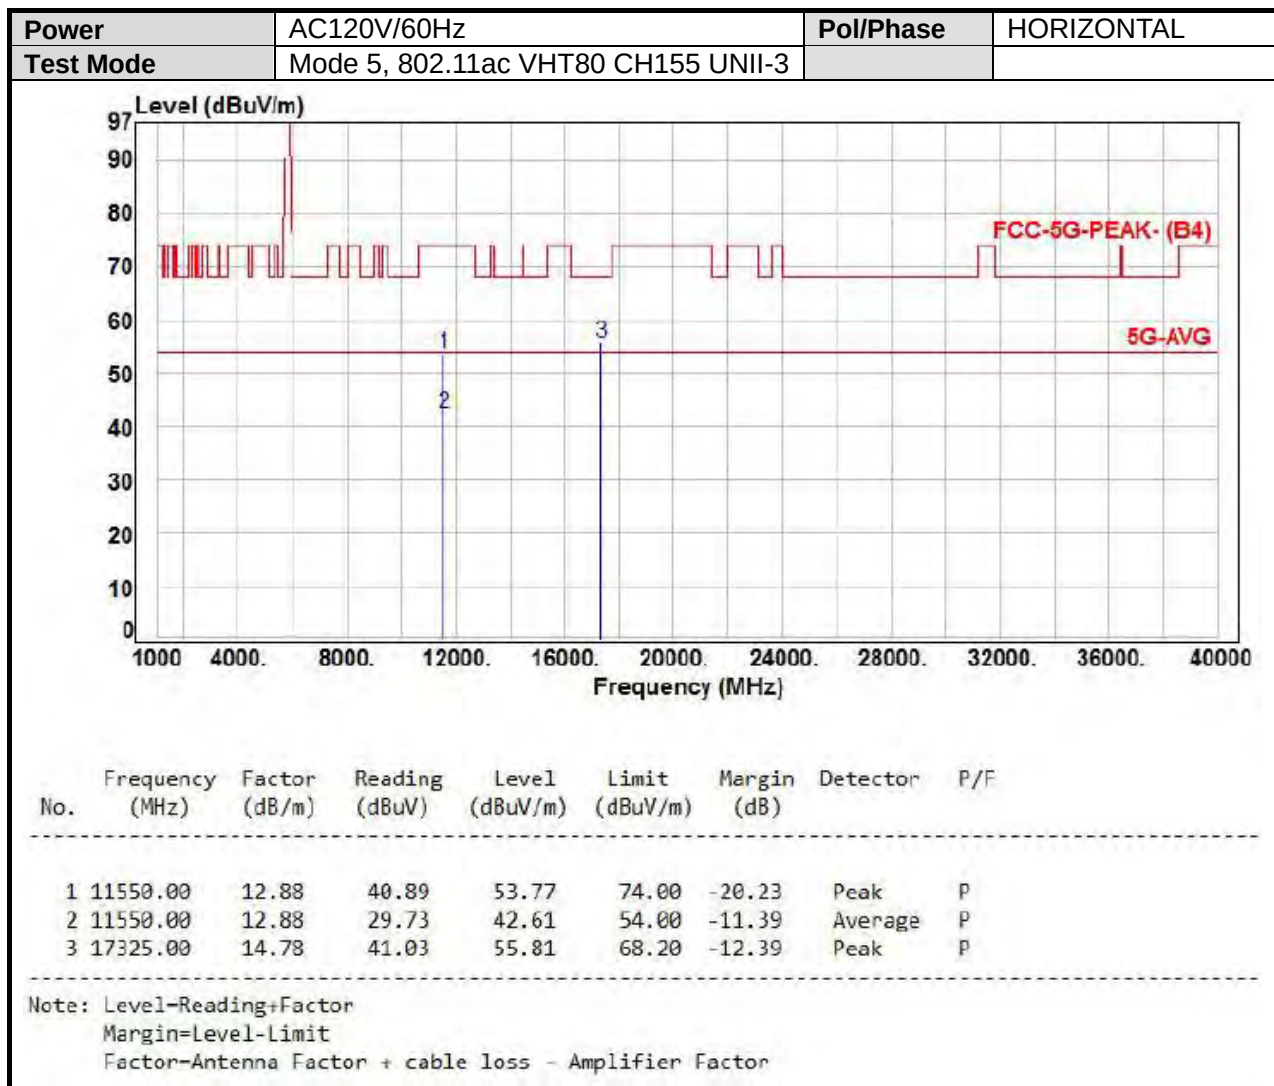


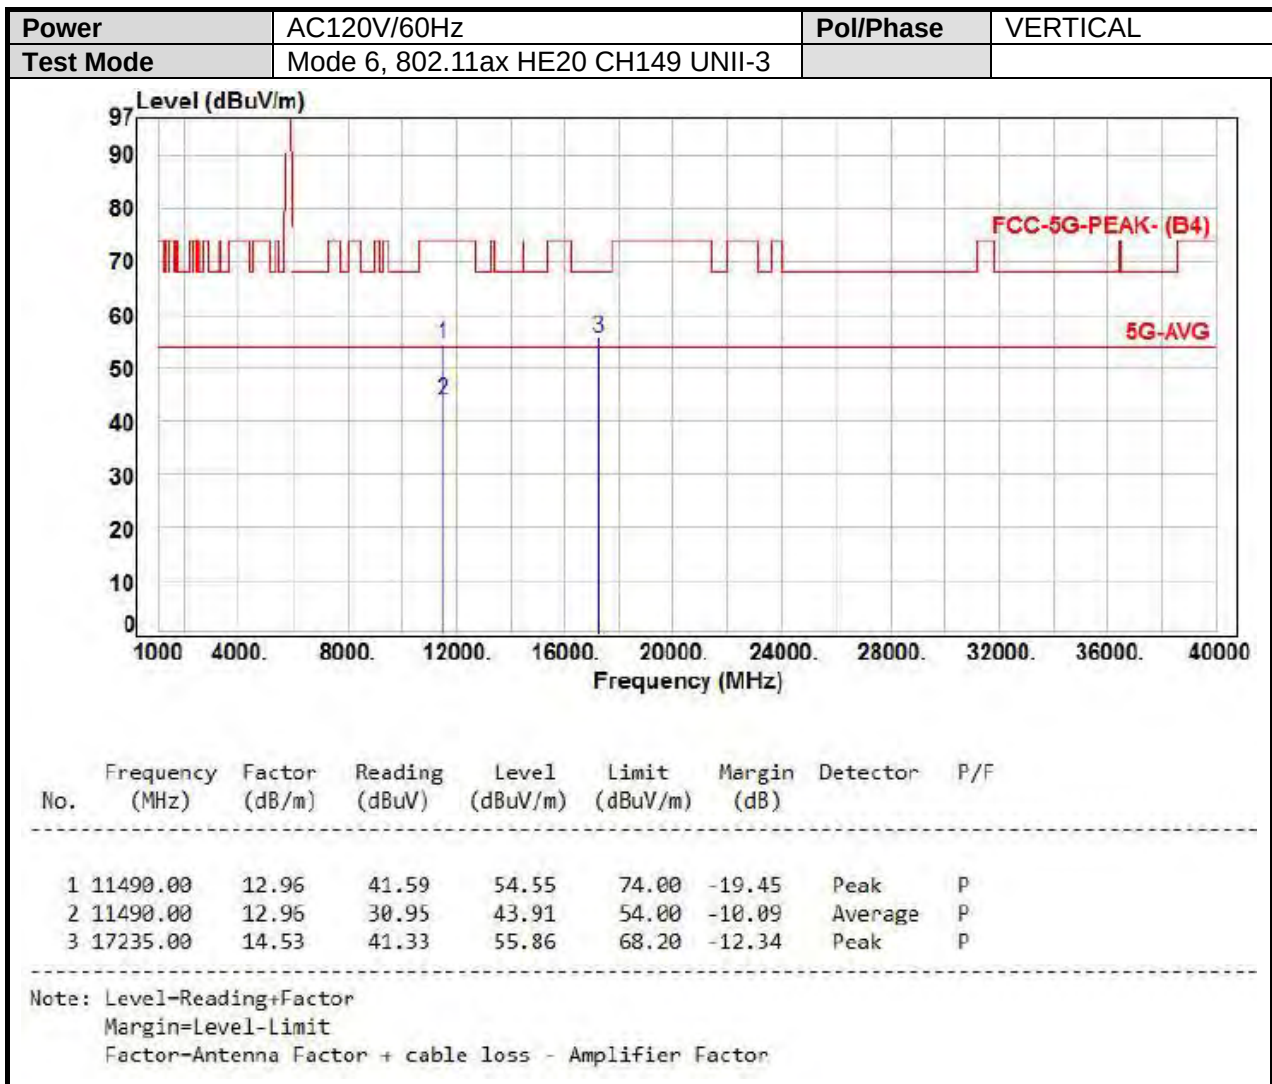


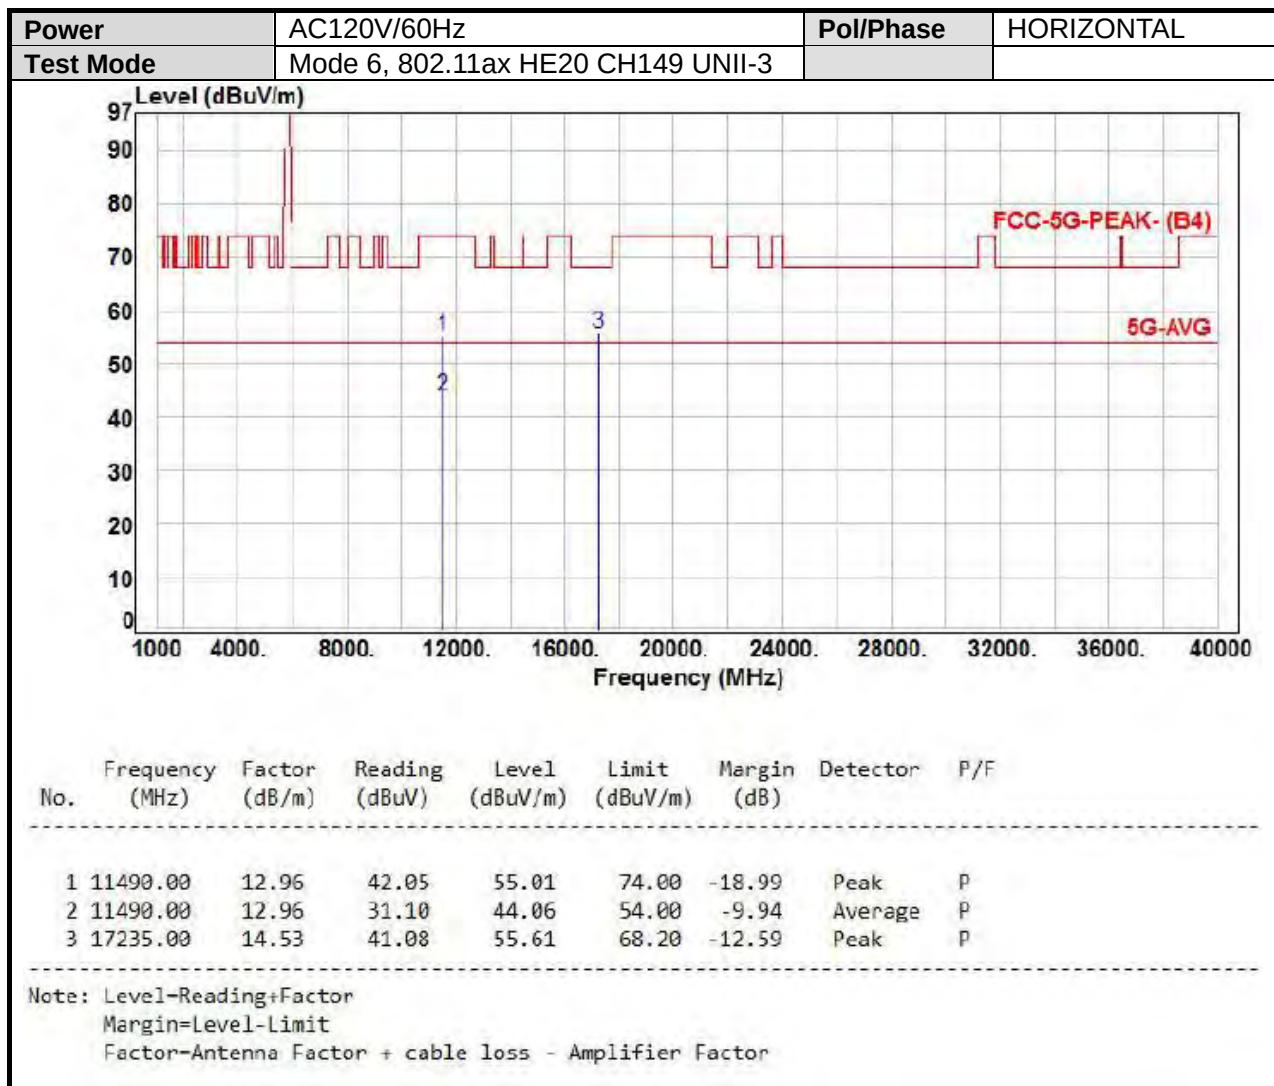


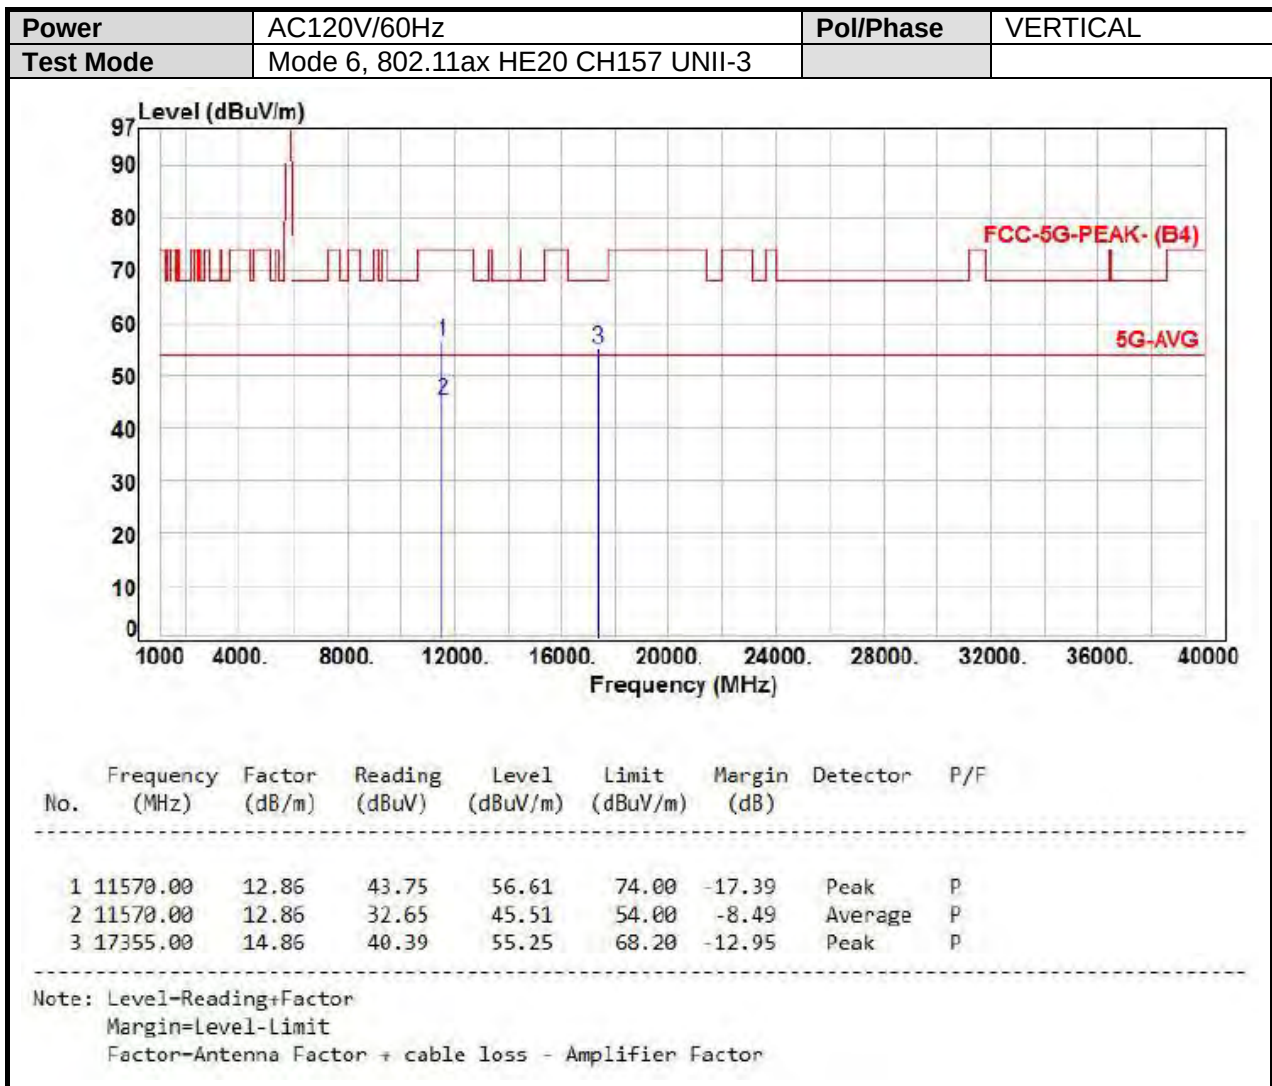


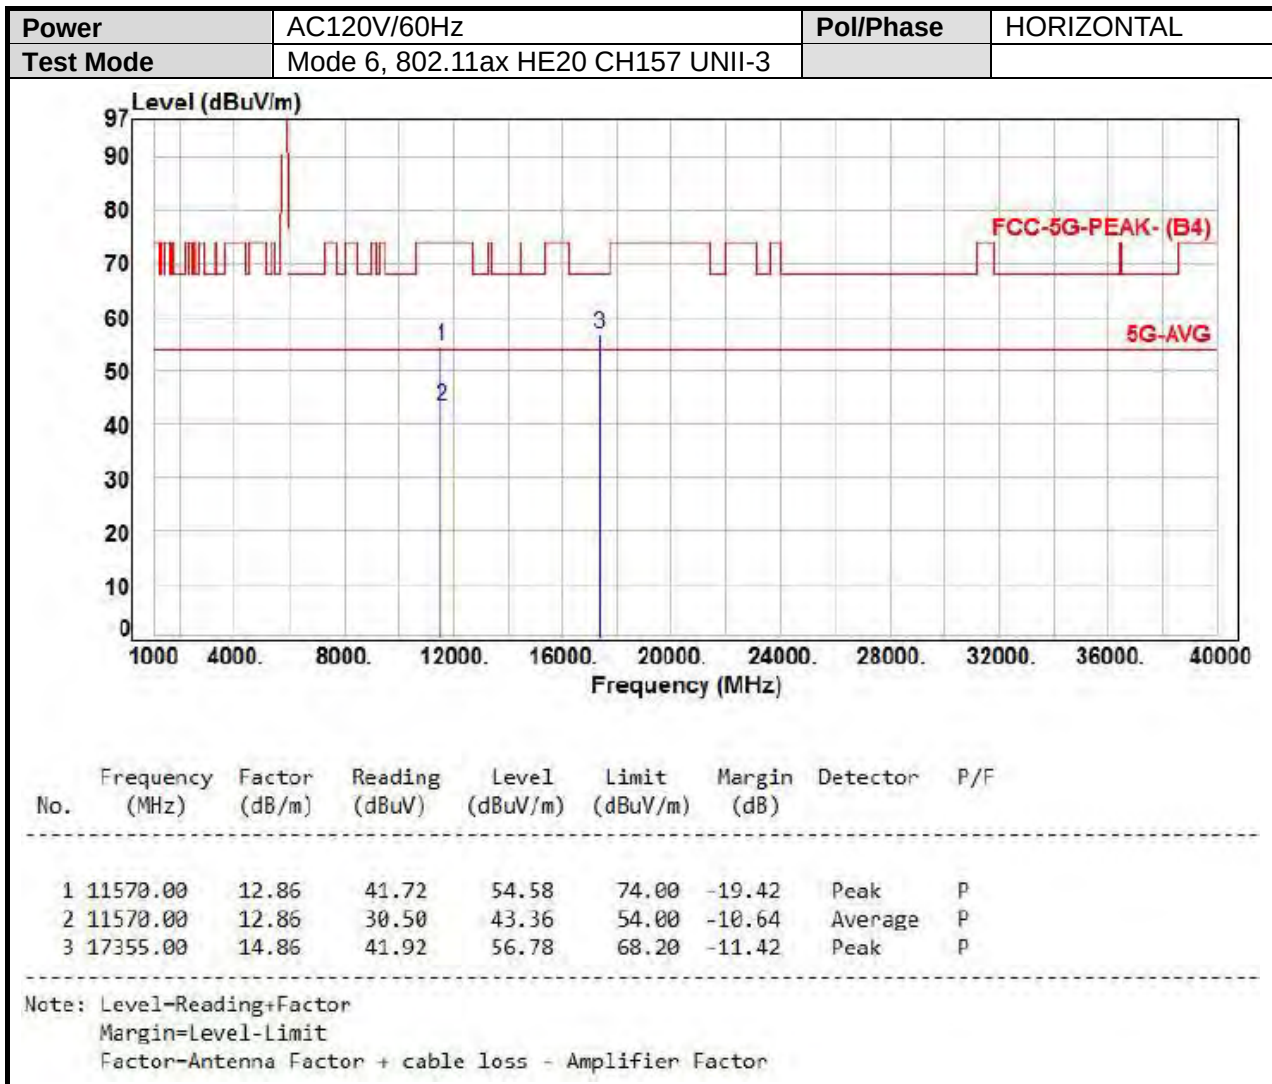


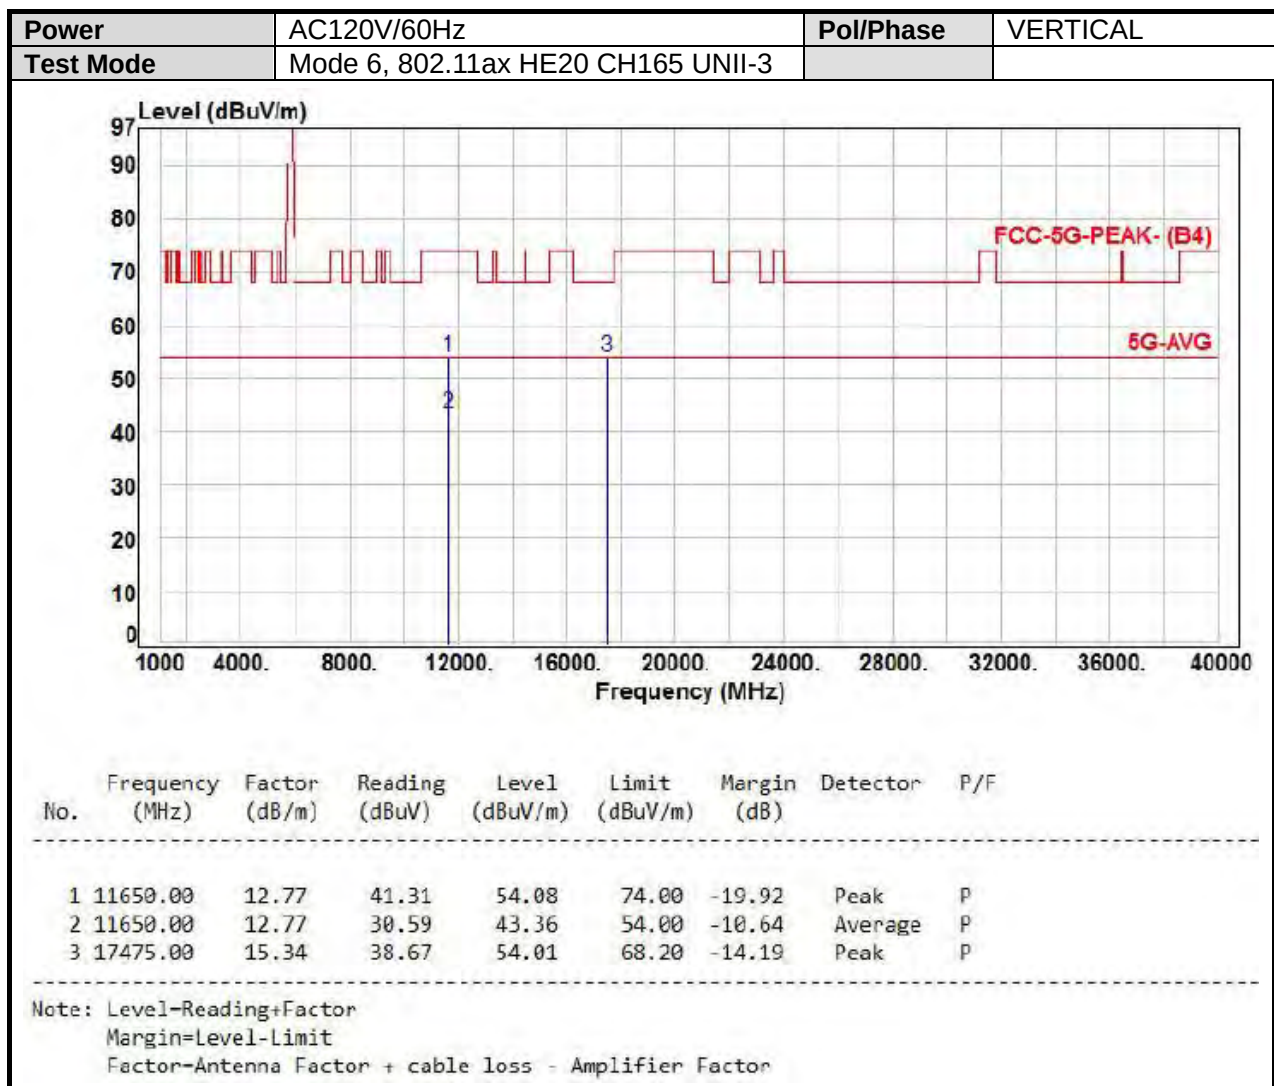


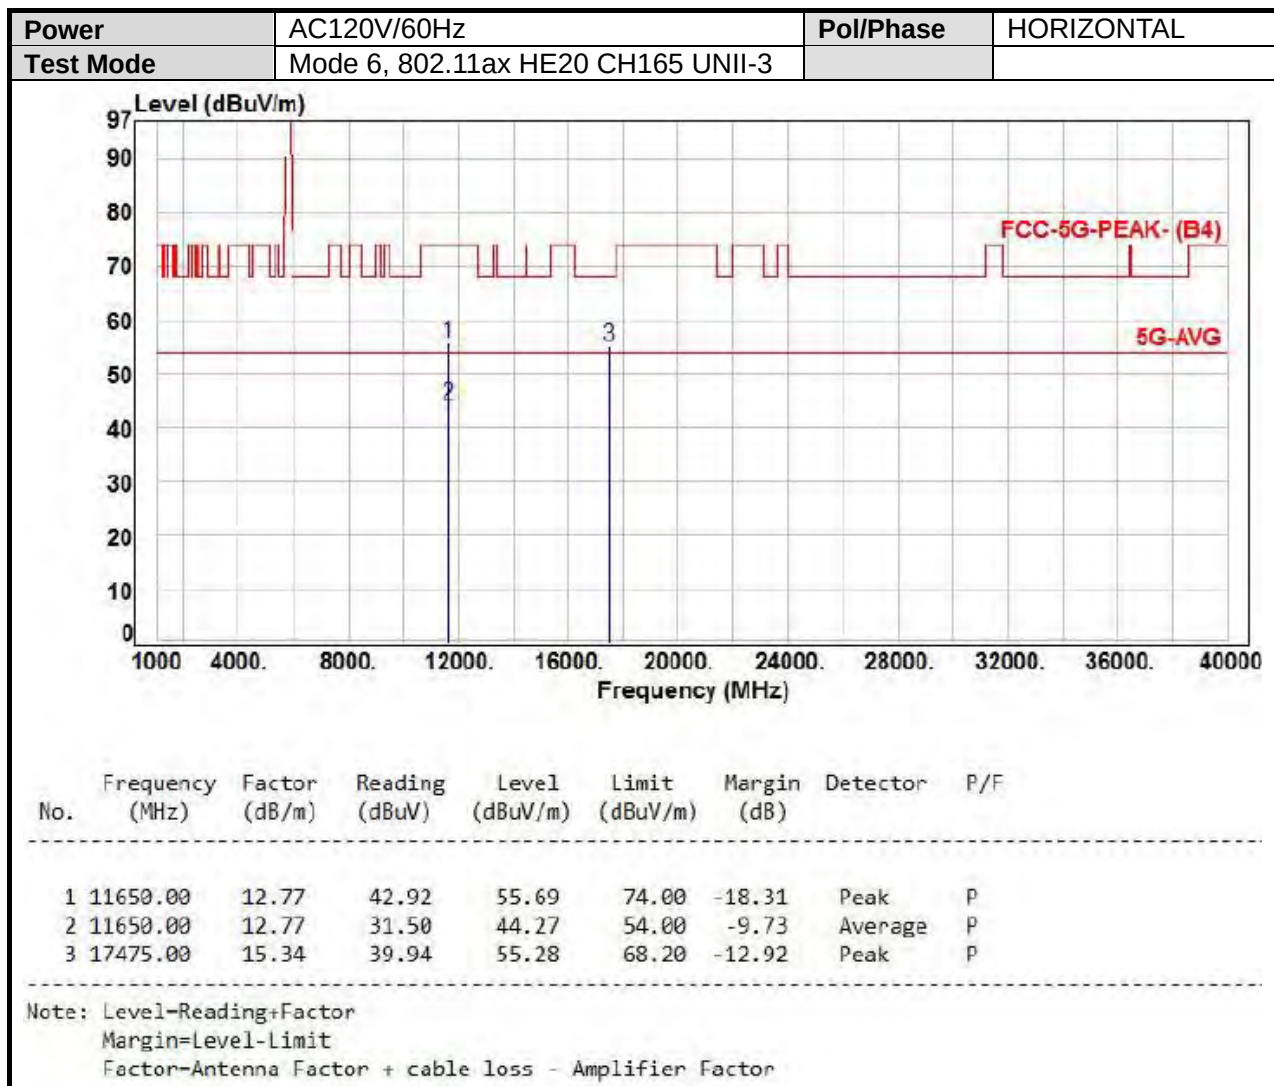


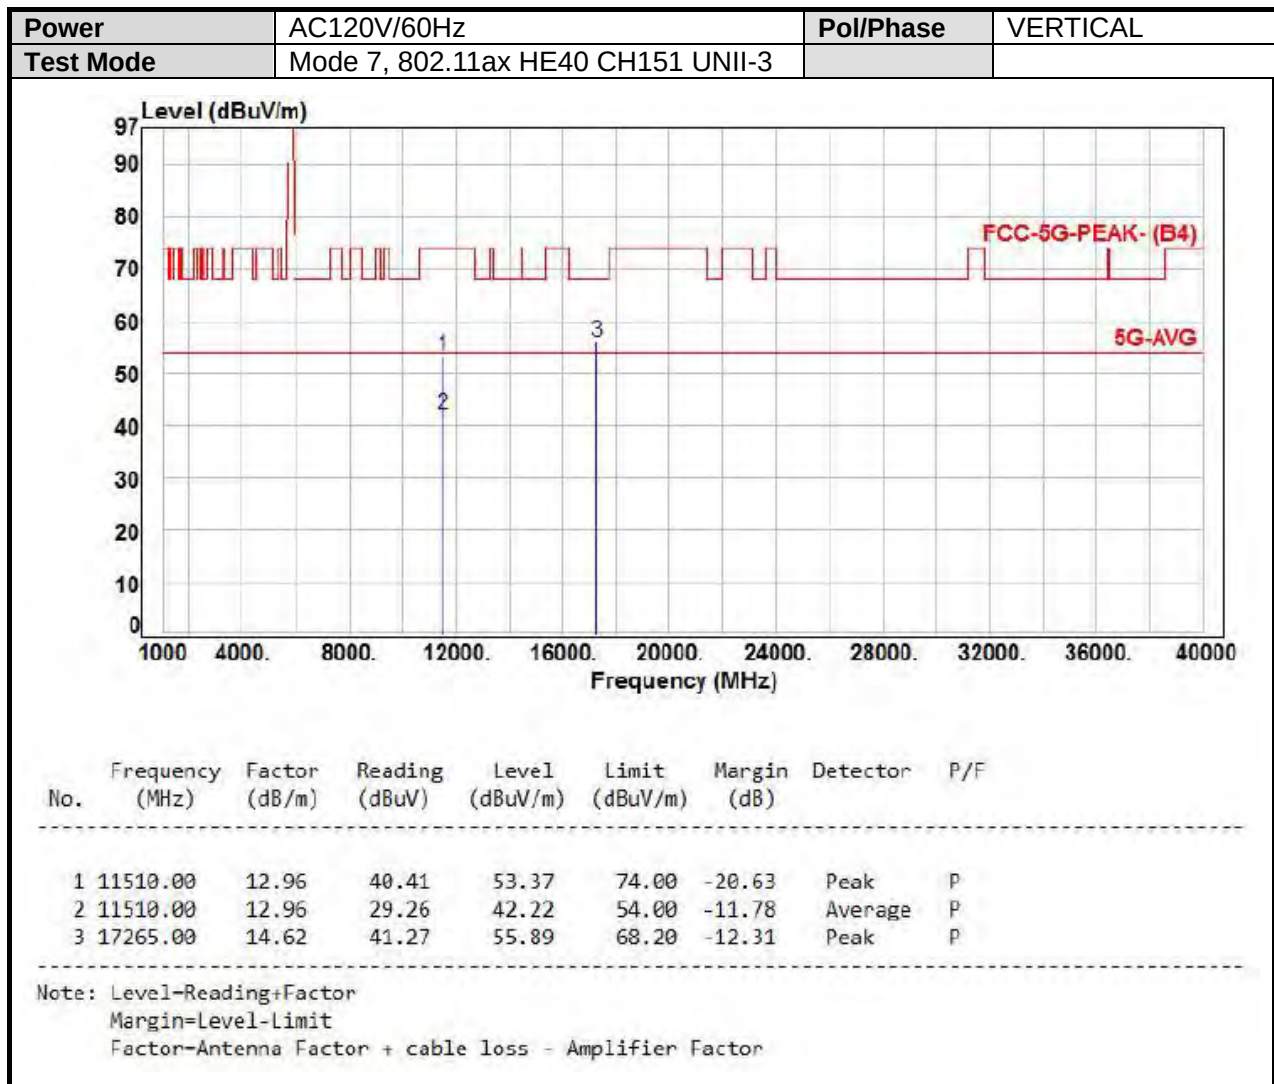


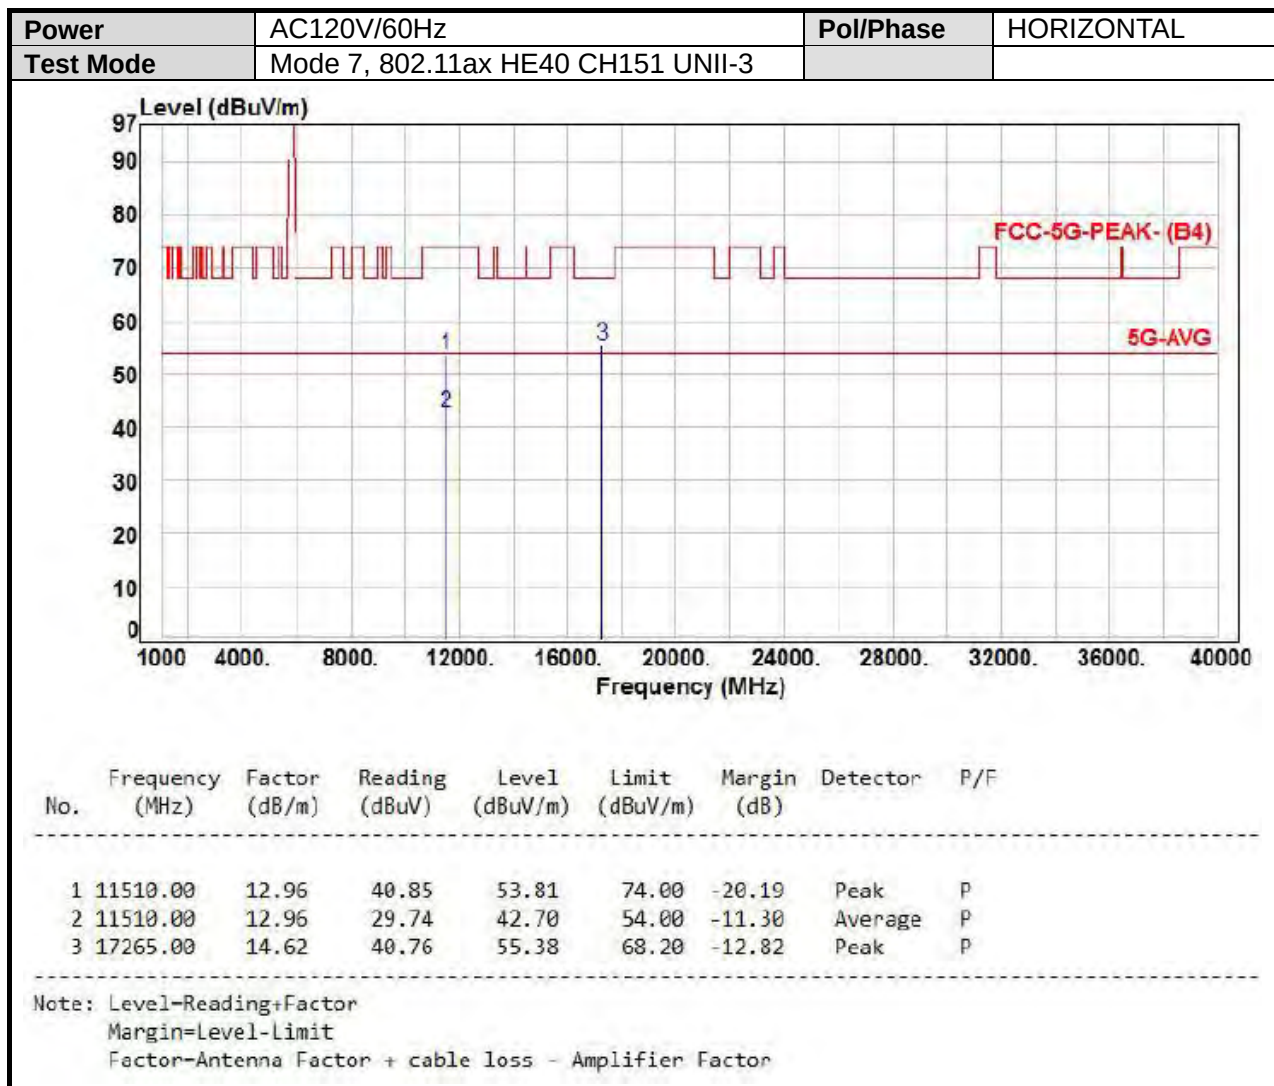

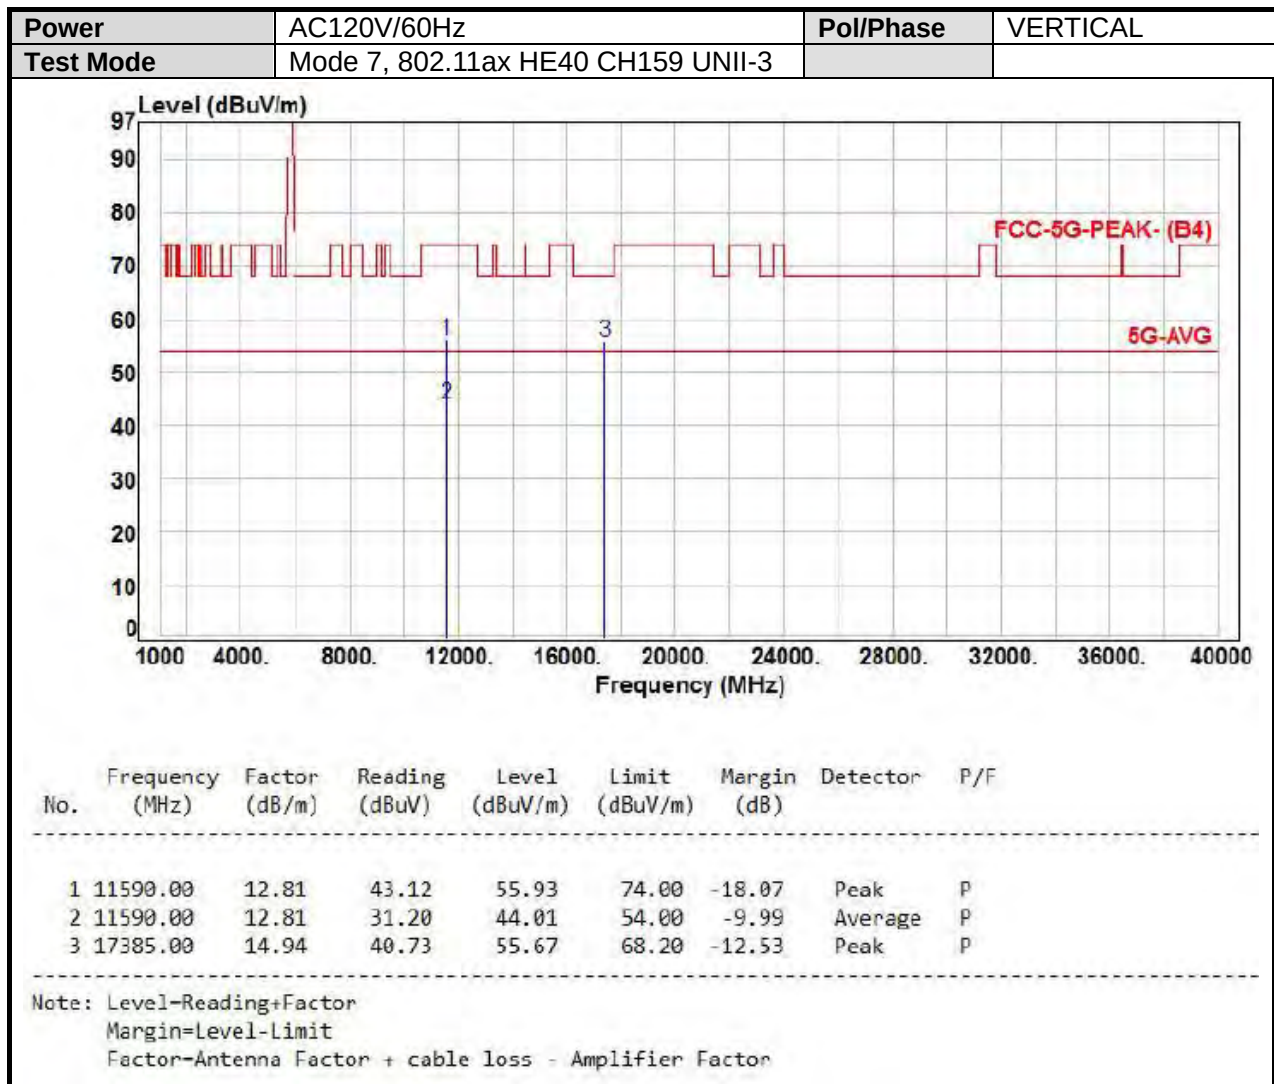

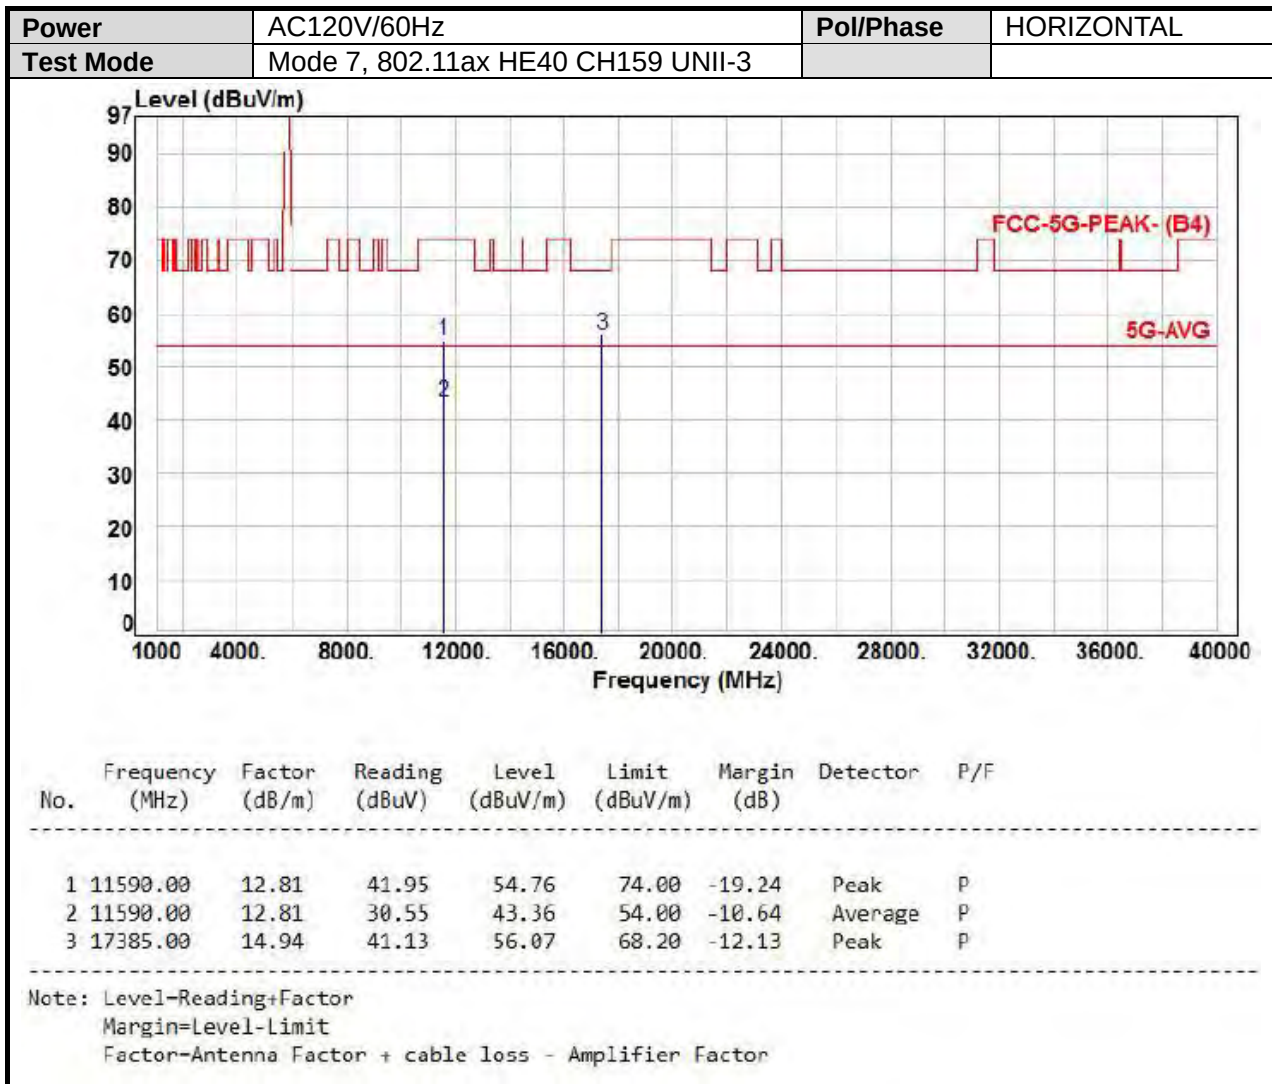

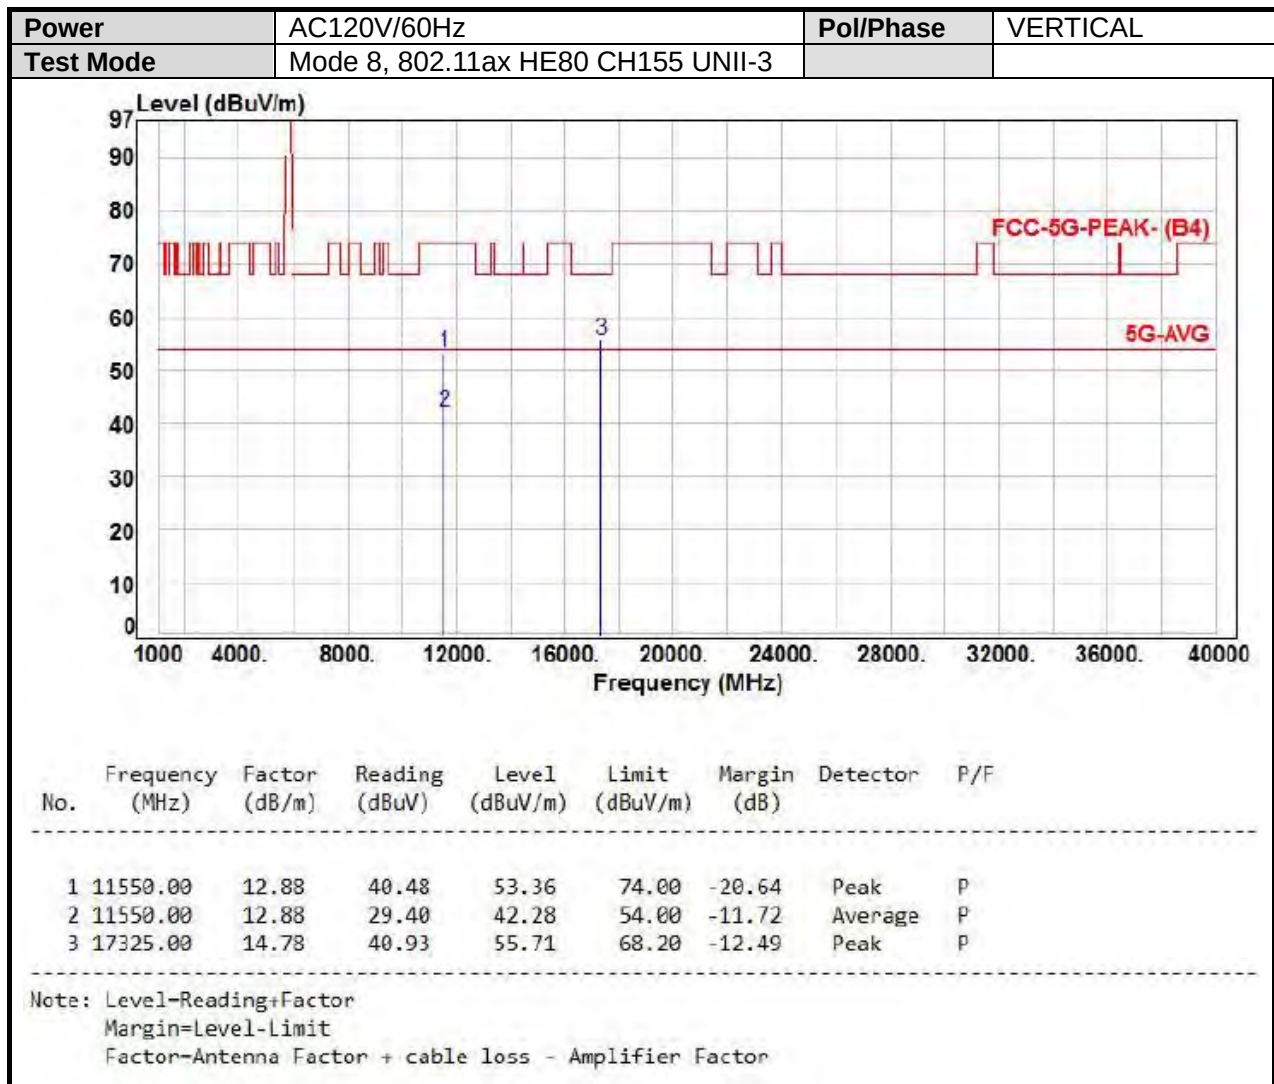

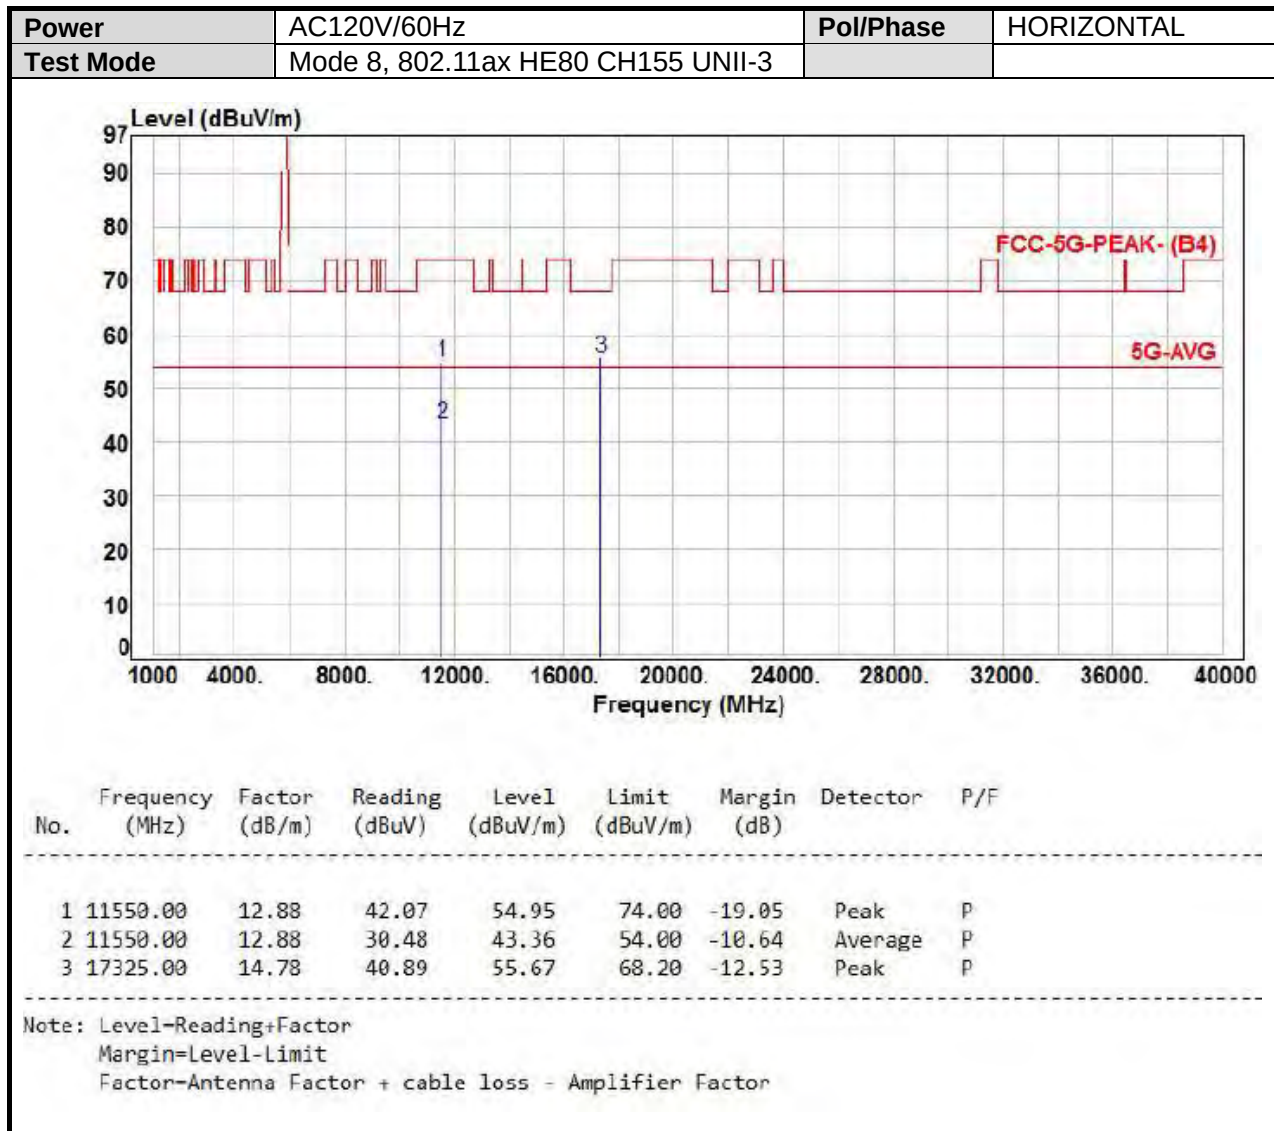

**6.7. Restricted Bands of Operation**


Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

SISO-Ant B
UNII-1

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH36 UNII-1		

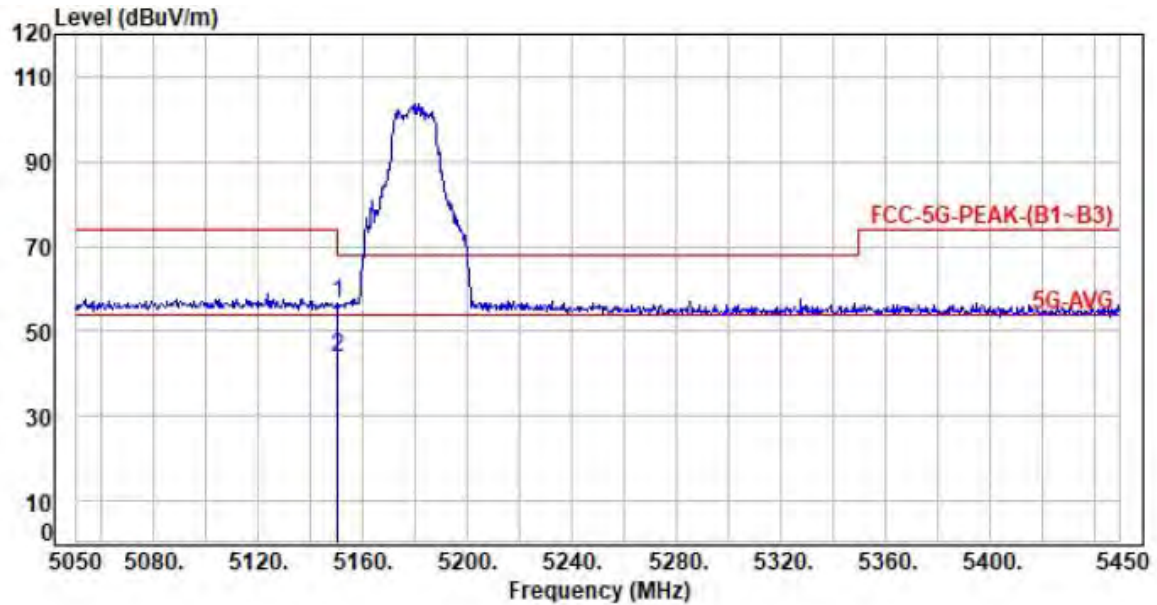



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	13.37	43.01	56.38	74.00	-17.62	Peak	P
2	5150.00	13.37	30.42	43.79	54.00	-10.21	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

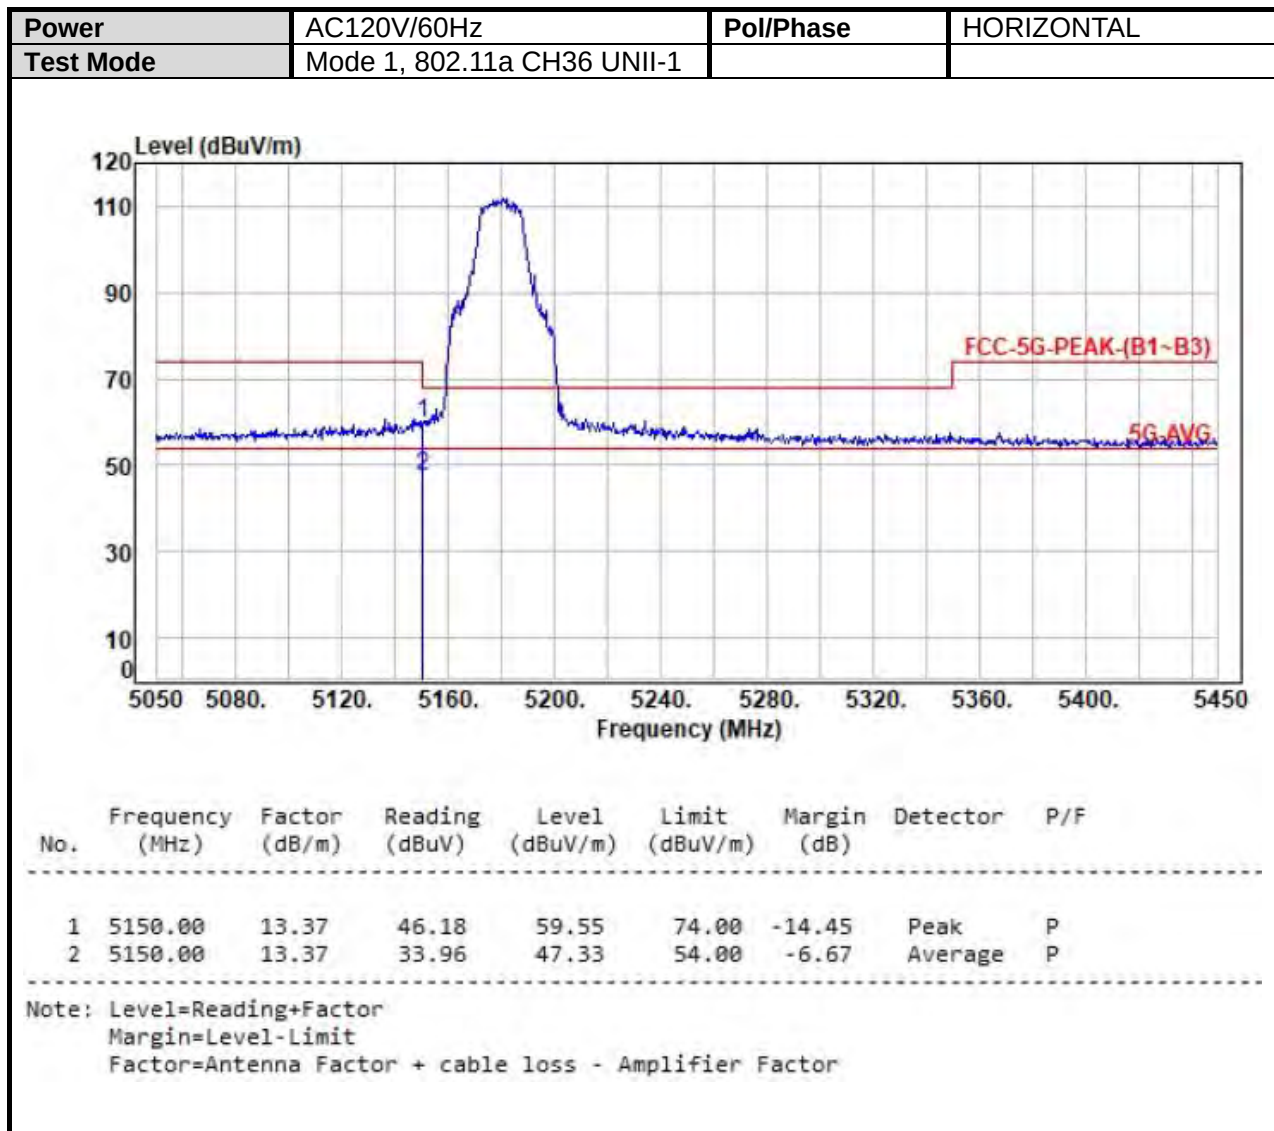


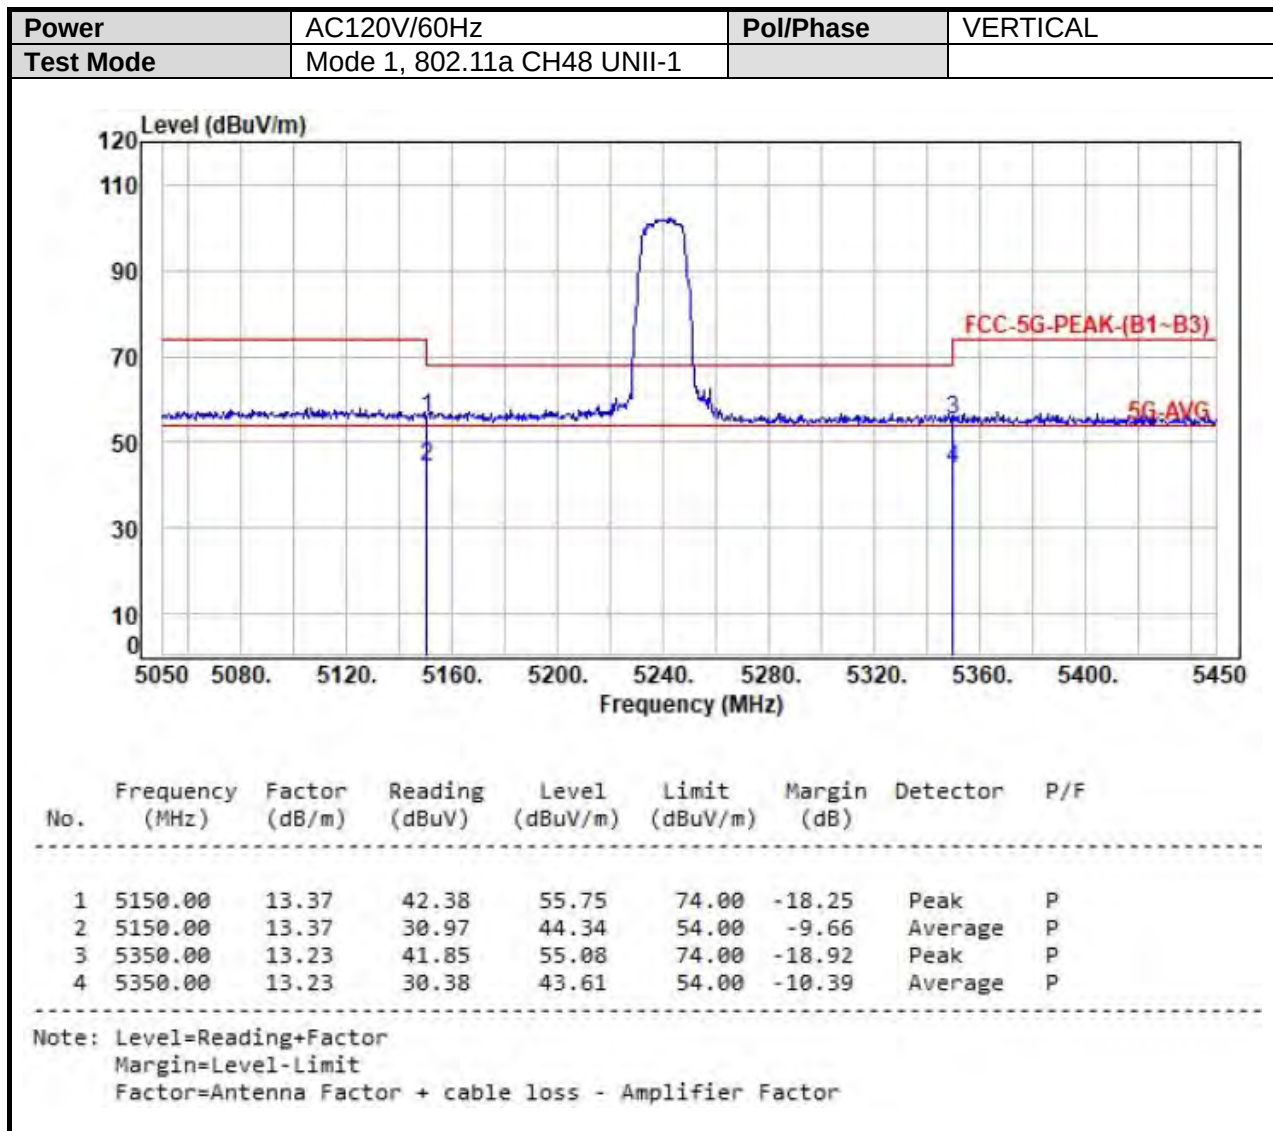


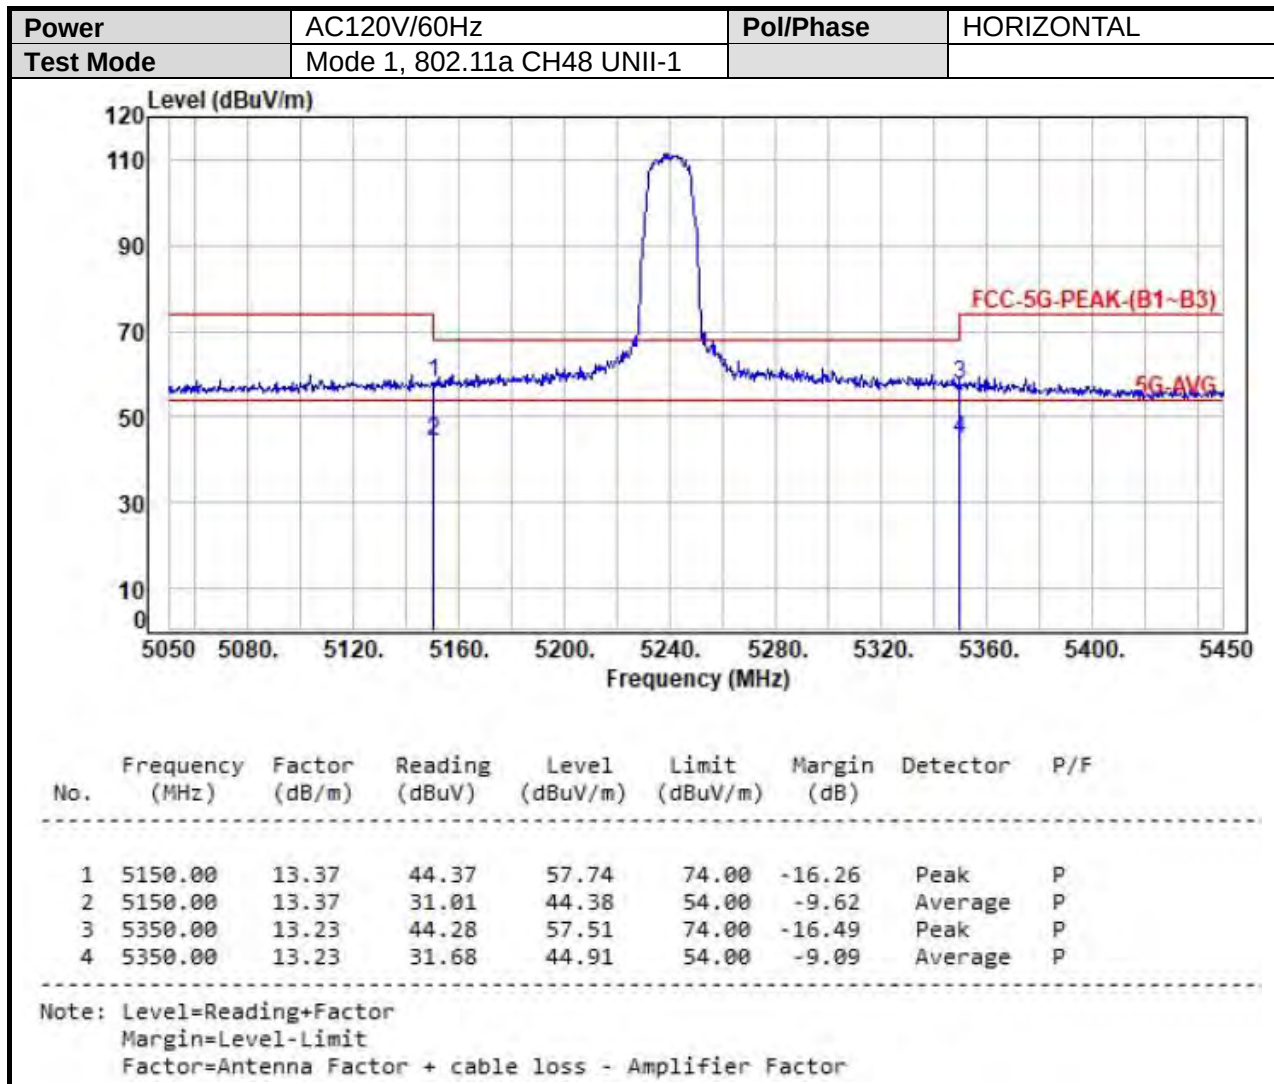






MIMO-UNII-1

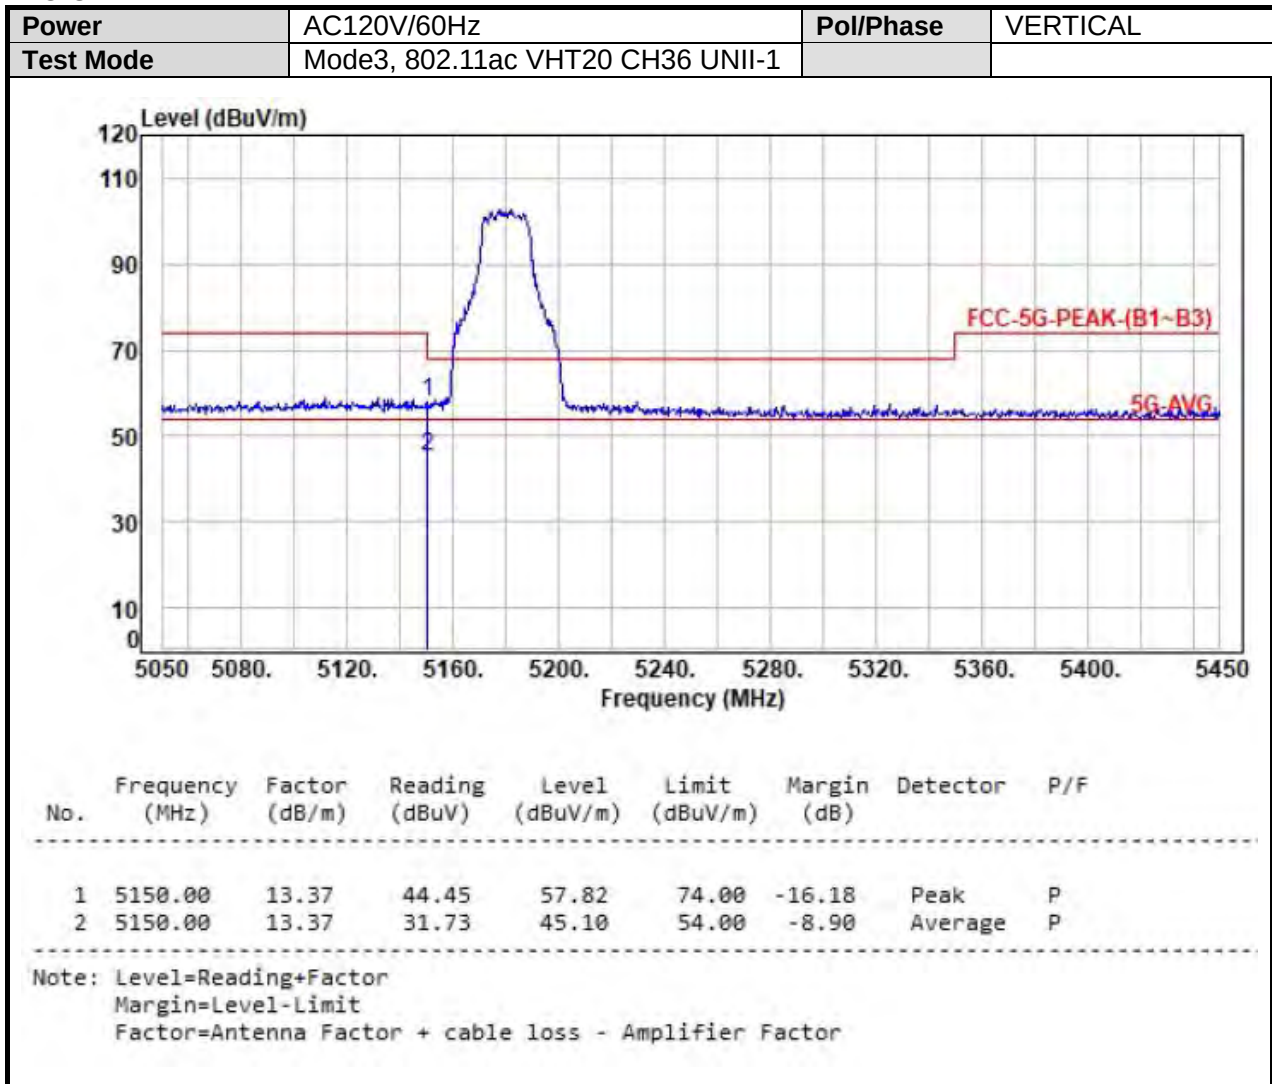


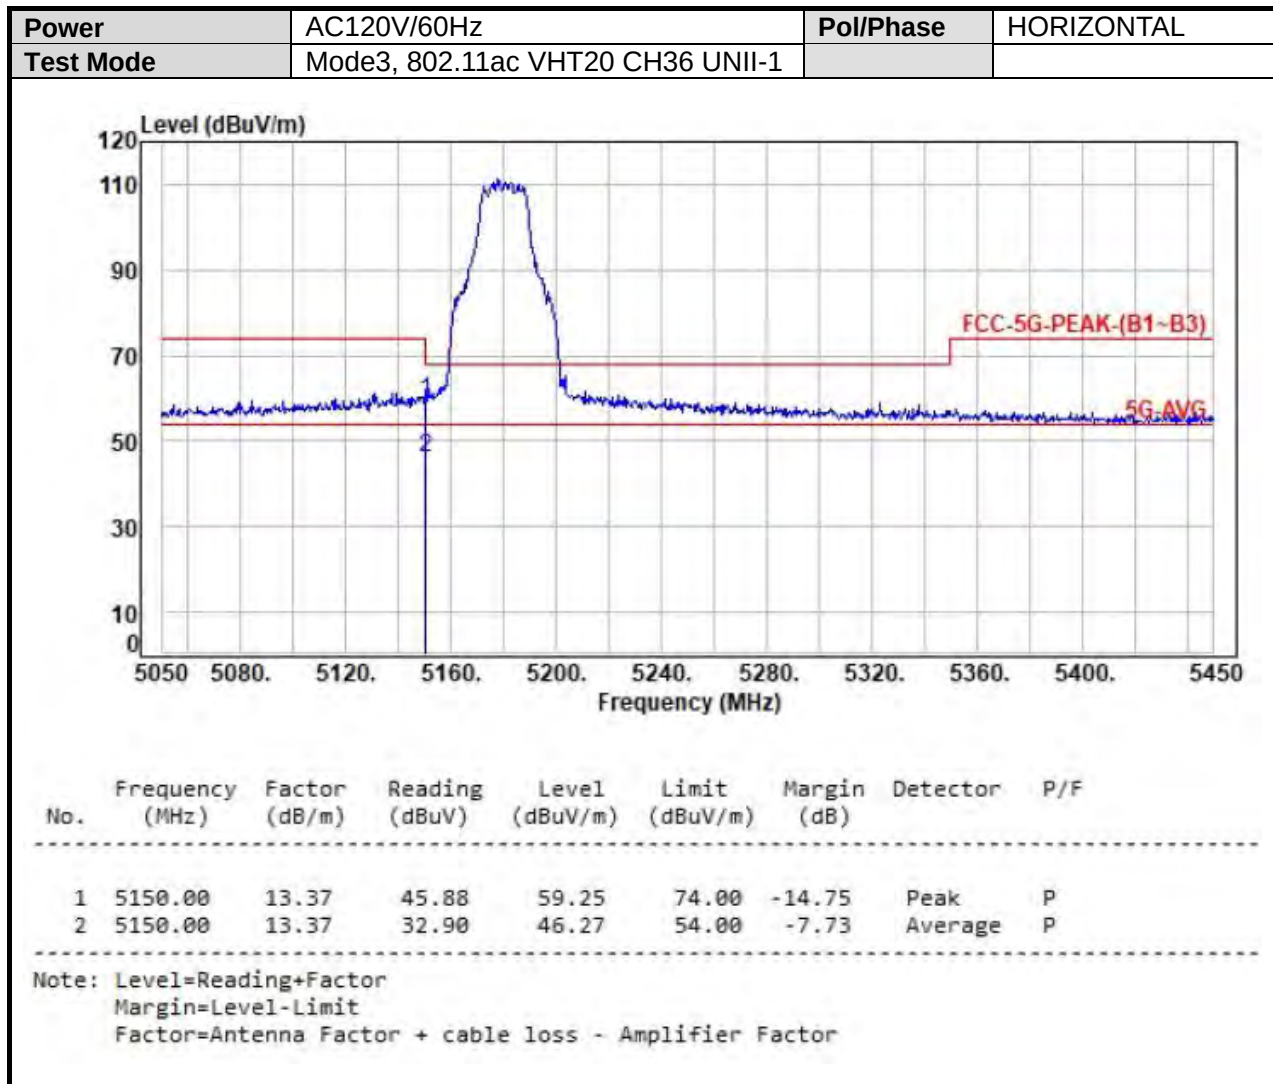


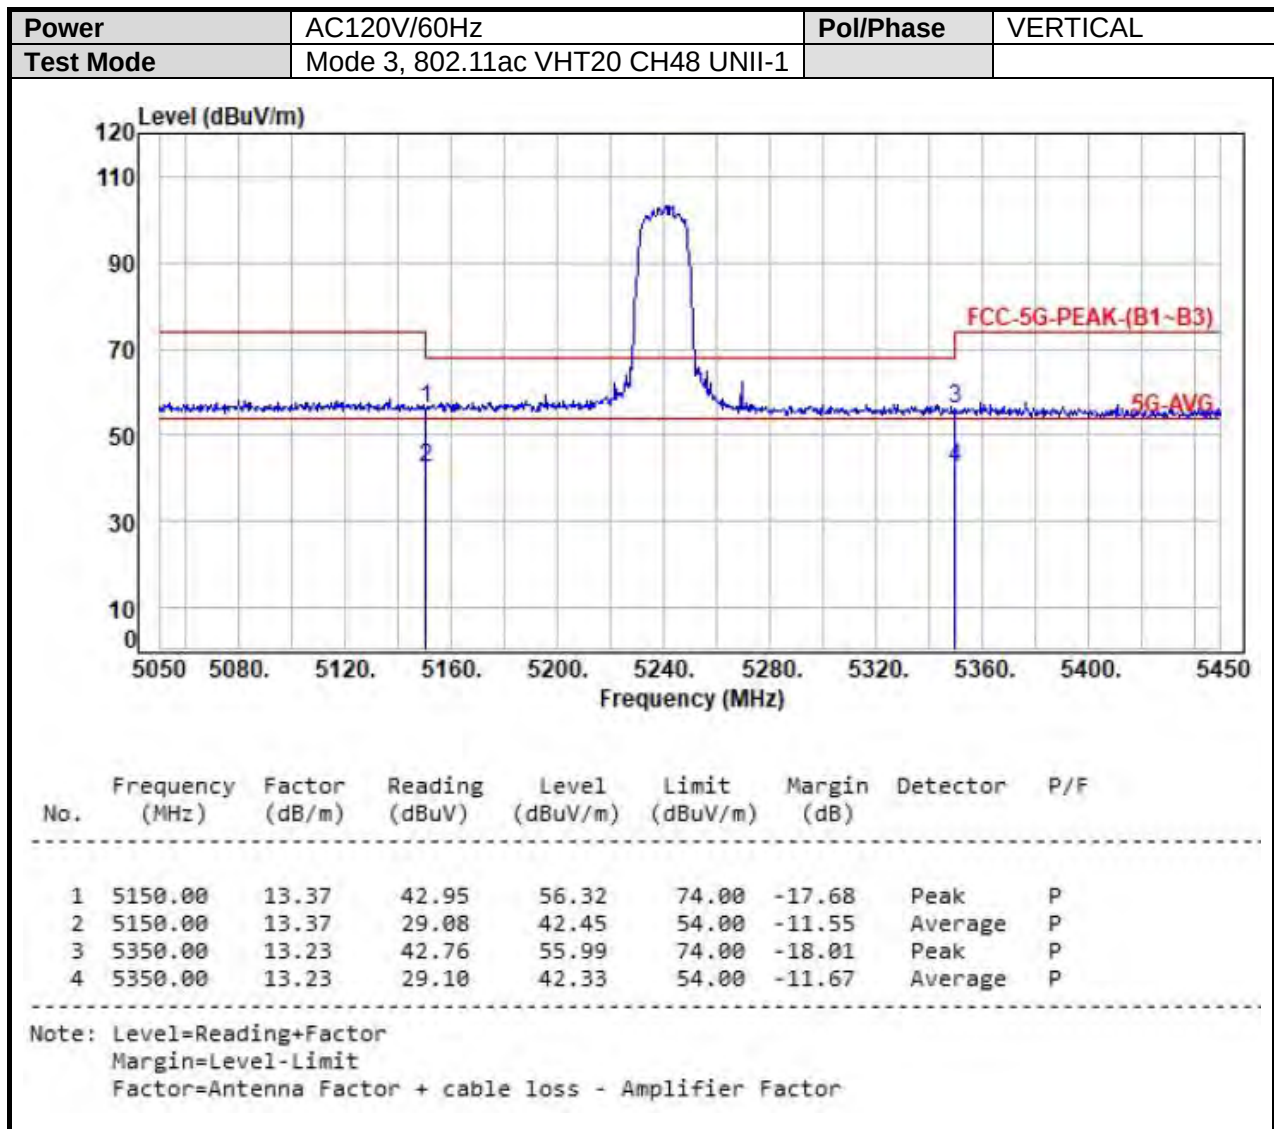


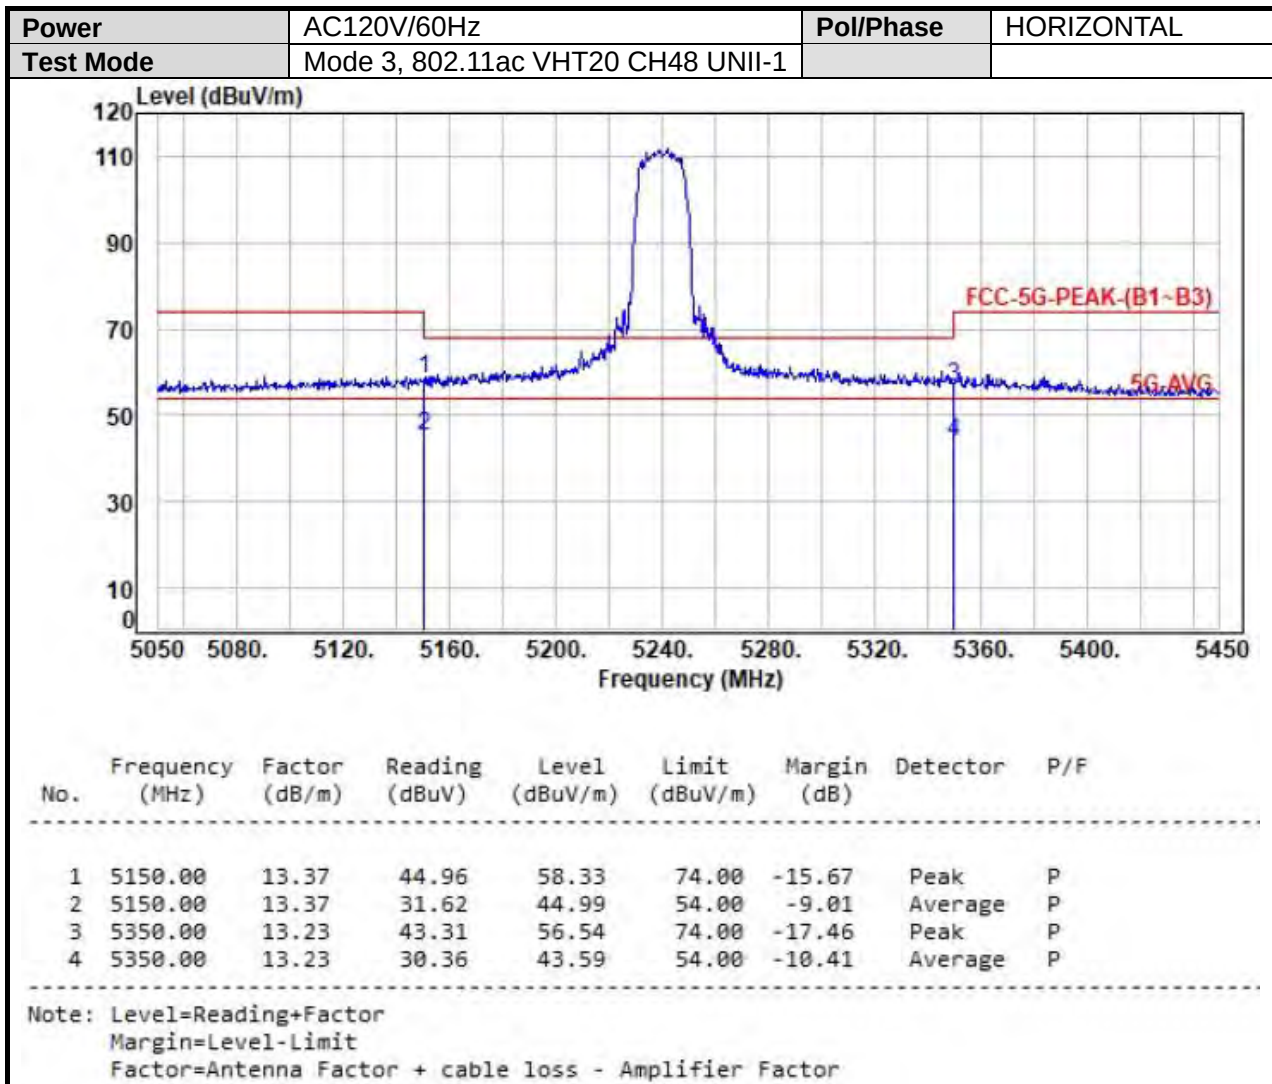


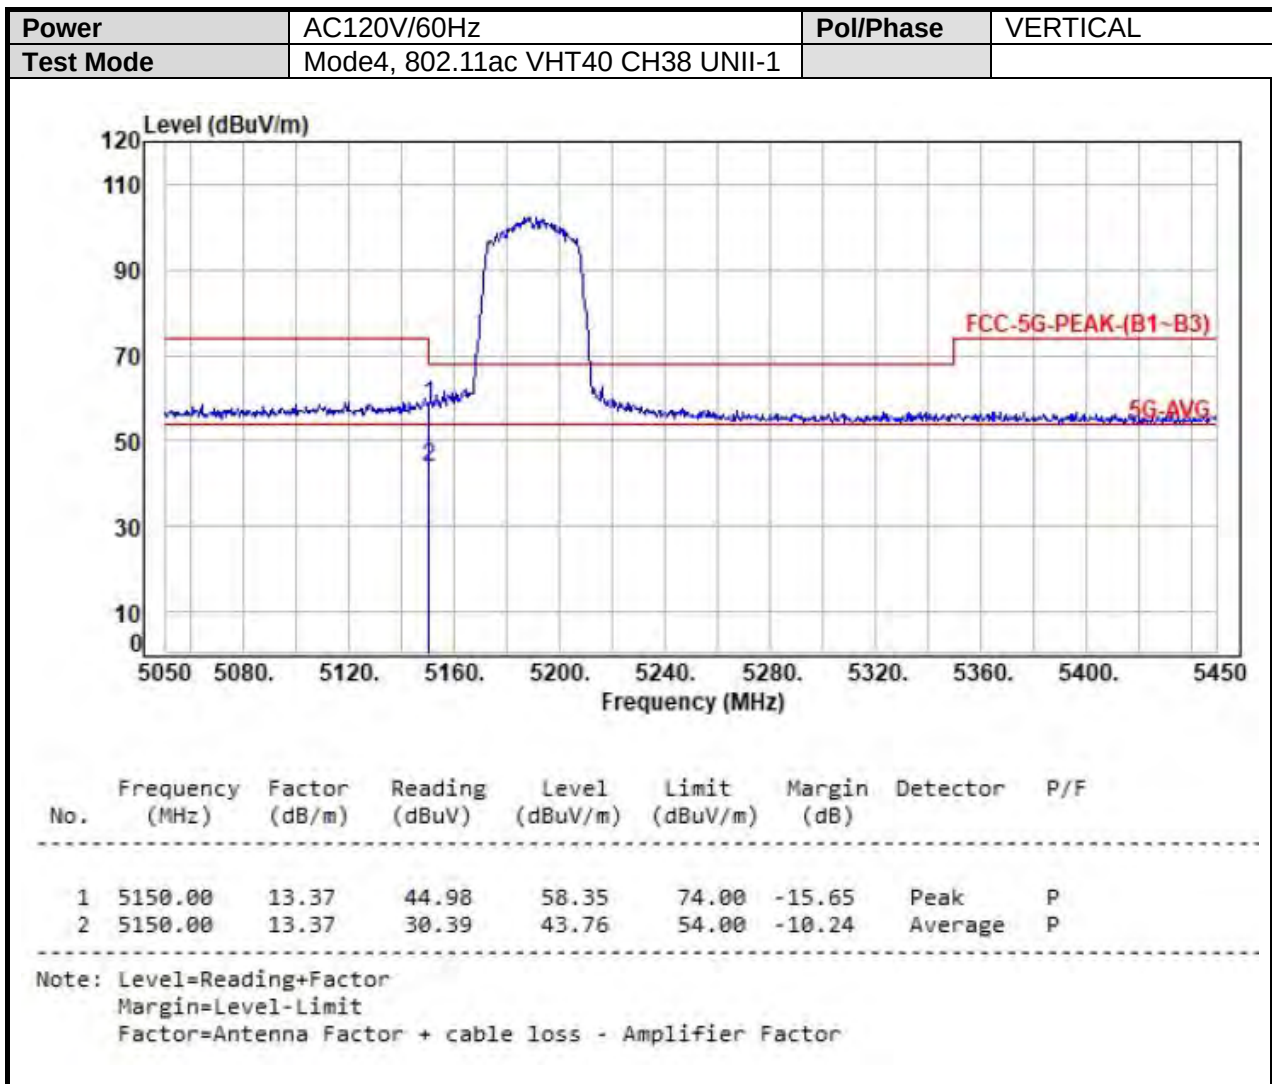


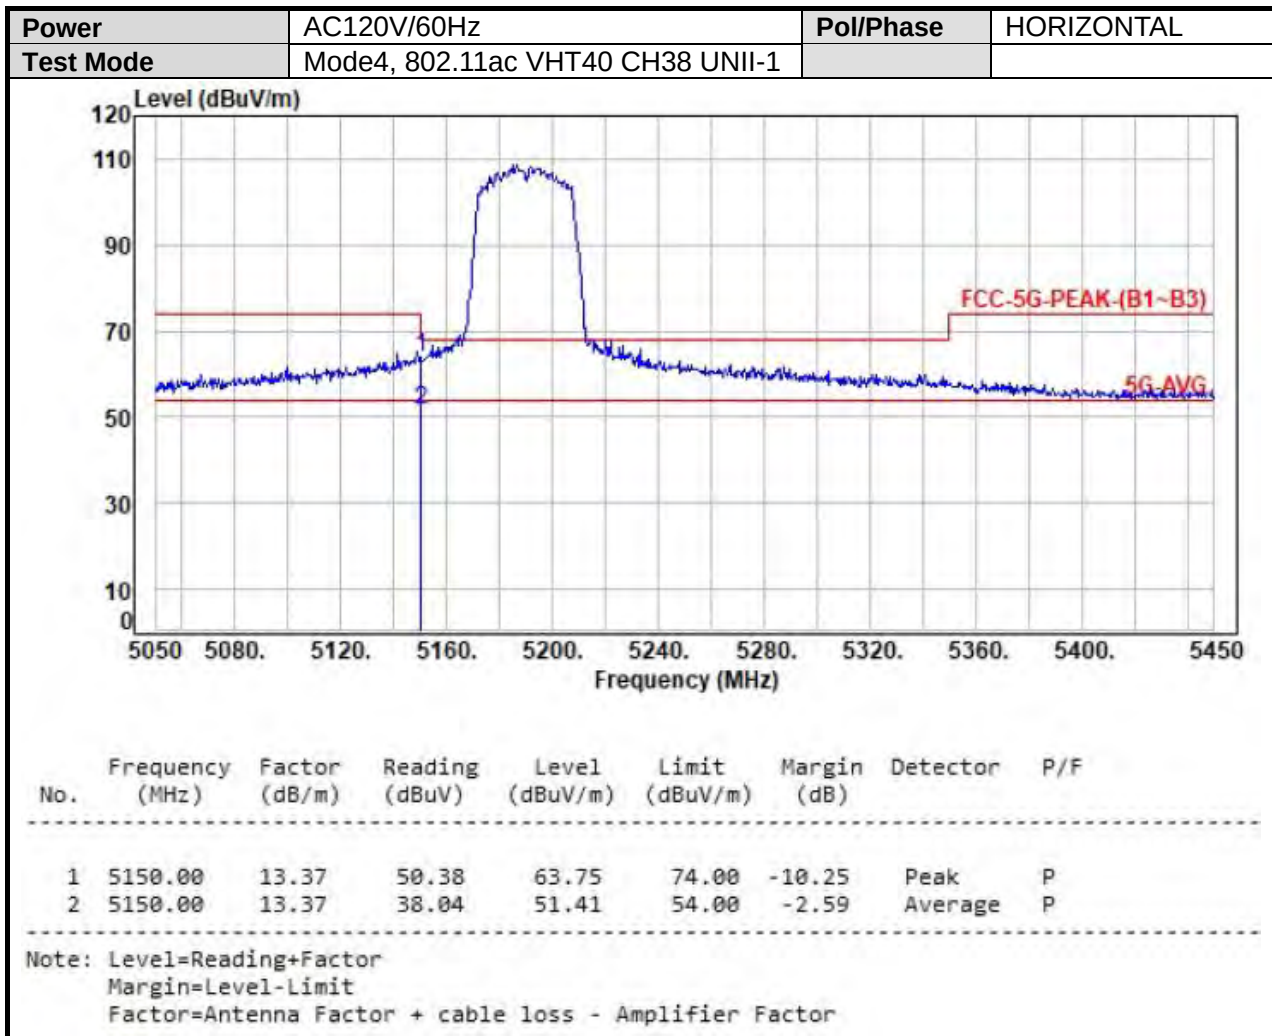


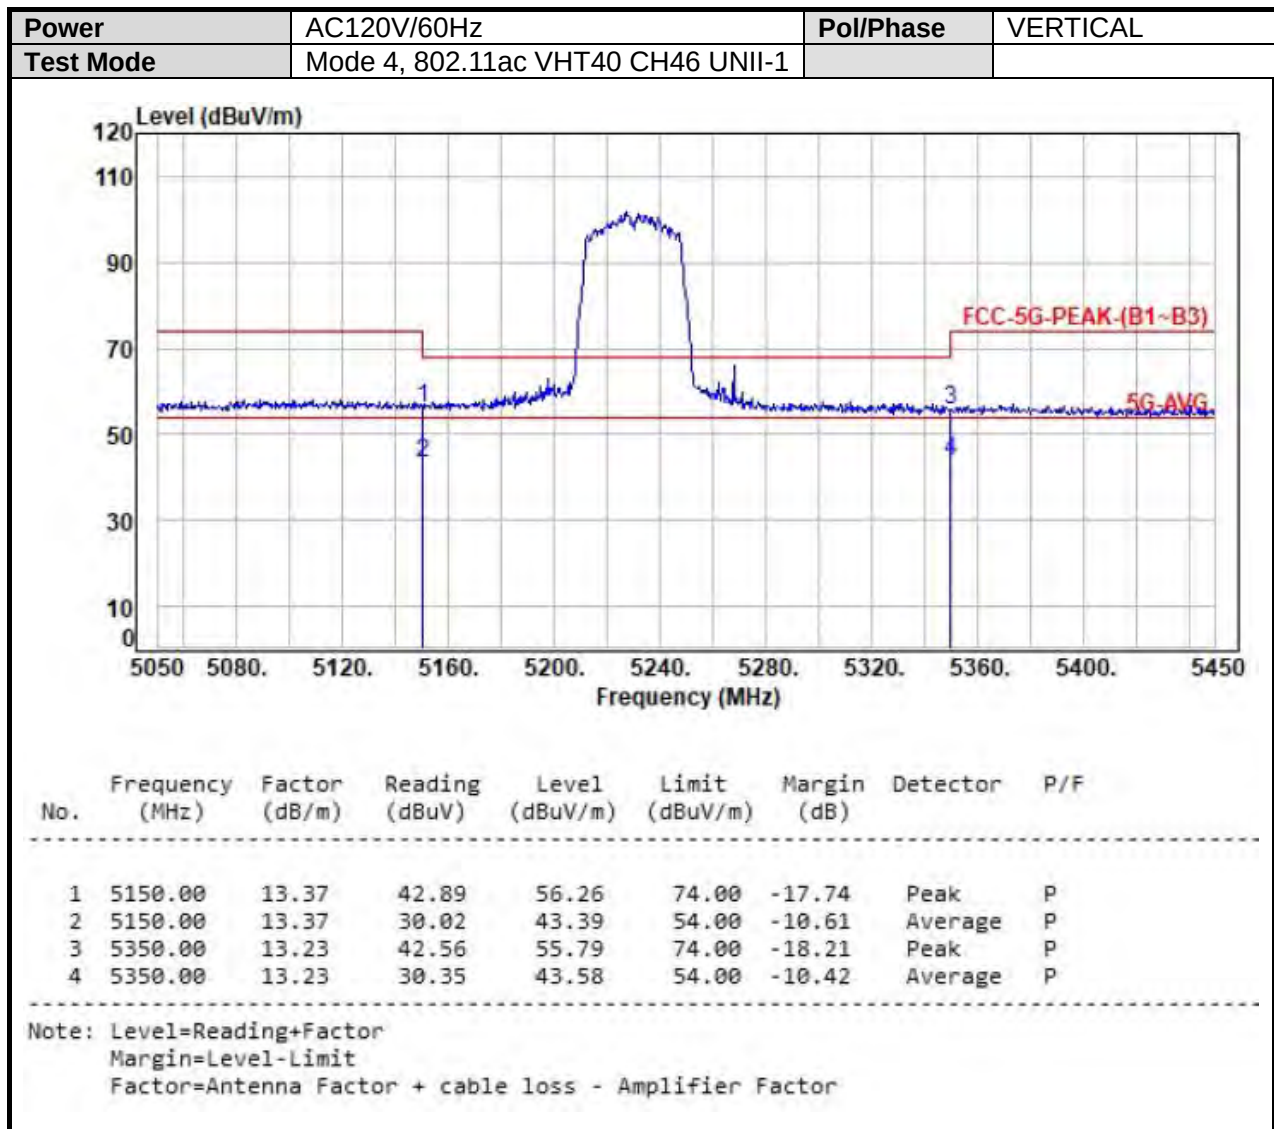


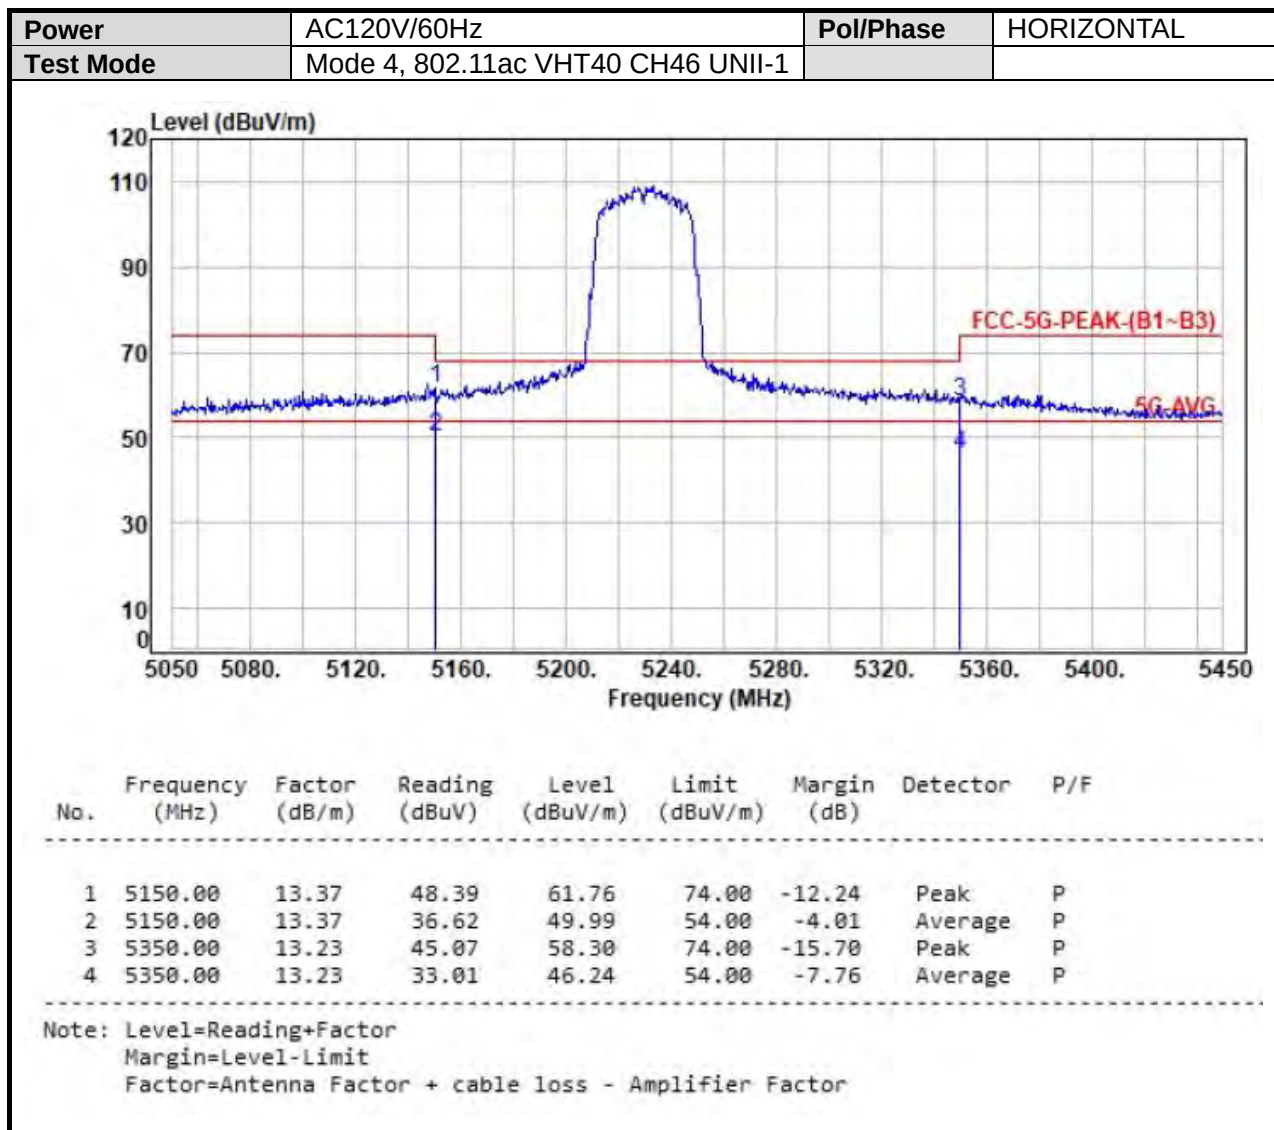


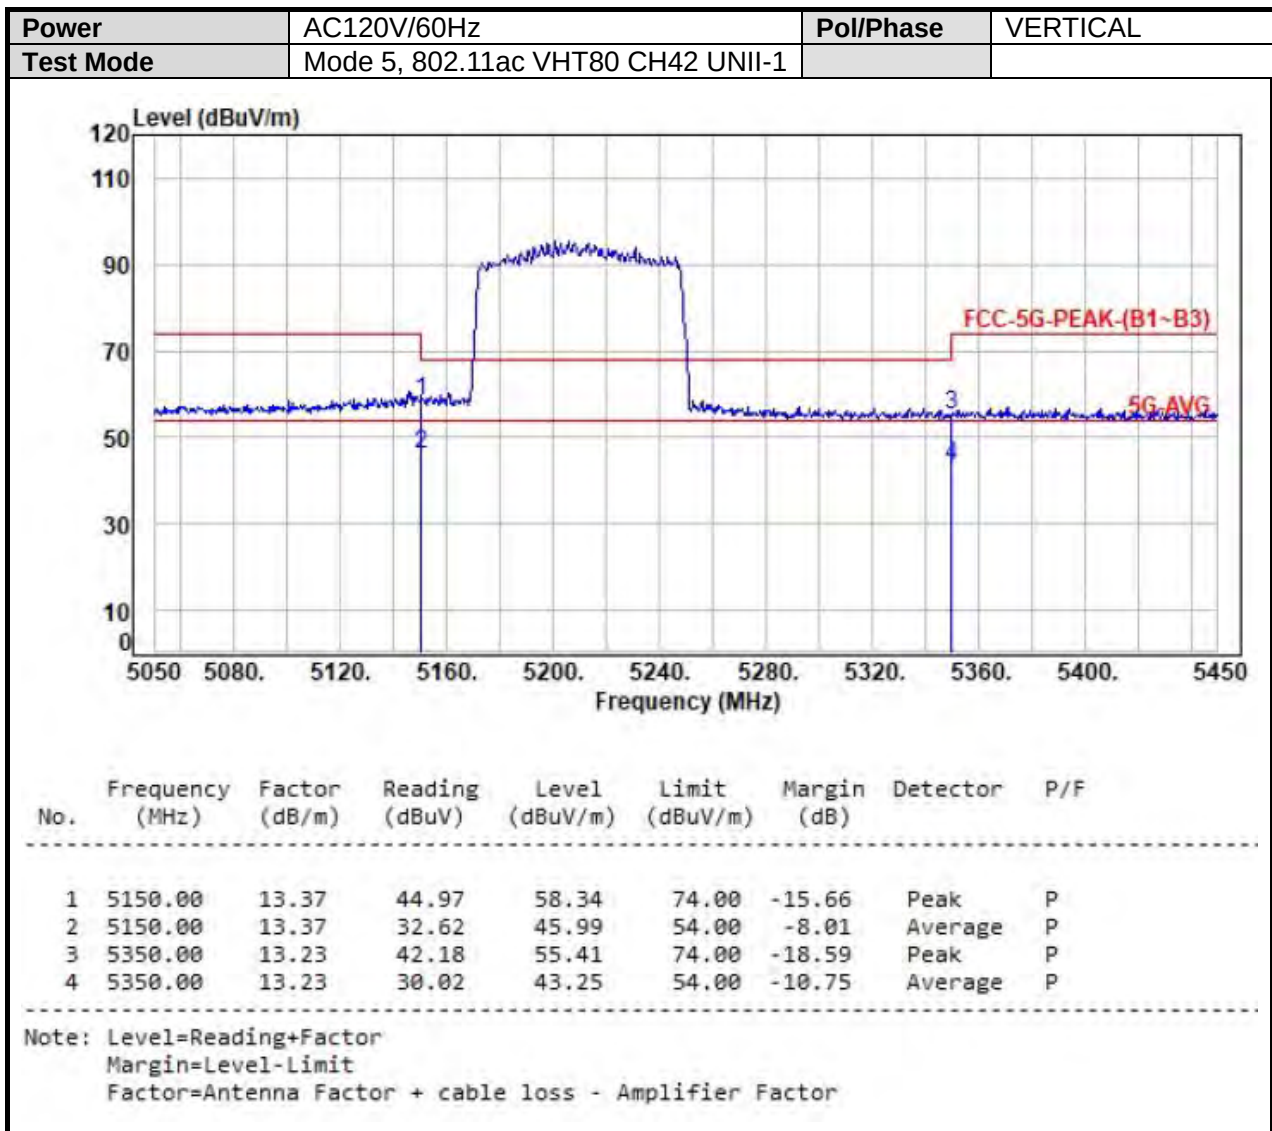


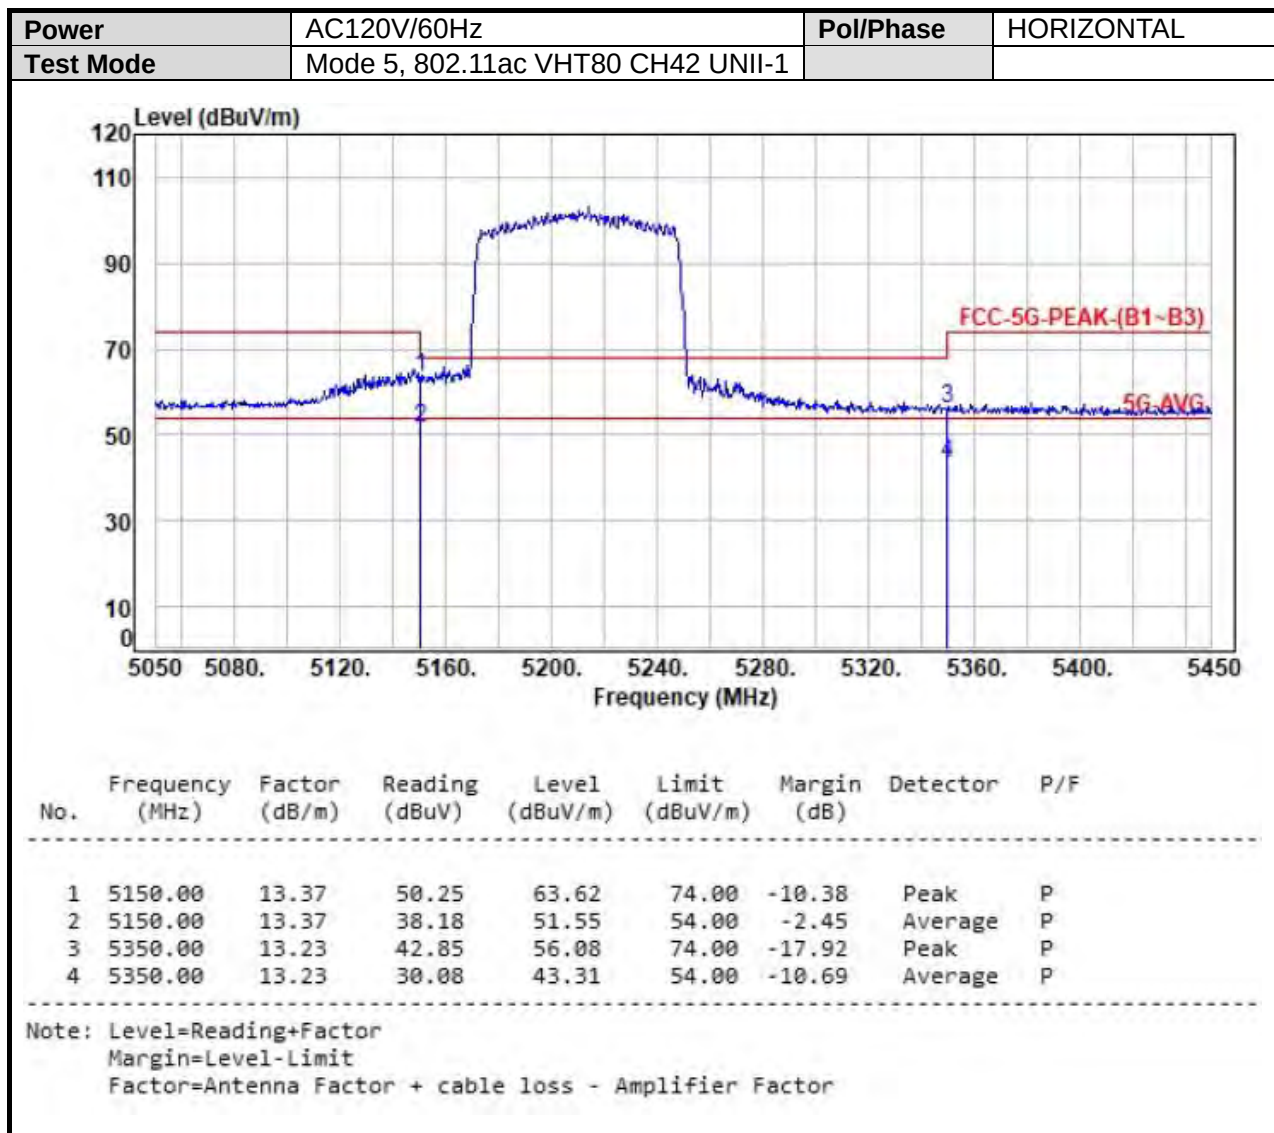


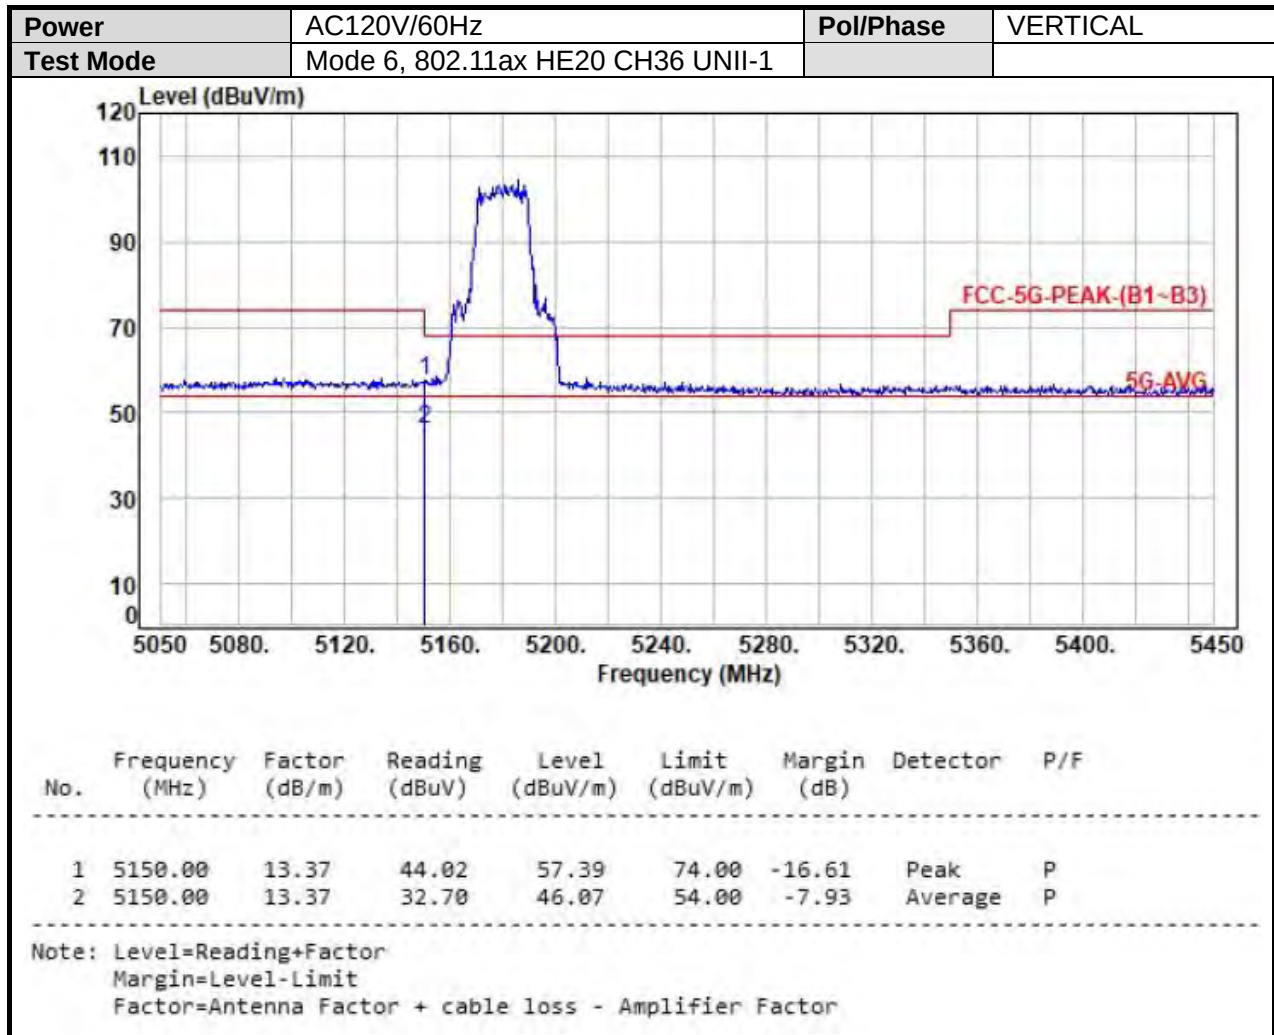


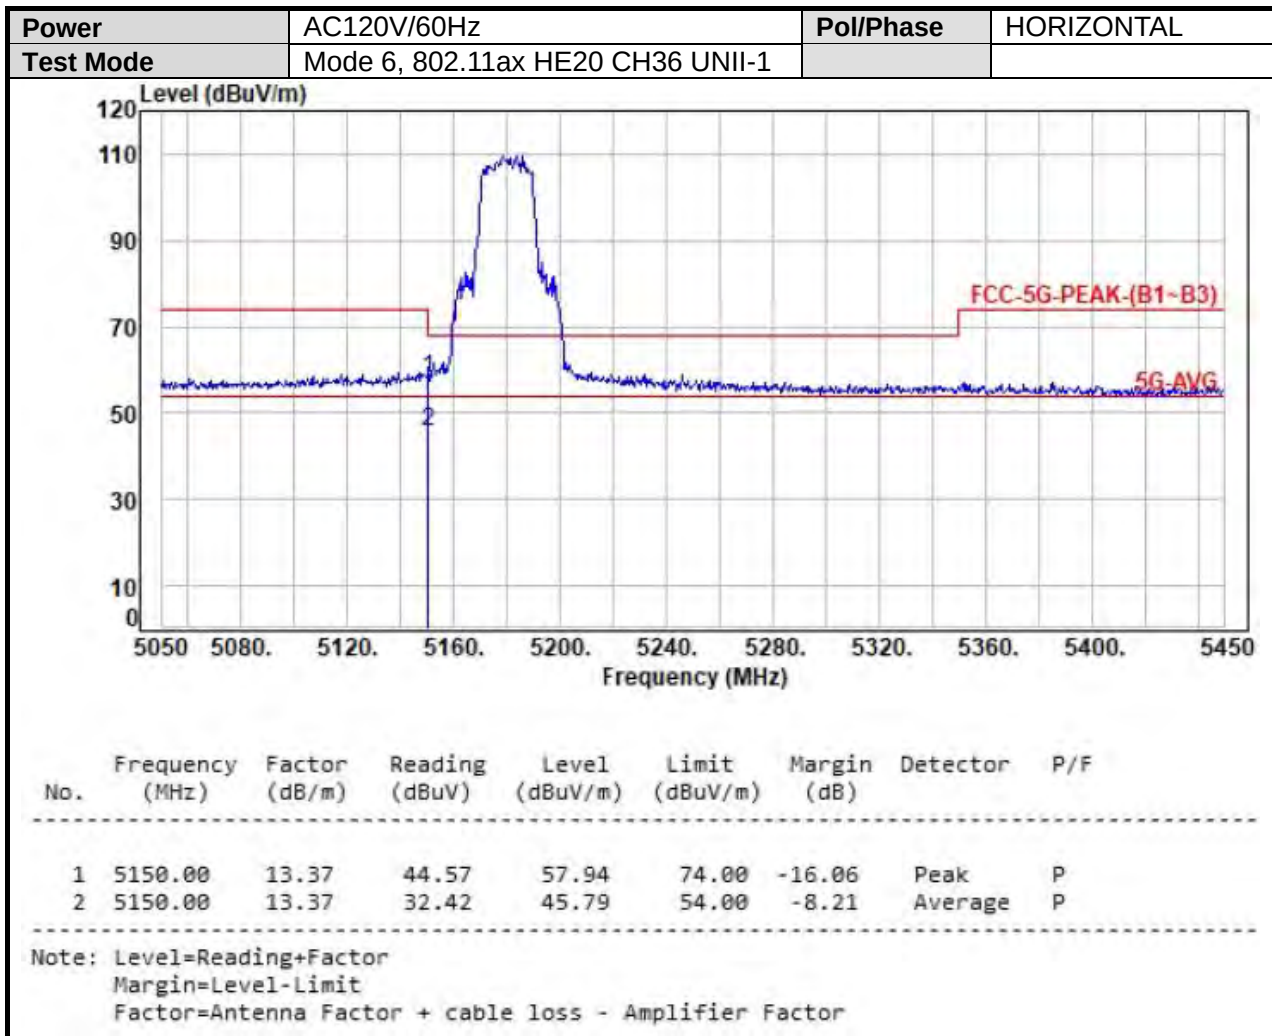


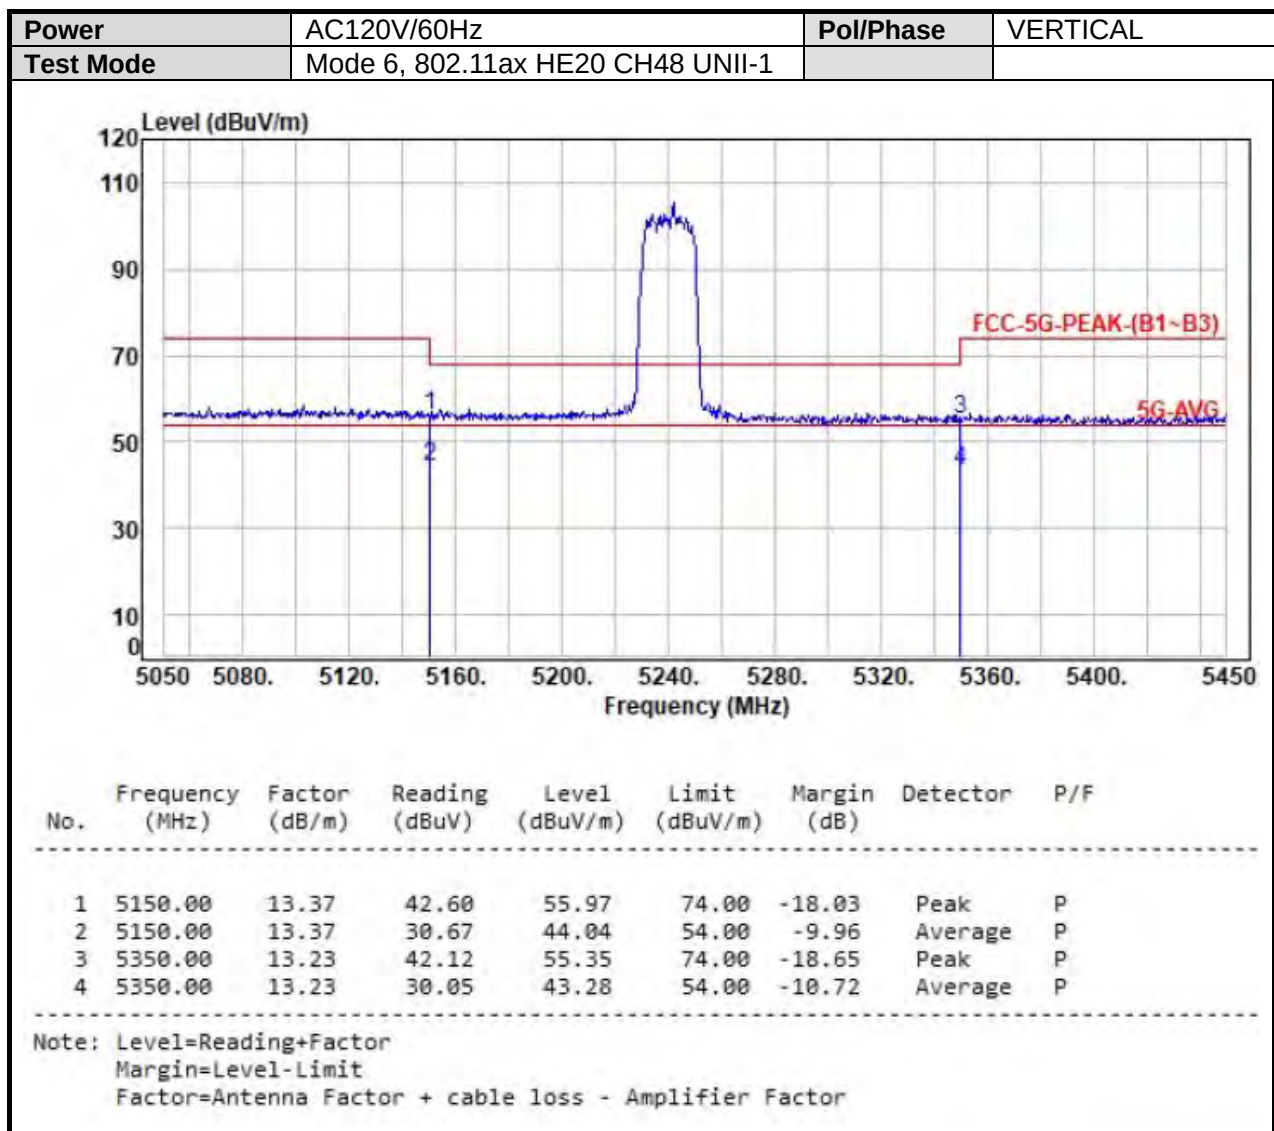


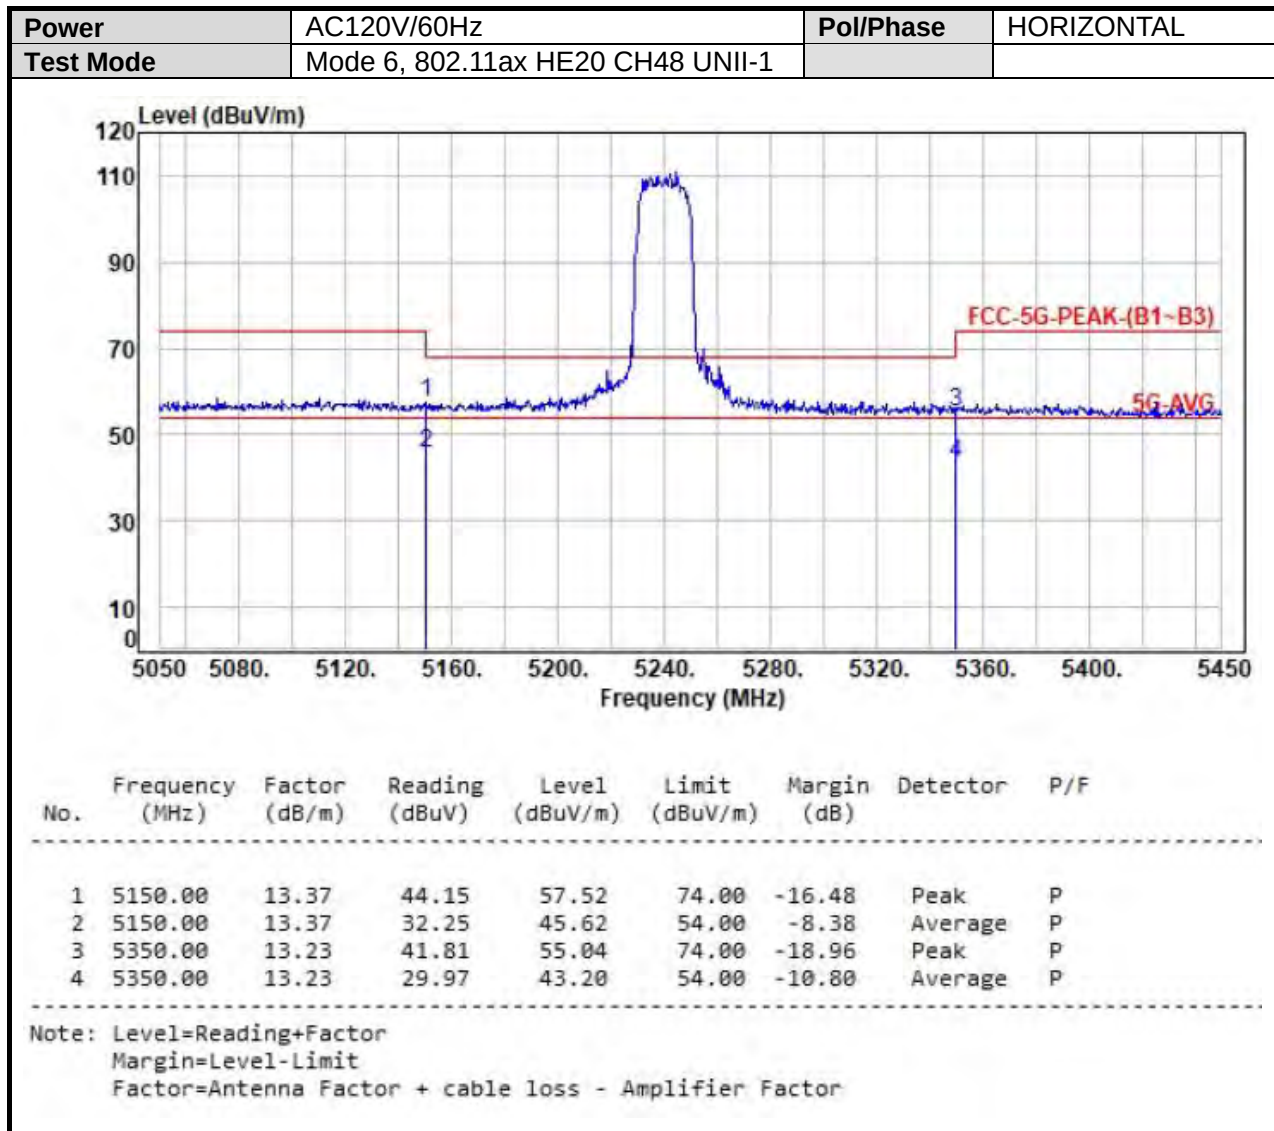


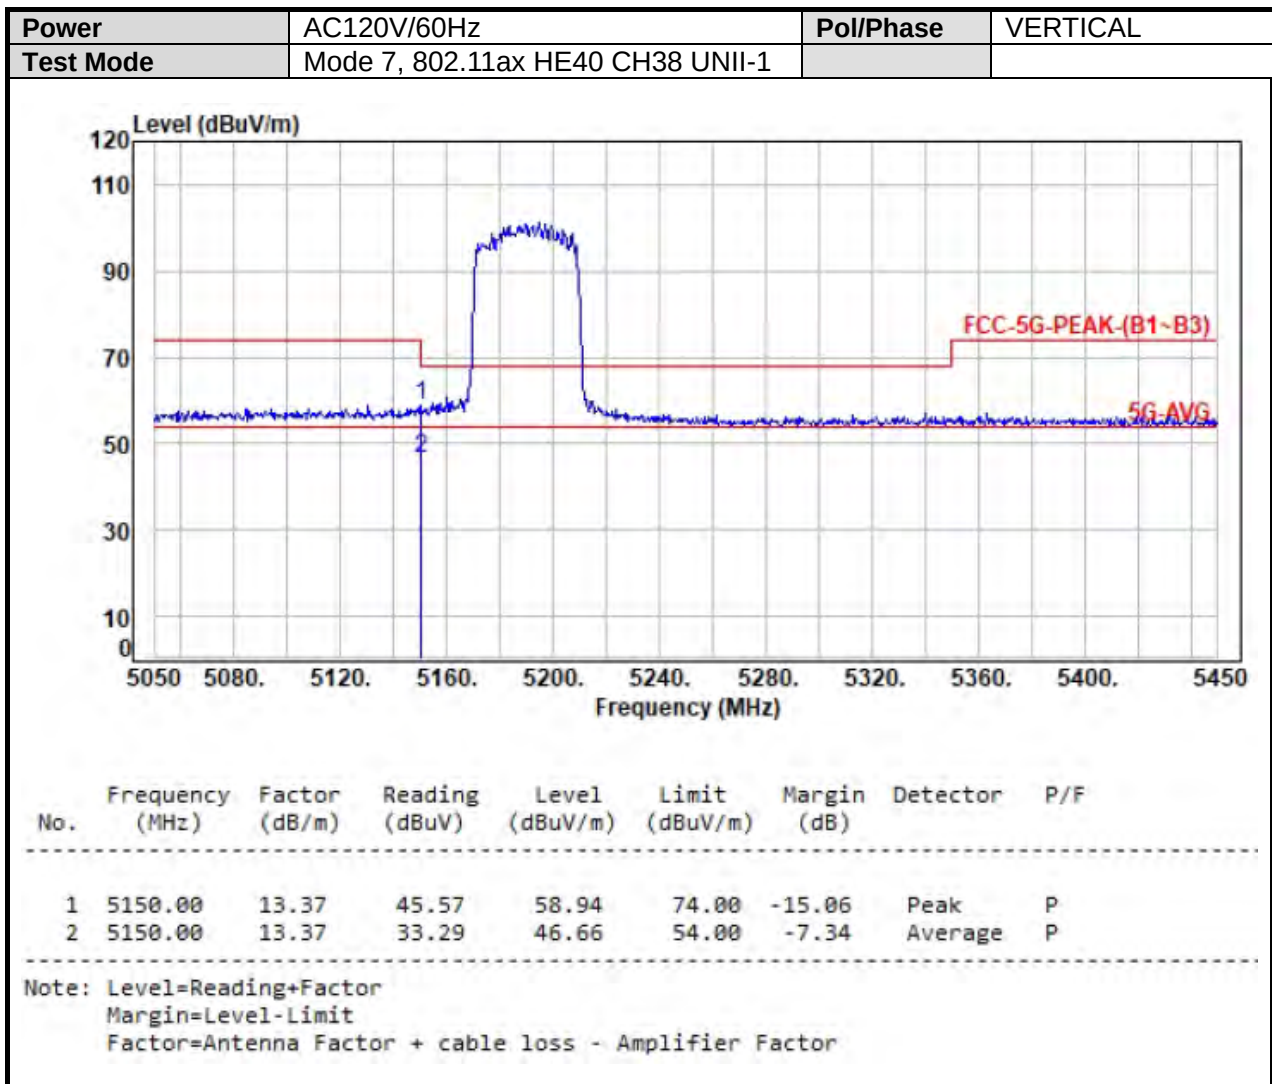


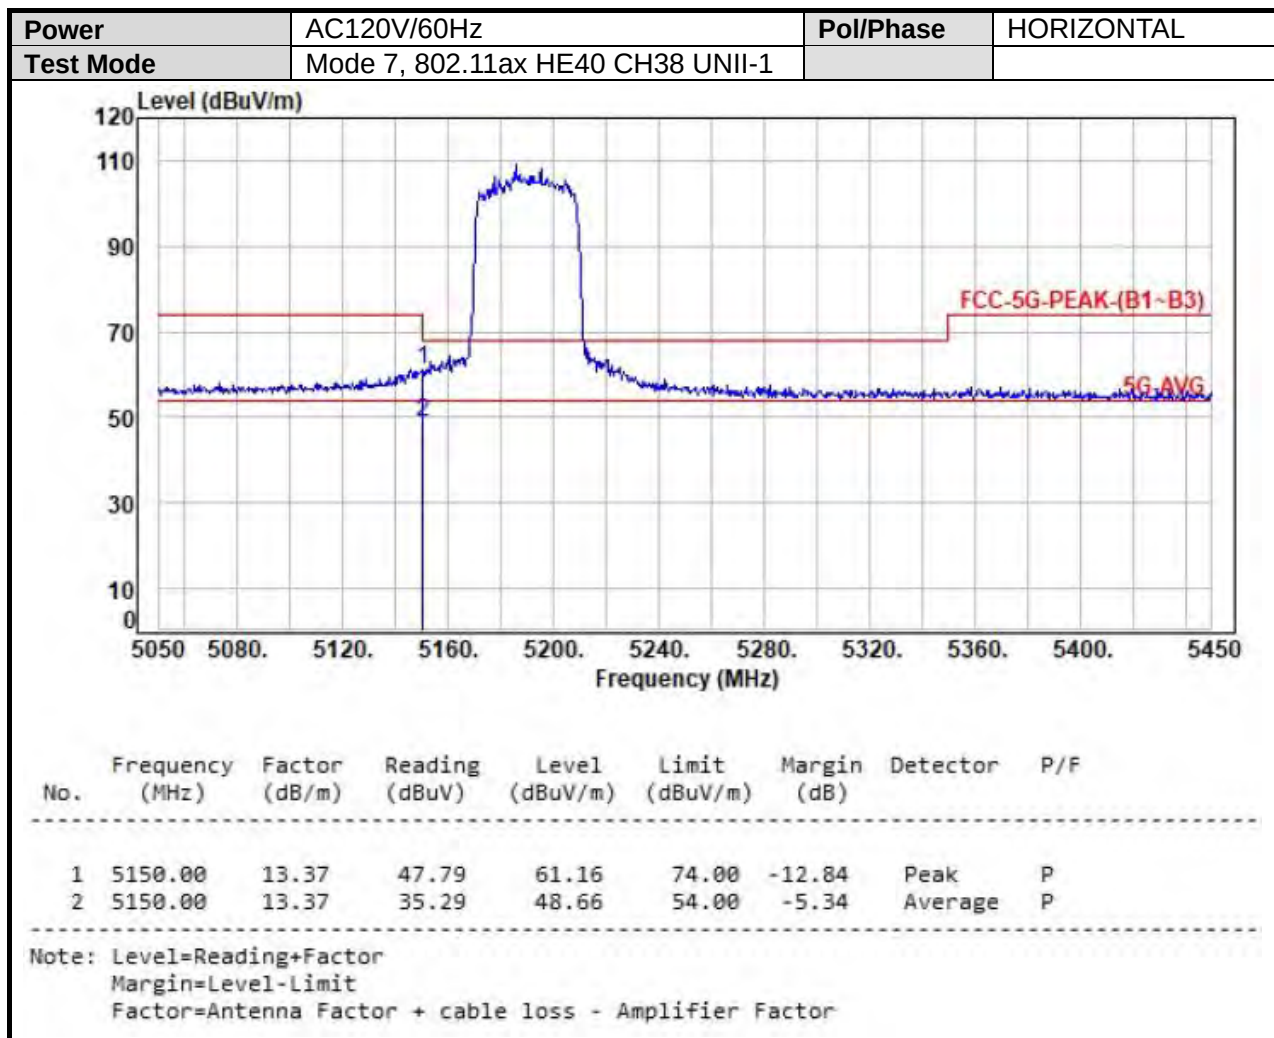

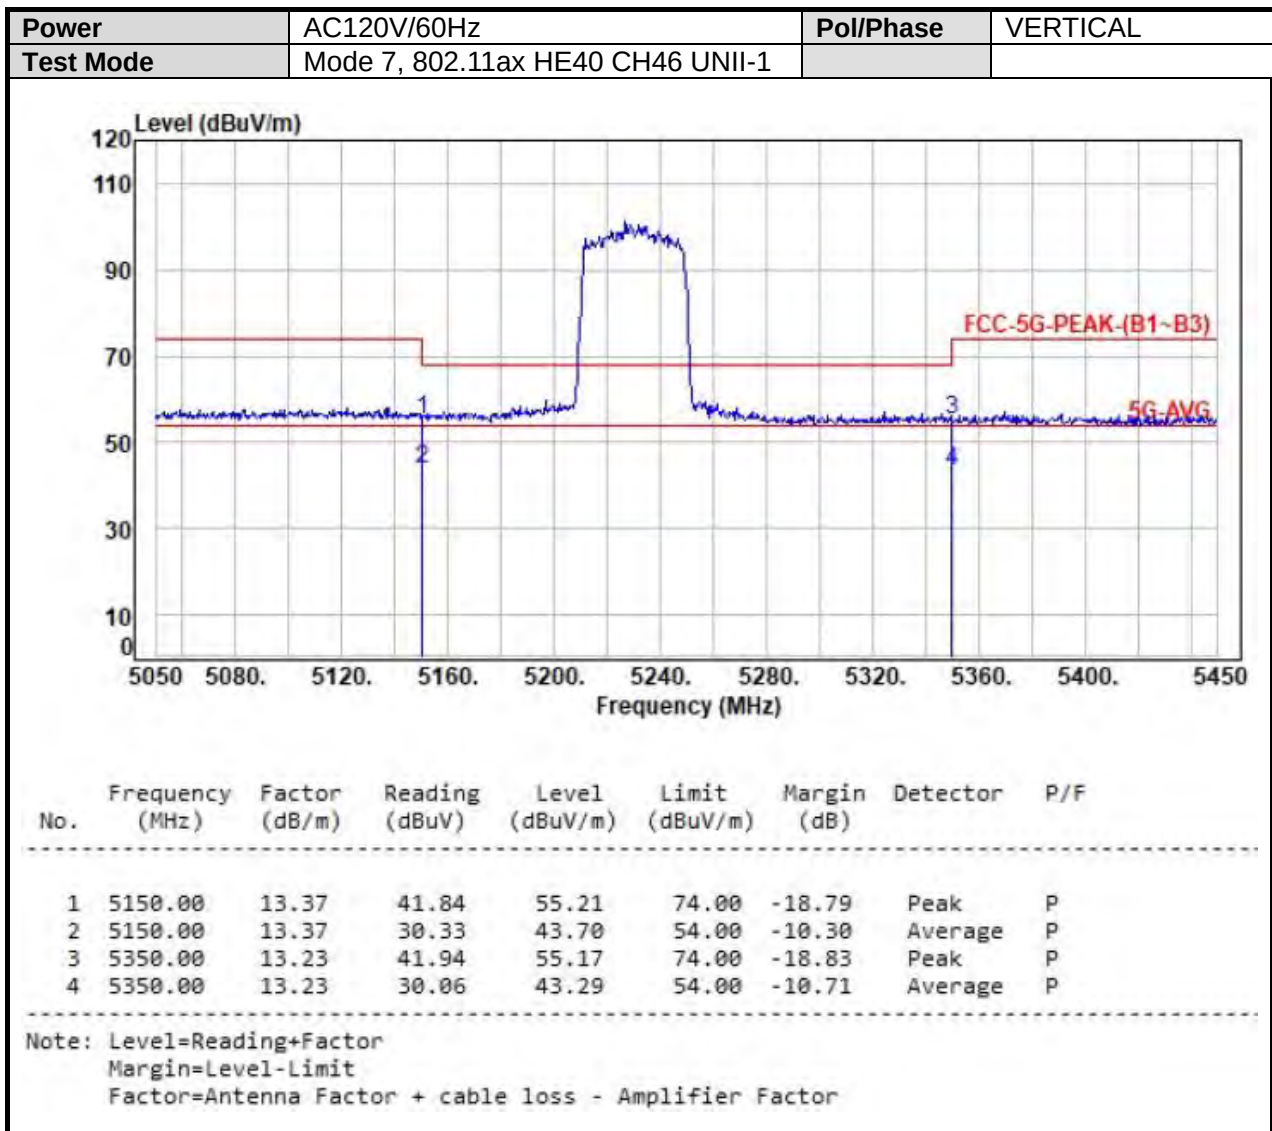

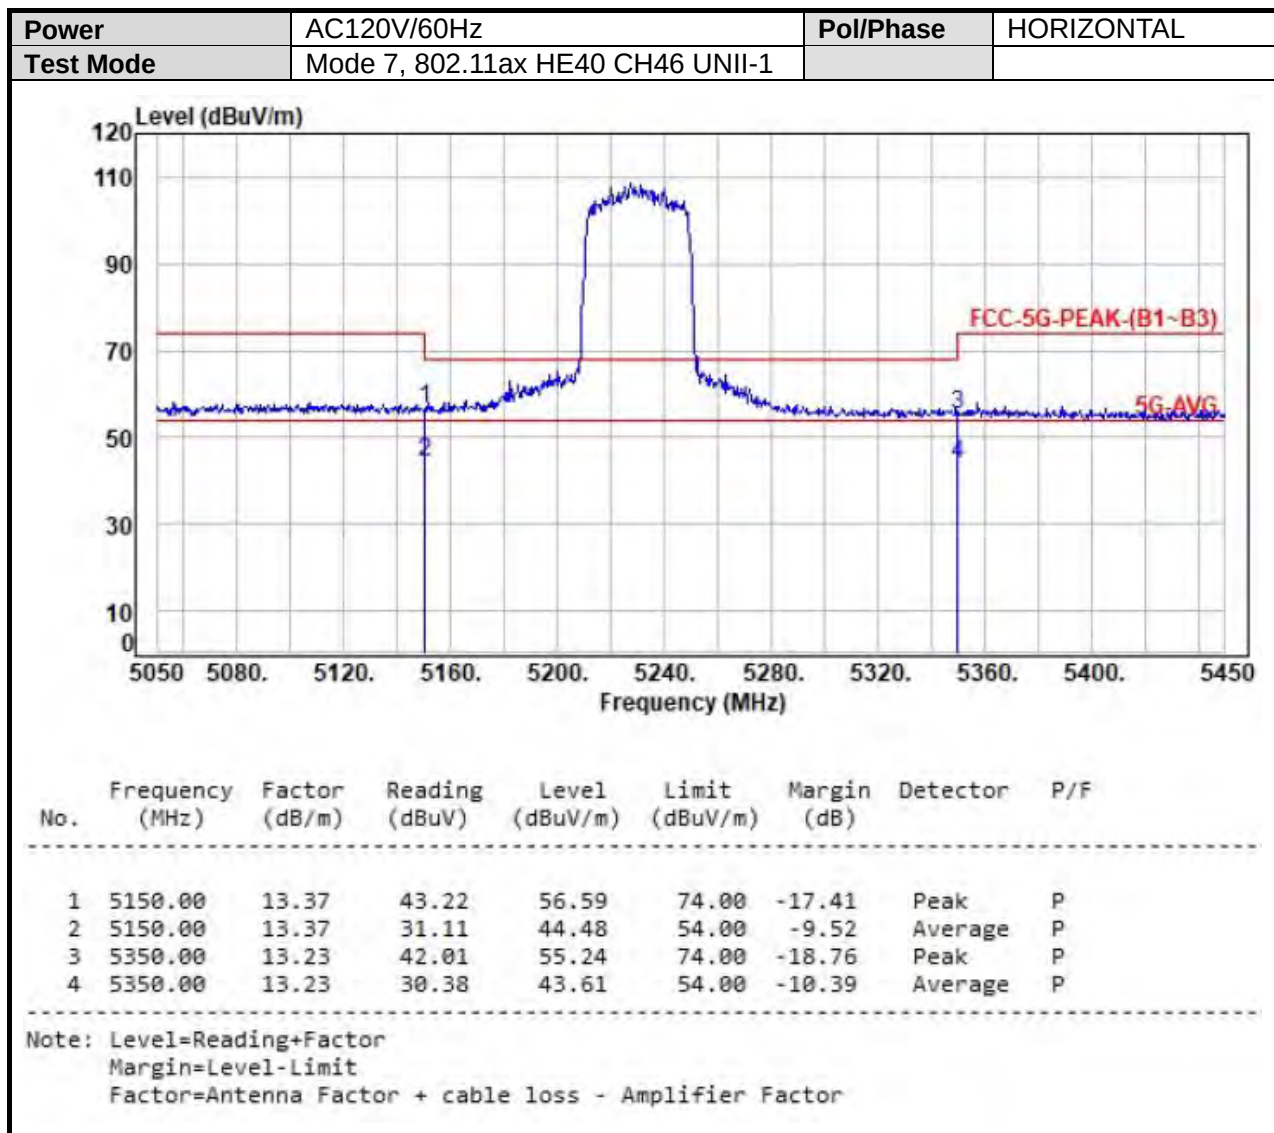

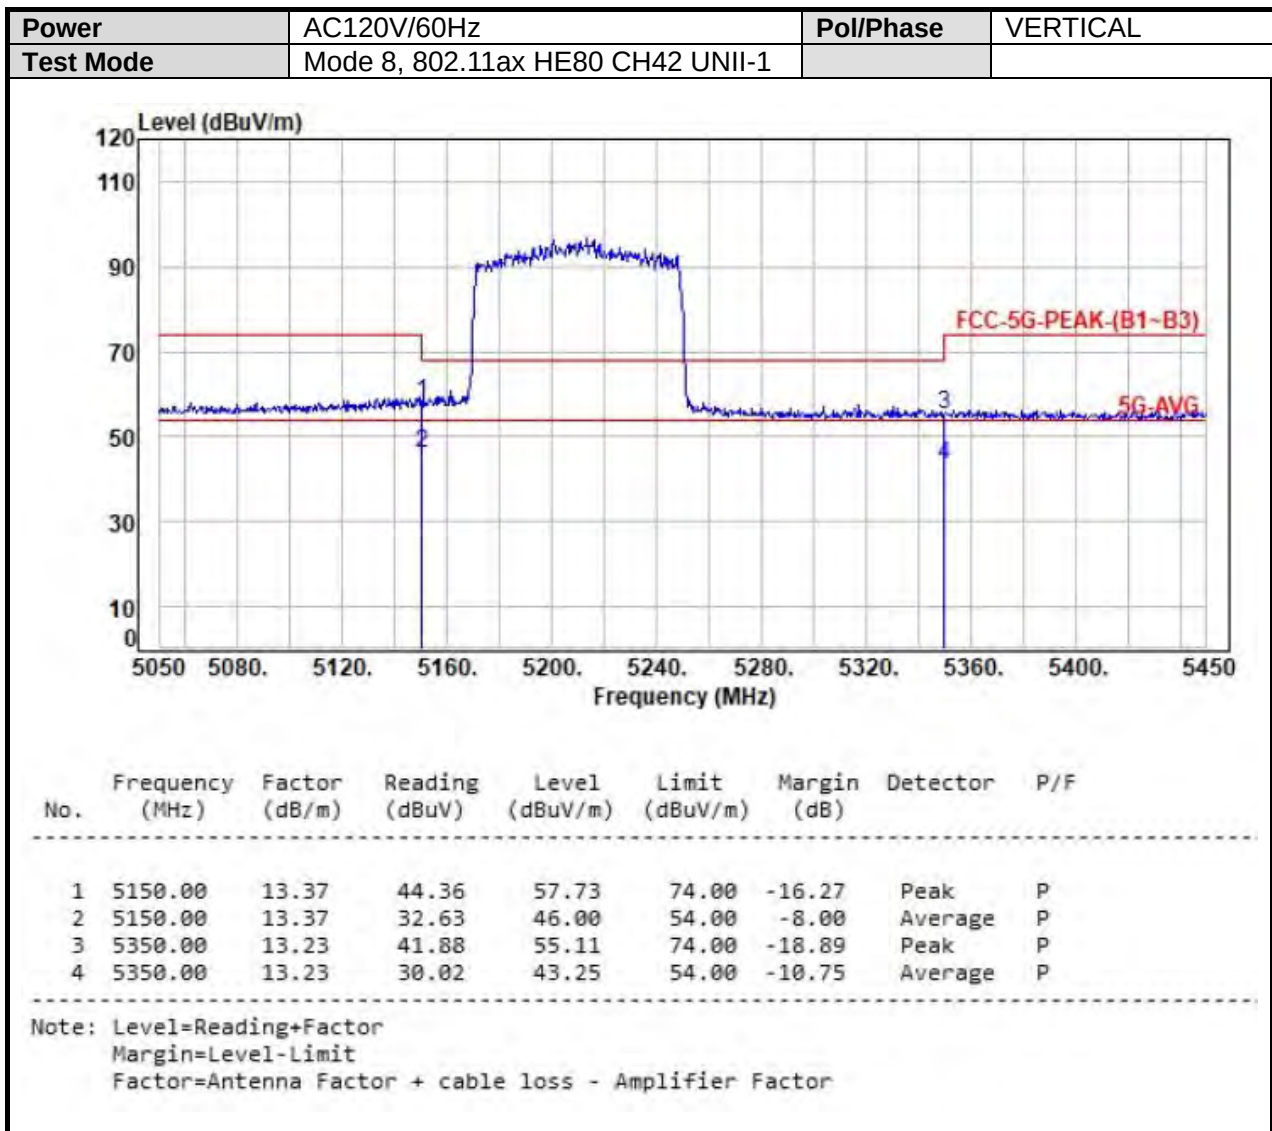

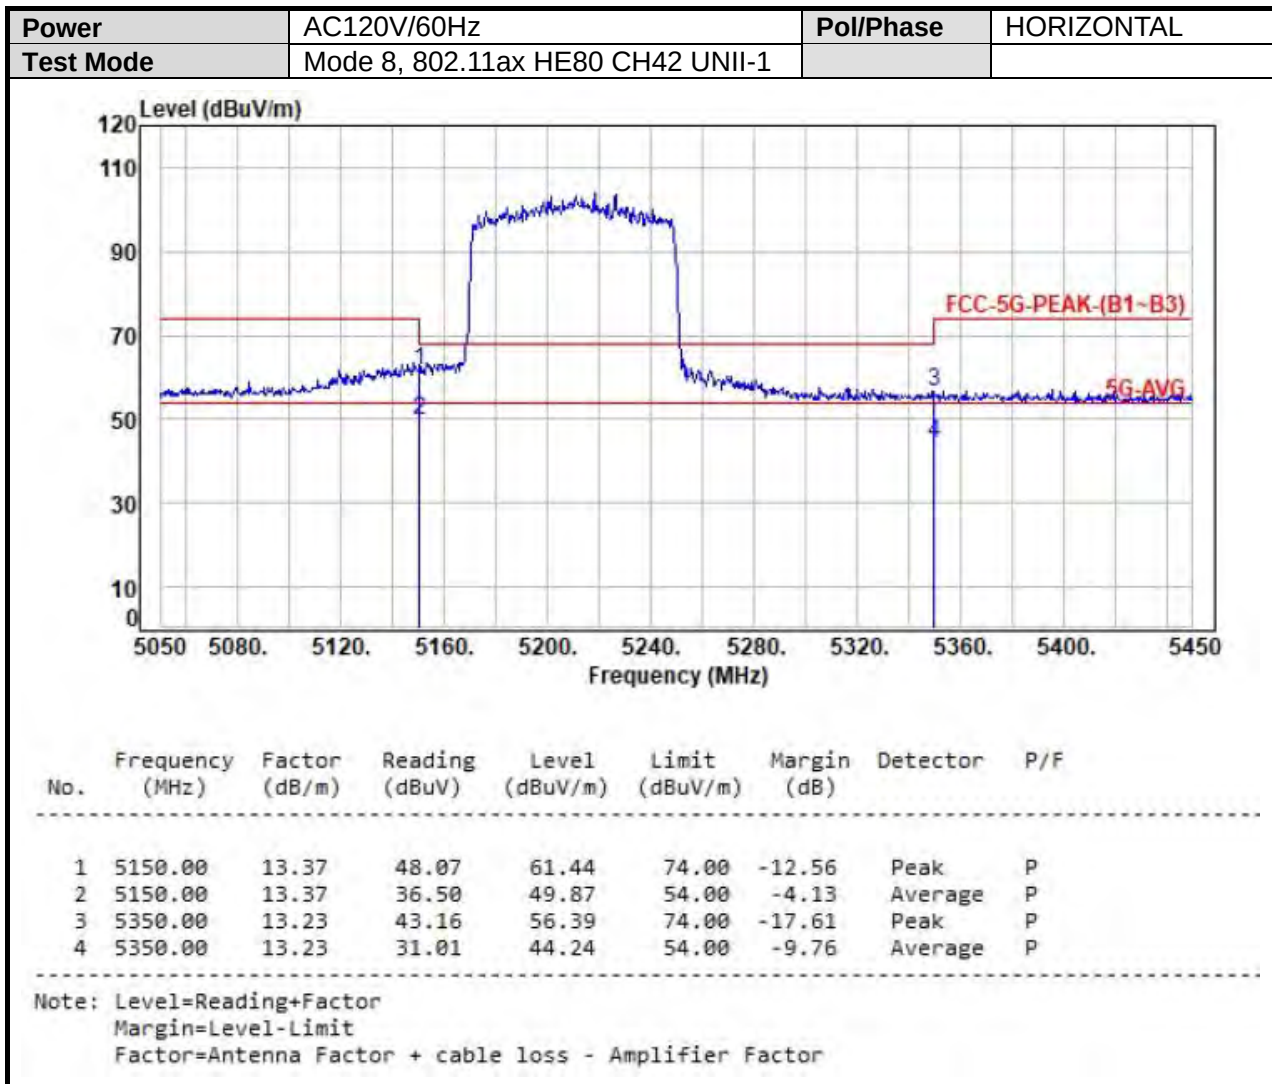




SISO-Ant B

UNII-2A

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH52 UNII-2A		

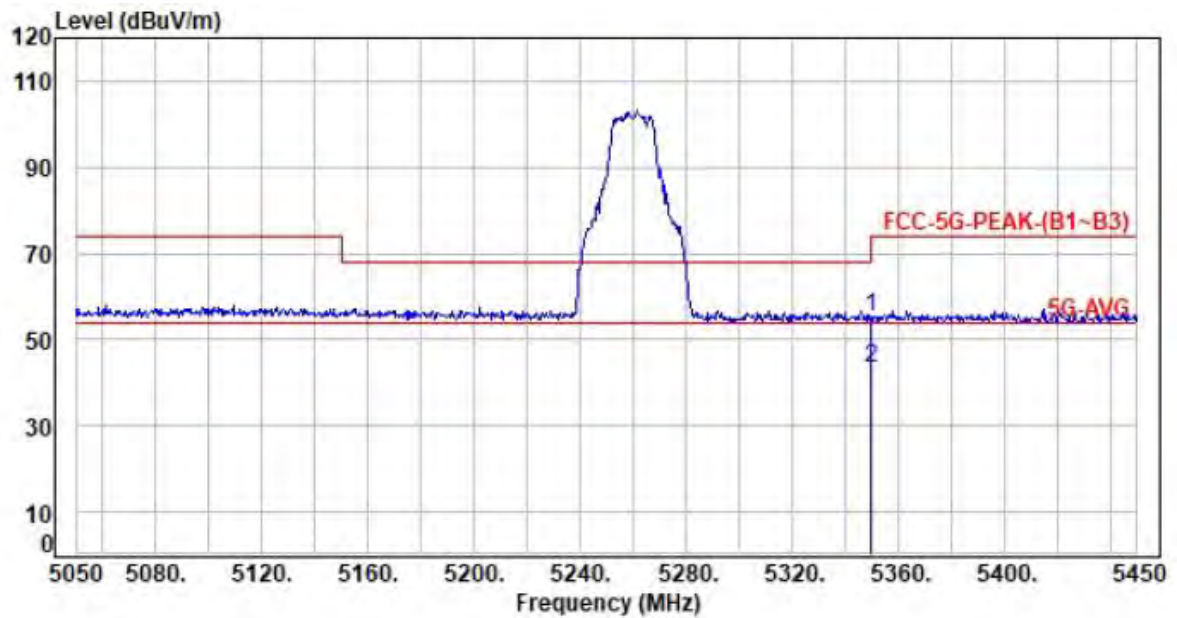

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	13.23	41.97	55.20	74.00	-18.80	Peak	P
2	5350.00	13.23	30.10	43.33	54.00	-10.67	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, 802.11a CH52 UNII-2A		

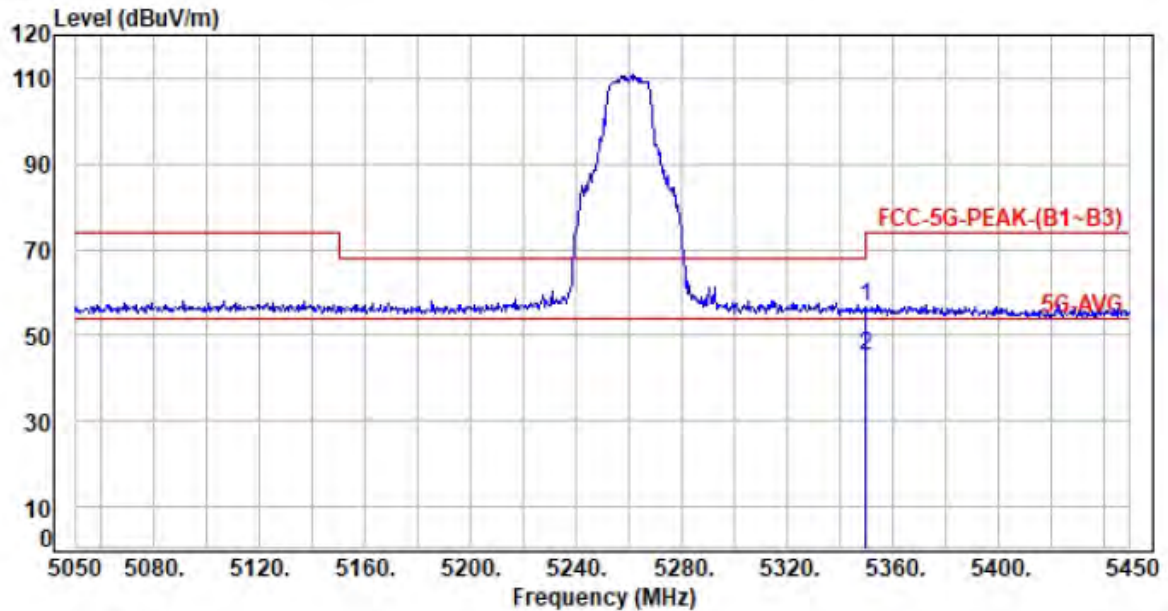



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	13.23	43.38	56.61	74.00	-17.39	Peak	P
2	5350.00	13.23	31.71	44.94	54.00	-9.06	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

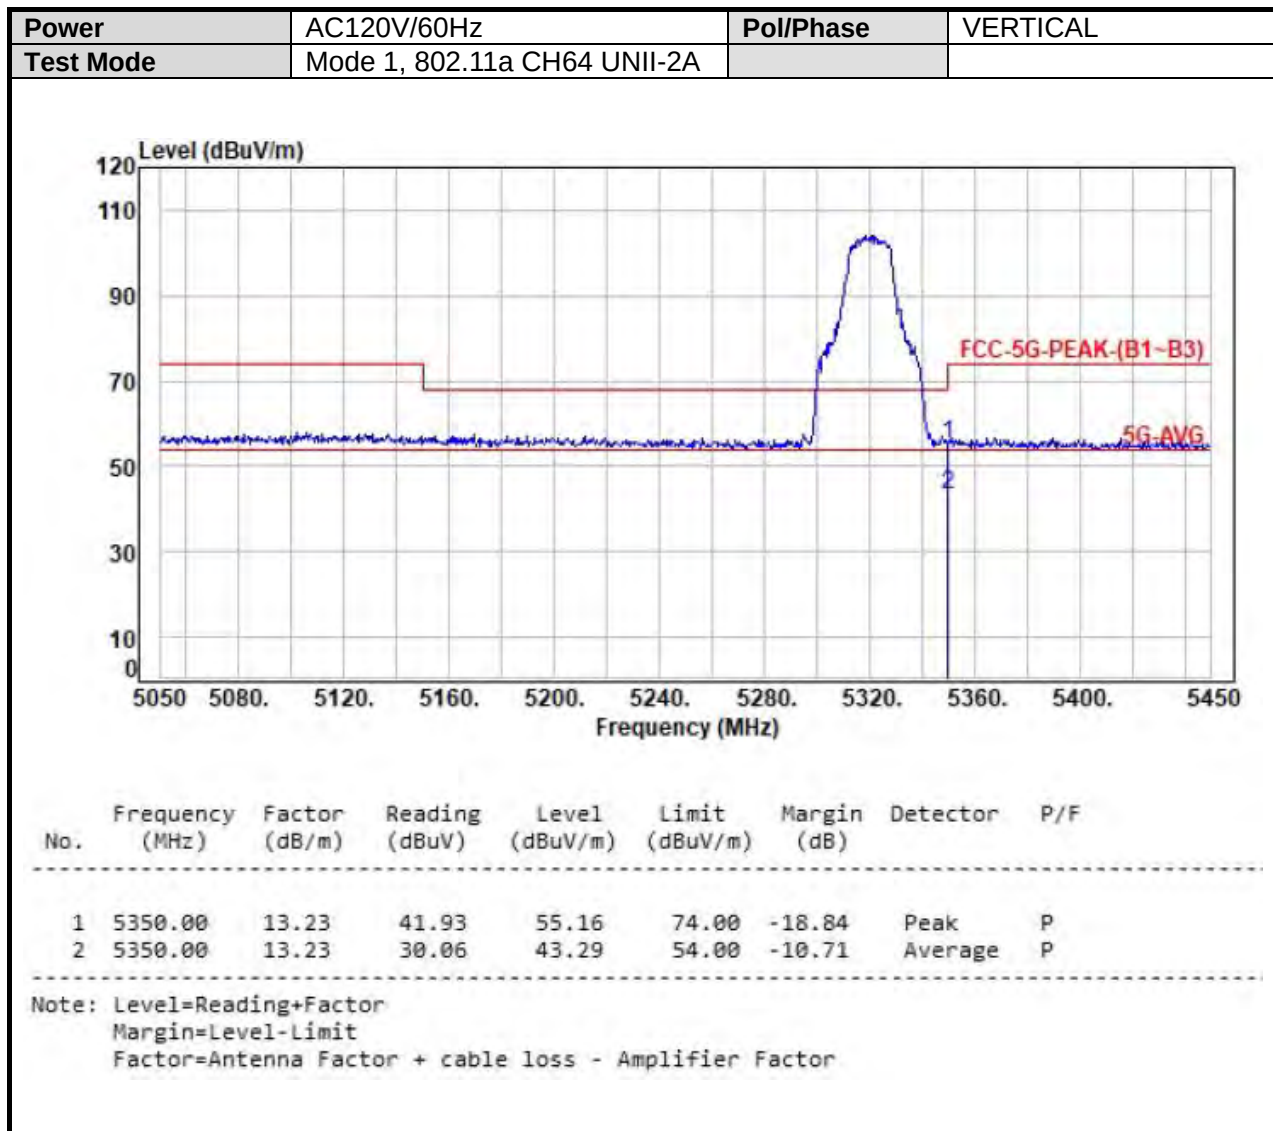


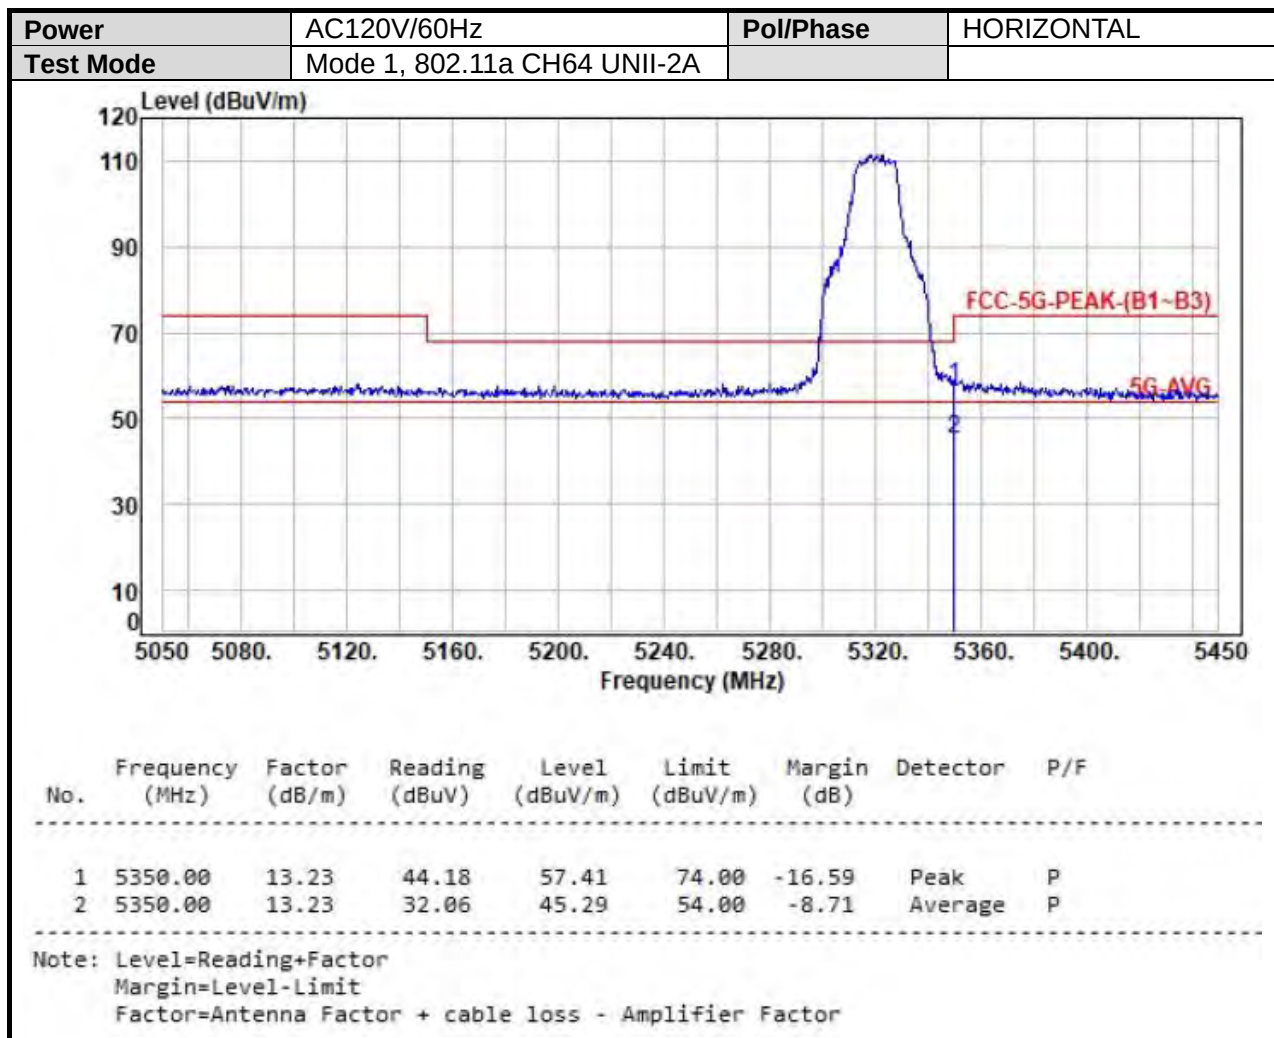


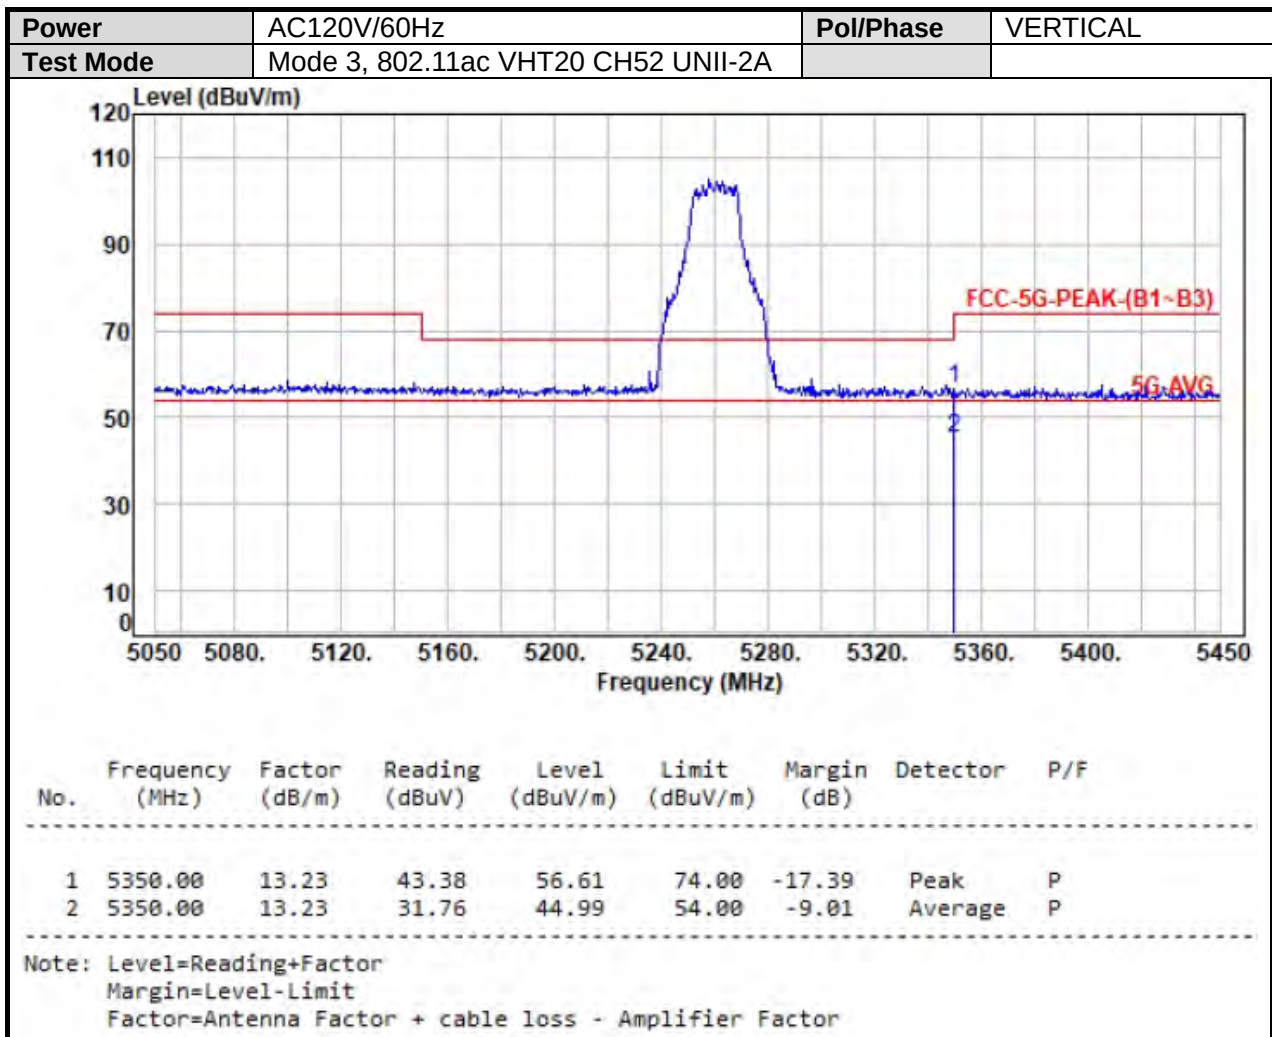


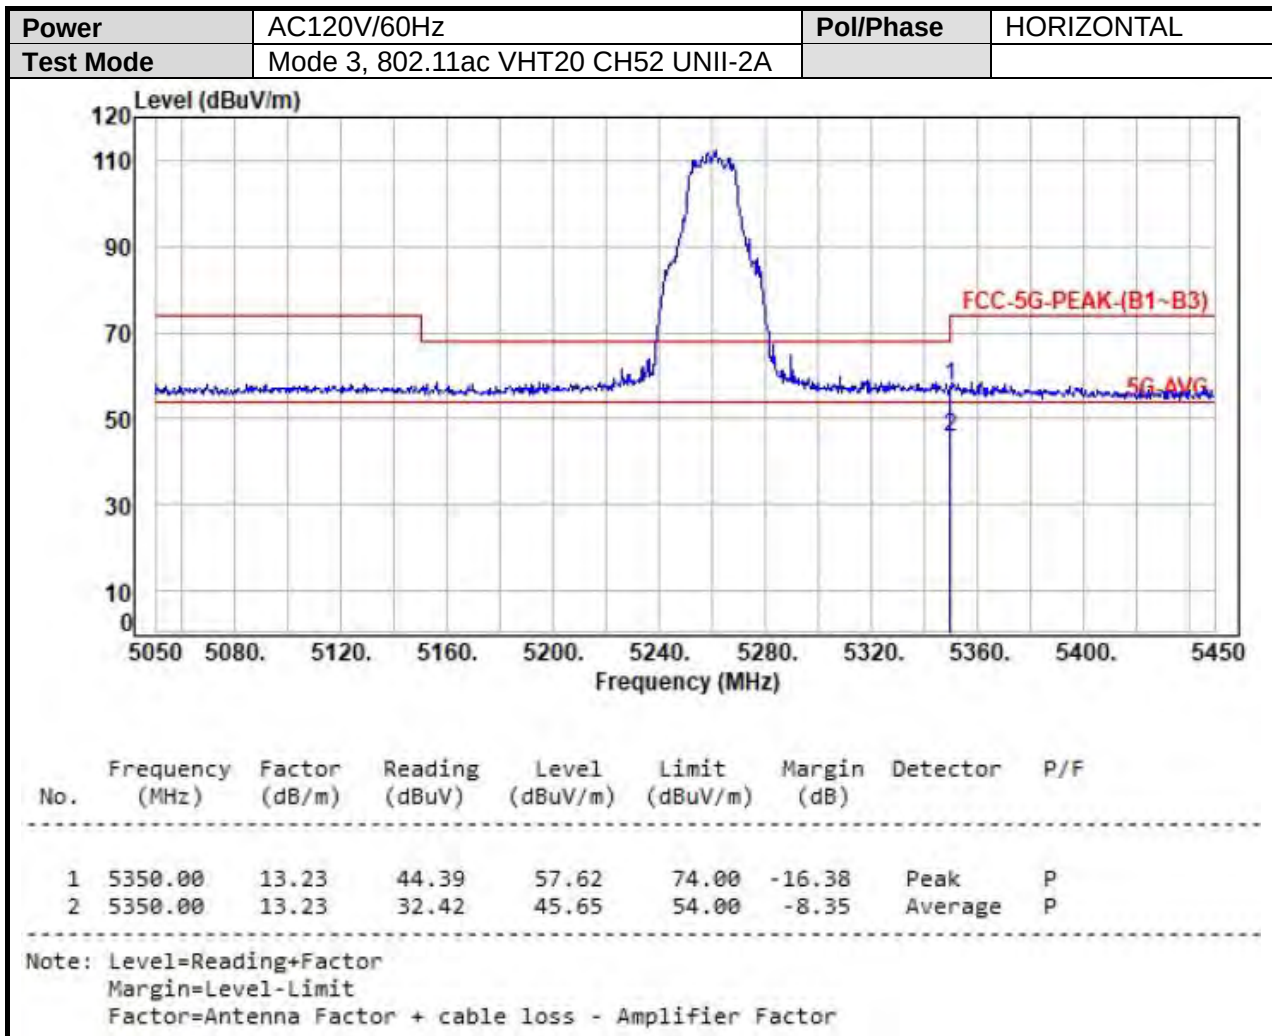


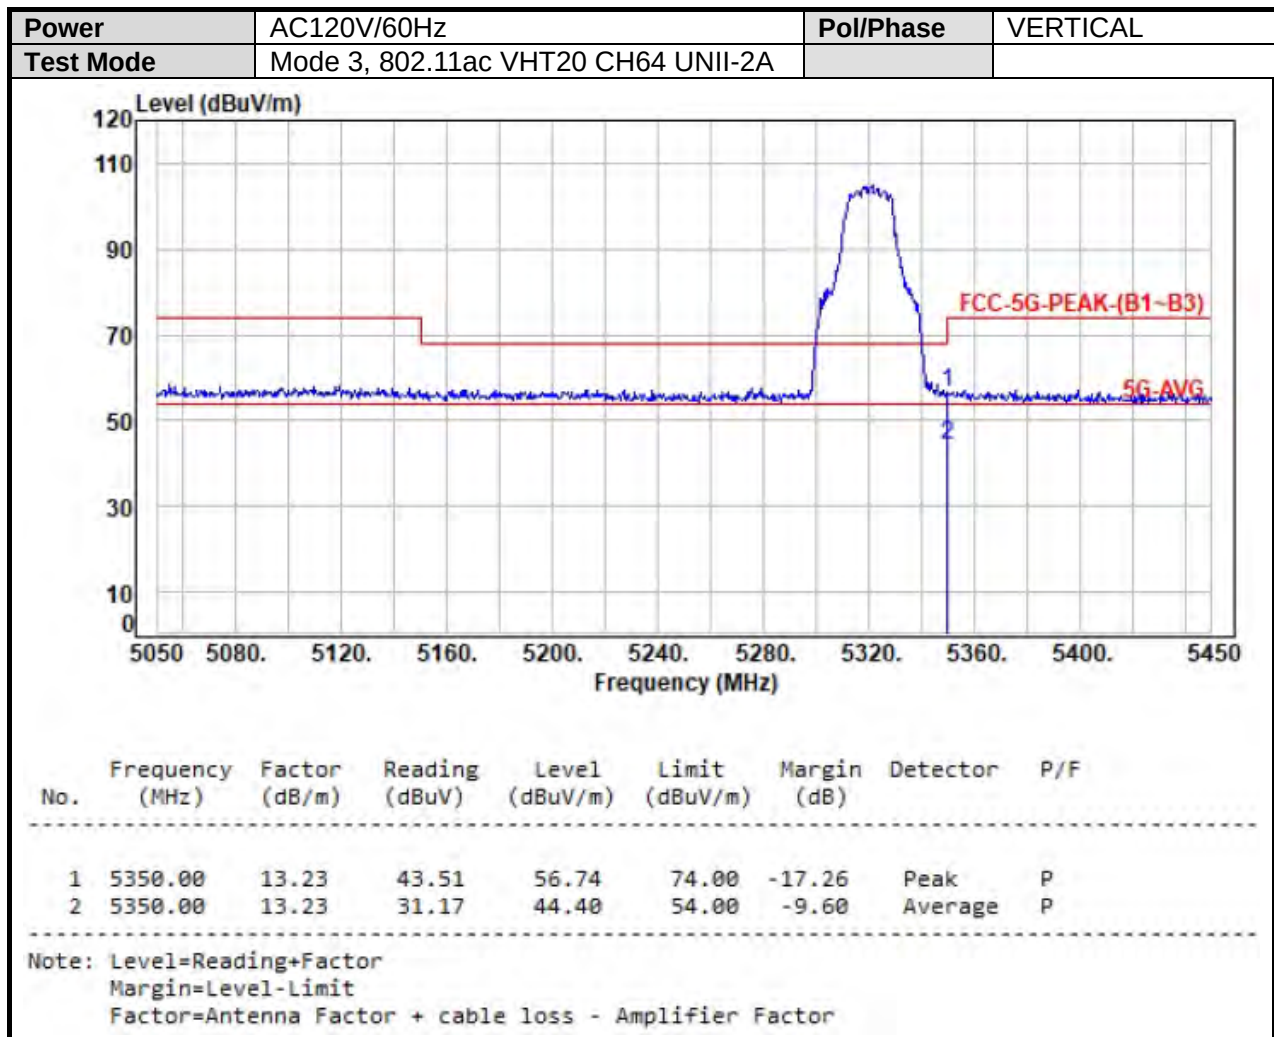


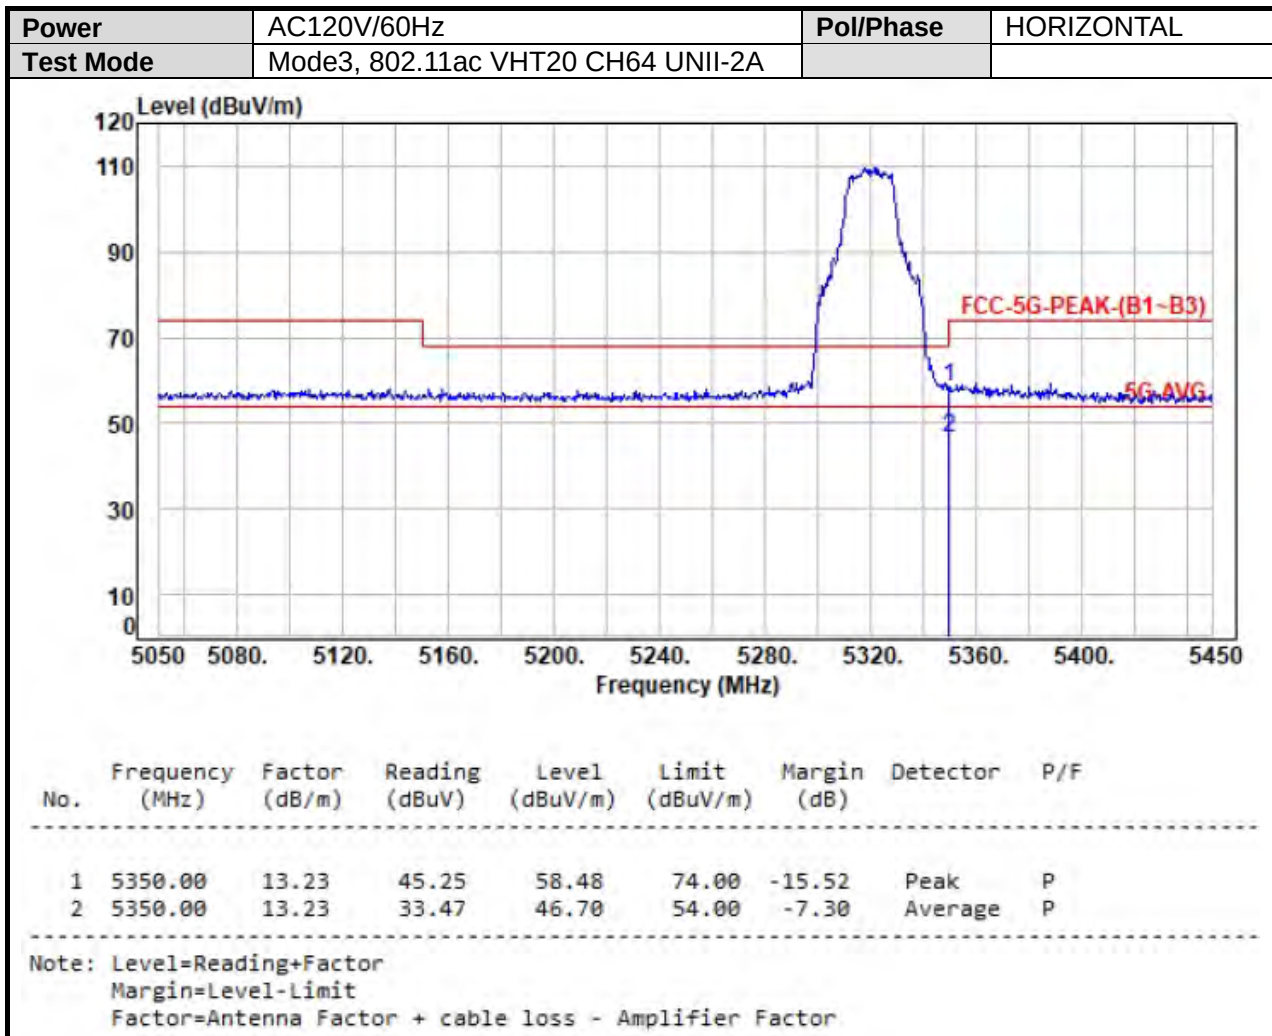


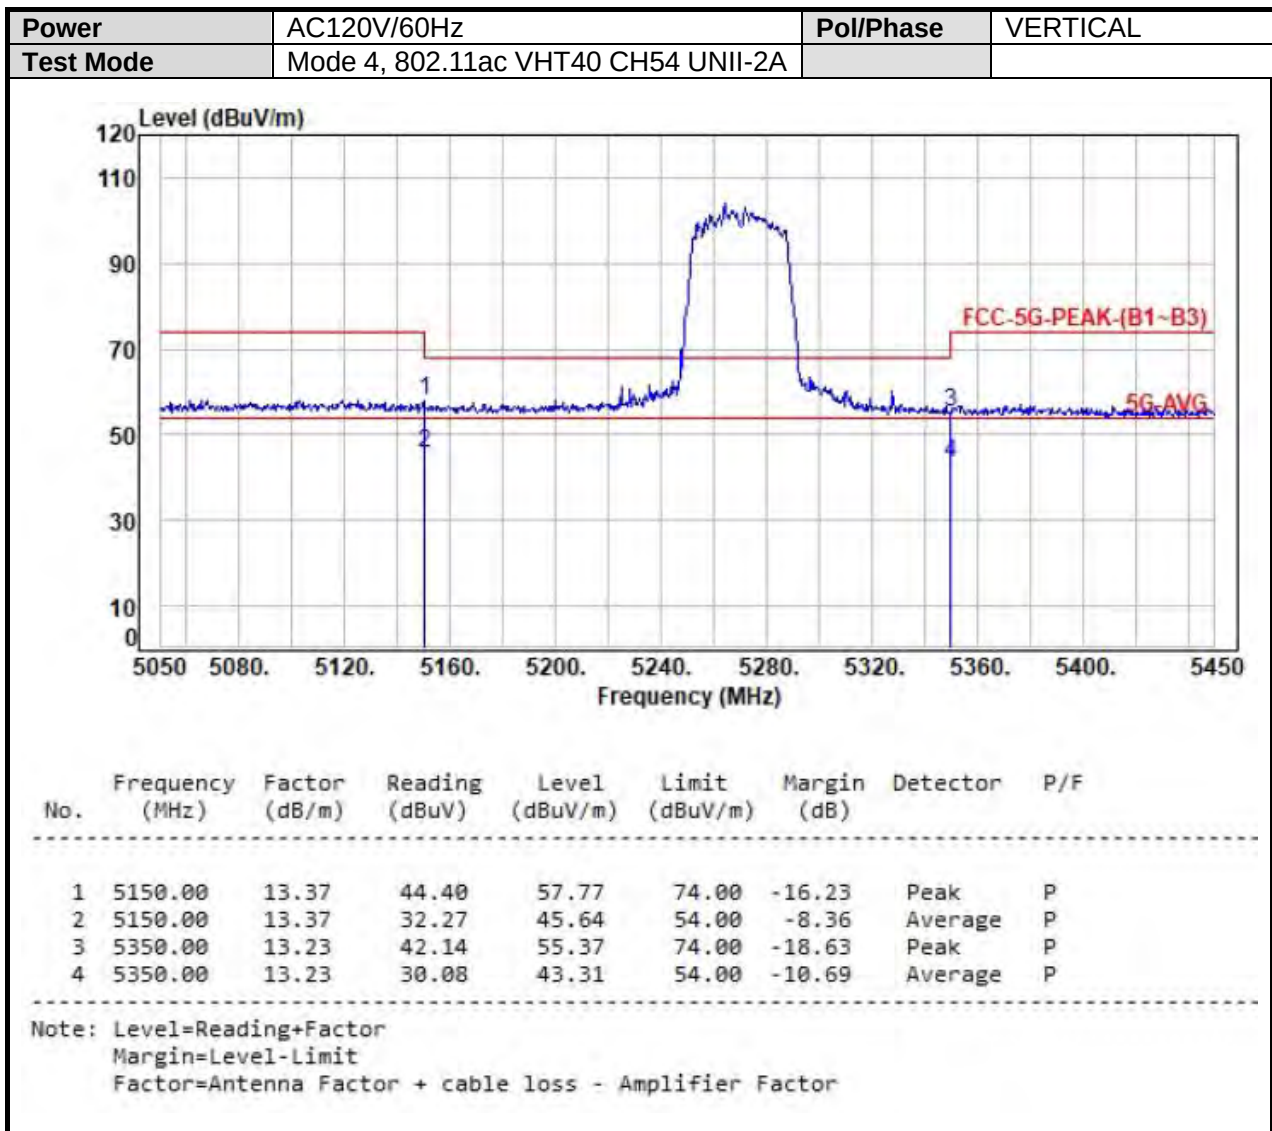


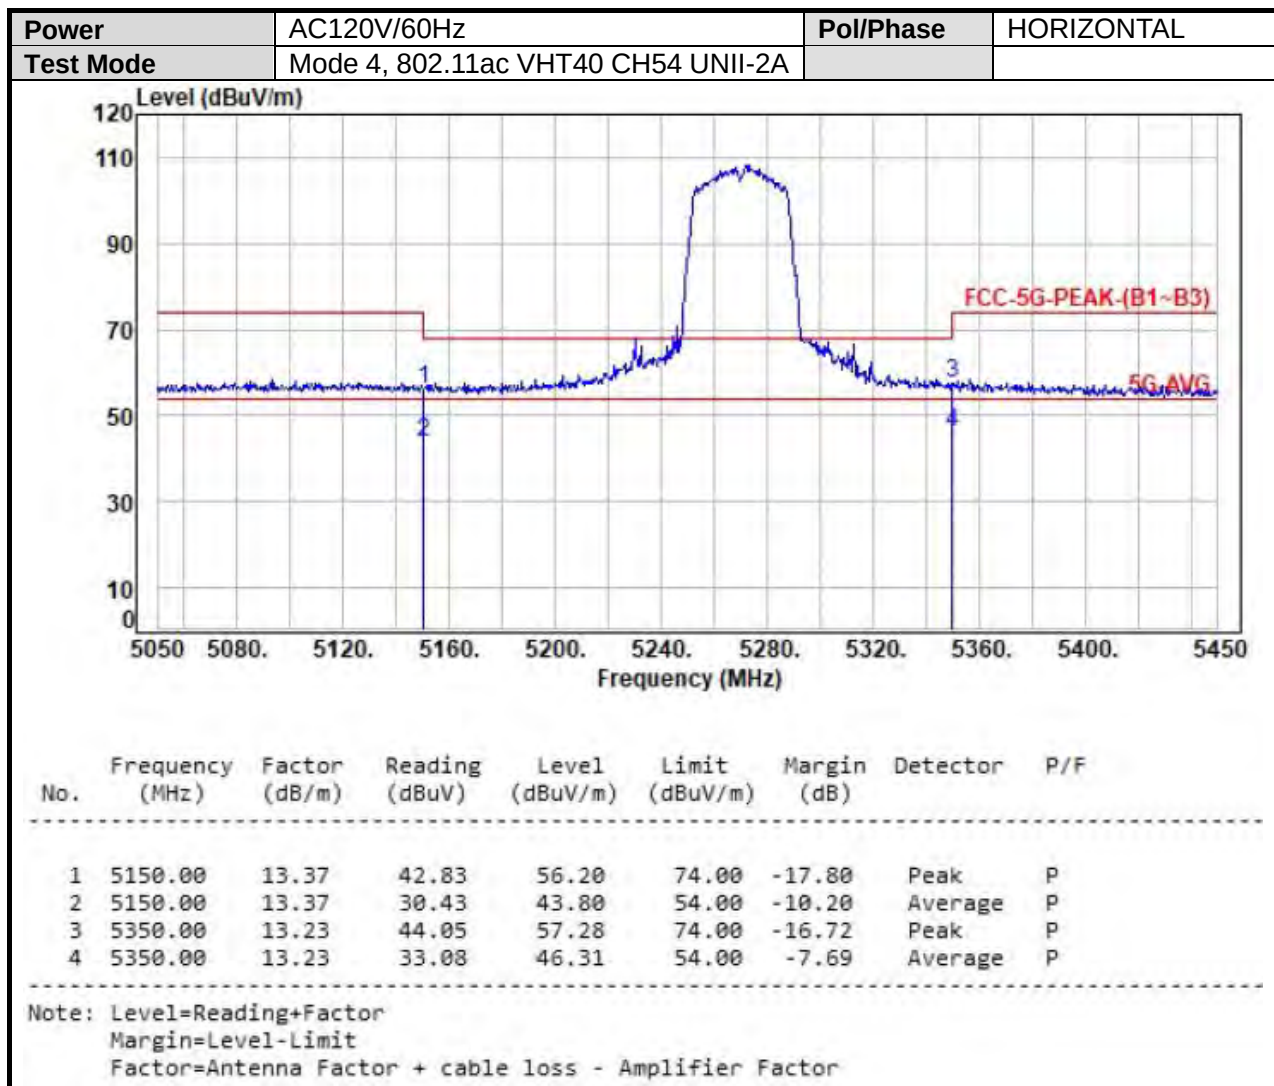


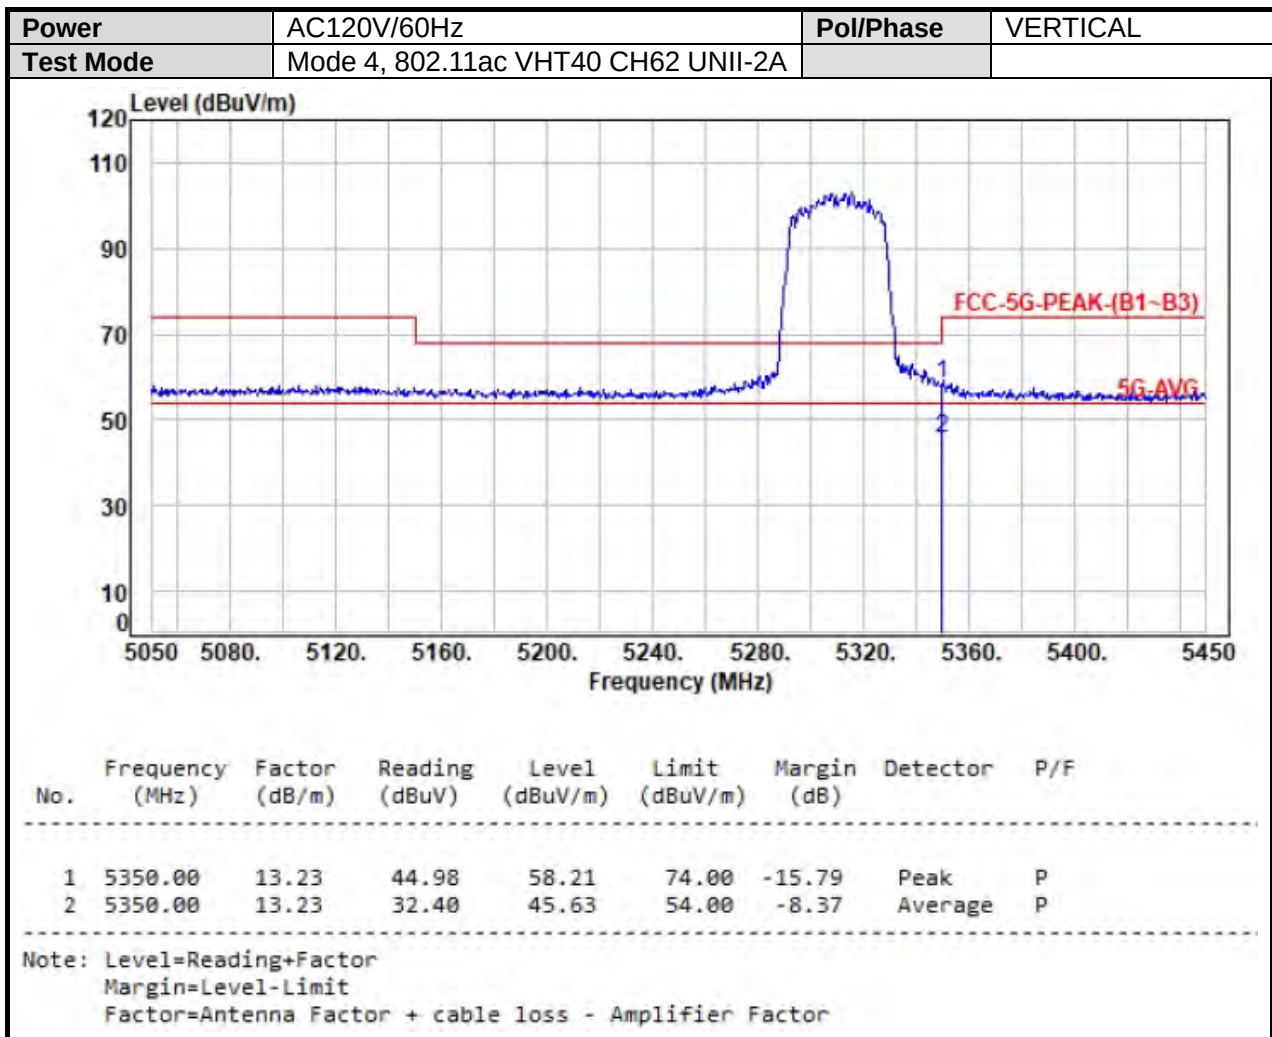


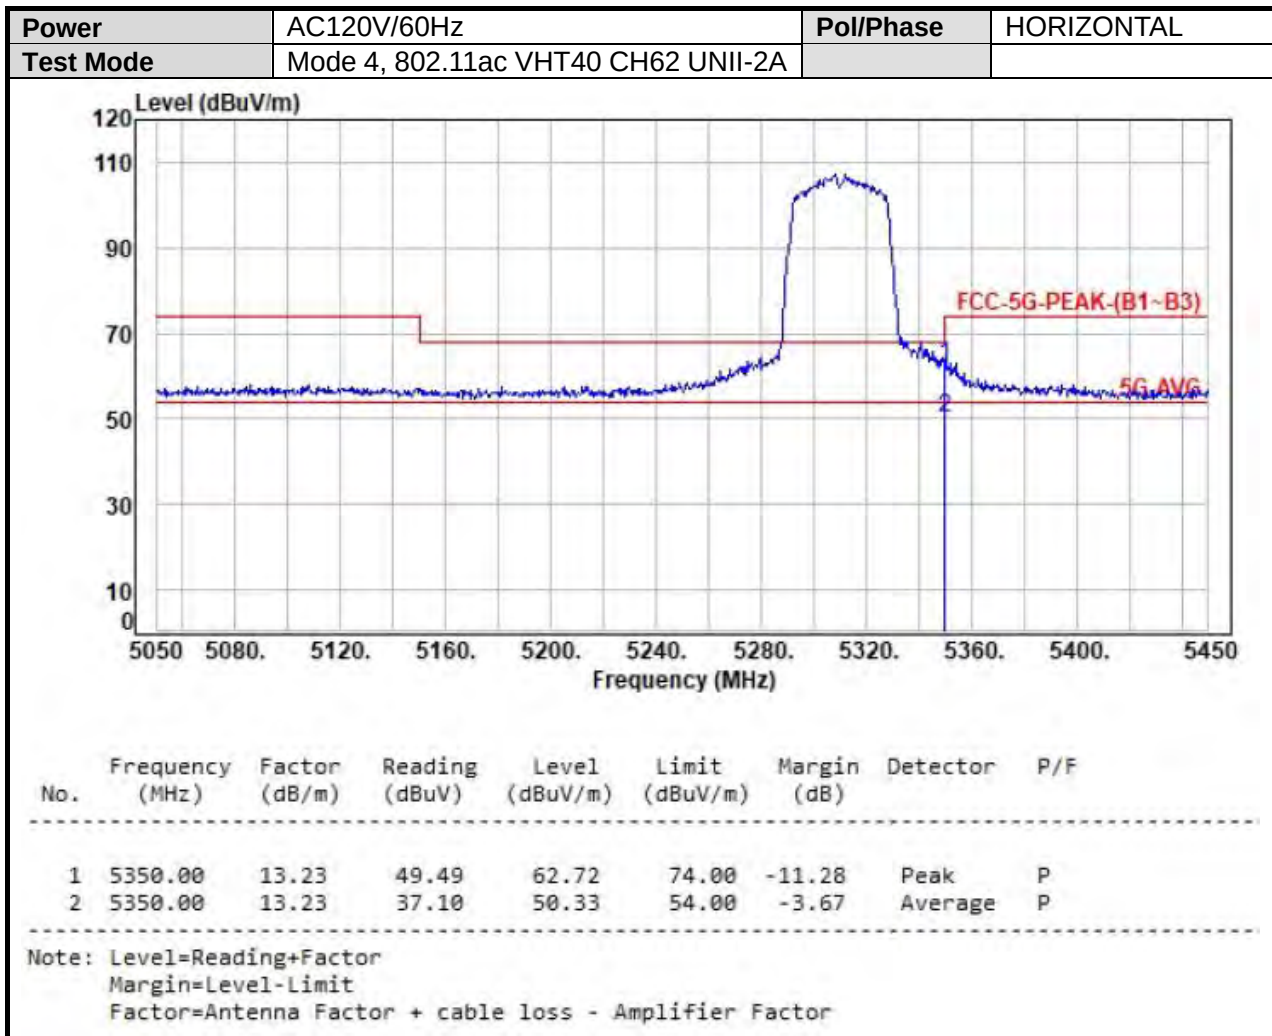


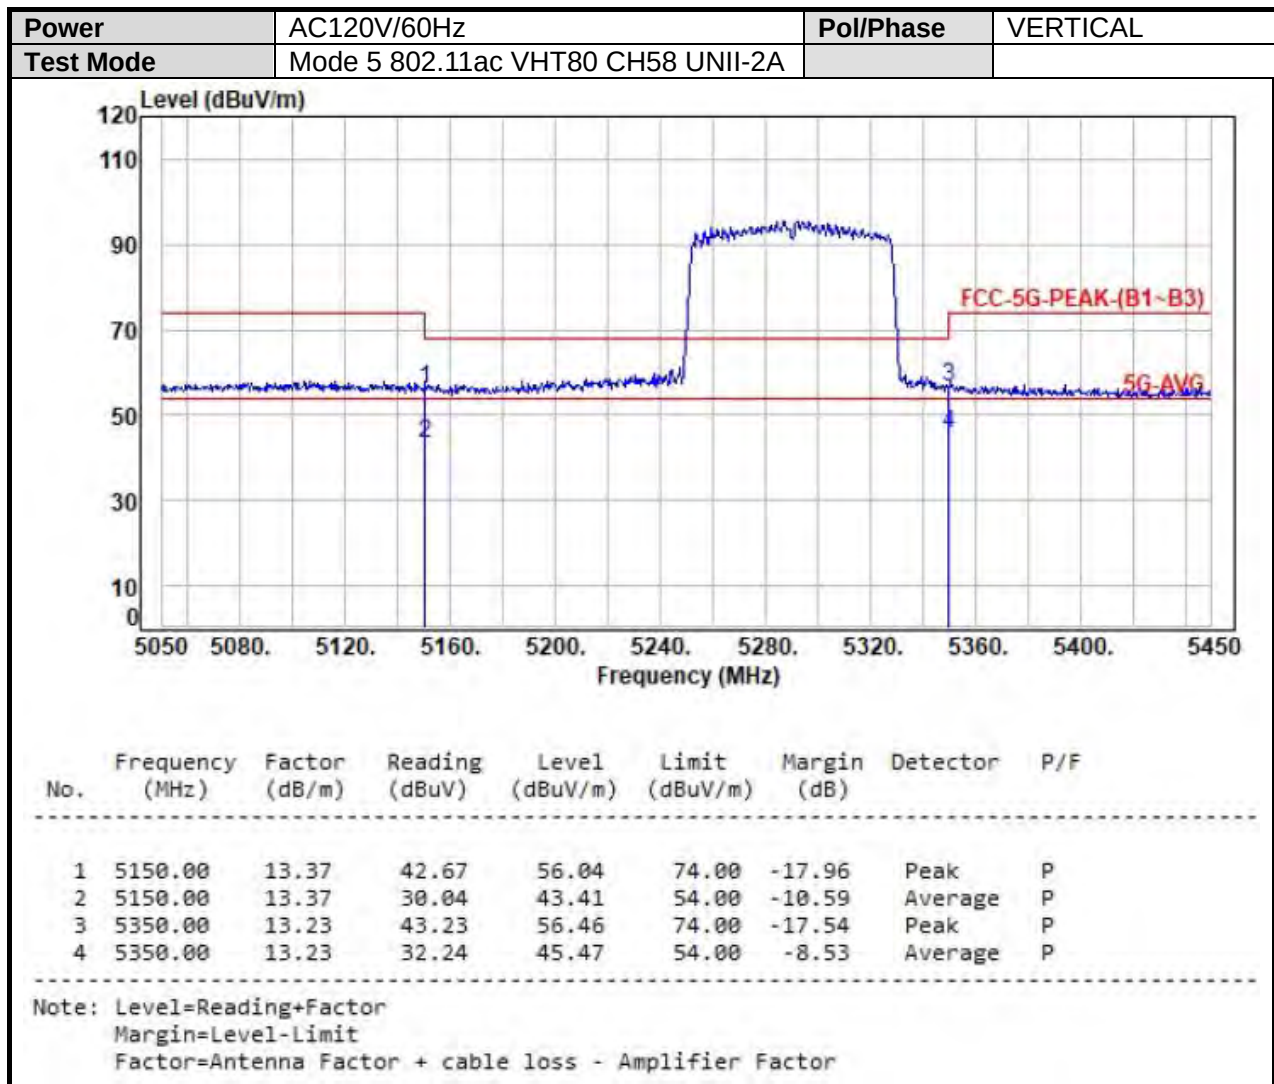


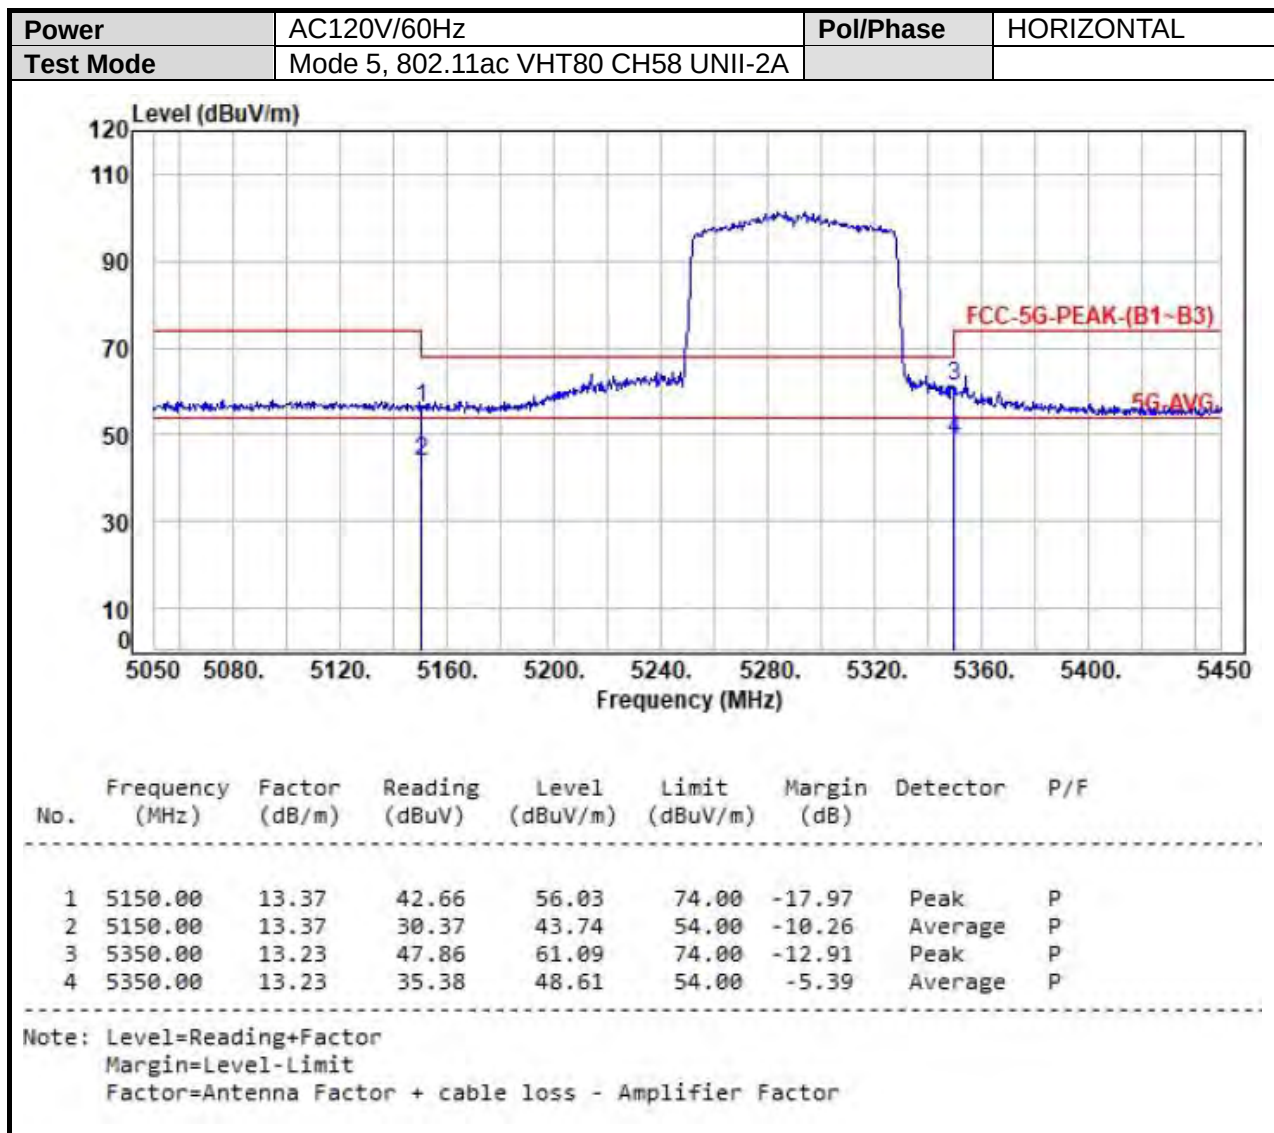


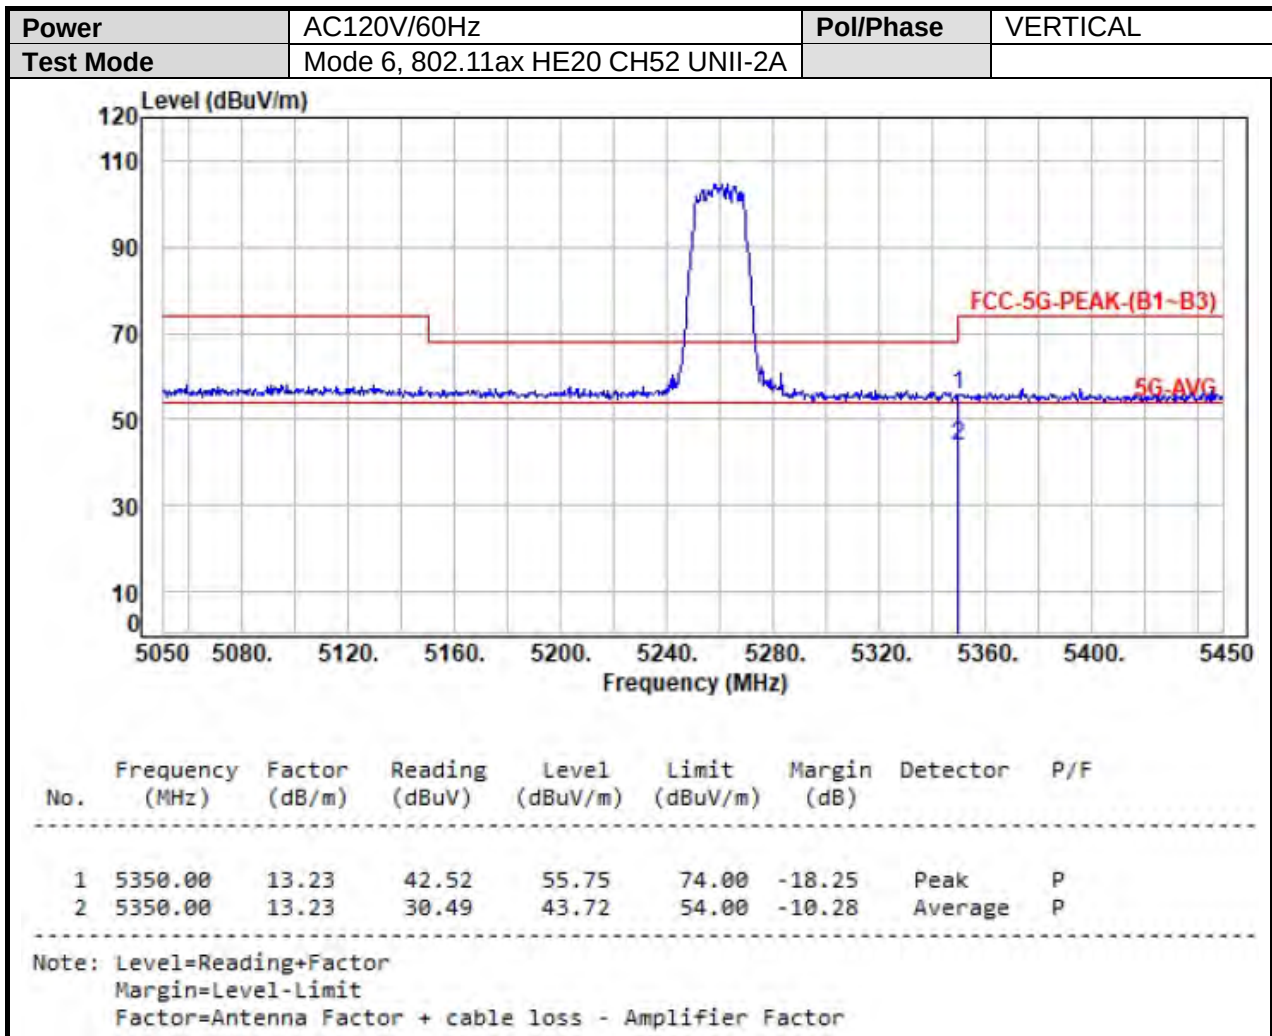


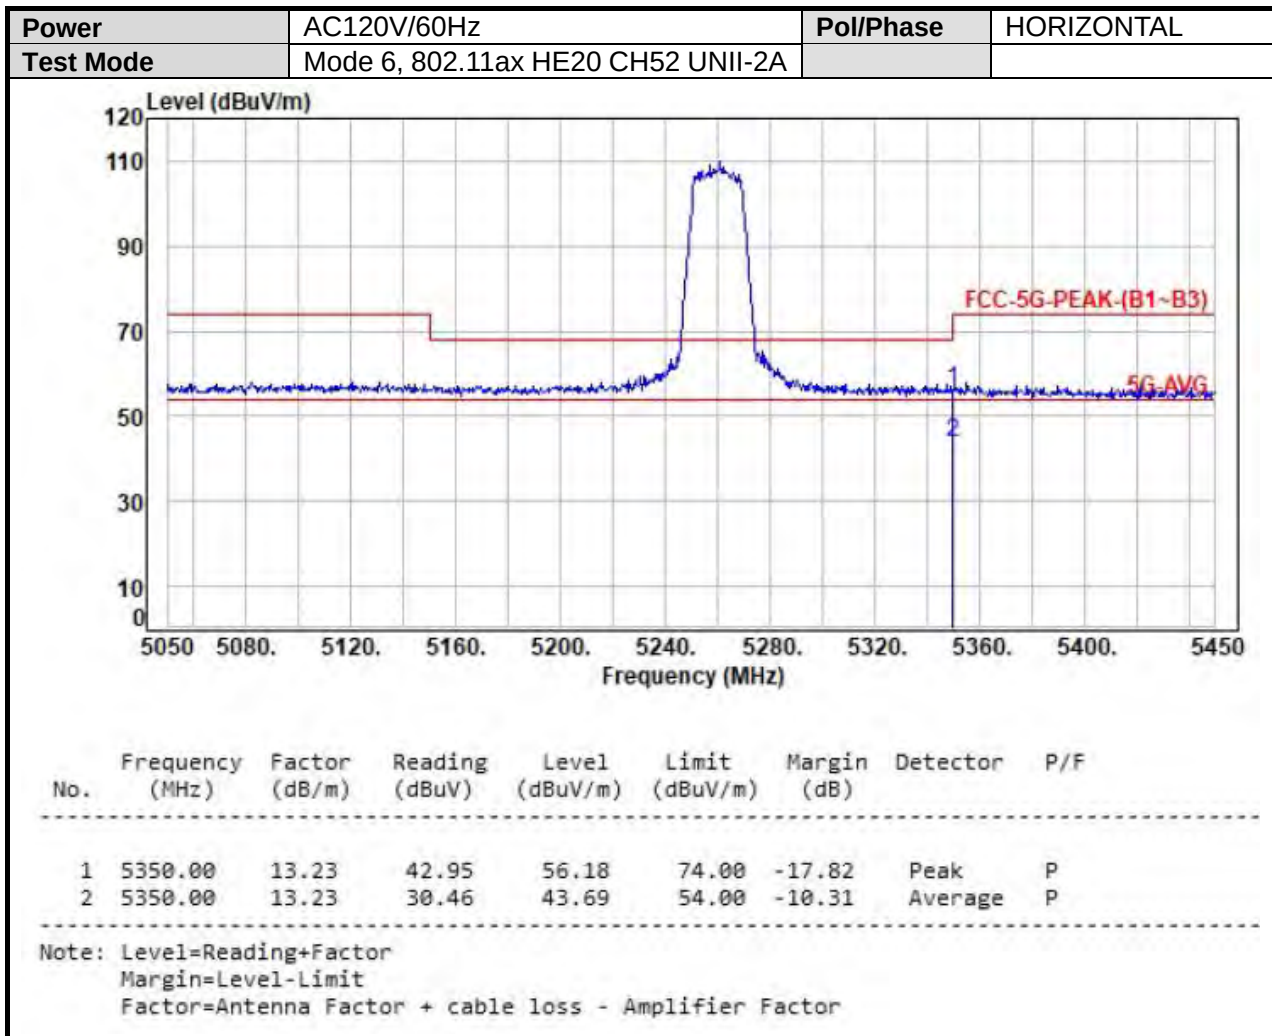


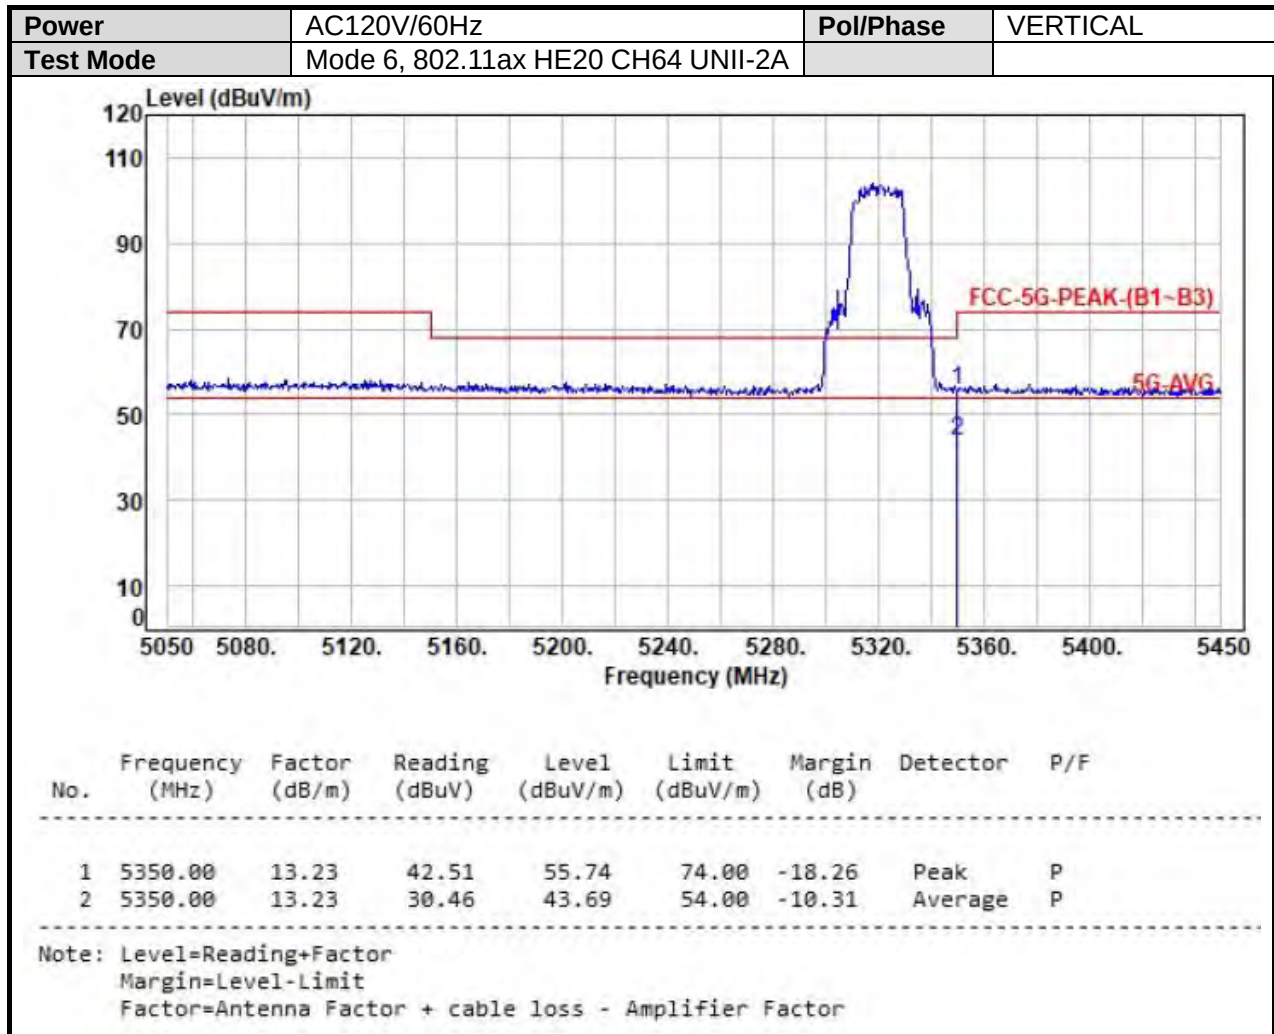


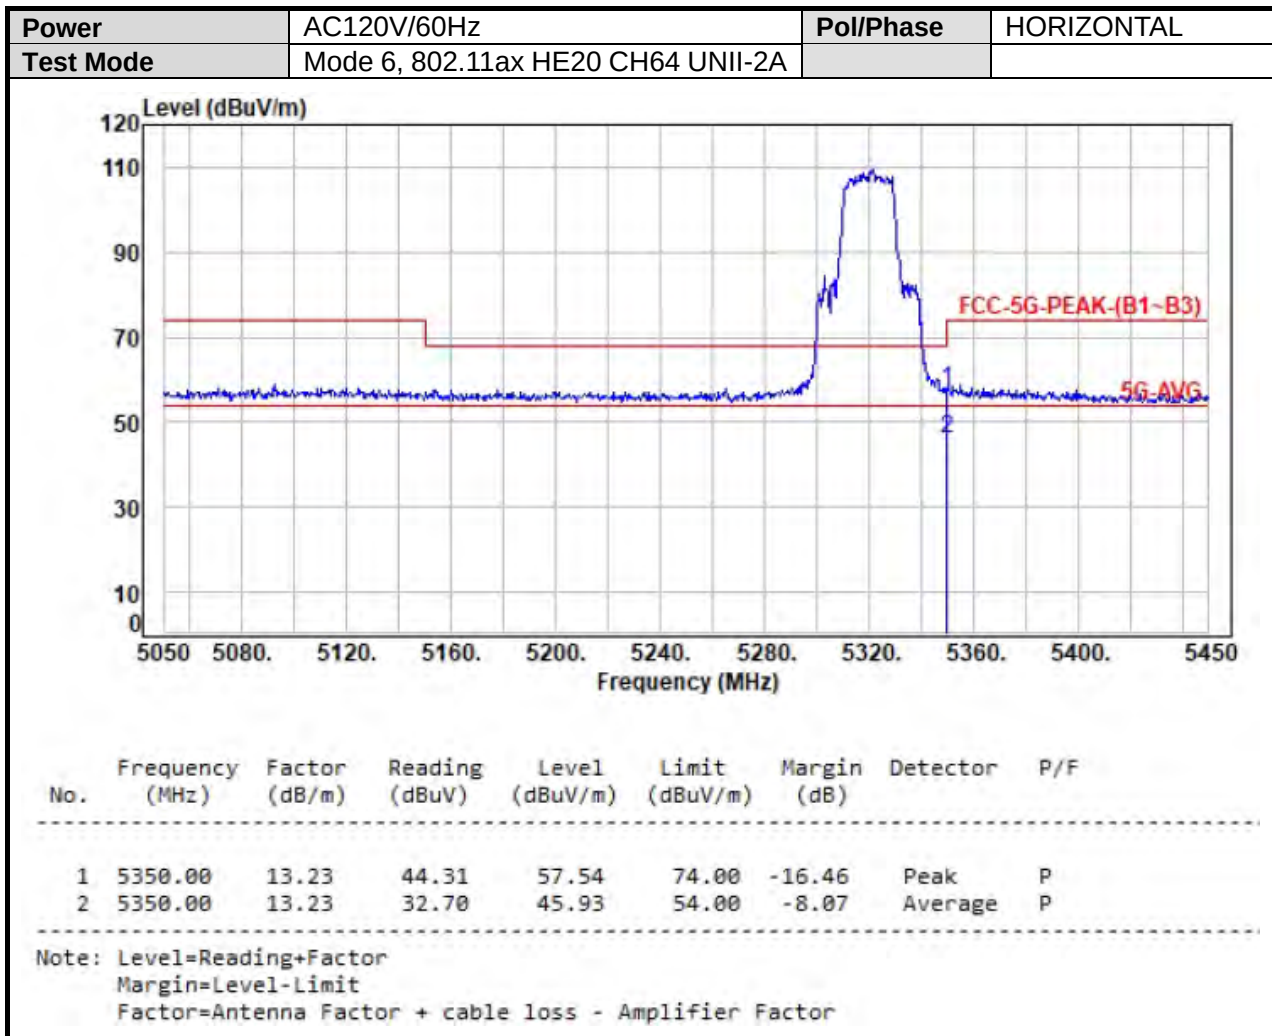


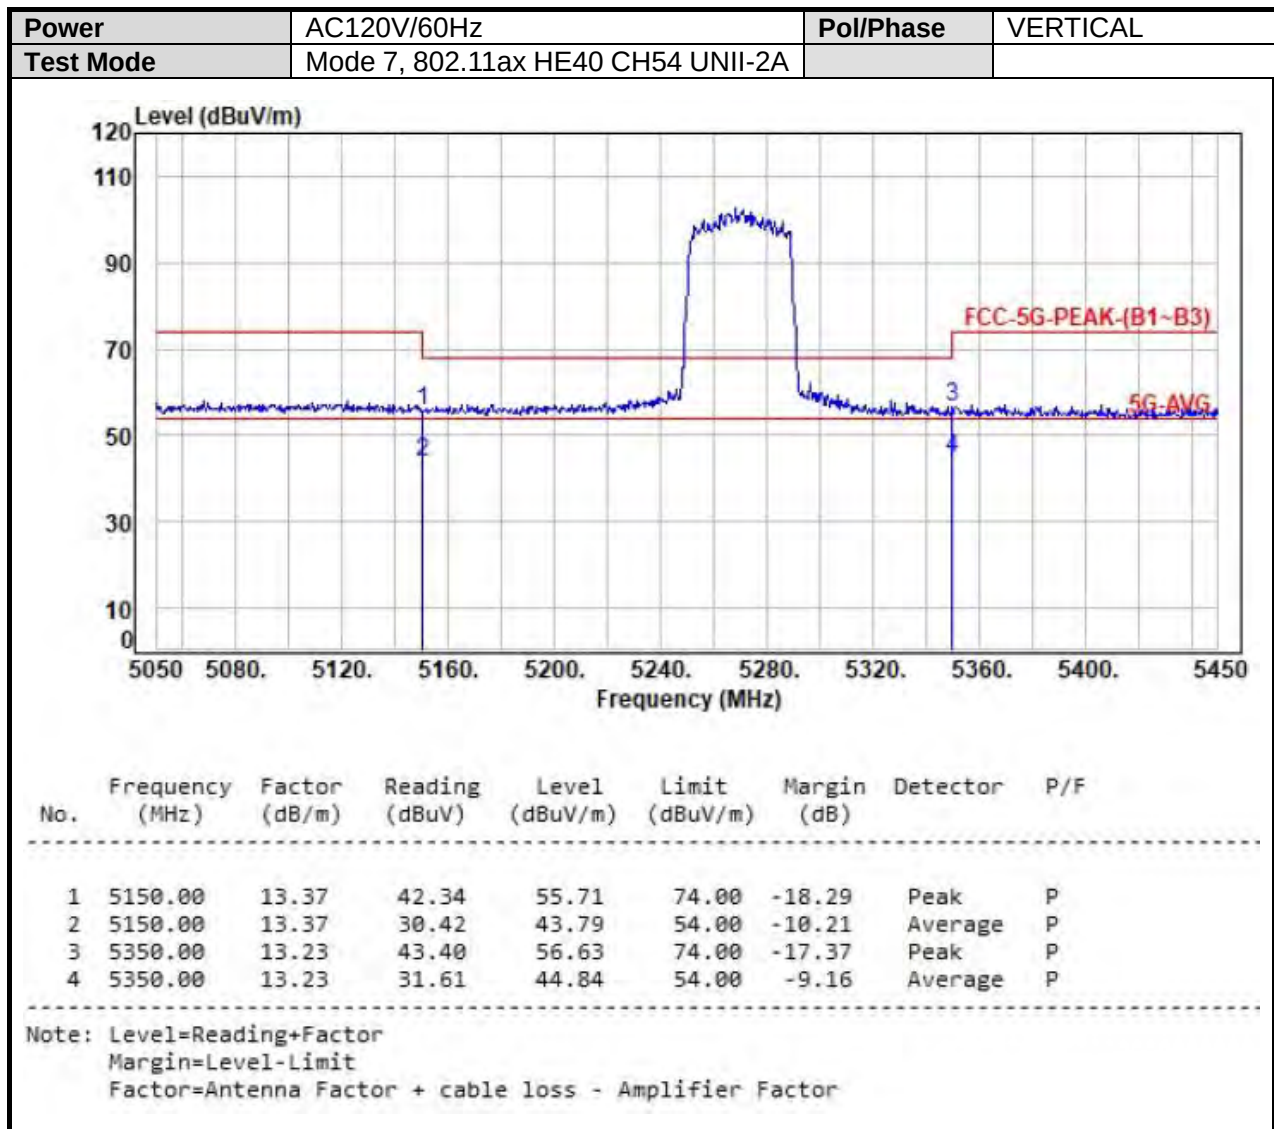


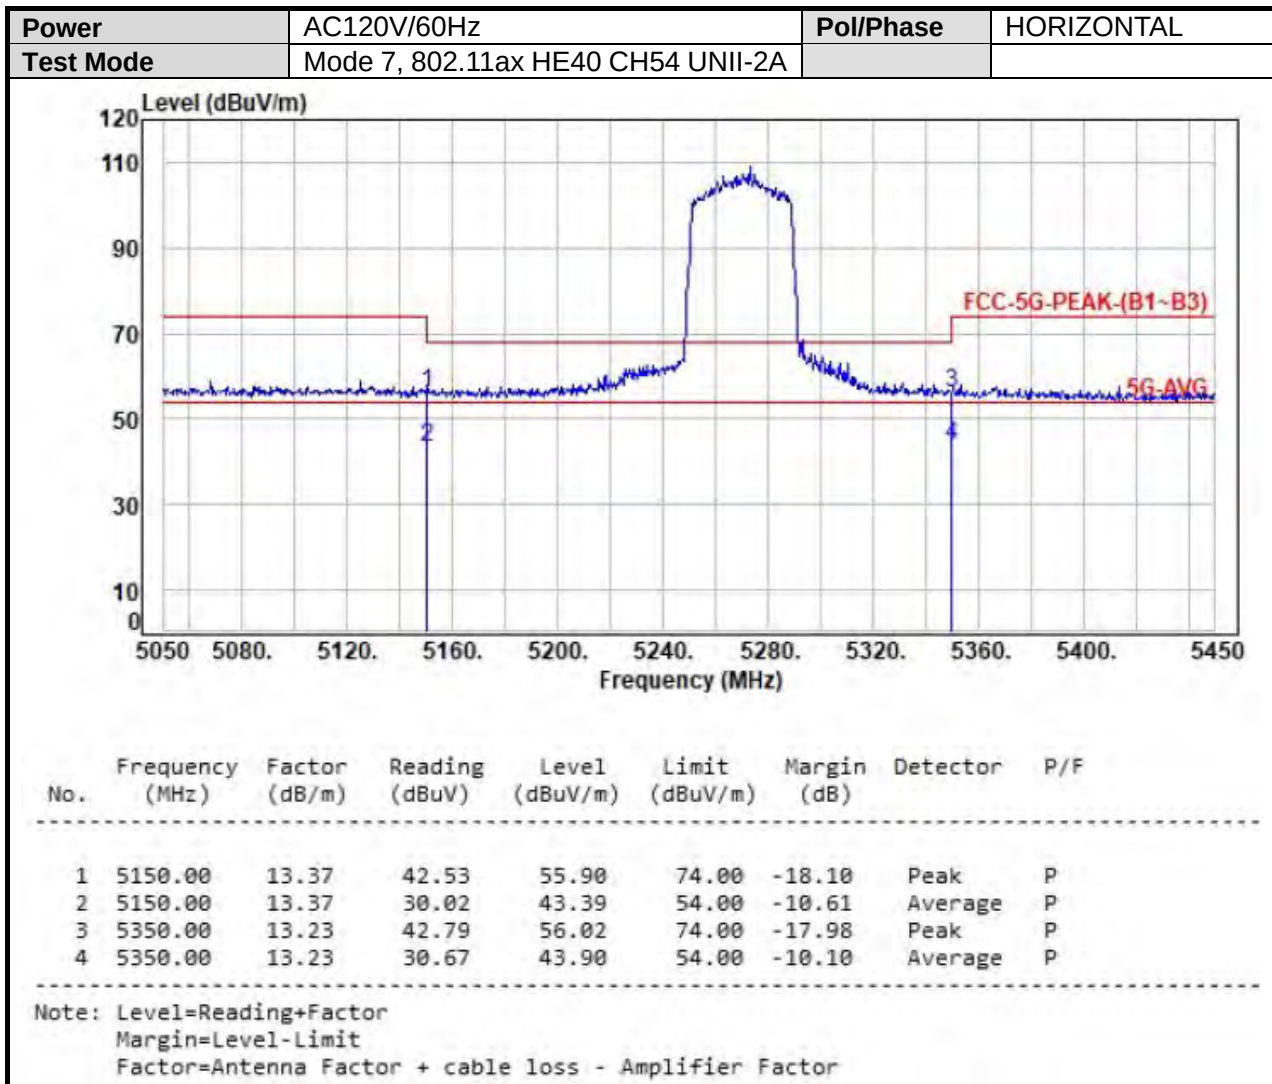

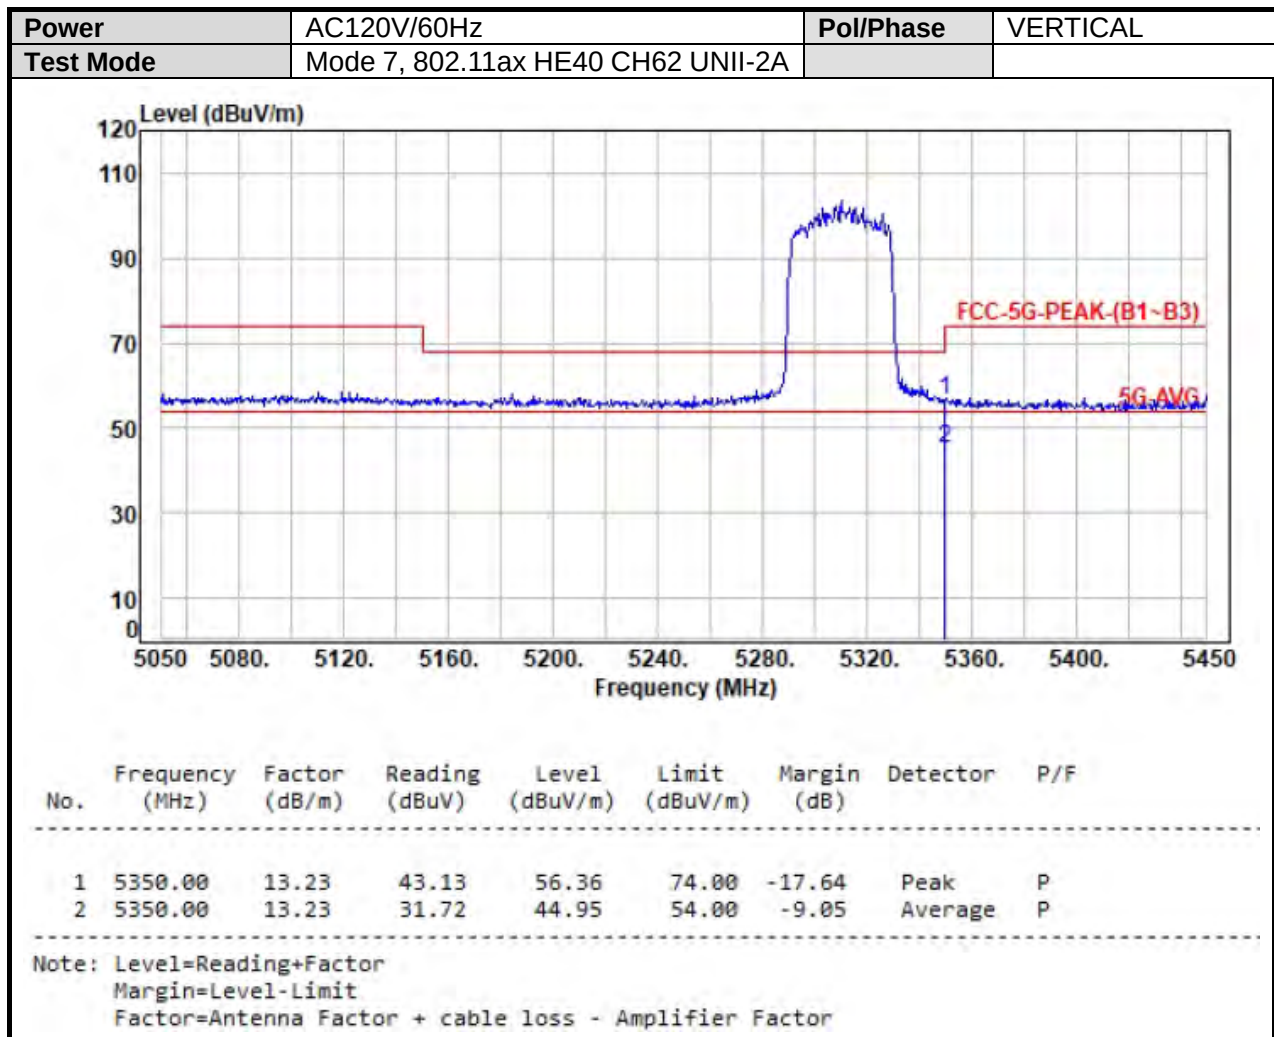

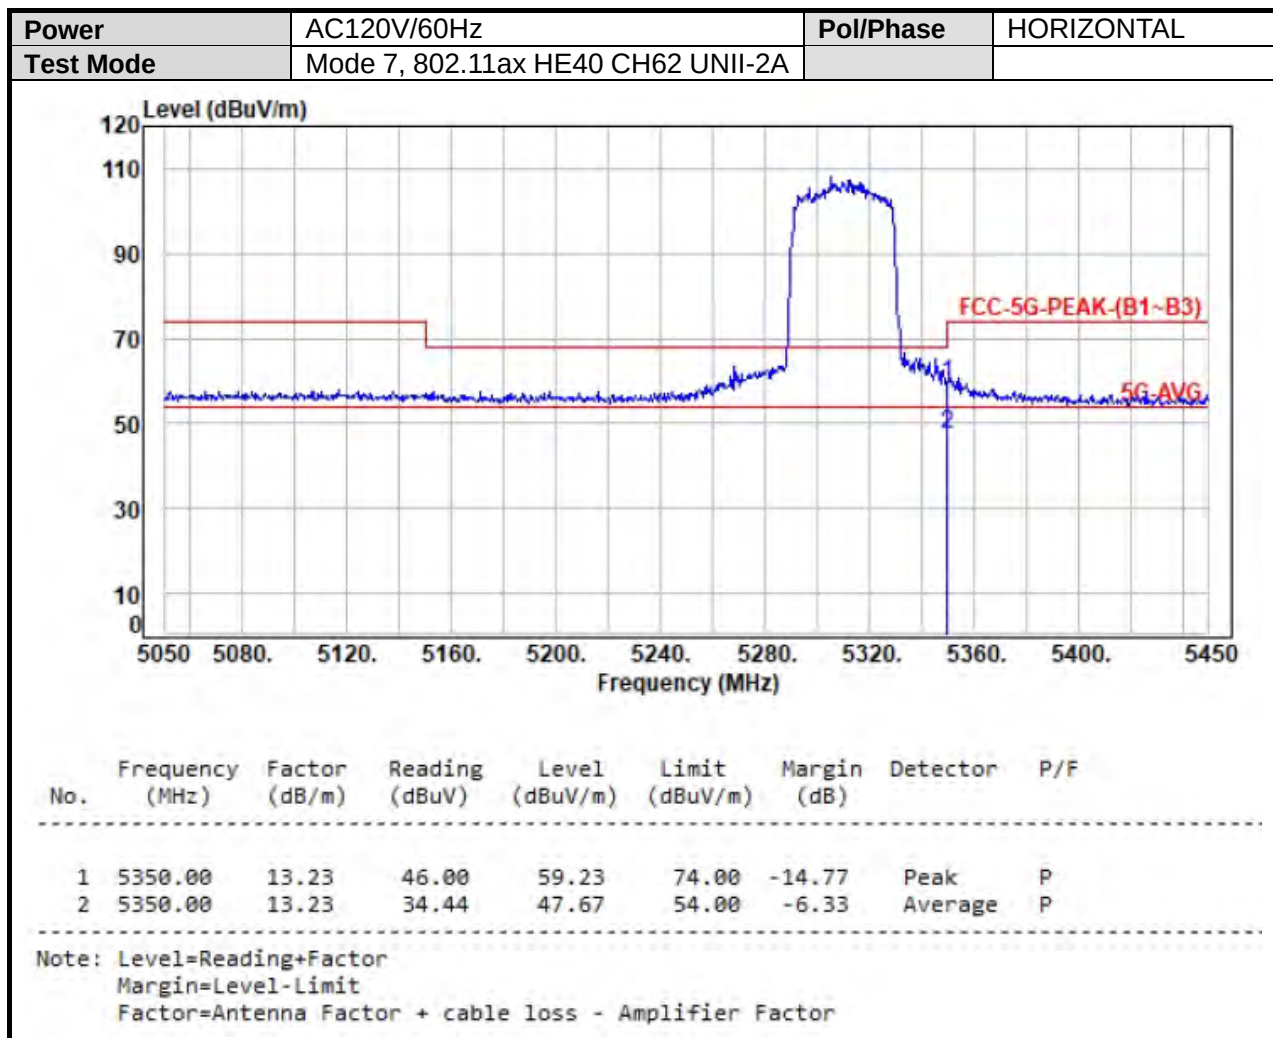

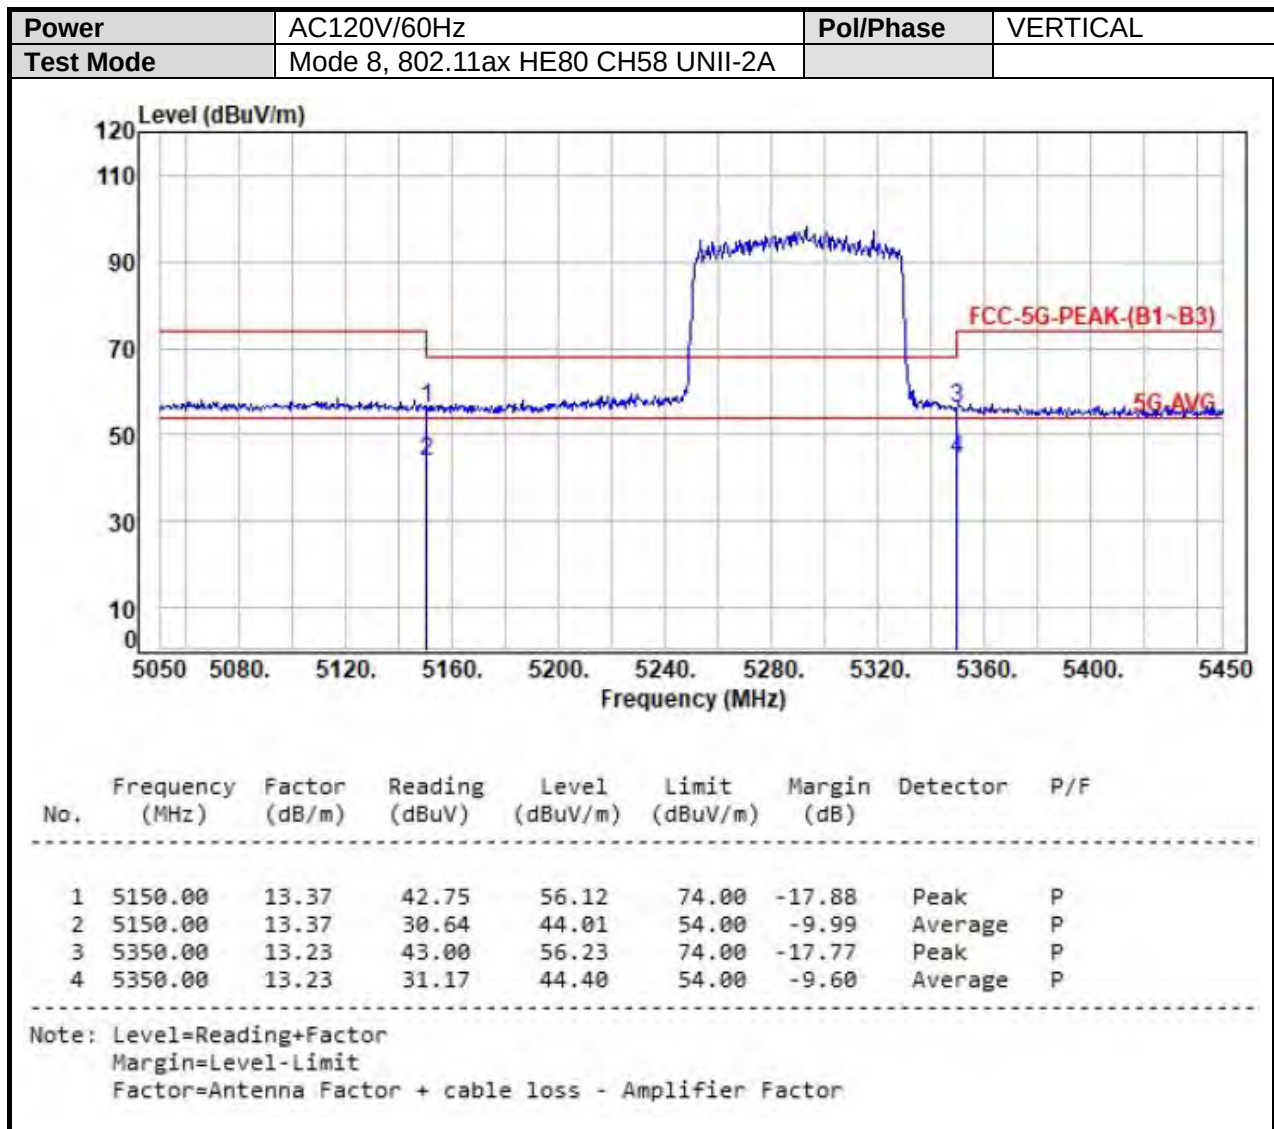


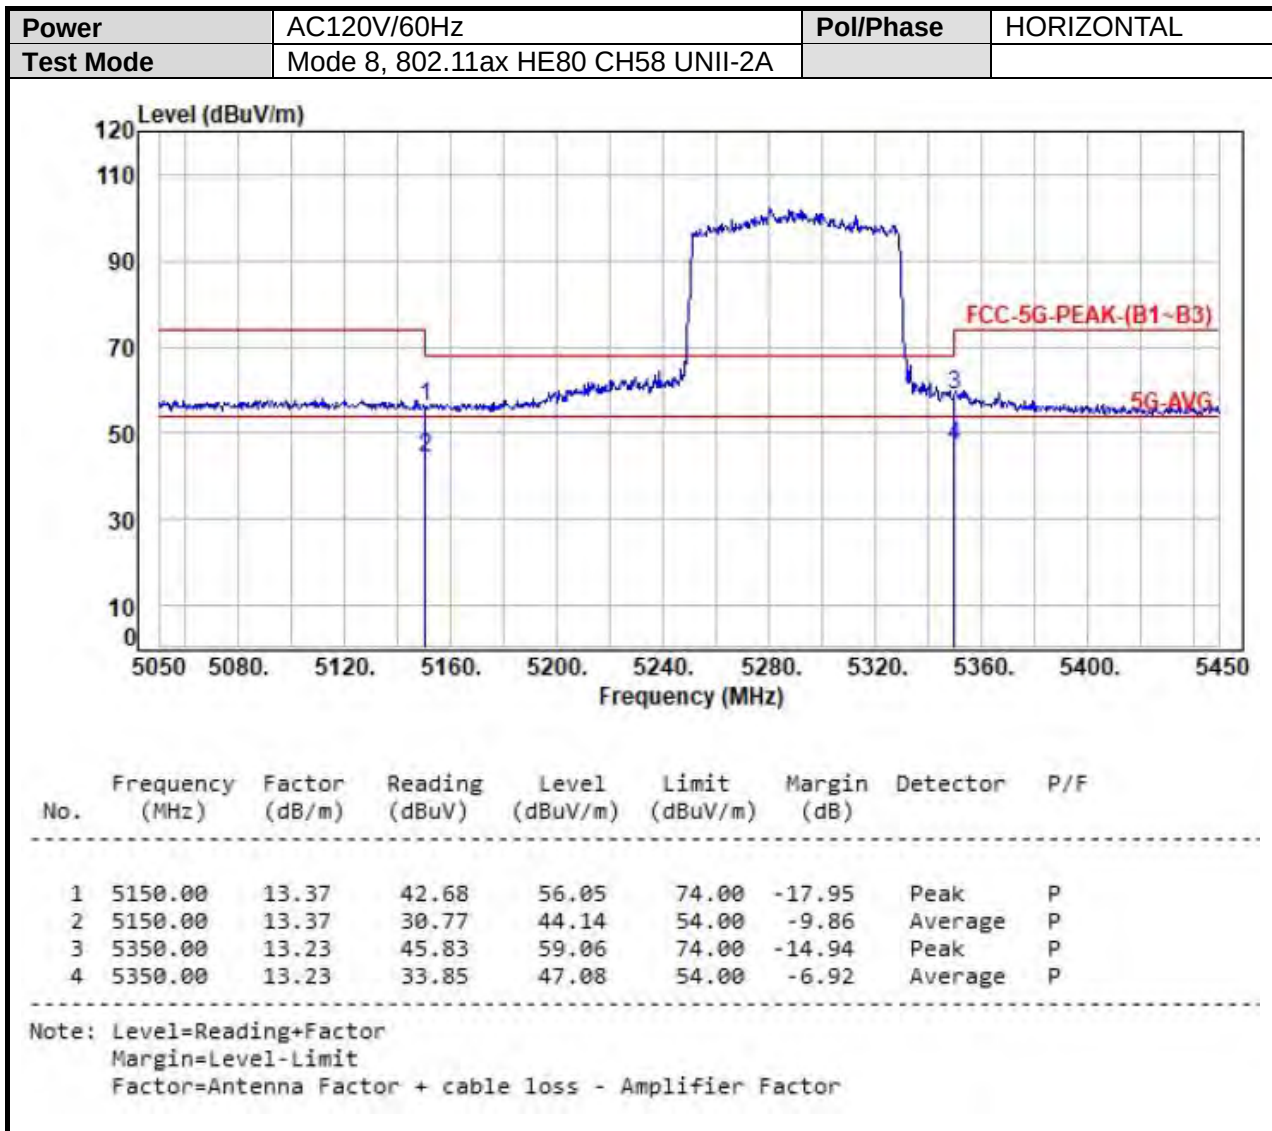






SISO-Ant B

UNII-2C

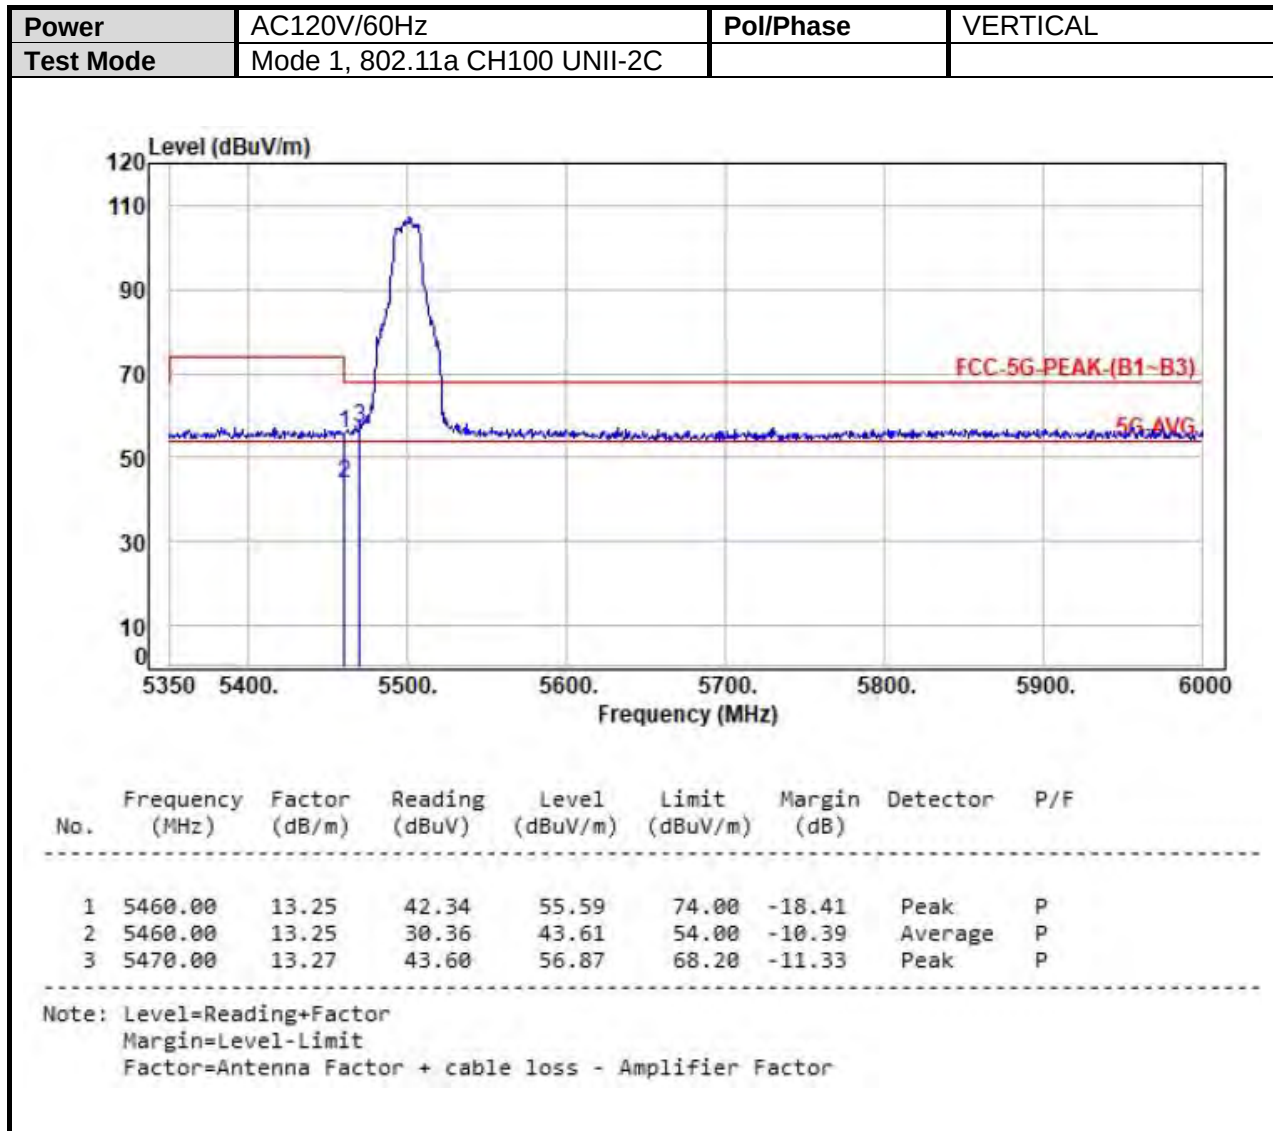

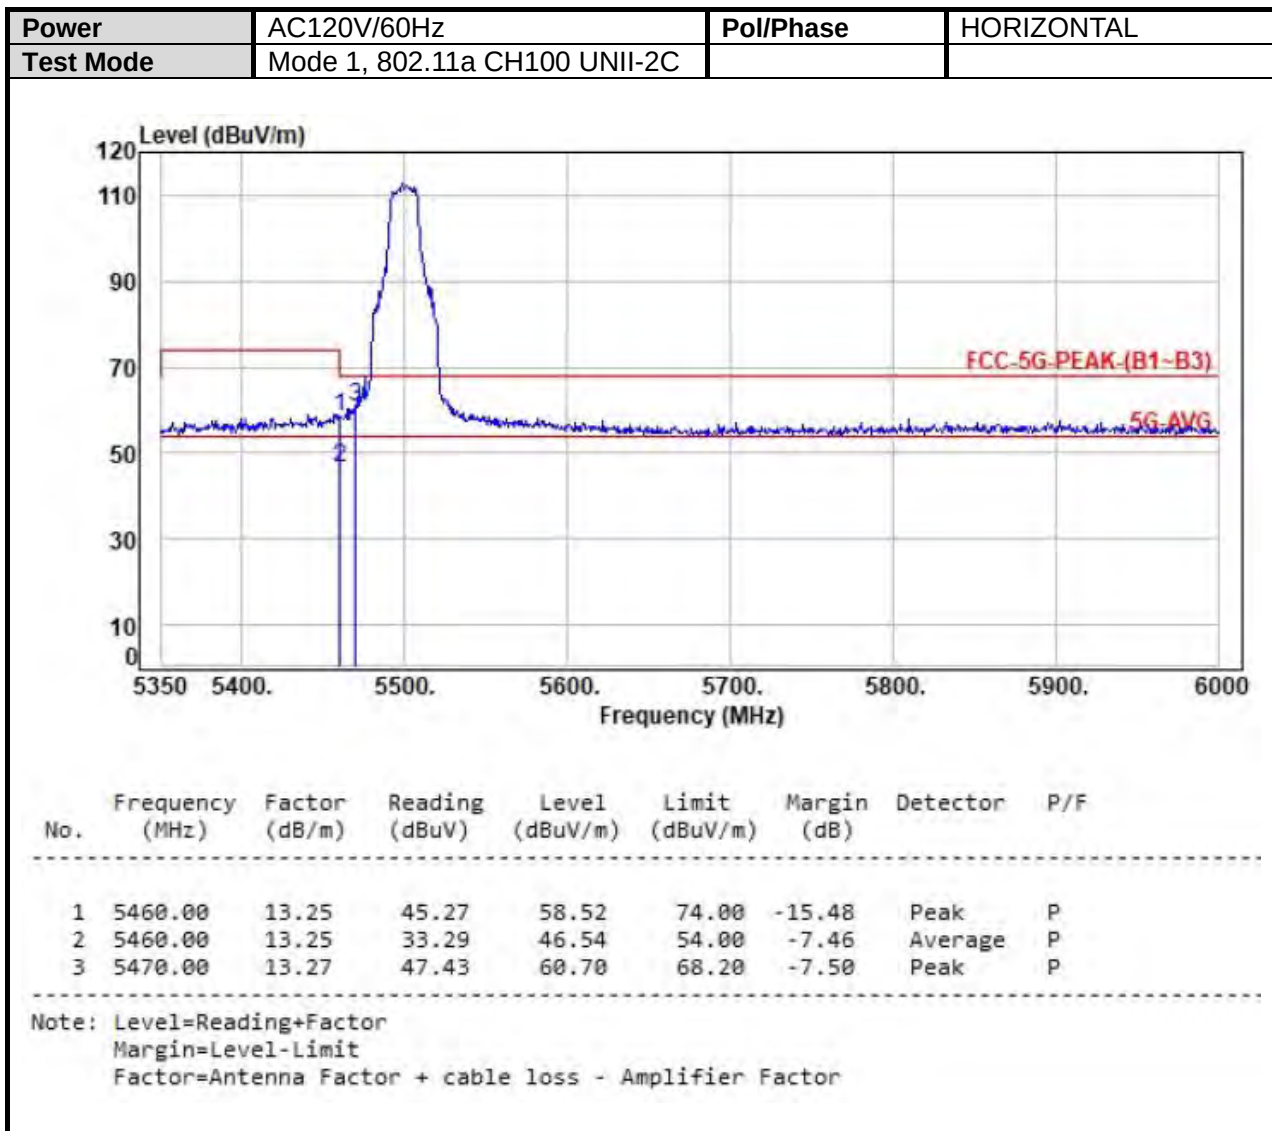

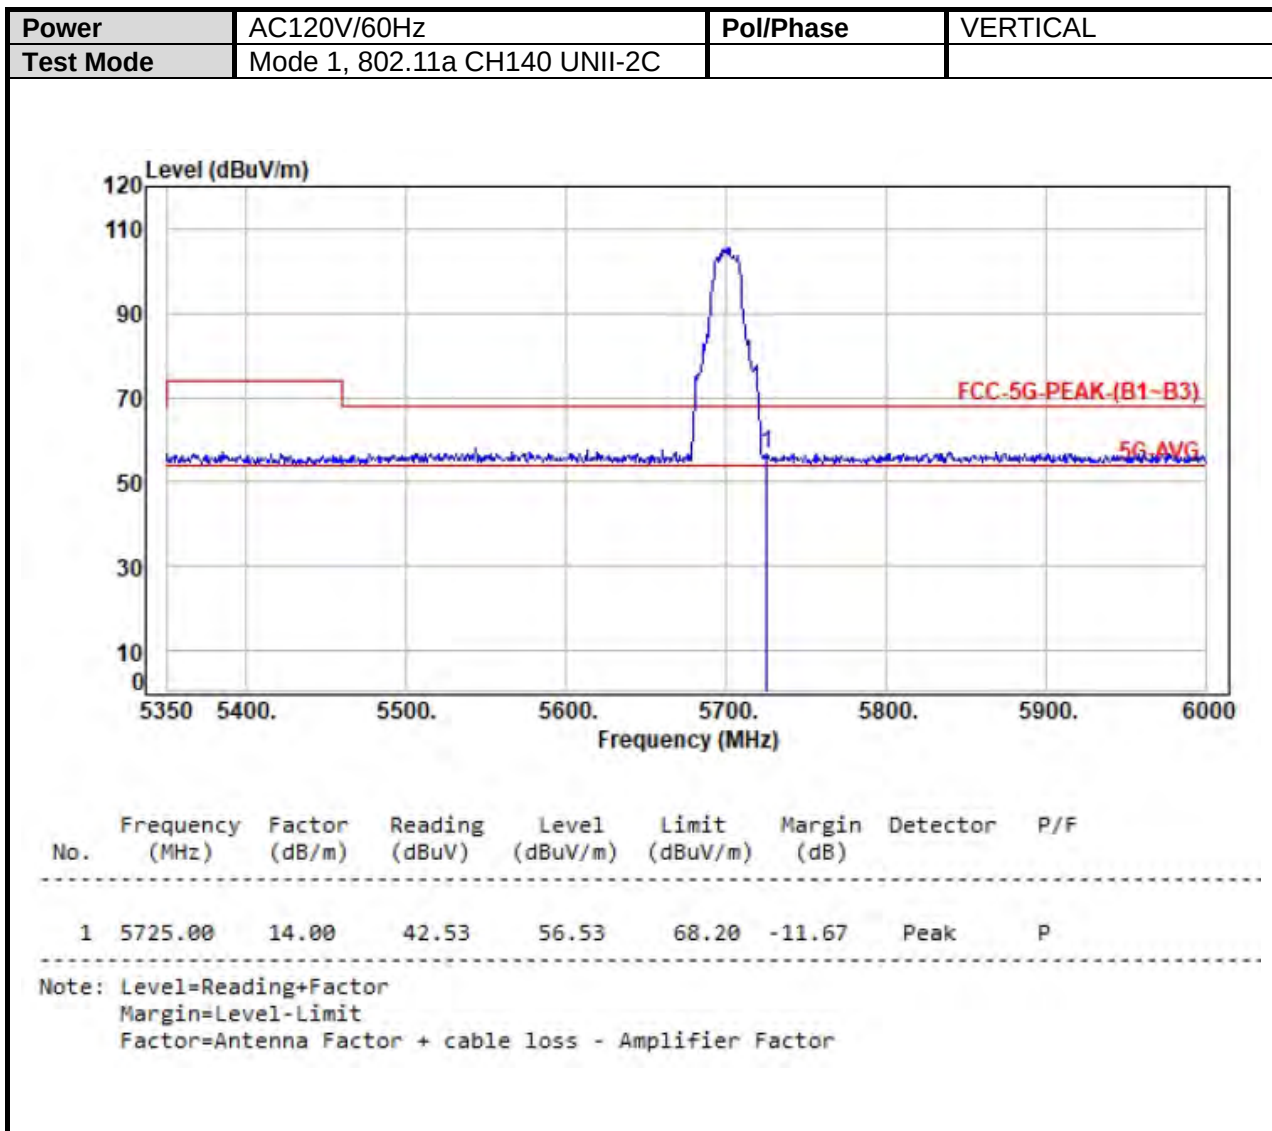


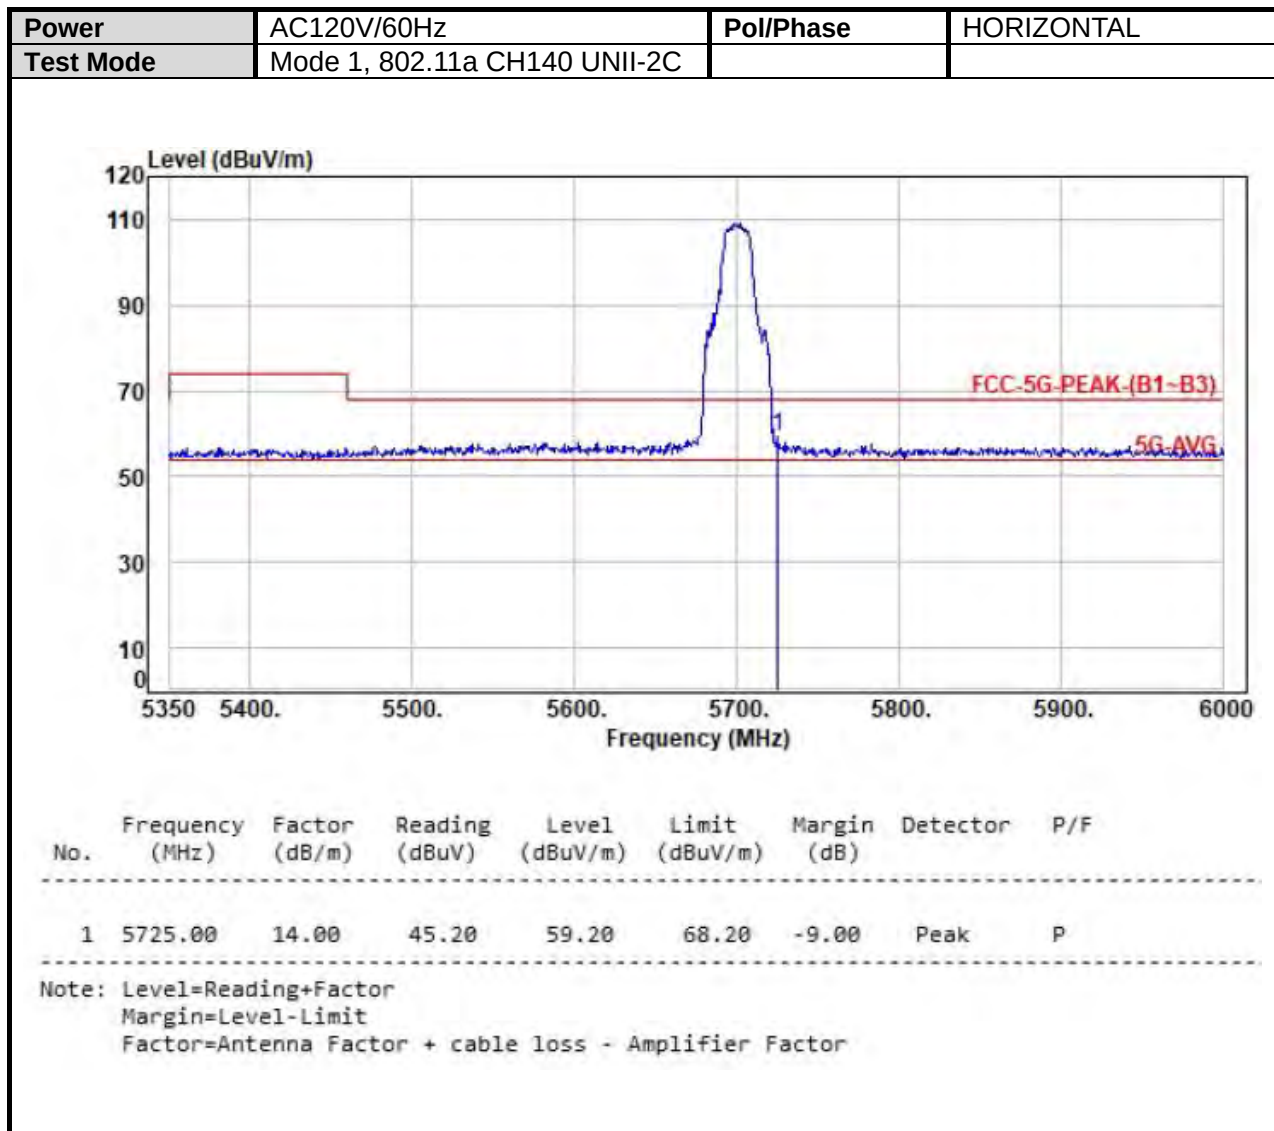



MIMO-UNII-2C

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH100 UNII-2C		

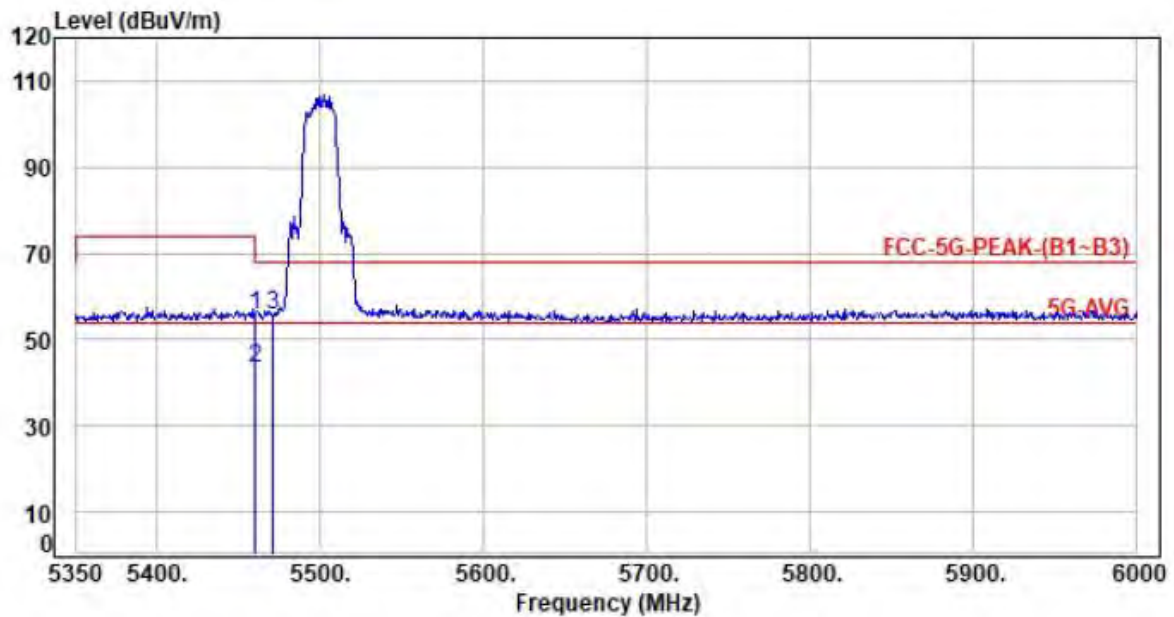

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.00	13.25	42.31	55.56	74.00	-18.44	Peak	P
2	5460.00	13.25	30.09	43.34	54.00	-10.66	Average	P
3	5470.25	13.28	42.19	55.47	68.20	-12.73	Peak	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

