


# 3.2 x 1.6 x 0.5 (mm) WiFi/Bluetooth Ceramic Chip Antenna 3216

## Engineering Specification

### 1. Product Number

H 2 U 3 4 W G T Q W 0 1 0 0

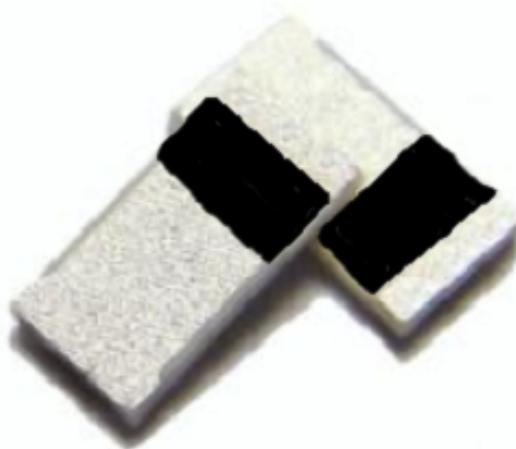

### 2. Features

- \*Stable and reliable in performances
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

### 3. Applications

- \*ISM 2.4 GHz applications
- \*ZigBee/BLE applications
- \*Bluetooth earphone systems
- \*Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- \*IEEE802.11 b/g/n
- \*Wireless PCMCIA cards or USB dongles

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055) Engineering Specification	DOCUMENT NO.	H2U34WGTQW0100	REV. D
		PAGE 1	OF 10

#### 4. Description


Unictron's AA055 ceramic chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, AA055 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

#### 5. Layout Guide & Electrical Specifications

##### 5-1. Layout Guide (unit : mm)

Solder Land Pattern:

The solder land pattern (gray marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

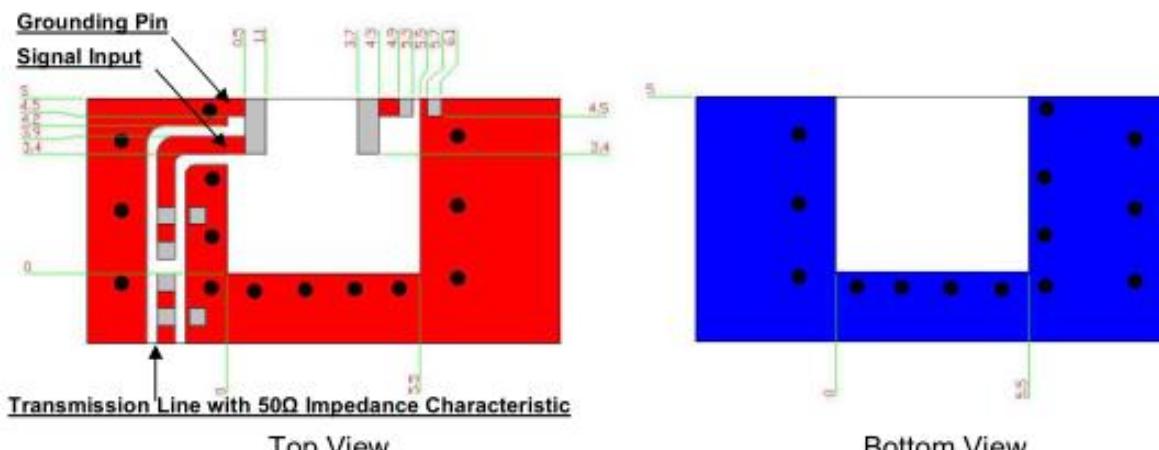

##### 5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm<sup>2</sup>)

###### 5-2-1. Electrical Table

Characteristics	Specifications	Unit
Outline Dimensions	3.2 x 1.6 x 0.5	mm
Ground Plane Dimensions	80 x 40	mm
Working Frequency	2400~2500	MHz
Bandwidth	100 (typical)	MHz
VSWR	2 Max. (typical)	
Characteristic Impedance	50	Ω
Polarization	Linear Polarization	
Peak Gain (@2442 MHz)	2.5 (typical)	dBi
Efficiency	84 (typical)	%

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken


Checked by : Mike

Approved by : Herbert


TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055) Engineering Specification	DOCUMENT NO.	H2U34WGTQW0100	REV. D
		PAGE 2 OF 10	

## 5-2-2. Return Loss & VSWR

### Return Loss (S<sub>11</sub>)

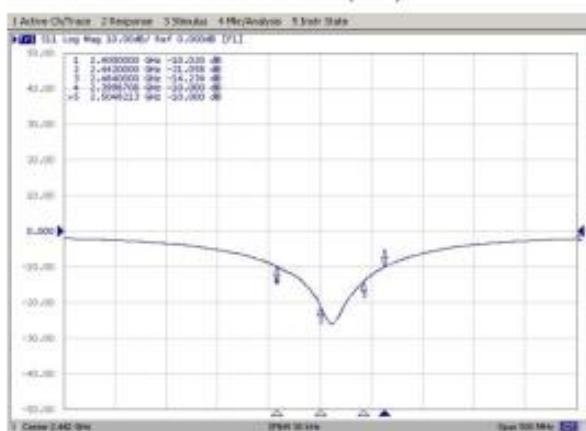


### VSWR(S<sub>11</sub>)

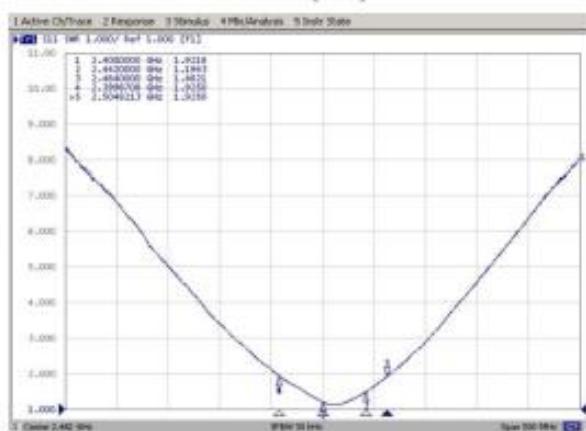

## 6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)

### 6-1. Antenna Dimensions

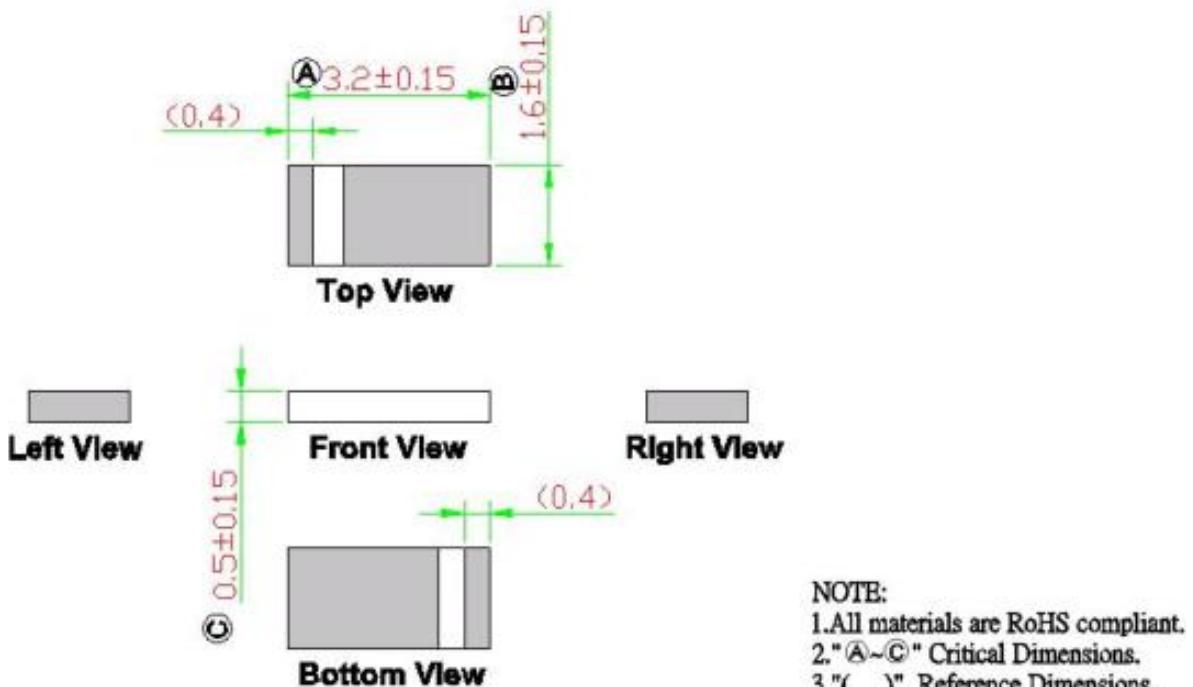

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert


**TITLE :** 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (AA055) Engineering Specification

**DOCUMENT**  
NO.

**H2U34WGTQW0100**

**REV.**  
**D**

## 6-2. Evaluation Board with Antenna

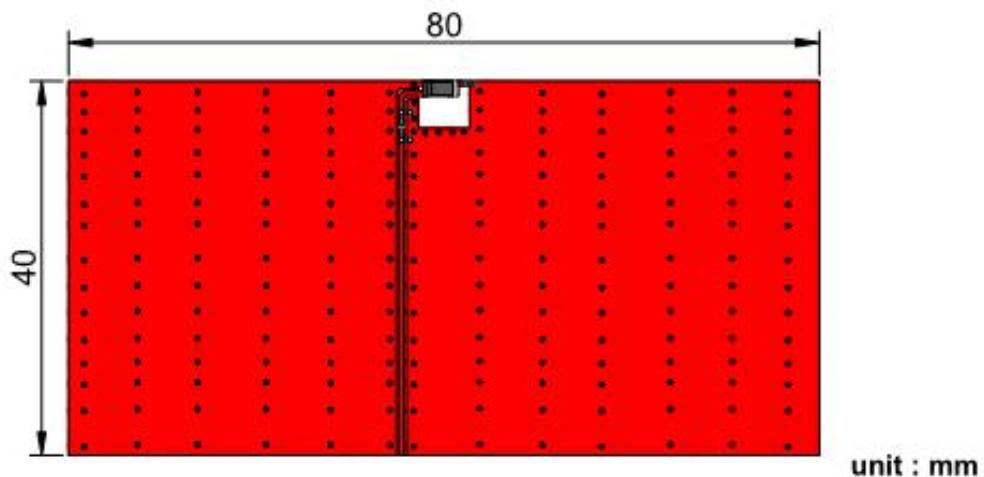

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken





Checked by : Mike

Approved by : Herbert

<b>TITLE :</b> 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055) Engineering Specification	<b>DOCUMENT</b> <b>NO.</b>	<b>H2U34WGTQW0100</b>	<b>REV.</b>
			<b>D</b>

## 7. Radiation Pattern (with 80 x 40 mm<sup>2</sup> Evaluation Board)

7-1. 3D Gain Pattern @ 2442 MHz (unit: dBi)

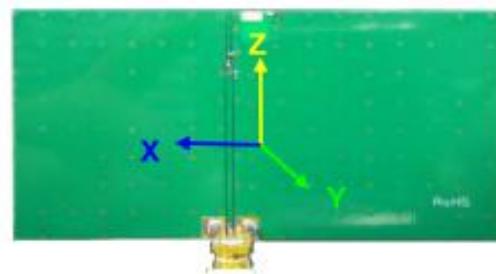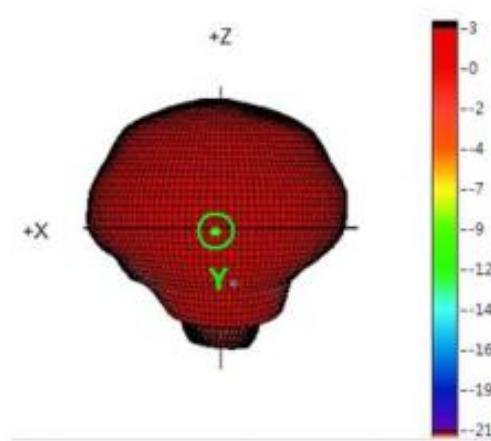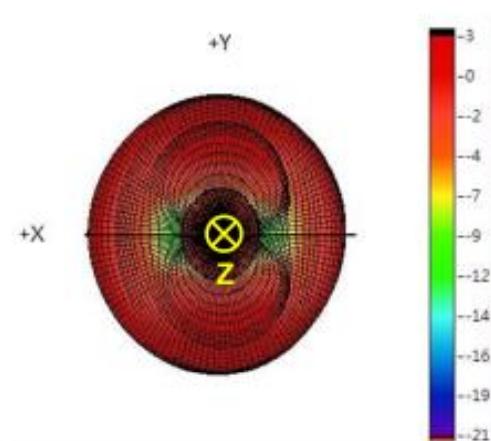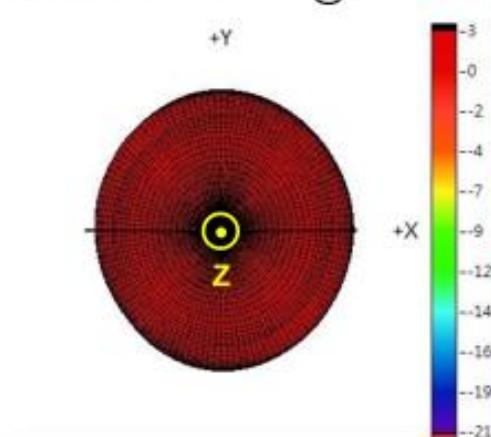

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert

**TITLE :** 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (AA055) Engineering Specification

DOCUMENT  
NO.


H2U34WGTQW0100

REV.  
D

7-2. 3D Efficiency Table

Frequency (MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	72.8	78.7	82.3	84.4	84.5	84.0	82.0	78.6	76.1	74.6	72.5
Peak Gain (dBi)	1.5	1.8	2.1	2.4	2.5	2.5	2.4	2.1	1.9	1.9	1.8

7-3. 3D Efficiency vs. Frequency

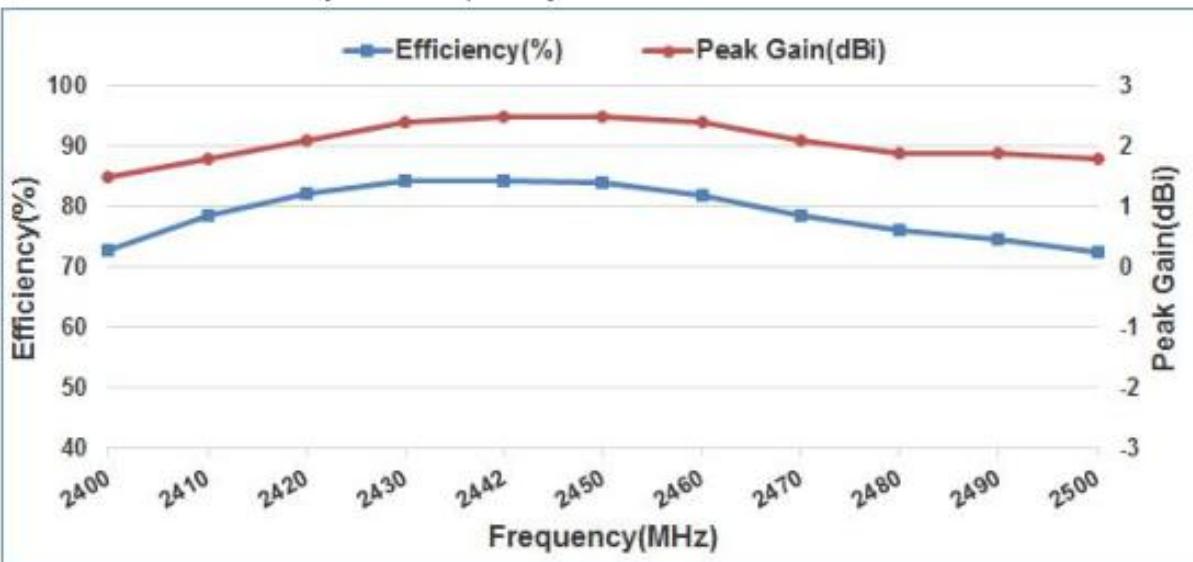

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (AA055) Engineering Specification


DOCUMENT  
NO.

H2U34WGTQW0100

REV.  
D


## 8. Frequency tuning

### 8-1. Chip antenna tuning scenario :

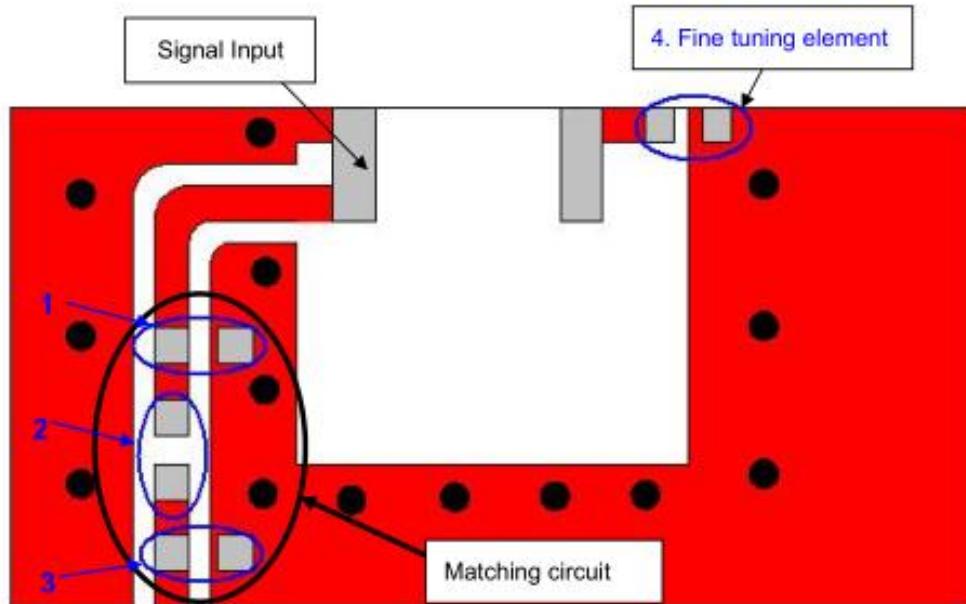

### 8-2. Matching circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 80x40 mm<sup>2</sup> evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

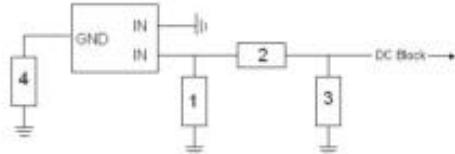

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	1.2pF, (0402)	DARFON	±0.1 pF
2	3.3nH, (0402)	DARFON	±0.1 nH
3	N/A	-	-
4	1.5pF, (0402)	DARFON	±0.1 pF

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert


TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (AA055) Engineering Specification

DOCUMENT  
NO.

H2U34WGTQW0100

REV.  
D

### 8-3. Reference for frequency tuning element

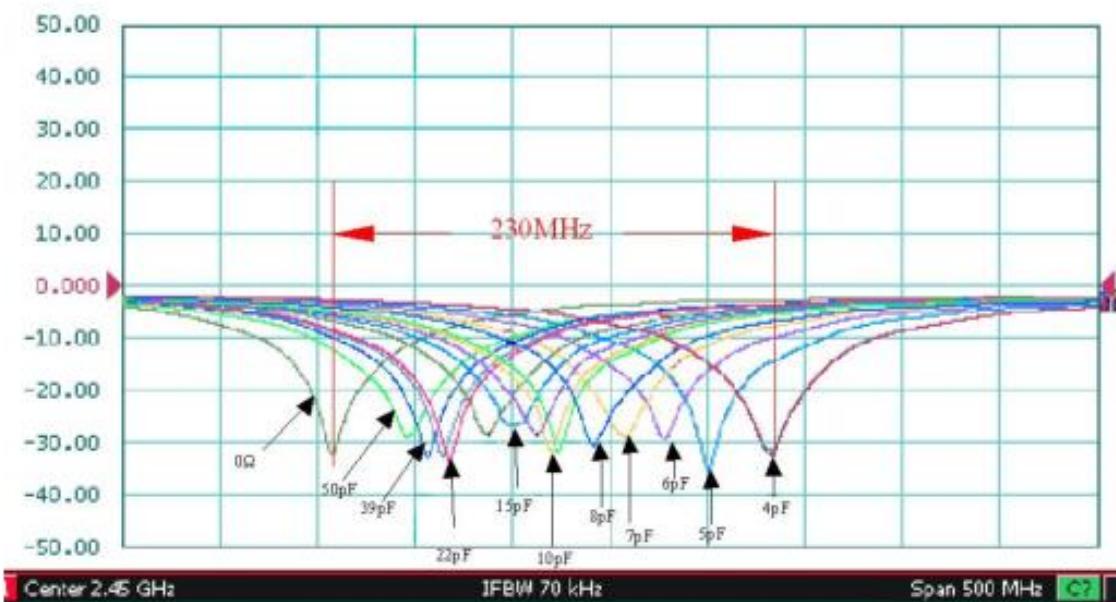

UNICTRON TECHNOLOGIES CORPORATION  
 Room 609, Building 3, Pingshan Private Enterprise  
 Science and Technology Park, No. 65, Lishan Road,  
 Pingshan Community, Taoyuan Subdistrict, Nanshan  
 District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
 PROPERTY OF UNICTRON TECHNOLOGIES  
 CORPORATION AND SHALL NOT BE REPRODUCED  
 OR USED AS THE BASIS FOR THE MANUFACTURE OR  
 SALE OF APPARATUS OR DEVICES WITHOUT  
 PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert

**TITLE :** 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
 Antenna (AA055) Engineering Specification


DOCUMENT  
 NO.

**H2U34WGTQW0100**

REV.  
**D**

## 9. Soldering Conditions

### 9-1. Typical Soldering Profile for Lead-free Process

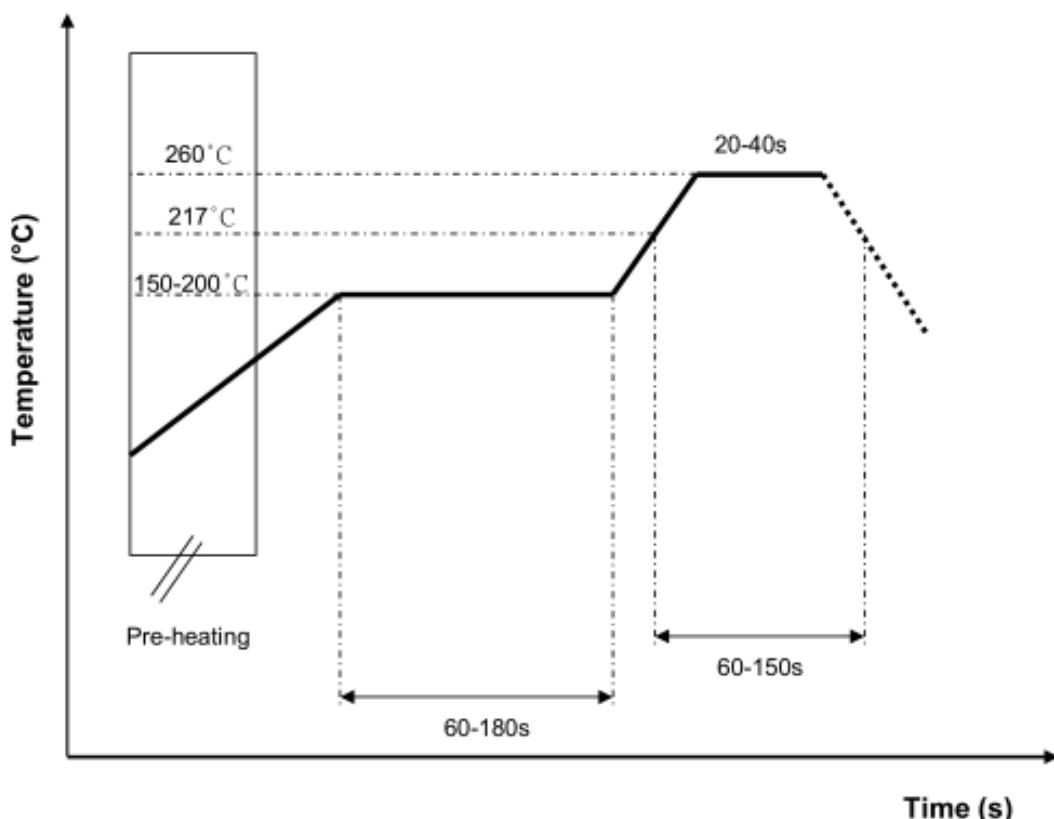

## 10. Reminders for users of Unictron's AA055 ceramic chip antennas

- 10-1. This chip antenna is made of ceramic materials which are relatively more rigid and brittle compared to printed circuit board materials. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 10-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 10-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike


Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip Antenna (AA055) Engineering Specification		DOCUMENT NO.	H2U34WGTQW0100	REV. D
--	--	-----------------	----------------	-----------

## 11. Packing

- (1) Quantity/Reel: 5000 pcs/Reel
- (2) Plastic tape:

a. Tape Drawing

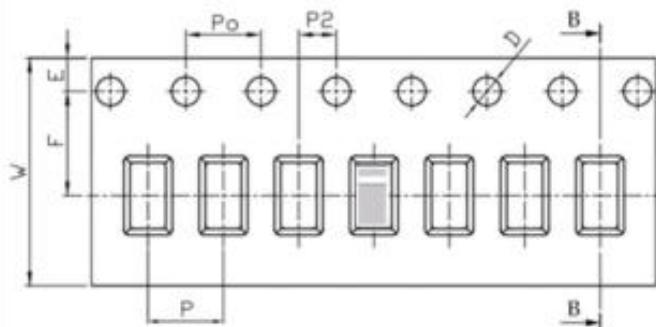

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	$\pm 0.30$
P	4.00	$\pm 0.10$
E	1.75	$\pm 0.10$
F	5.50	$\pm 0.10$
P2	2.00	$\pm 0.10$
D	1.50	$+0.10$ $-0.00$
Po	4.00	$\pm 0.10$
10Po	40.00	$\pm 0.20$

## 12. Operating & Storage Conditions

### 12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C

### 12-2. Storage

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

## 13. Notice

- (1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

- (2) All specifications are subject to change without notice.

UNICTRON TECHNOLOGIES CORPORATION  
Room 609, Building 3, Pingshan Private Enterprise  
Science and Technology Park, No. 65, Lishan Road,  
Pingshan Community, Taoyuan Subdistrict, Nanshan  
District, Shenzhen City

THIS DRAWINGS AND SPECIFICATIONS ARE THE  
PROPERTY OF UNICTRON TECHNOLOGIES  
CORPORATION AND SHALL NOT BE REPRODUCED  
OR USED AS THE BASIS FOR THE MANUFACTURE OR  
SALE OF APPARATUS OR DEVICES WITHOUT  
PERMISSION

Prepared by : Xenia

Designed by : Ken

Checked by : Mike

Approved by : Herbert

TITLE : 3.2 x 1.6 x 0.5(mm) WiFi/Bluetooth Ceramic Chip  
Antenna (AA055) Engineering Specification

DOCUMENT  
NO.

H2U34WGTQW0100

REV.  
D