



# FCC Radio Test Report

## FCC ID: 2BQ4V0825DG

**This report concerns: Original Grant**

**Project No.** : 2506C290  
**Equipment** : Wireless dongle  
**Brand Name** : NAYA TECH, Naya Create  
**Test Model** : NAYA-100-1(Dongle)  
**Series Model** : N/A  
**Applicant** : Naya B.V.  
**Address** : Wasaweg 3  
Groningen, 9723JD, NL  
**Manufacturer** : Dongguan Boen Intelligent Technology Co., Ltd.  
**Address** : 2nd Floor & 3rd floor, Building A, No.23.Shiyang Street, Dongcheng  
Street, Dongguan City, Guangdong Province, China  
**Factory** : Dongguan Boen Intelligent Technology Co., Ltd.  
**Address** : 2nd Floor & 3rd floor, Building A, No.23.Shiyang Street, Dongcheng  
Street, Dongguan City, Guangdong Province, China  
**Date of Receipt** : Jun. 20, 2025  
**Date of Test** : Jun. 26, 2025 ~ Jul. 16, 2025  
**Issued Date** : Aug. 12, 2025  
**Test Sample** : Engineering Sample No.: DG20250620574 for AC power line  
conducted emissions and radiated emissions, DG20250620572 for  
others.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the  
relative standards by BTL Inc. (Dongguan)

**Prepared by**

: Sheldon. Ou

Sheldon Ou

**Approved by**

: Chay . Cai

Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . APPLICABLE STANDARDS</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 SUPPORT UNITS	12
3.6 CUSTOMER INFORMATION DESCRIPTION	12
<b>4 . AC POWER LINE CONDUCTED EMISSIONS</b>	<b>13</b>
4.1 LIMIT	13
4.2 TEST PROCEDURE	13
4.3 DEVIATION FROM TEST STANDARD	13
4.4 TEST SETUP	14
4.5 EUT OPERATING CONDITIONS	14
4.6 TEST RESULTS	14
<b>5 . RADIATED EMISSIONS</b>	<b>15</b>
5.1 LIMIT	15
5.2 TEST PROCEDURE	16
5.3 DEVIATION FROM TEST STANDARD	17
5.4 TEST SETUP	17
5.5 EUT OPERATING CONDITIONS	19
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	19
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	19
5.8 TEST RESULT - ABOVE 1000 MHZ	19
<b>6 . BANDWIDTH</b>	<b>20</b>
6.1 LIMIT	20

Table of Contents	Page
6.2 TEST PROCEDURE	20
6.3 DEVIATION FROM STANDARD	20
6.4 TEST SETUP	20
6.5 EUT OPERATION CONDITIONS	20
6.6 TEST RESULTS	20
<b>7 . MAXIMUM OUTPUT POWER</b>	<b>21</b>
7.1 LIMIT	21
7.2 TEST PROCEDURE	21
7.3 DEVIATION FROM STANDARD	21
7.4 TEST SETUP	21
7.5 EUT OPERATION CONDITIONS	21
7.6 TEST RESULTS	21
<b>8 . CONDUCTED SPURIOUS EMISSION</b>	<b>22</b>
8.1 LIMIT	22
8.2 TEST PROCEDURE	22
8.3 DEVIATION FROM STANDARD	22
8.4 TEST SETUP	22
8.5 EUT OPERATION CONDITIONS	22
8.6 TEST RESULTS	22
<b>9 . POWER SPECTRAL DENSITY</b>	<b>23</b>
9.1 LIMIT	23
9.2 TEST PROCEDURE	23
9.3 DEVIATION FROM STANDARD	23
9.4 TEST SETUP	23
9.5 EUT OPERATION CONDITIONS	23
9.6 TEST RESULTS	23
<b>10 . MEASUREMENT INSTRUMENTS LIST</b>	<b>24</b>
<b>11 . EUT TEST PHOTO</b>	<b>26</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>33</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>36</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>41</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>44</b>

<b>Table of Contents</b>	<b>Page</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>52</b>
<b>APPENDIX F - MAXIMUM OUTPUT POWER</b>	<b>54</b>
<b>APPENDIX G - CONDUCTED SPURIOUS EMISSION</b>	<b>56</b>
<b>APPENDIX H - POWER SPECTRAL DENSITY</b>	<b>58</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2506C290	R00	Original Report.	Aug. 12, 2025	Valid

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.  
BTL's Registration Number for FCC: 747969  
BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))  
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ ,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

## C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	AC 120V/60Hz	Hayden Chen	Jul. 04, 2025
Radiated Emissions -9 kHz to 30 MHz	22°C	48%	DC 5V	Hayden Chen	Jul. 01, 2025
Radiated Emissions -30 MHz to 1000 MHz	23°C	55%	DC 5V	Calvin Wen	Jul. 08, 2025
Radiated Emissions -Above 1000 MHz	23°C	55%	DC 5V	Calvin Wen	Jul. 13, 2025
	23°C	55%	DC 5V	Calvin Wen	Jul. 09, 2025
	23°C	55%	DC 5V	Calvin Wen	Jul. 16, 2025
Bandwidth	23°C	48%	DC 5V	Parker Yang	Jul. 02, 2025
	24°C	56%	DC 5V	Parker Yang	Jul. 15, 2025
Maximum Output Power	23°C	48%	DC 5V	Parker Yang	Jul. 02, 2025
	24°C	56%	DC 5V	Parker Yang	Jul. 15, 2025
Conducted Spurious Emission	23°C	48%	DC 5V	Parker Yang	Jul. 02, 2025
	24°C	56%	DC 5V	Parker Yang	Jul. 15, 2025
Power Spectral Density	23°C	48%	DC 5V	Parker Yang	Jul. 02, 2025
	24°C	56%	DC 5V	Parker Yang	Jul. 15, 2025

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless dongle
Brand Name	NAYA TECH, Naya Create
Test Model	NAYA-100-1(Dongle)
Series Model	N/A
Model Difference(s)	N/A
Software Version	Naya_Temp_Flash_Pair.exe
Hardware Version	B0K17_Dongle_20241106_V01
Power Source	Supplied from USB port.
Power Rating	DC 5V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	2Mbps
Max. Output Power	2Mbps: 8.97 dBm (0.0079 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

#### 2. Channel List:

Channel	Type	Frequency (MHz)	Channel	Type	Frequency (MHz)
00	Data	2404	20	Data	2444
01	Data	2406	21	Data	2446
02	Data	2408	22	Data	2448
03	Data	2410	23	Data	2450
04	Data	2412	24	Data	2452
05	Data	2414	25	Data	2454
06	Data	2416	26	Data	2456
07	Data	2418	27	Data	2458
08	Data	2420	28	Data	2460
09	Data	2422	29	Data	2462
10	Data	2424	30	Data	2464
11	Data	2426	31	Data	2466
12	Data	2428	32	Data	2468
13	Data	2430	33	Data	2470
14	Data	2432	34	Data	2472
15	Data	2434	35	Data	2474
16	Data	2436	36	Data	2476
17	Data	2438	37	Advertising	2402
18	Data	2440	38	Advertising	2426
19	Data	2442	39	Advertising	2480

#### 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	BOEN	RF0401A	PCB	N/A	3.11

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_2Mbps Channel 37/19/39
Mode 2	TX Mode_2Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 39

<b>Radiated emissions test - Below 1GHz &amp; Above 18 GHz</b>	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 39

<b>Radiated emissions test - 1 GHz - 18 GHz</b>	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 37/19/39

<b>Conducted test</b>	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 37/19/39

Note:


- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 2Mbps Channel 39 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal and recorded.

### 3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	nrfconnect-setup-5.1.0-x64		
Frequency (MHz)	2402	2442	2480
2Mbps	8	7	8

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

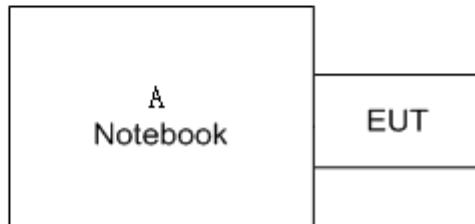

### 3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	INSPIRON 5493	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-

### 3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

## 4. AC POWER LINE CONDUCTED EMISSIONS

### 4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4 TEST SETUP

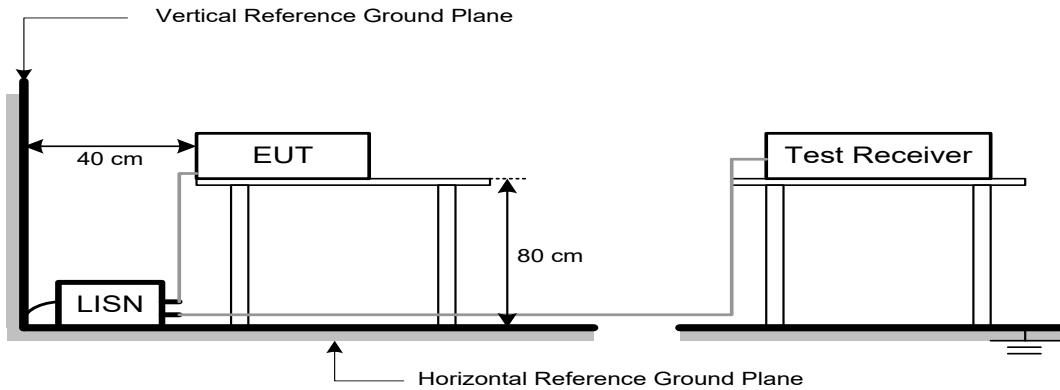

#### 4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 5. RADIATED EMISSIONS

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB $\mu$ V/m)		Harmonic at 1m (dB $\mu$ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 4)	63.5 (Note 4)

#### Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB $\mu$ V/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d<sub>limit</sub>/d<sub>measure</sub>)=20log (3/1)=9.5 dB.

FS<sub>limit</sub>: Harmonic at 3m Peak and Average limit.

FS<sub>max</sub>: Harmonic at 1m Peak and Average Maximum value.

d<sub>limit</sub>: Harmonic at 3m test distance.

d<sub>measure</sub>: Harmonic Actual test distance.

## 5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

### 5.3 DEVIATION FROM TEST STANDARD


No deviation.

### 5.4 TEST SETUP


#### 9 kHz to 30 MHz

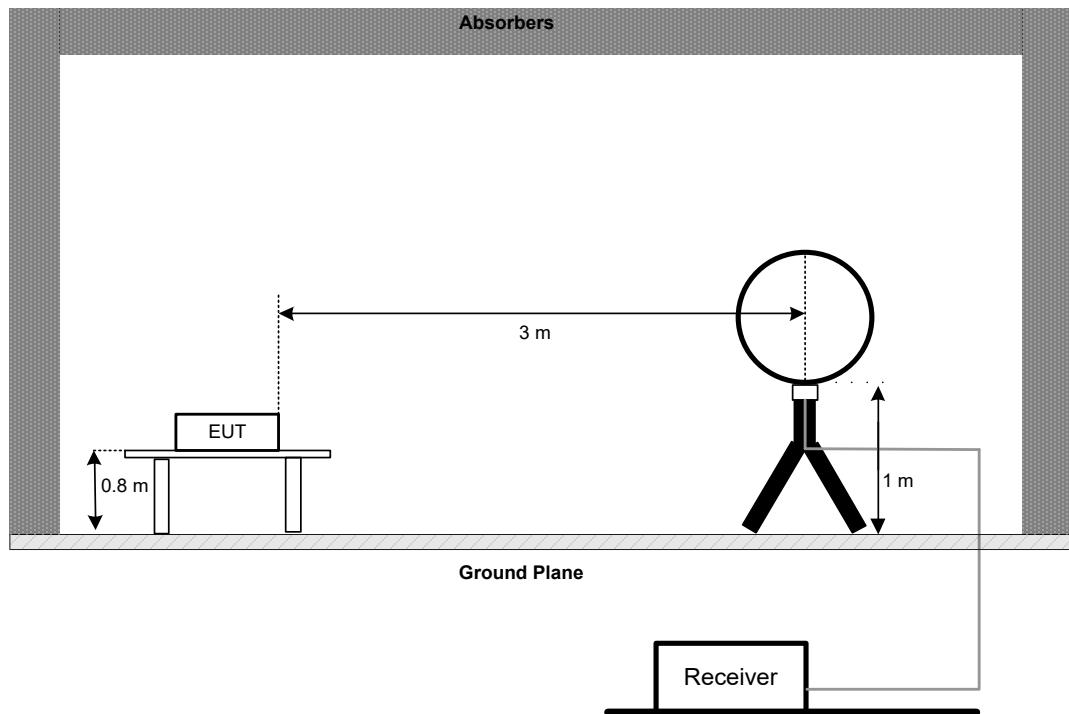


#### 30 MHz to 1 GHz

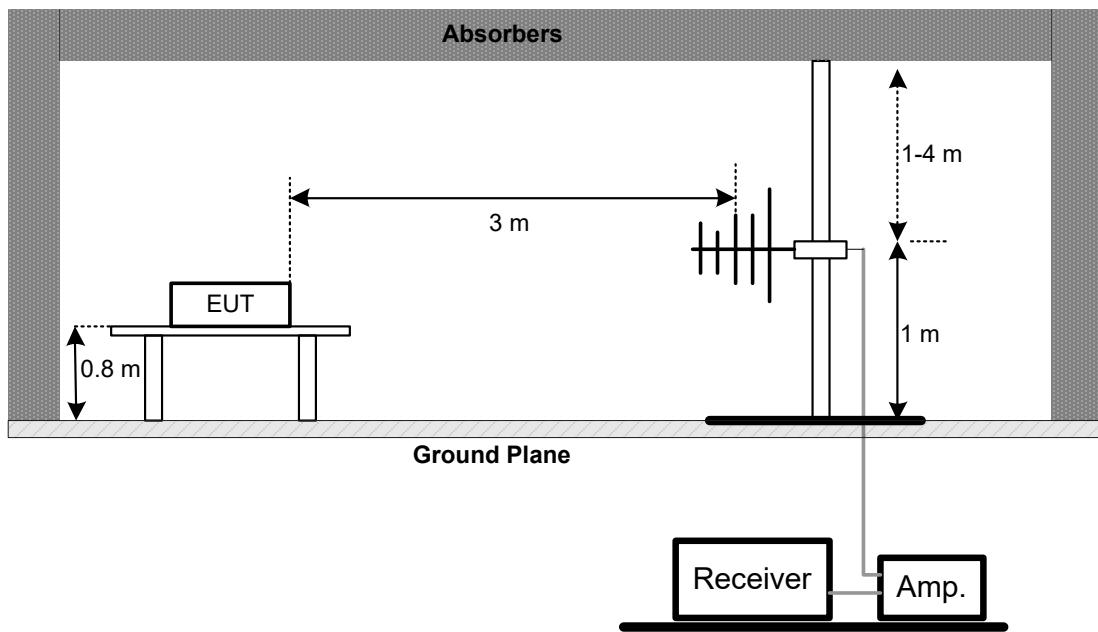

**Above 1 GHz  
Band edge & Harmonic(1 GHz to 18 GHz)**

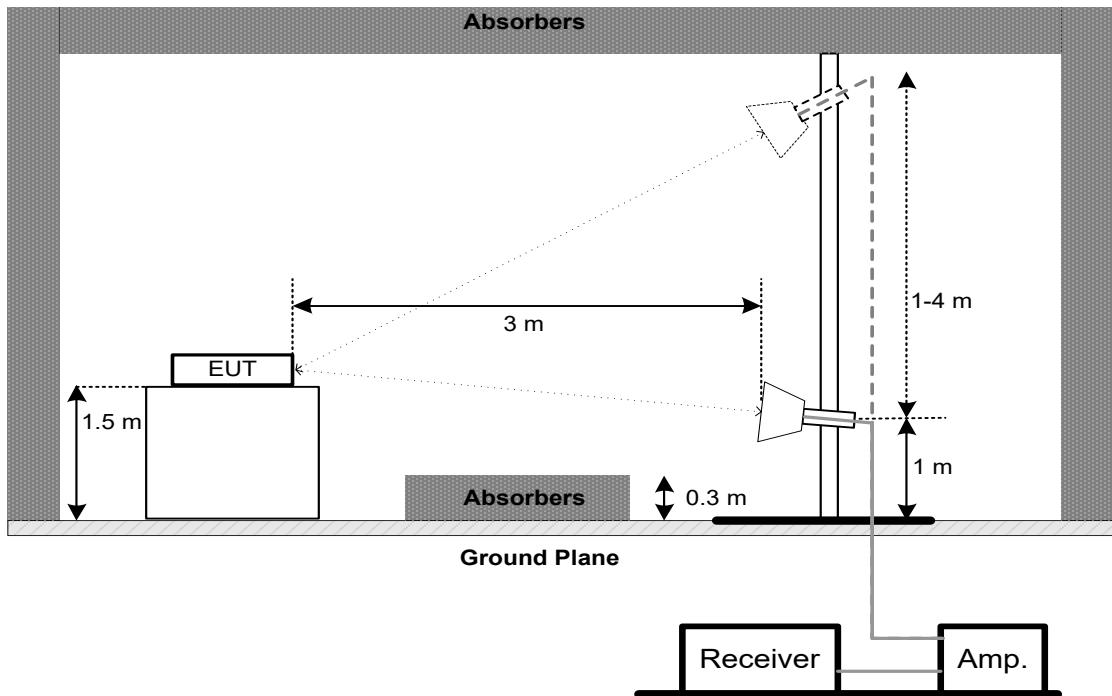

**Harmonic(18 GHz to 26.5 GHz)**

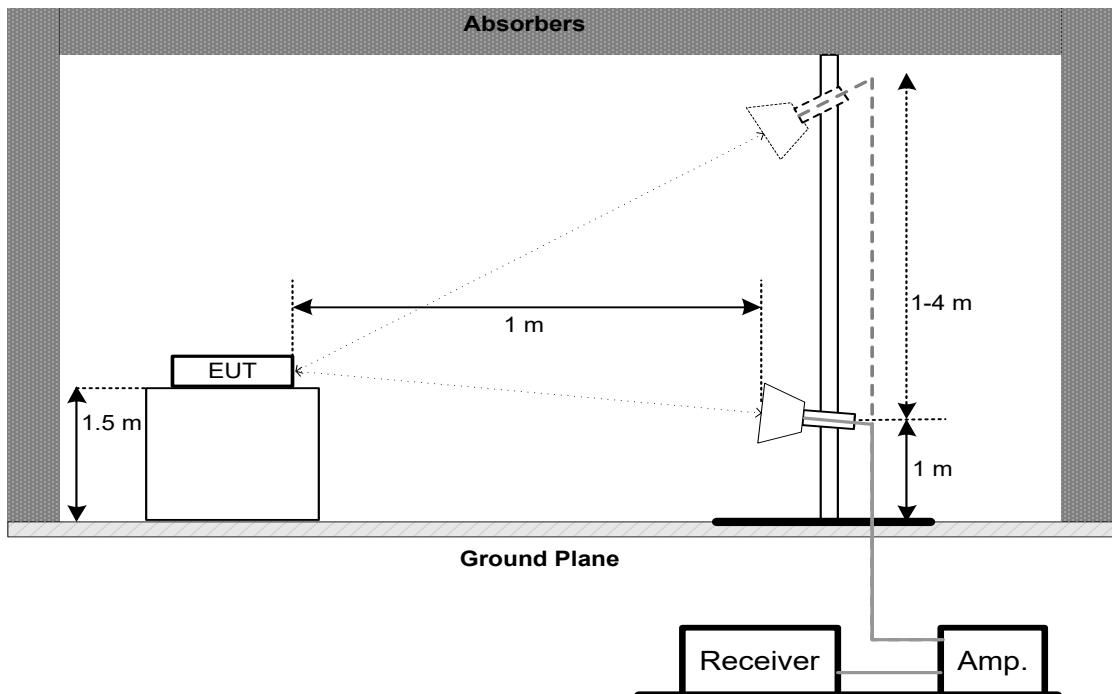

**5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULT - 9 kHz TO 30 MHz**

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**5.7 TEST RESULT - 30 MHz TO 1000 MHz**

Please refer to the APPENDIX C.

**5.8 TEST RESULT - ABOVE 1000 MHz**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. BANDWIDTH

### 6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

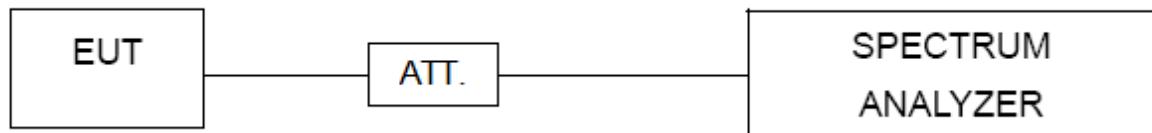

### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. MAXIMUM OUTPUT POWER

### 7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. CONDUCTED SPURIOUS EMISSION

### 8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

## 9. POWER SPECTRAL DENSITY

### 9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	4MHz
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H.

## 10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	102771	Jun. 27, 2026
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-12 M-001	12M	Apr. 23, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM -3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz - 18GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	966 Chamber room	CM	9*6*6	N/A	May 09, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jun. 29, 2026
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jun. 29, 2026
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jun. 29, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 29, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9912	N/A	May 27, 2026



Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 09, 2026
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A



Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

**11. EUT TEST PHOTO****AC Power Line Conducted Emissions Test Photos**

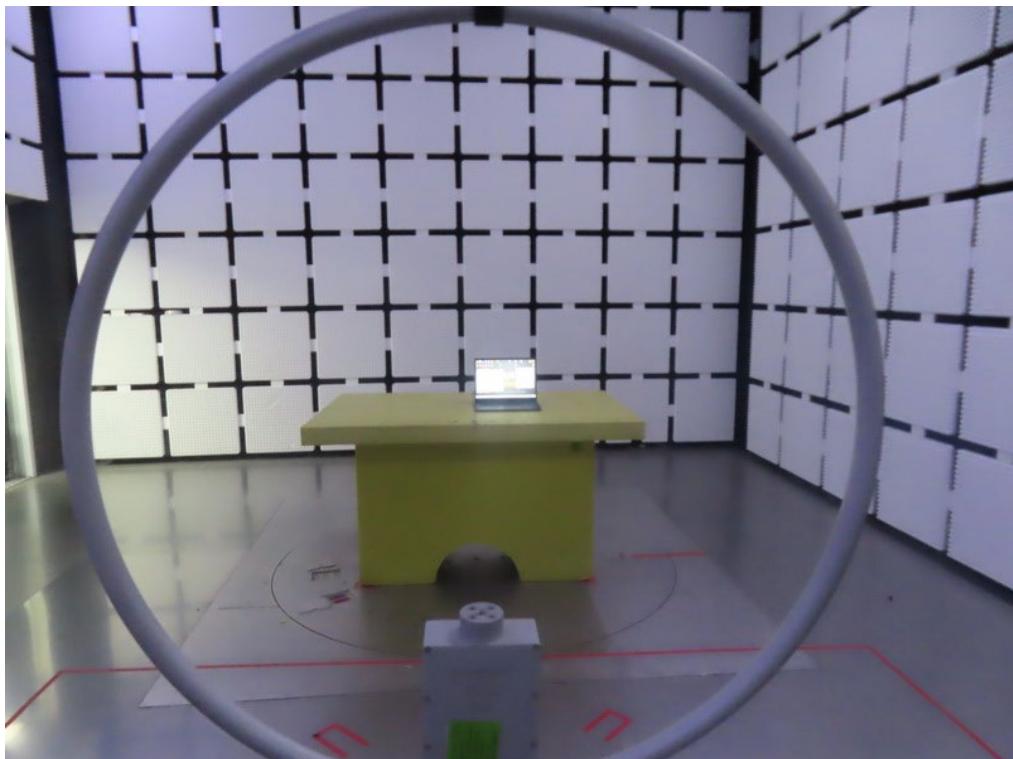
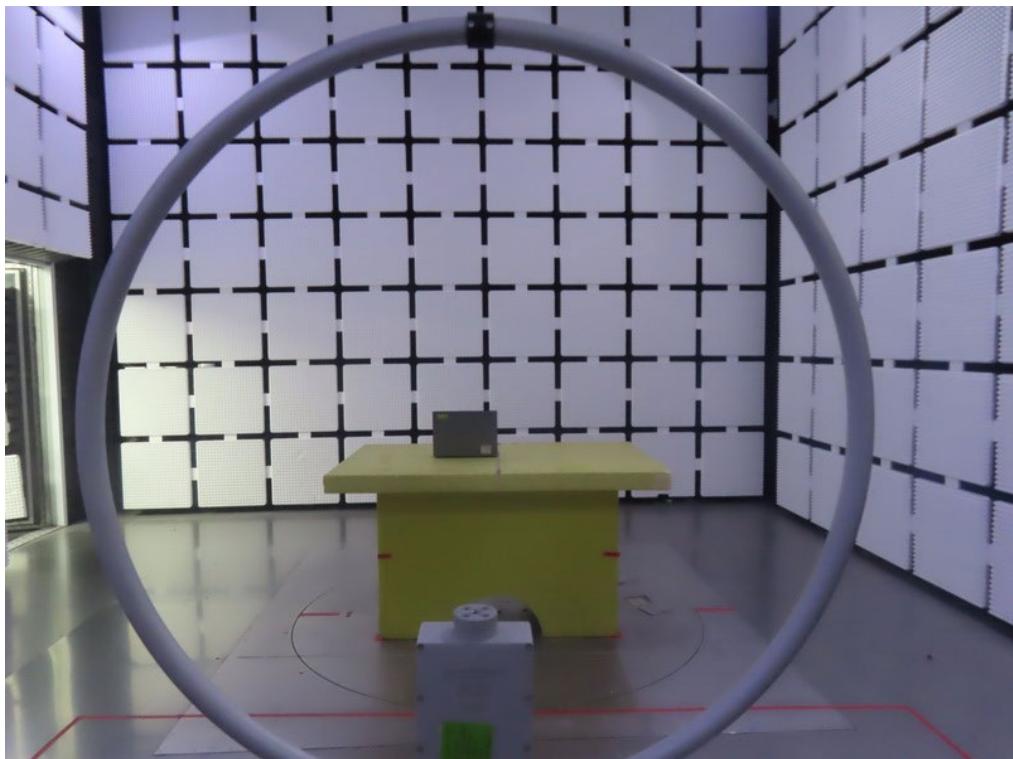
**Radiated Emissions Test Photos****9 kHz to 30 MHz**

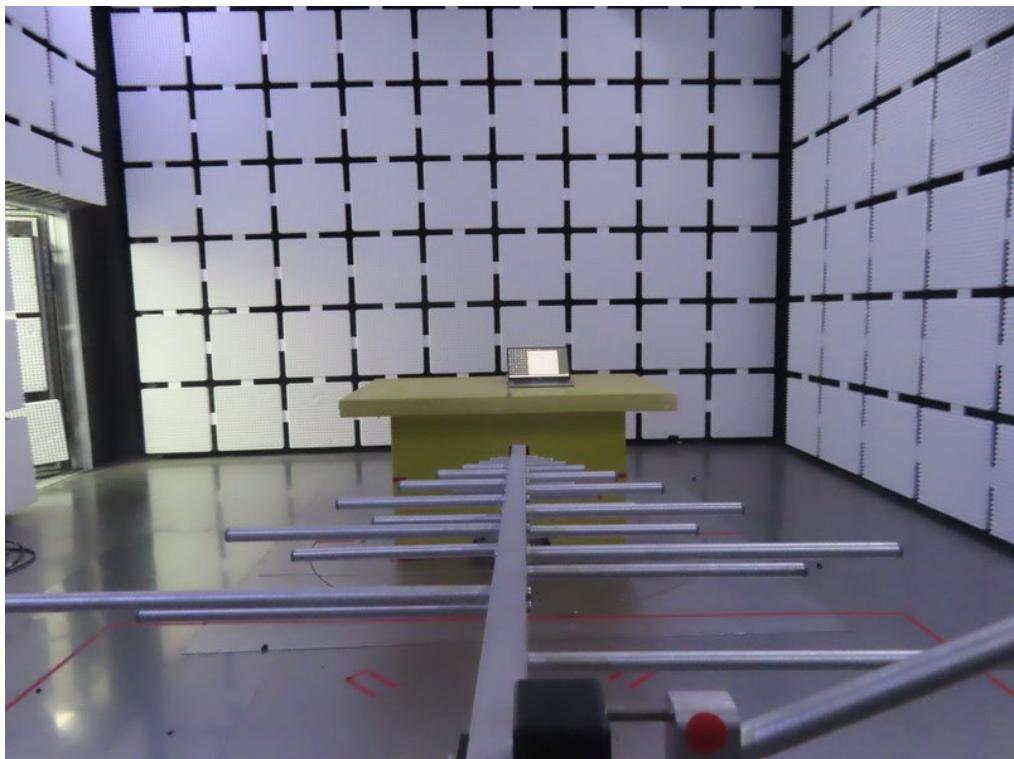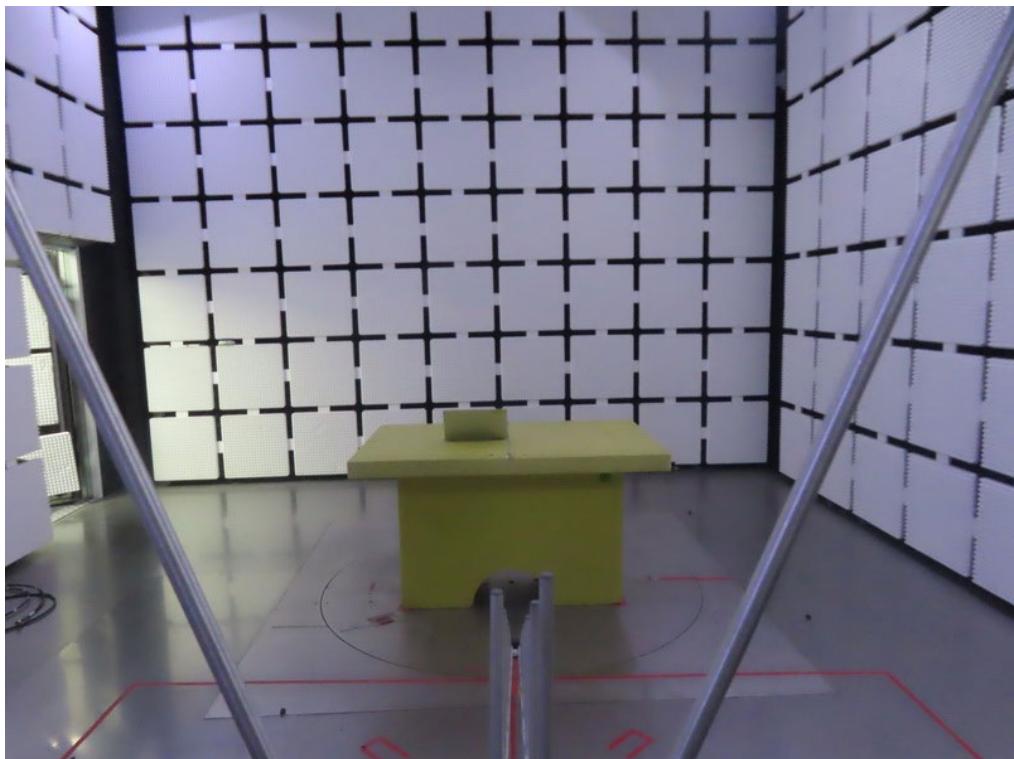**Radiated Emissions Test Photos****30 MHz to 1000 MHz**

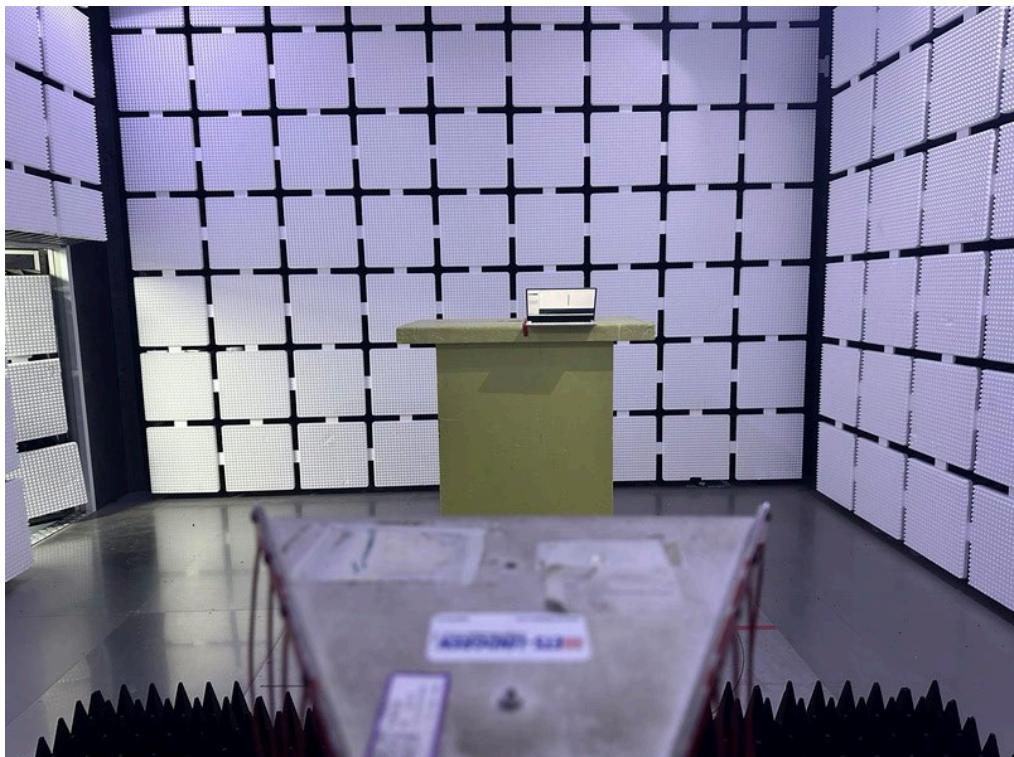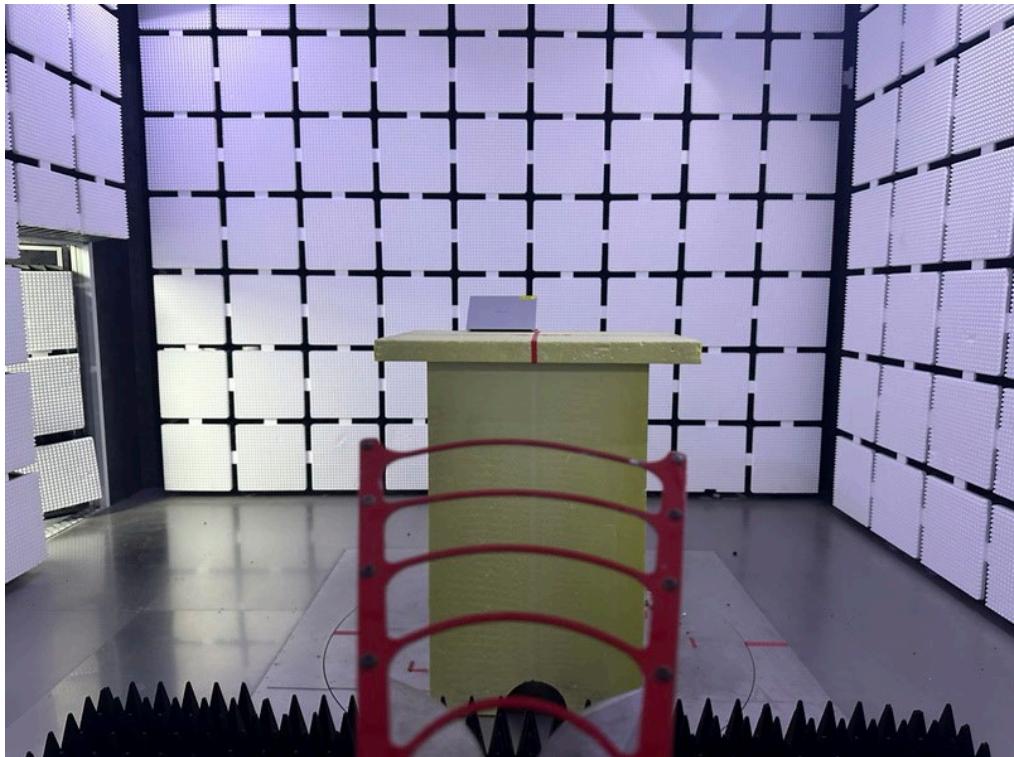**Radiated Emissions Test Photos****Band edge & Harmonic(1 GHz to 18 GHz)**

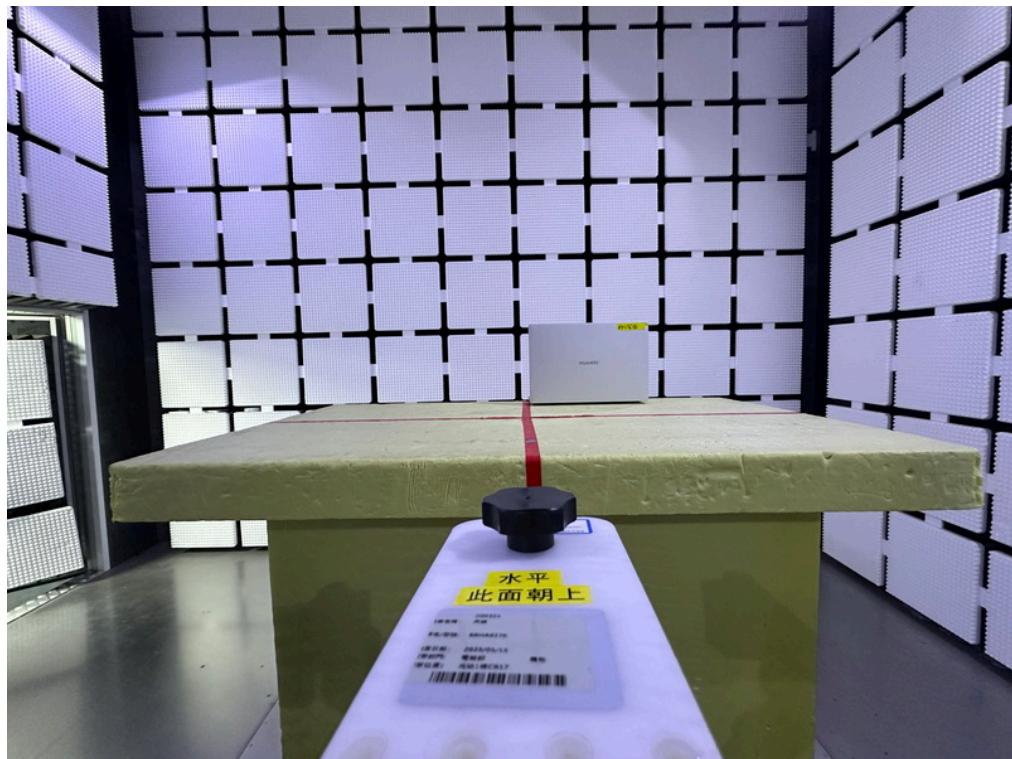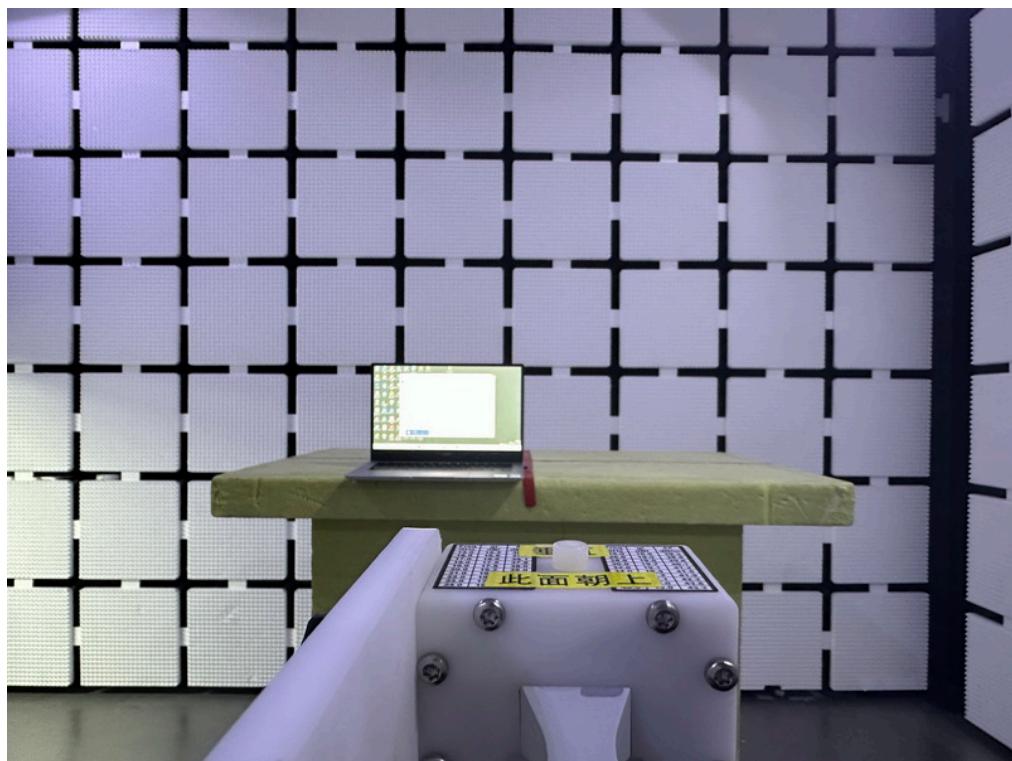
**Radiated Emissions Test Photos****Harmonic(18 GHz to 26.5 GHz)**

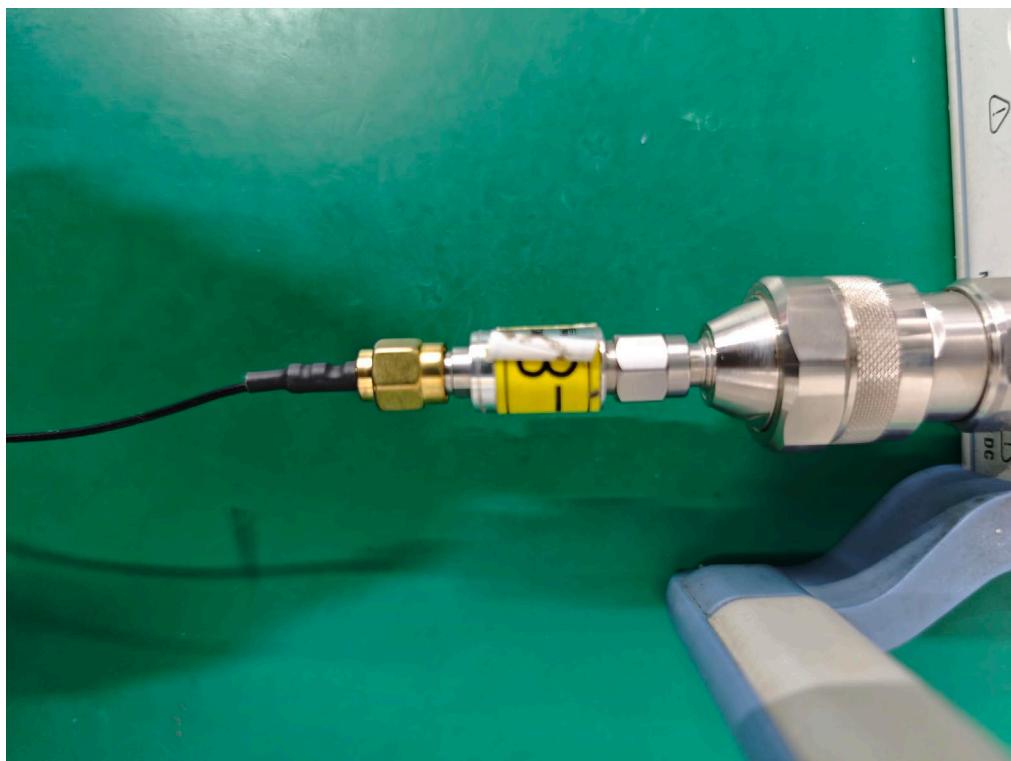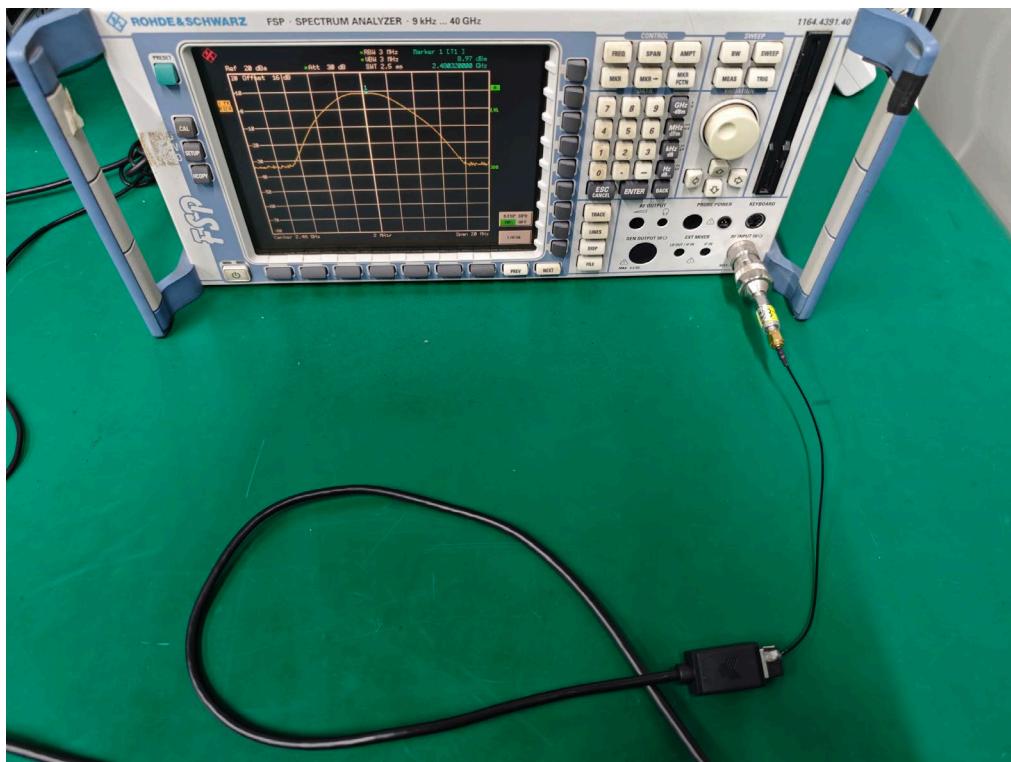

**Conducted Test Photos**

## APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_2Mbps Channel 39	Phase	Line
-----------	--------------------------	-------	------

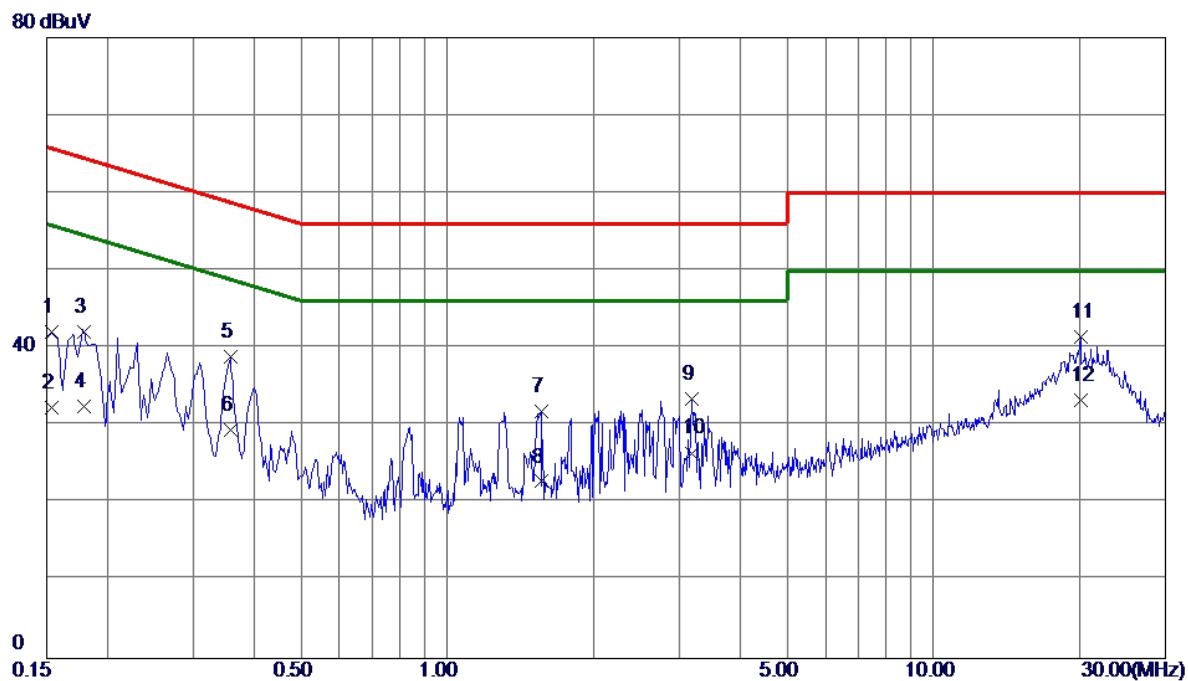


No.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure ment dBuV	Limit dBuV	Margin dB	Detector		Comment
							Detector	Comment	
1	0.1539	32.28	9.79	42.07	65.79	-23.72	QP		
2	0.1539	22.60	9.79	32.39	55.79	-23.40	AVG		
3	0.1787	32.31	9.79	42.10	64.55	-22.45	QP		
4	0.1787	22.70	9.79	32.49	54.55	-22.06	AVG		
5	0.3580	29.00	9.81	38.81	58.77	-19.96	QP		
6	0.3580	19.60	9.81	29.41	48.77	-19.36	AVG		
7	1.5580	21.77	10.00	31.77	56.00	-24.23	QP		
8	1.5580	12.80	10.00	22.80	46.00	-23.20	AVG		
9	3.1860	23.23	10.27	33.50	56.00	-22.50	QP		
10	3.1860	16.21	10.27	26.48	46.00	-19.52	AVG		
11	20.0459	26.71	14.68	41.39	60.00	-18.61	QP		
12 *	20.0459	18.60	14.68	33.28	50.00	-16.72	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Phase	Neutral
-----------	--------------------------	-------	---------

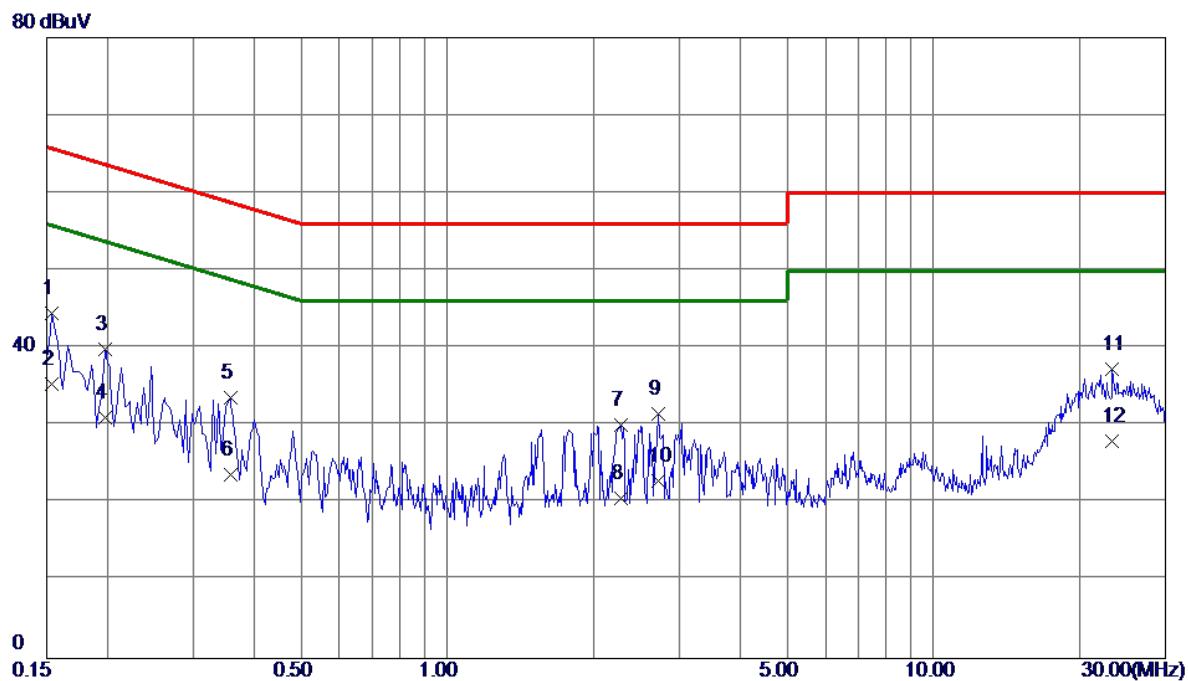


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dB			
1	0.1539	34.73	9.76	44.49	65.79	-21.30	QP	
2 *	0.1539	25.60	9.76	35.36	55.79	-20.43	AVG	
3	0.1980	30.13	9.77	39.90	63.69	-23.79	QP	
4	0.1980	21.20	9.77	30.97	53.69	-22.72	AVG	
5	0.3580	23.77	9.78	33.55	58.77	-25.22	QP	
6	0.3580	13.90	9.78	23.68	48.77	-25.09	AVG	
7	2.2780	19.94	10.08	30.02	56.00	-25.98	QP	
8	2.2780	10.60	10.08	20.68	46.00	-25.32	AVG	
9	2.7180	21.35	10.15	31.50	56.00	-24.50	QP	
10	2.7180	12.71	10.15	22.86	46.00	-23.14	AVG	
11	23.2780	22.09	15.20	37.29	60.00	-22.71	QP	
12	23.2780	12.80	15.20	28.00	50.00	-22.00	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

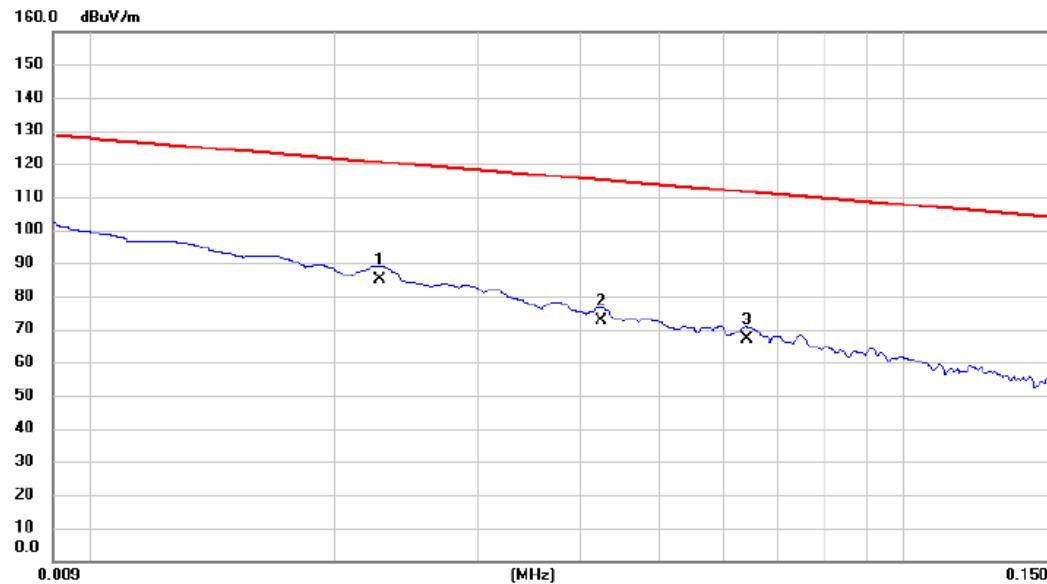


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.023	64.77	20.29	85.06	120.48	-35.42	AVG	
2		0.042	52.58	20.14	72.72	115.06	-42.34	AVG	
3		0.064	46.68	20.14	66.82	111.47	-44.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

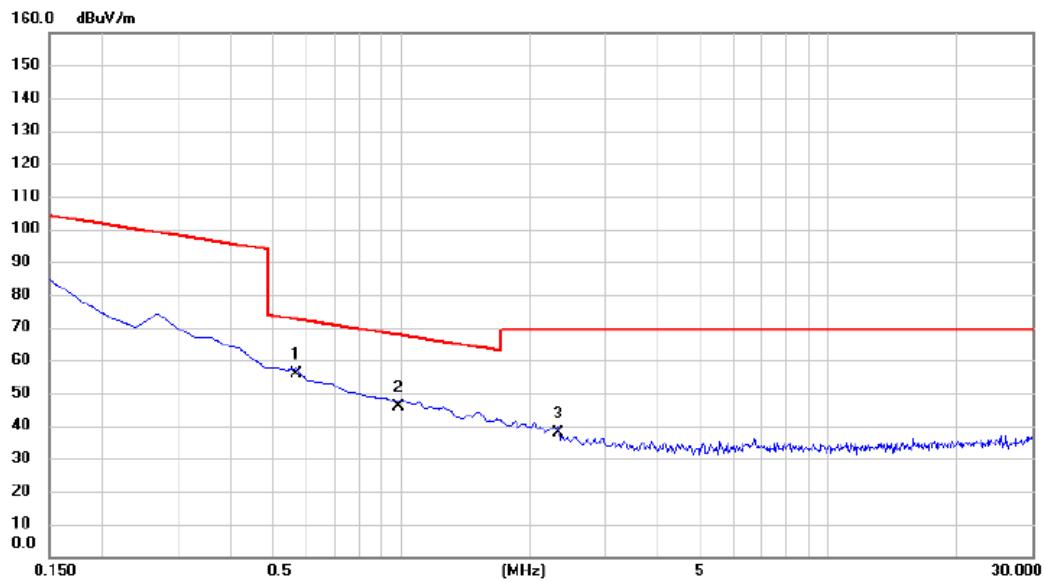


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m				
1 *		0.568	35.60	20.04	55.64	72.52	-16.88	QP	
2		0.986	25.90	20.00	45.90	67.73	-21.83	QP	
3		2.329	17.94	20.03	37.97	69.54	-31.57	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

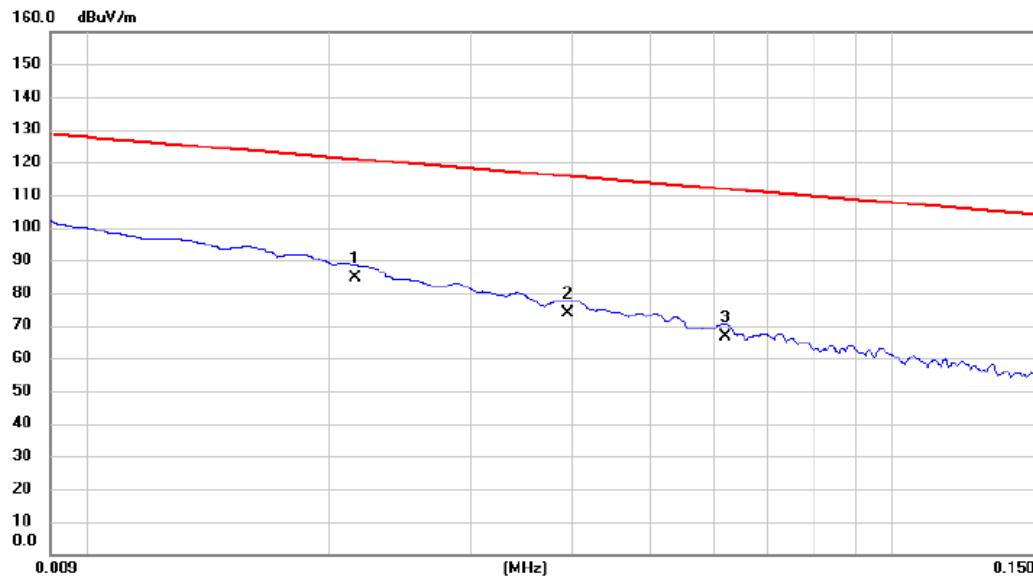


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.021	64.36	20.31	84.67	120.96	-36.29	AVG	
2		0.040	53.57	20.14	73.71	115.65	-41.94	AVG	
3		0.062	46.61	20.14	66.75	111.76	-45.01	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

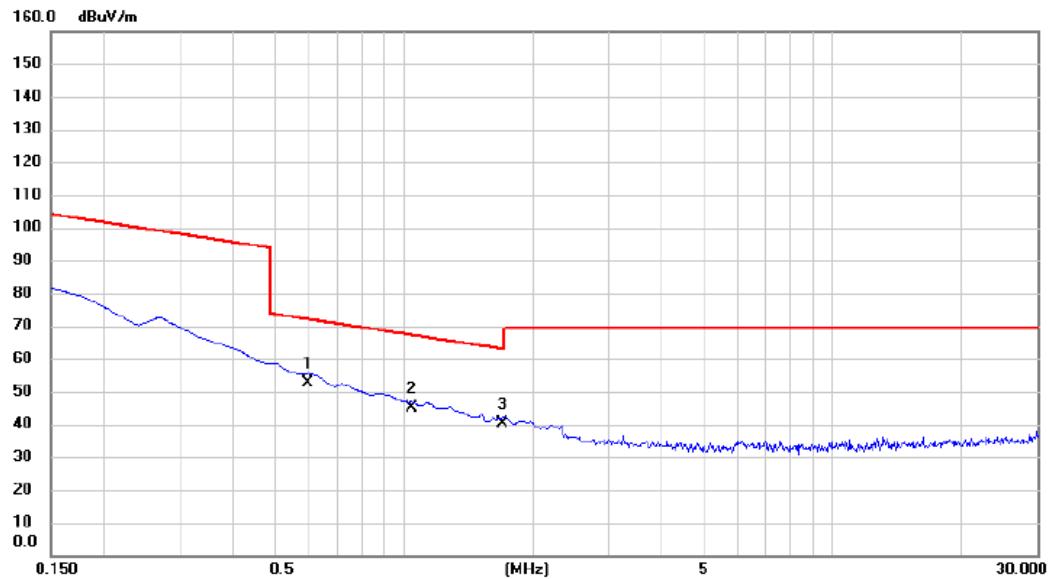


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	0.598	32.59	20.03	52.62	72.07	-19.45
2		1.046	24.85	20.00	44.85	67.22	-22.37
3		1.702	20.15	20.01	40.16	62.98	-22.82

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

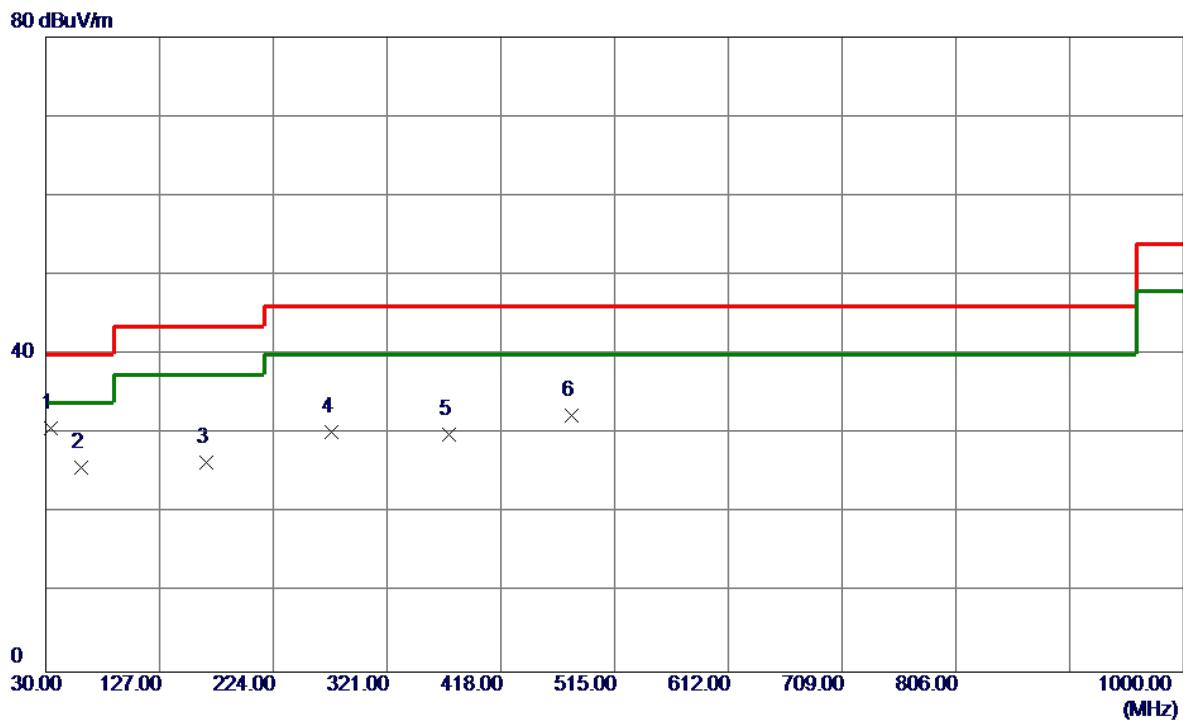


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit		Margin	Detector	Comment
					MHz	dBuV/m	dB	dBuV/m	dB
1 *	33.8800	43.00	-12.29	30.71	40.00	-9.29	Peak		
2	60.0700	37.36	-11.57	25.79	40.00	-14.21	Peak		
3	166.7700	36.94	-10.61	26.33	43.52	-17.19	Peak		
4	273.4700	40.67	-10.49	30.18	46.02	-15.84	Peak		
5	373.3800	37.82	-7.96	29.86	46.02	-16.16	Peak		
6	478.1400	37.85	-5.57	32.28	46.02	-13.74	Peak		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

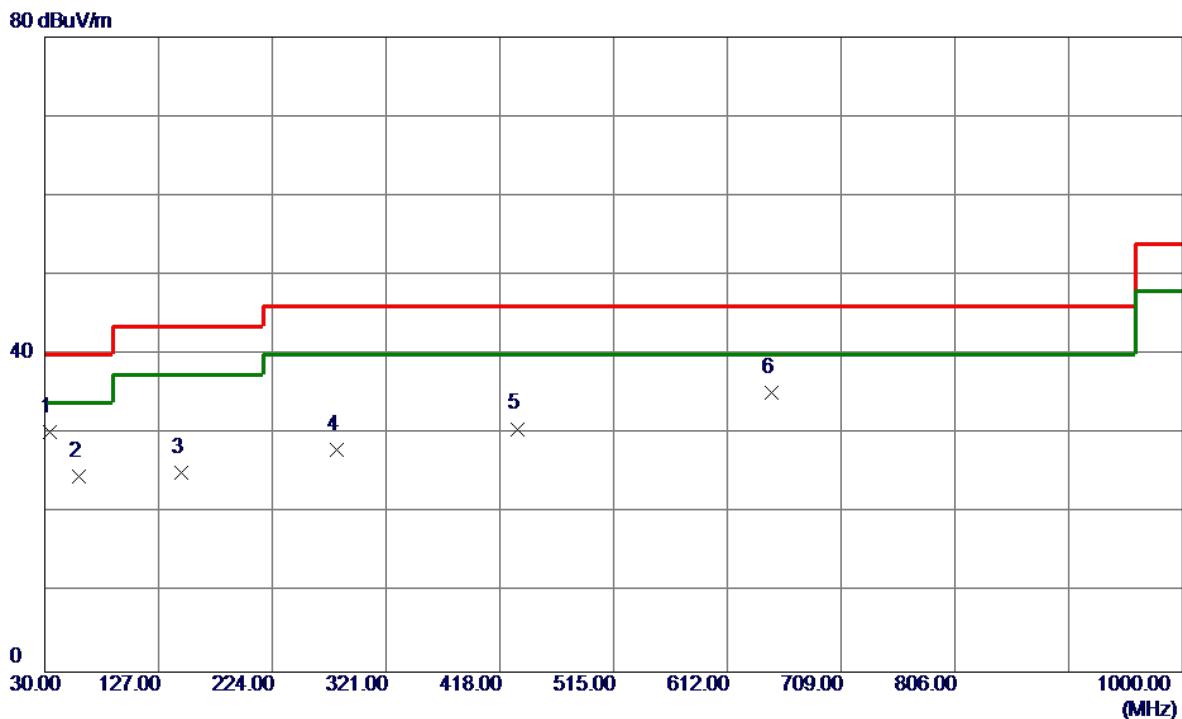


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1 *	33.8800	42.54	-12.29	30.25	40.00	-9.75	Peak		
2	59.1000	36.09	-11.49	24.60	40.00	-15.40	Peak		
3	146.4000	35.93	-10.84	25.09	43.52	-18.43	Peak		
4	279.2900	38.16	-10.15	28.01	46.02	-18.01	Peak		
5	433.5200	37.08	-6.44	30.64	46.02	-15.38	Peak		
6	649.8300	37.33	-2.19	35.14	46.02	-10.88	Peak		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	TX 2402 MHz _CH37_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

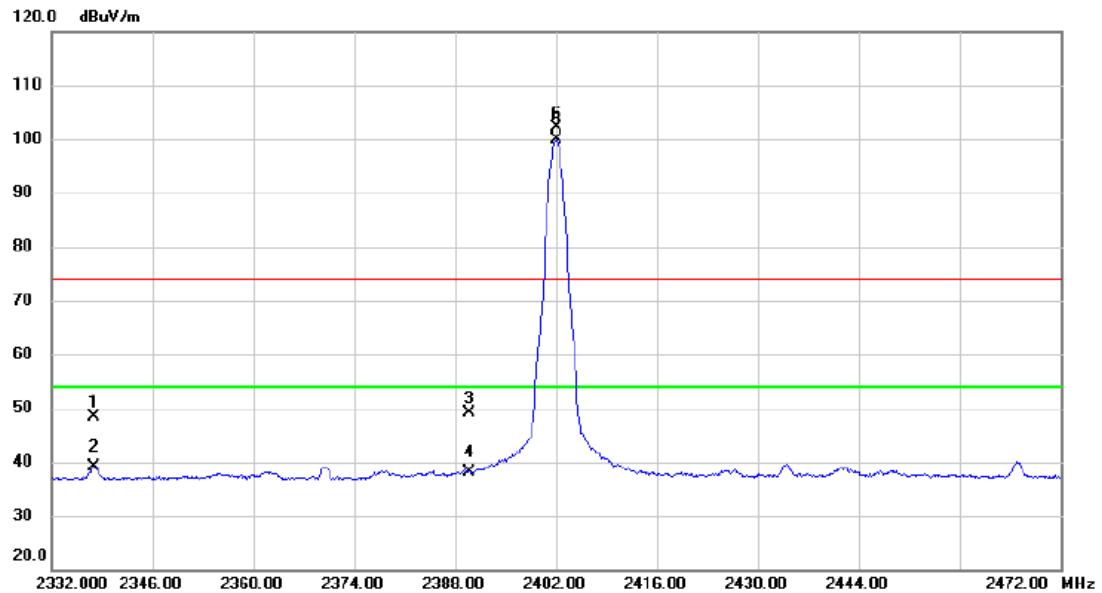


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2337.880	40.52	7.77	48.29	74.00	-25.71	peak	
2		2337.880	31.26	7.77	39.03	54.00	-14.97	AVG	
3		2390.000	41.15	7.89	49.04	74.00	-24.96	peak	
4		2390.000	30.26	7.89	38.15	54.00	-15.85	AVG	
5	*	2402.000	91.90	7.92	99.82	54.00	45.82	AVG	No Limit
6	X	2402.140	94.16	7.92	102.08	74.00	28.08	peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH37_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

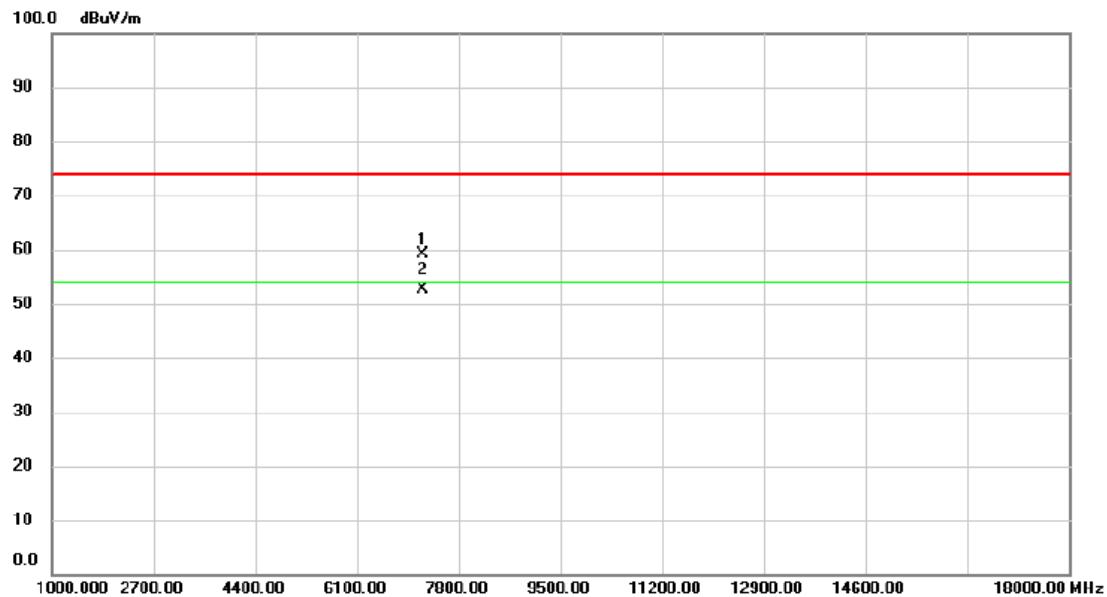


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		7204.520	49.88	9.22	59.10	74.00	-14.90	peak
2	*	7204.780	43.47	9.22	52.69	54.00	-1.31	AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2442 MHz _CH19_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

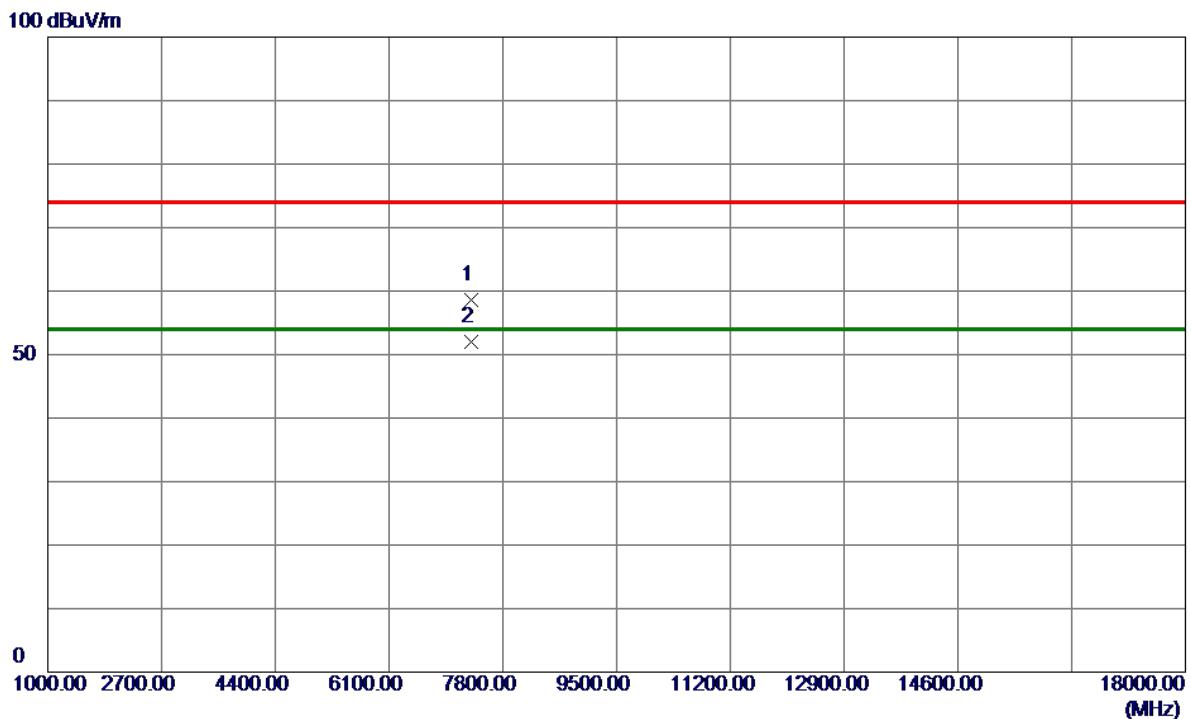


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	7324.4000	49.44	9.17	58.61	74.00	-15.39	Peak	
2 *	7324.7800	42.92	9.17	52.09	54.00	-1.91	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

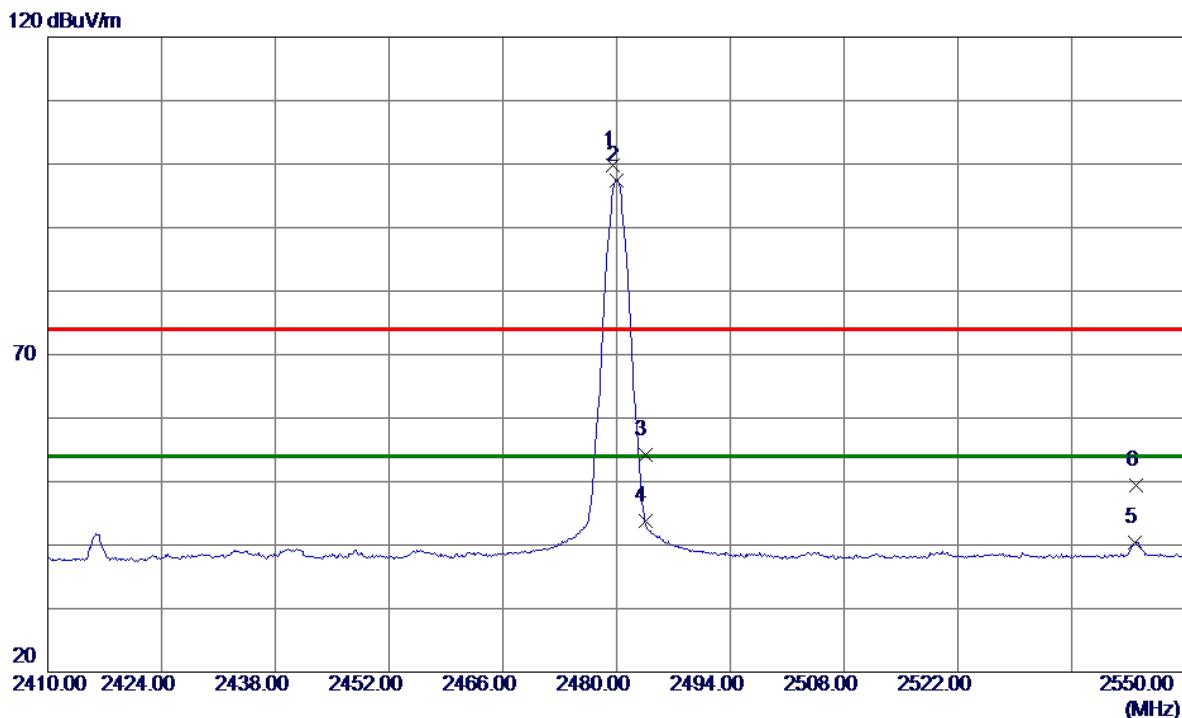


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2479.5800	91.70	8.10	99.80	74.00	25.80	Peak	No Limit
2 *	2480.0000	89.34	8.10	97.44	54.00	43.44	AVG	No Limit
3	2483.5000	46.10	8.11	54.21	74.00	-19.79	Peak	
4	2483.5000	35.77	8.11	43.88	54.00	-10.12	AVG	
5	2543.8400	32.05	8.41	40.46	54.00	-13.54	AVG	
6	2543.9800	41.08	8.41	49.49	74.00	-24.51	Peak	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

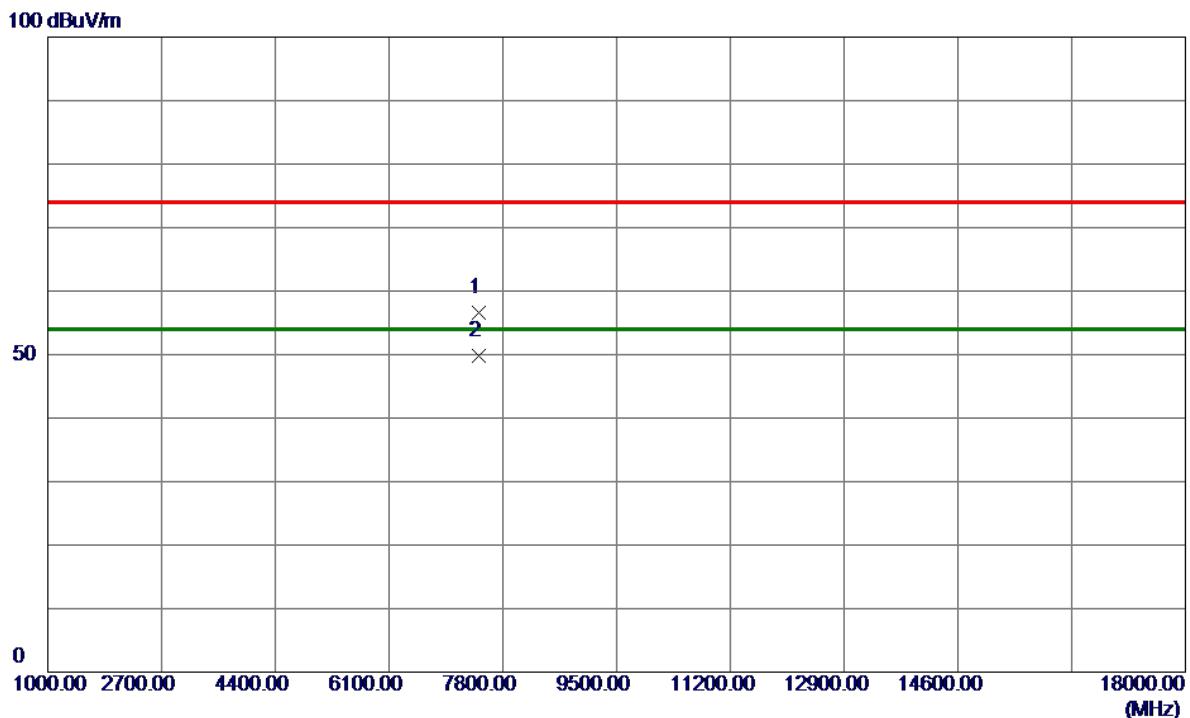


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	7438.3800	47.44	9.13	56.57	74.00	-17.43	Peak	
2 *	7438.7800	40.63	9.13	49.76	54.00	-4.24	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

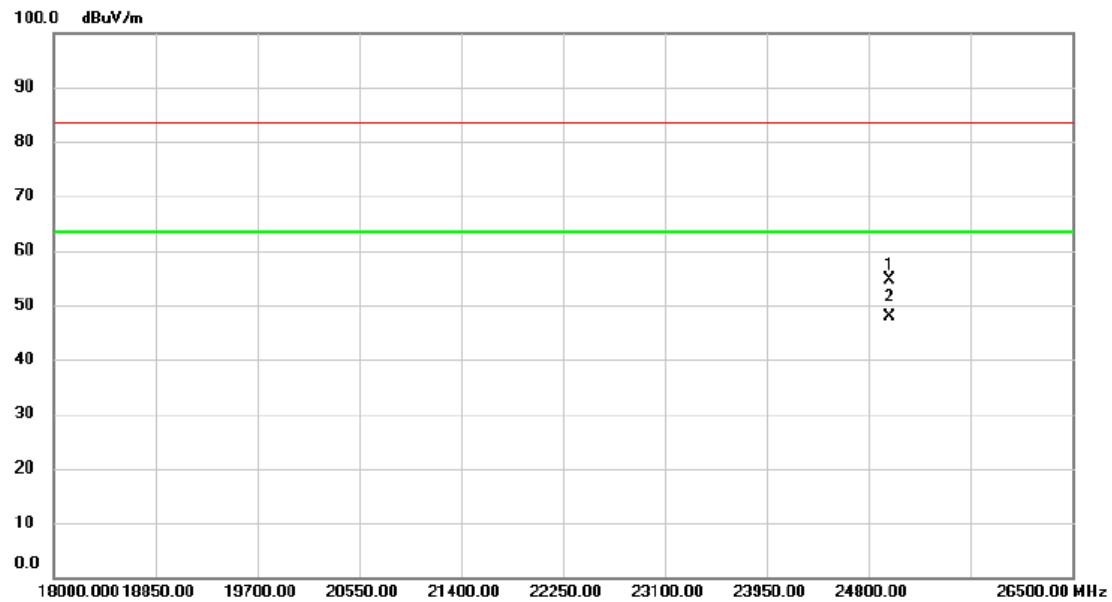


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		24970.000	50.41	4.25	54.66	83.50	-28.84	peak	
2	*	24970.000	43.56	4.25	47.81	63.50	-15.69	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

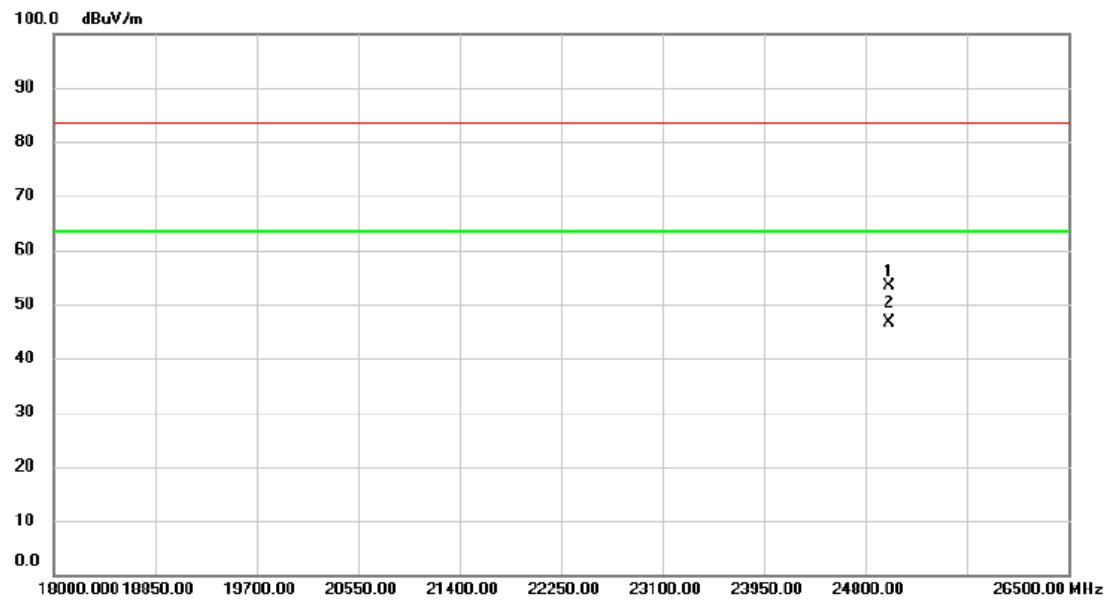

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		24995.500	49.10	4.33	53.43	83.50	-30.07	peak
2	*	24995.500	42.38	4.33	46.71	63.50	-16.79	AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH


Test Mode	TX Mode _2Mbps
-----------	----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
37	2402	1.124	2.040	0.5	Pass
19	2442	1.192	2.040	0.5	Pass
39	2480	1.192	2.048	0.5	Pass

CH37




Date: 15.JUL.2025 09:15:53

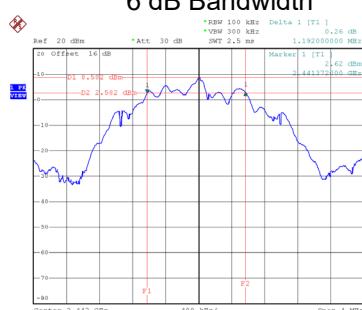CH19  
6 dB Bandwidth

Date: 2.JUL.2025 10:14:12

CH39

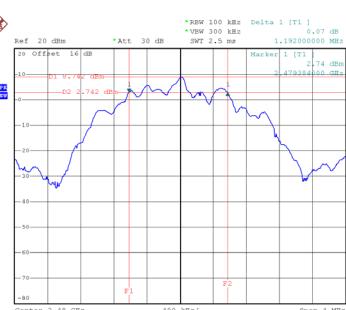

Date: 2.JUL.2025 10:10:45


99 % Occupied Bandwidth



Date: 15.JUL.2025 09:15:06



Date: 2.JUL.2025 10:14:24

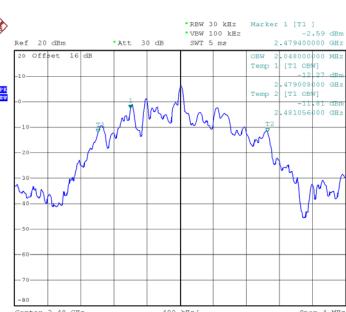

Date: 2.JUL.2025 10:10:56


## APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX Mode _2Mbps
-----------	----------------


Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	8.38	0.0069	30.00	1.0000	Pass
2442	8.16	0.0065	30.00	1.0000	Pass
2480	8.97	0.0079	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss


CH37

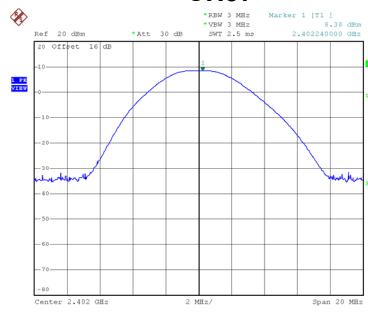

CH19

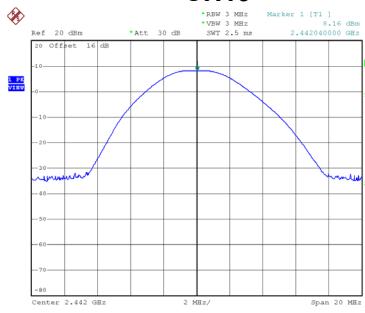

CH39

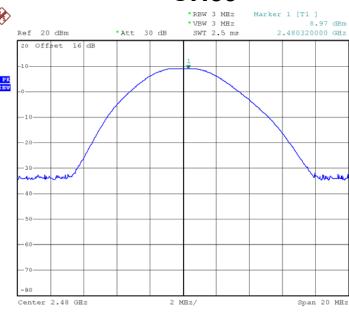

Date: 15.JUL.2025 09:15:00



Date: 14.JUL.2025 12:13:54

Date: 2.JUL.2025 10:20:13

## APPENDIX G - CONDUCTED SPURIOUS EMISSION




Test Mode

TX Mode \_2Mbps

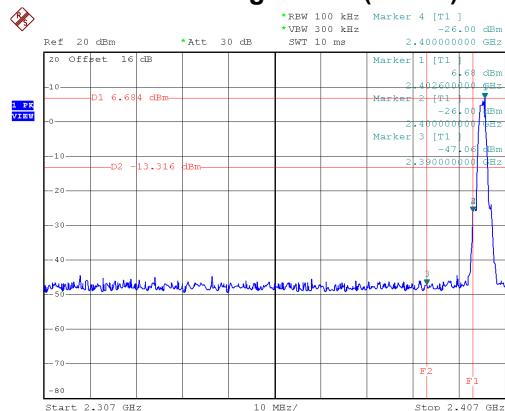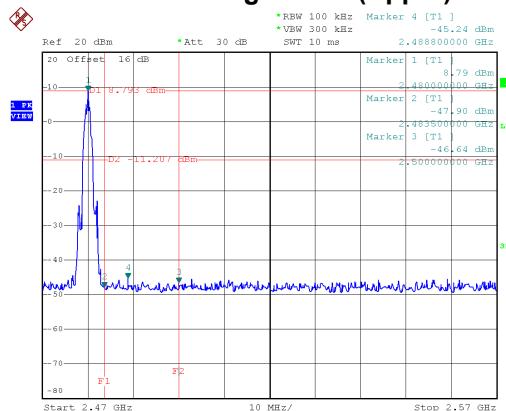**Bandedge CH37 (Lower)**

**Bandedge CH39 (Upper)**


Date: 15.JUL.2025 09:16:01

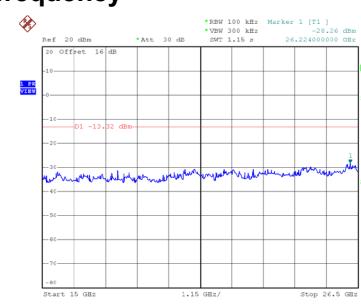
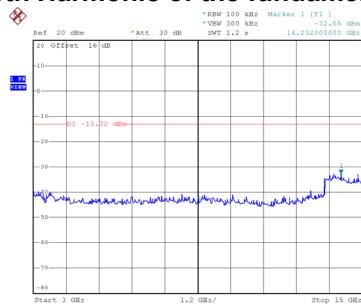
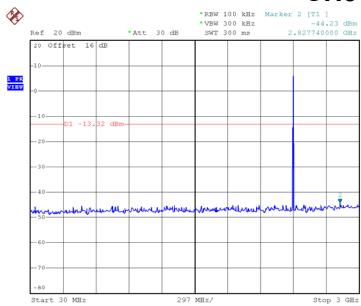
Date: 2.JUL.2025 10:19:04

**CH37 – 10th Harmonic of the fundamental frequency**


Date: 15.JUL.2025 09:16:15

Date: 15.JUL.2025 09:16:24




Date: 15.JUL.2025 09:16:12

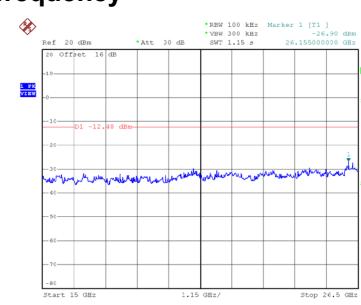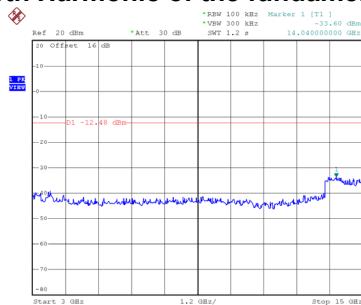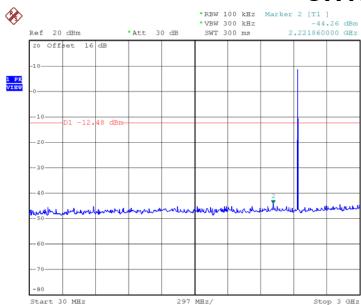**CH19 – 10th Harmonic of the fundamental frequency**


Date: 2.JUL.2025 10:14:45

Date: 2.JUL.2025 10:14:53

Date: 2.JUL.2025 10:15:02

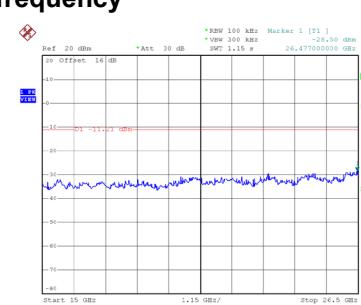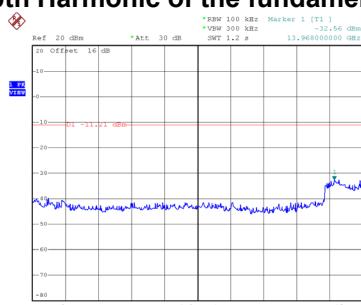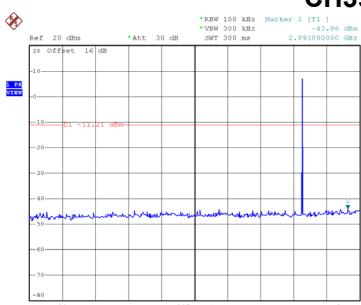**CH39 – 10th Harmonic of the fundamental frequency**


Date: 2.JUL.2025 10:19:35


Date: 2.JUL.2025 10:19:43


Date: 2.JUL.2025 10:19:51

**APPENDIX H - POWER SPECTRAL DENSITY**

Test Mode	TX Mode _2Mbps
-----------	----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
37	2402	-11.34	8.00	Pass
19	2442	-11.78	8.00	Pass
39	2480	-11.57	8.00	Pass

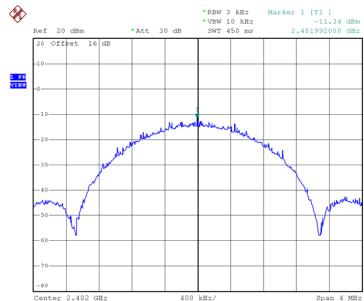**CH37**

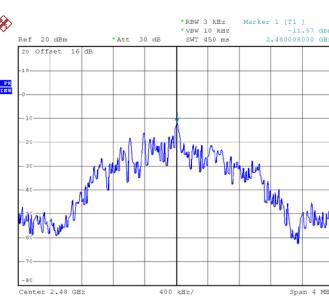**CH19**

**CH39**


Date: 15.JUL.2025 09:16:38

Date: 2.JUL.2025 10:15:13

Date: 2.JUL.2025 10:20:02

**End of Test Report**