

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Customer Name: _____

Product Name: _____ 433 Antenna _____

Part NO. : _____ SKL. TH27. 433 _____

Write By: _____ zhangchanghua _____

Issued Date: _____ 2025-07-10 _____

Customer

R&D Dept	Business Dept	Approved By

SKYLink

R&D Dept	Engineer Dept	Approval

● Specification Summary

A. Electrical Characteristics	
Frequency	433MHz
VSWR	<2.0
Efficiency	>30%
Peak Gain	-1.29dbi
Impedance	50 Ohm
Polarization	Line
Type of Antenna	Integral Antenna
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Cable Type	/
Connector Type	/
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions



1. Network Analyzers :

Agilent 8753D 5071B


Communications Test Set:

Agilent E5515C CMW500


2. 3D Chamber Test System

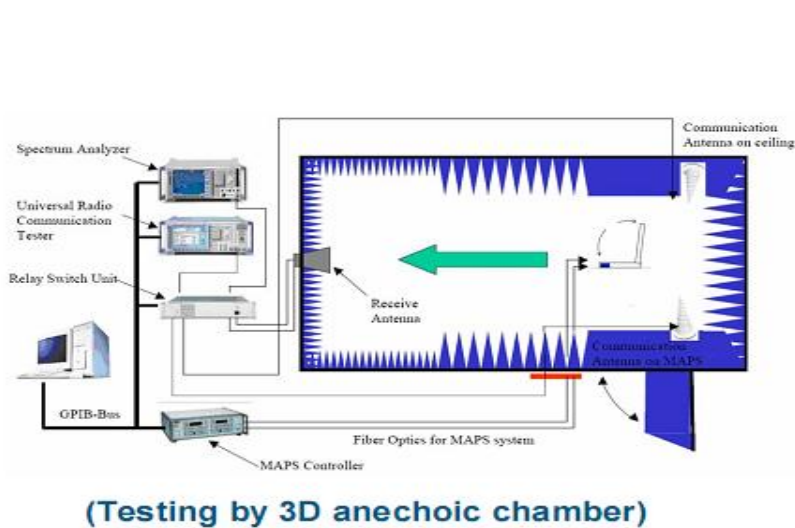


Phi axis test



Theta axis test

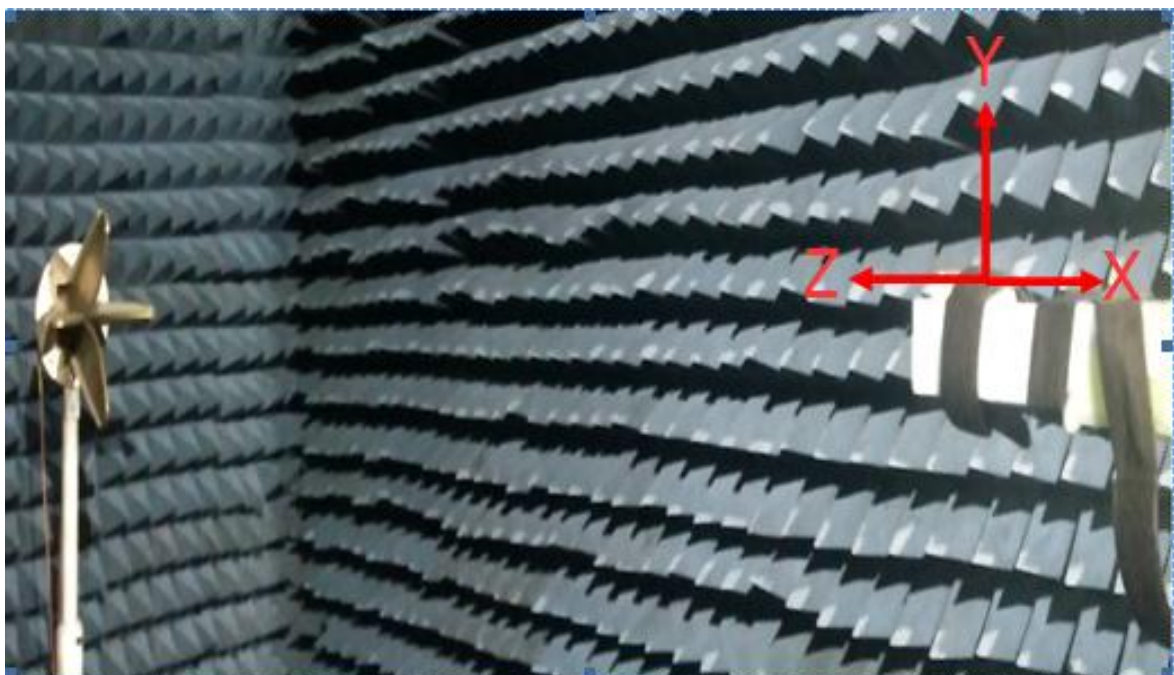


◆ Return Loss

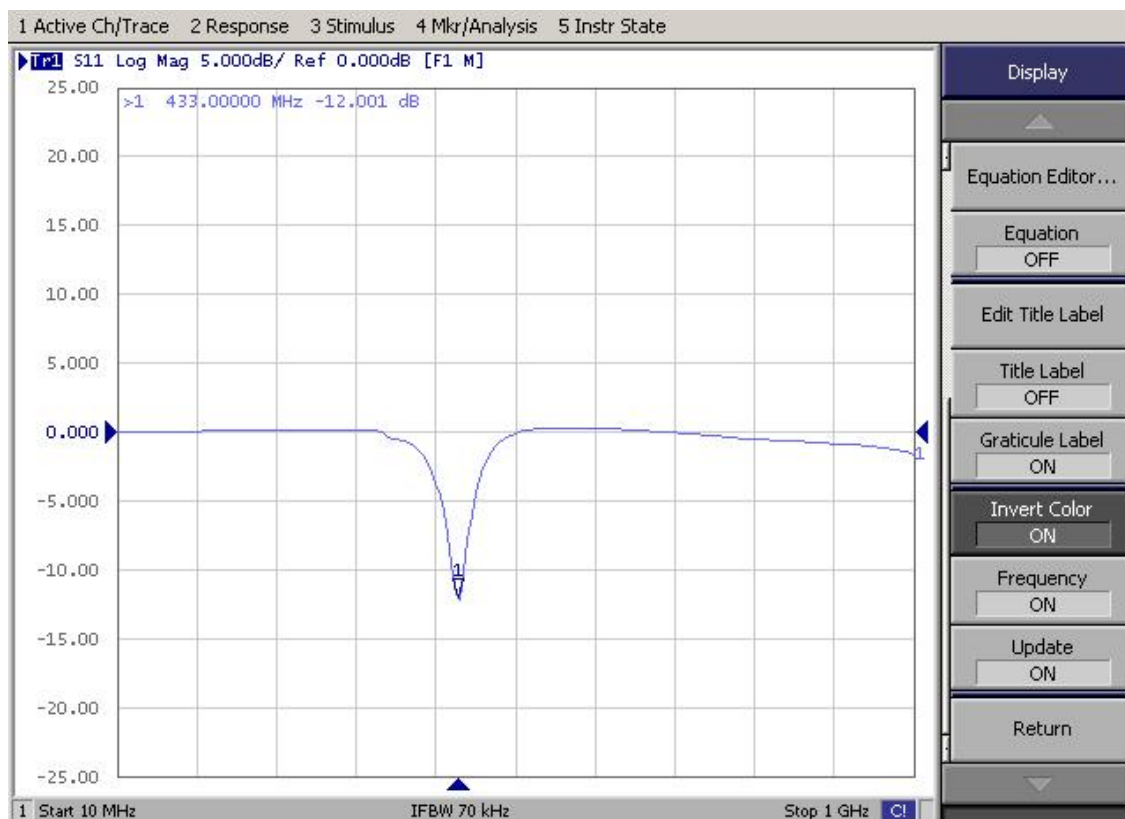


◆ Gain & Efficiency

Freq	Effi	Gain
(MHz)	(%)	(dBi)
420	30.5	-2.73
430	37.27	-1.29
440	33.67	-1.93

◆ Radiation Pattern

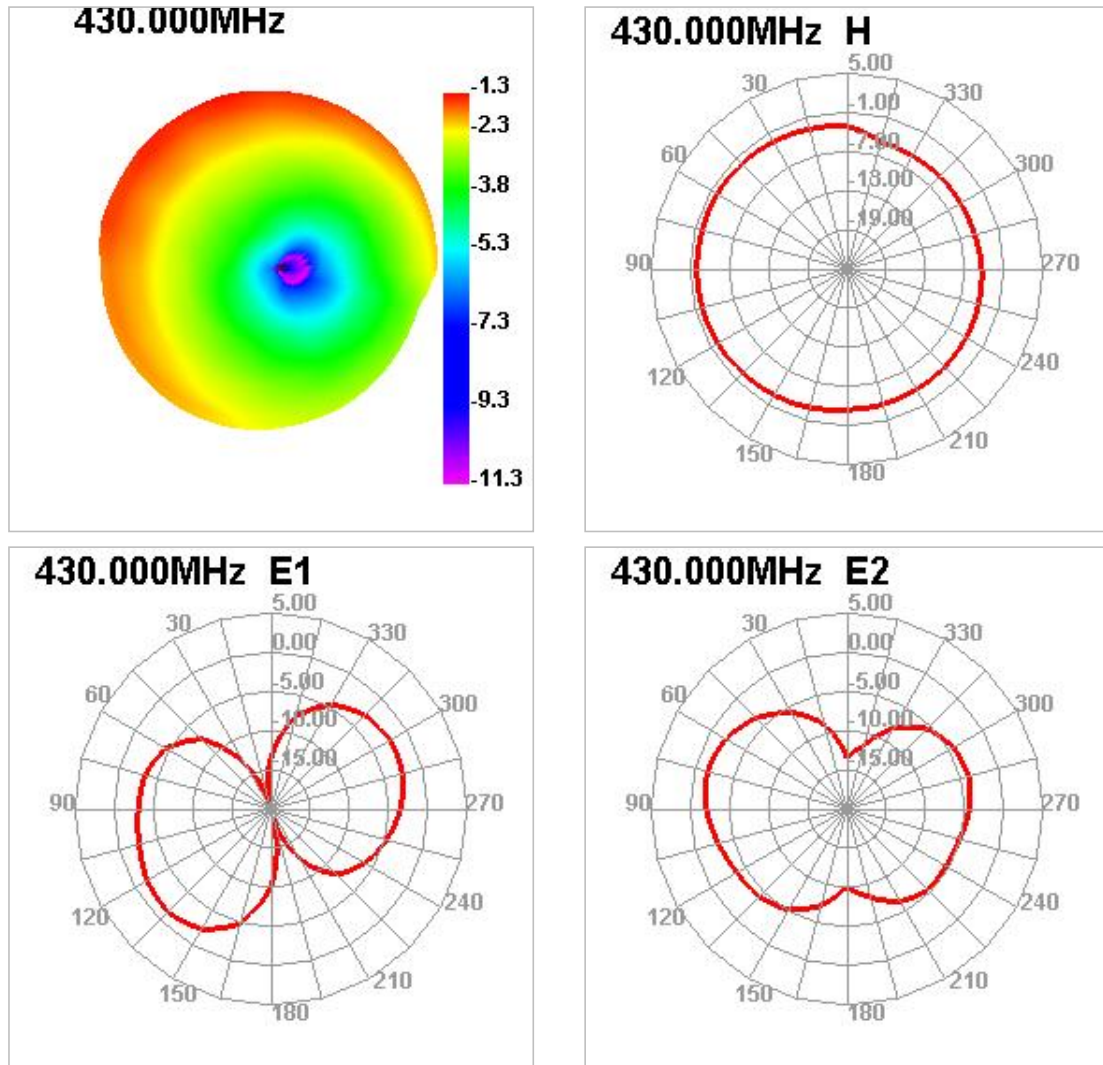

◆ Antenna Picture

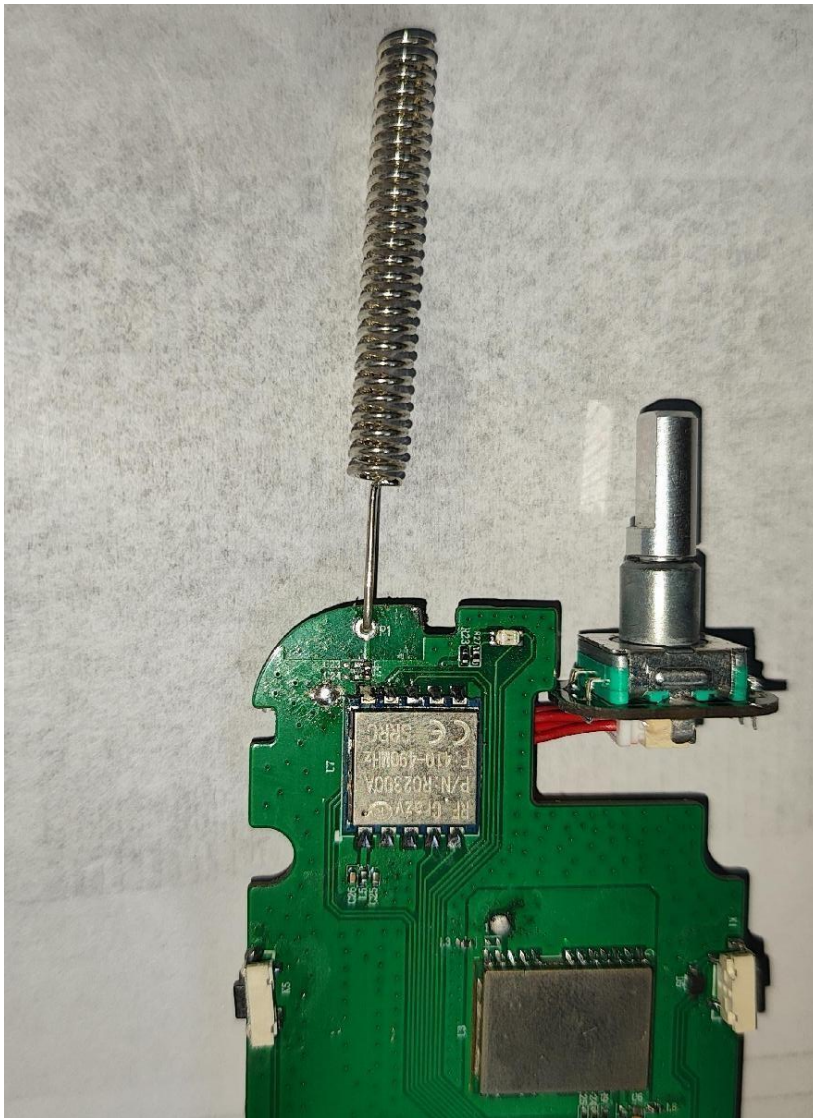

◆ Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: $35 \pm 2^{\circ}\text{C}$ Humidity: 85% NaCl salt spray :5 ± 1 %.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS