

Shenzhen Lixinhui Electronics Co., Ltd.

No. 45, Minfu Road, Shatou Industrial Zone, Shajing Sub-district Office,
Bao'an District, Shenzhen

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0.17DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P white

Connector Type : NO

Dimension


C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Dimension


No. 45, Minfu Road, Shatou Industrial Zone, Shajing Sub-district Office,
Bao'an District, Shenzhen

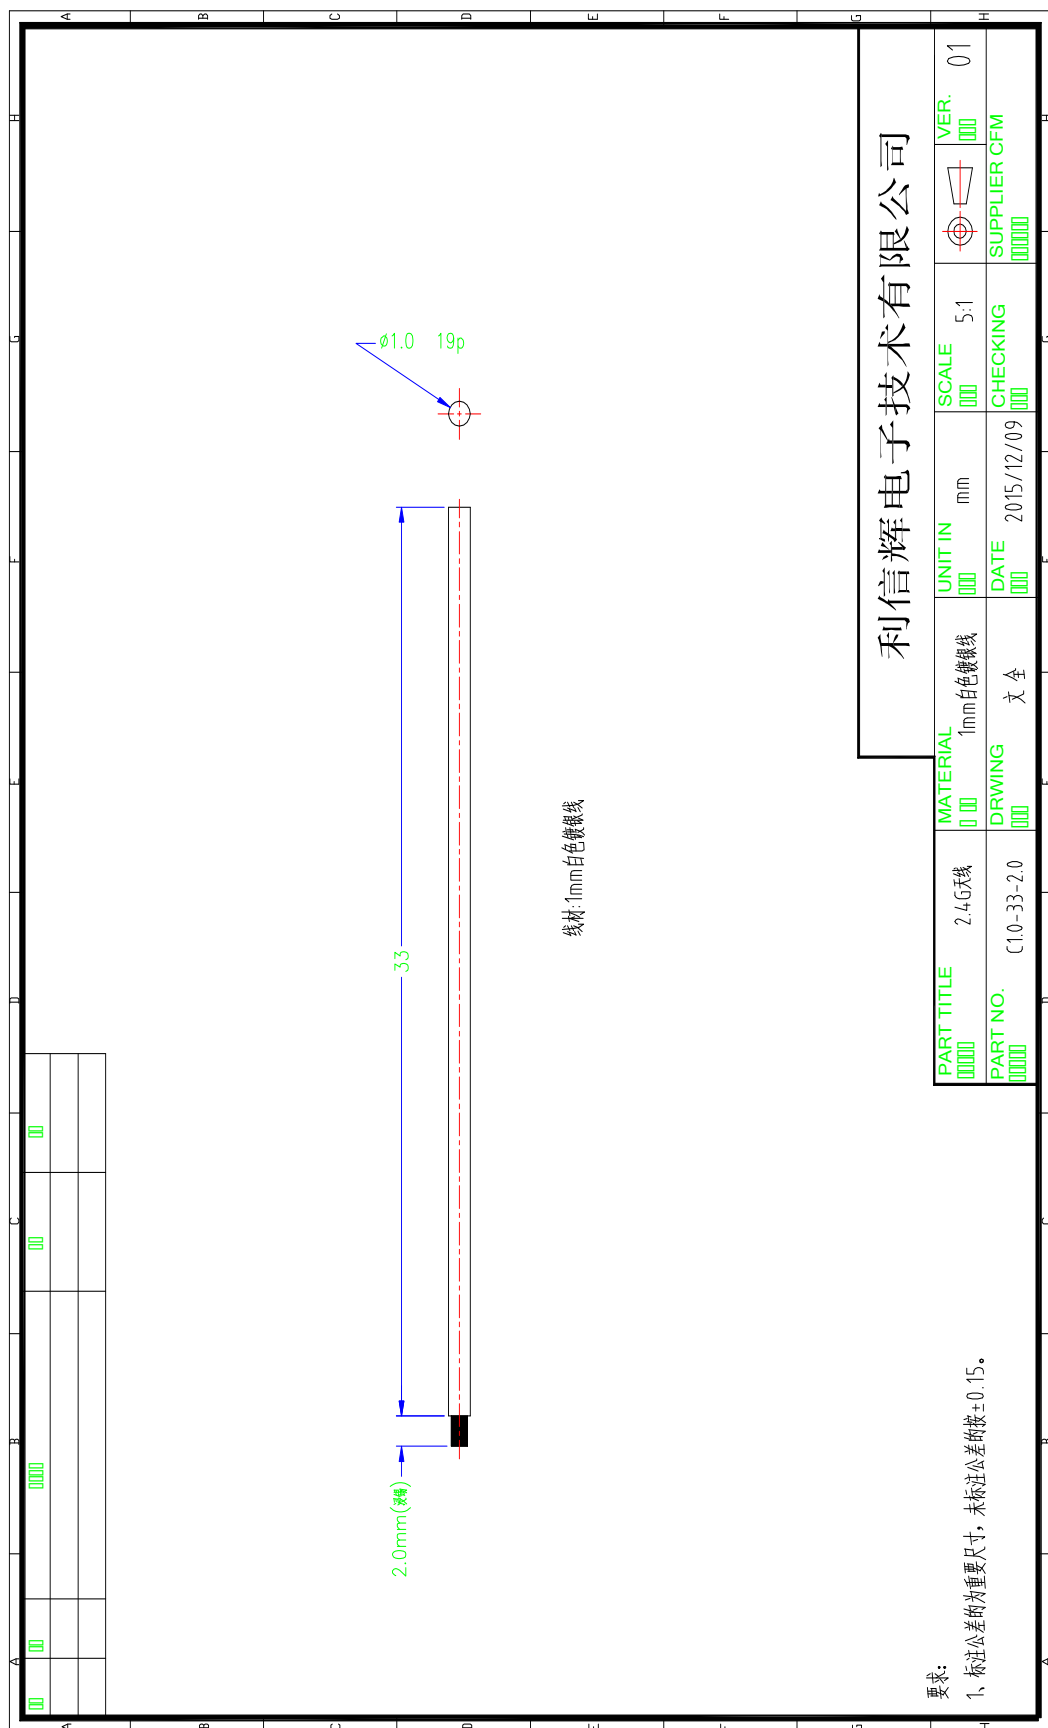


Shenzhen Lixinhui Electronics Co., Ltd.

No. 45, Minfu Road, Shatou Industrial Zone, Shajing Sub-district Office,
Bao'an District, Shenzhen


Efficiency & Gain

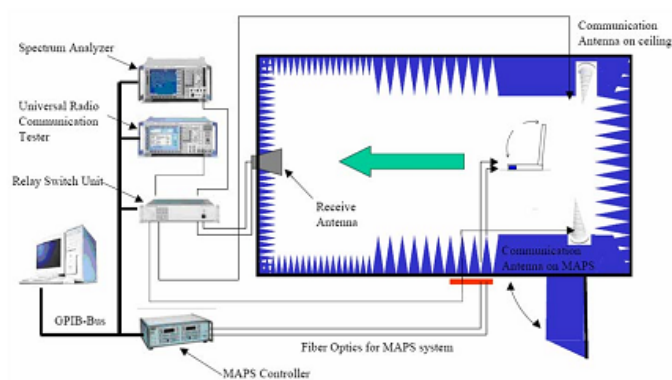

(Testing by 3D anechoic chamber)



Phi axis test



Theta axis test


Efficiency & Gain

2.400 -2.17


2.450 0.12

2.500 0.17

Radiation Pattern:

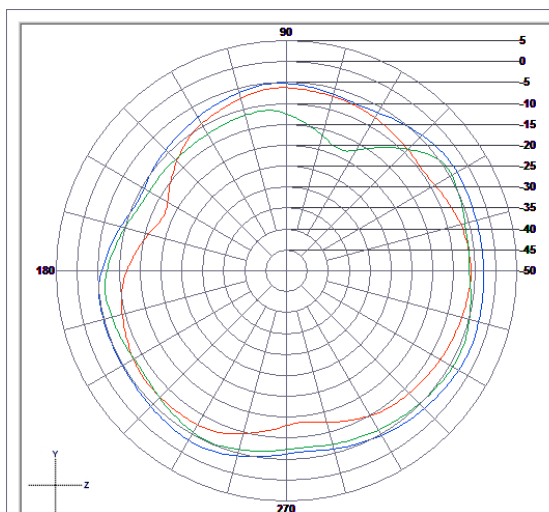

	Vertical	Horizontal	Total
Avg. Gain	-8.4	-6.99	-4.63
Peak Gain	-5.48	-3.77	-2.17

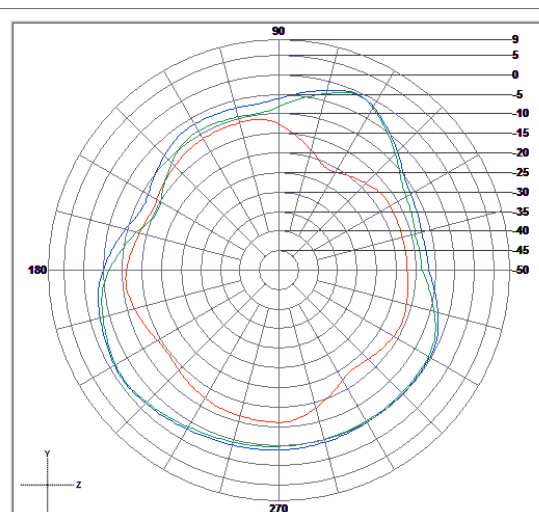

	Vertical	Horizontal	Total
Avg. Gain	-13.34	-5.06	-4.46
Peak Gain	-10.3	0.09	0.12

Shenzhen Lixinhui Electronics Co., Ltd.

No. 45, Minfu Road, Shatou Industrial Zone, Shajing Sub-district Office,
Bao'an District, Shenzhen

