


Manufacturer:Shenzhen Huasheng Plastic Mold Technology Co., Ltd
Manufacturer add.:Jinwanxing Cable, No. 23 Xifu Road, Songgang Street, Bao'an District, Shenzhen City, Guangdong Province, China

Product specification

Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	-3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	1.0%	
Gain (dBi)	1.68 (Peak Gain XZ-plane)	
Maximum Power (dBm)	-2.6 (XY-plane)	
Minimum Power (dBm)	-8.5(XY-plane)	
Avg. Power (dBm)	-4.8(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 3	

All the technical data and information contained herein are subject to change without prior notice
Antenna Layout & module on the system board

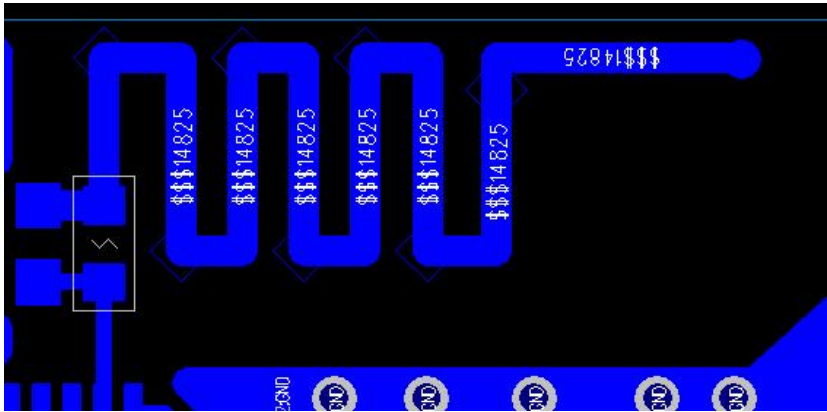


Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	47.6%


Return Loss

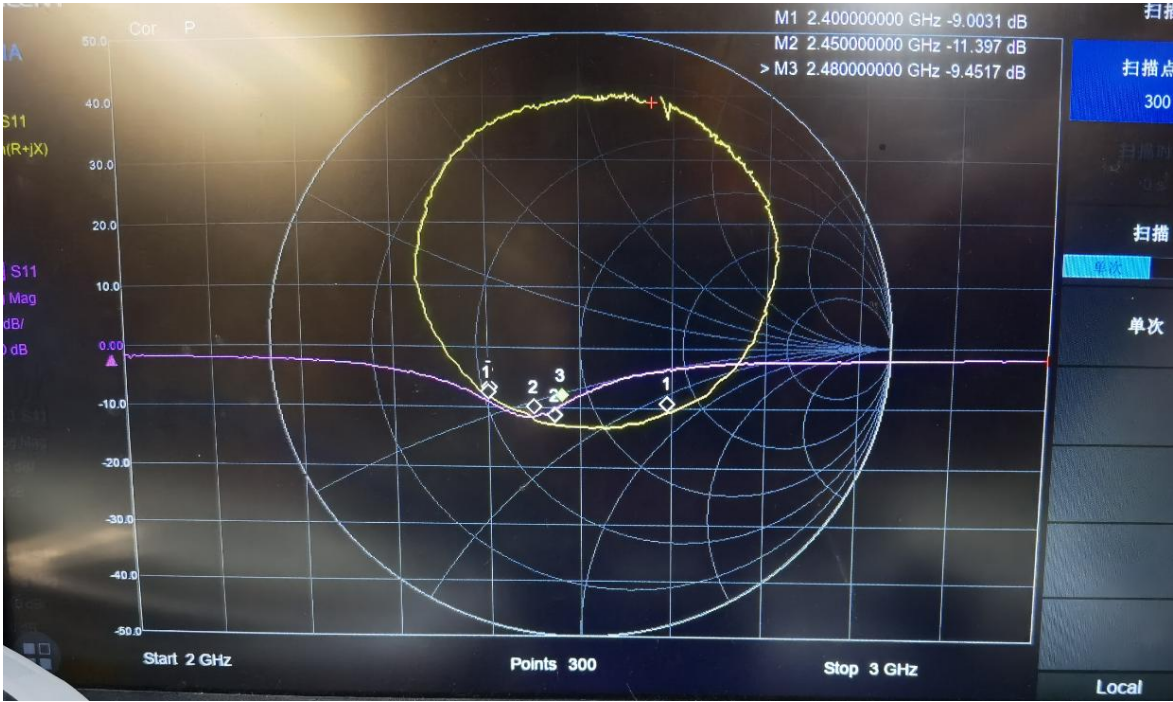


3D radiation pattern diagram

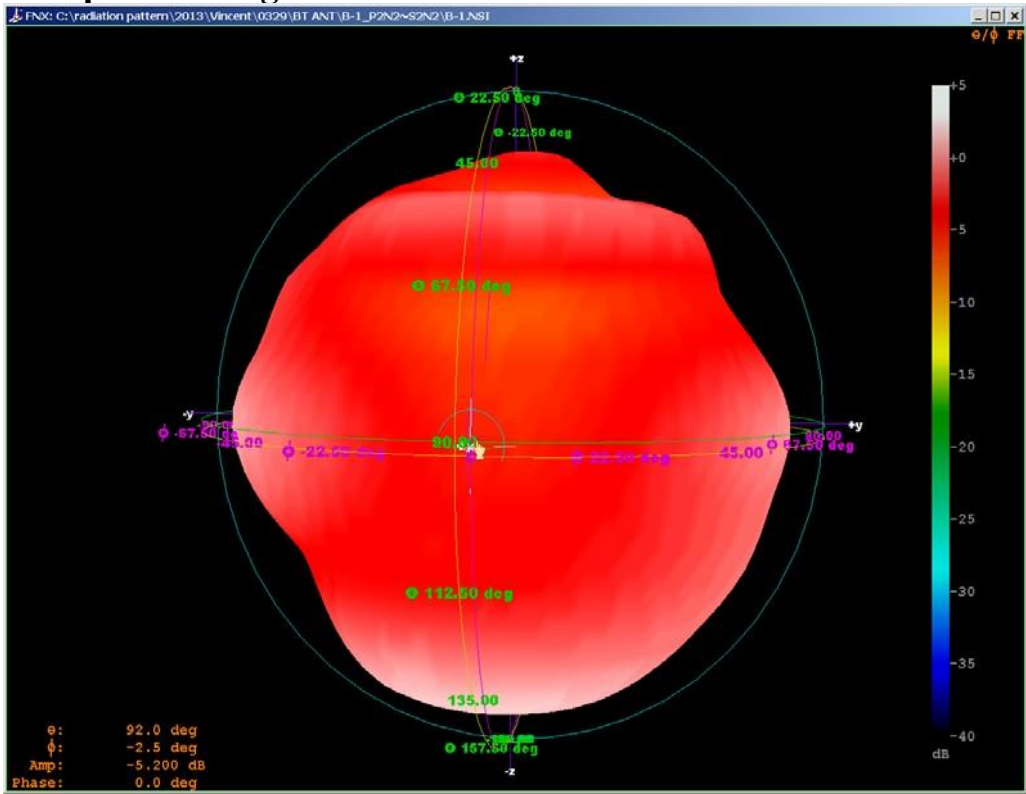

XY-plane

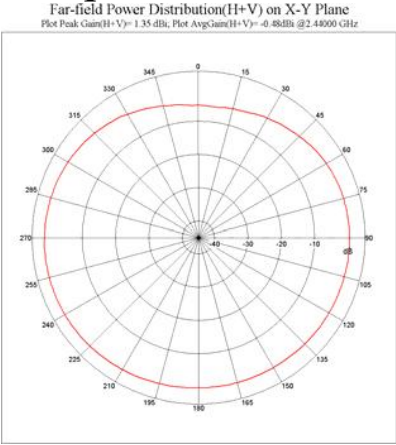

XZ-plane

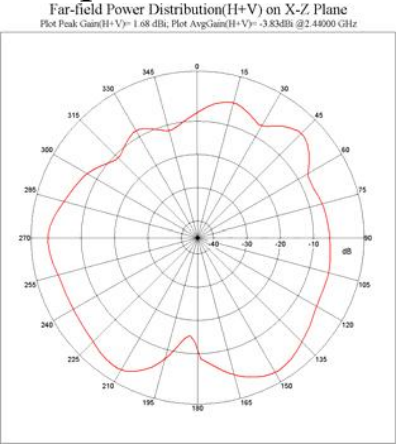

YZ-plane

