

TEST REPORT

Product Name: MP3 Player
Trade Mark: Agluicsy
Model No.: Agluicsy-1
Add Model No.: BOF324HG4G, BOF327C31F,
BOF324KTXS, BOF324XHRJ,
BOF324CH84
Report Number: 25062418687EMC-1
Test Standards: FCC 47 CFR Part 15 Subpart B
FCC ID: 2BQF9ZH130630021130
Test Result: PASS
Date of Issue: July 3, 2025

Prepared for:

Shenzhen Jisudu Digital Technology Co., Ltd
4 / F, Building 8, Nankeng Third Industrial Zone, Bantian Street,
Longgang District, Shenzhen

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Kevin Liang

Kevin Liang
Assistant Manager

Date:

July 3, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

Version

Version No.	Date	Description
V1.0	July 3, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST MODES	9
4.3 TEST SETUP	10
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4 SYSTEM TEST CONFIGURATION	11
5. REFERENCE DOCUMENTS FOR TESTING	12
6. EMC REQUIREMENTS SPECIFICATION	12
6.1 RADIATED EMISSION	12
6.2 CONDUCTED EMISSION	18
APPENDIX 1 PHOTOS OF TEST SETUP	21
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	21

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Shenzhen Jisudu Digital Technology Co., Ltd
Address of Applicant:	4 / F, Building 8, Nankeng Third Industrial Zone, Bantian Street, Longgang District, Shenzhen
Manufacturer:	Shenzhen Jisudu Digital Technology Co., Ltd
Address of Manufacturer:	4 / F, Building 8, Nankeng Third Industrial Zone, Bantian Street, Longgang District, Shenzhen

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	MP3 Player
Model No.:	Agluicsy-1
Add Model No.:	BOF324HG4G, BOF327C31F, BOF324KTXS, BOF324XHRJ, BOF324CH84
Trade Mark:	Agluicsy
Rated Voltage:	DC3.7V supplied by Battery or DC5V supplied by USB port
Classification of digital devices:	Class B
Highest Internal Frequency:	108 MHz
Sample Received Date:	June 24, 2025
Sample Tested Date:	June 24, 2025 to June 26, 2025
Note: The additional models BOF324HG4G, BOF327C31F, BOF324KTXS, BOF324XHRJ, BOF324CH84 are identical with the test model Agluicsy-1 except the model number and color for marketing purpose.	

Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.2.2 Description of Accessories

None

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Adapter	HUAWEI	HW-050200C01	B78578GBT02395	UnionTrust
SD card	SANDISK	N/A	N/A	UnionTrust
Headset	EDIFIER	K550	N/A	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length(Meter)	Supplied by
1	USB Cable	Type-B	0.3 Unshielded without ferrite	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS



3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT 001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
☒	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	29-Mar-2025	28-Mar-2026
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	28-Mar-2025	27-Mar-2026
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	28-Oct-2024	27-Oct-2025
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESC13	1166.5950.03	25-Oct-2024	24-Oct-2025
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
☒	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
☐	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
☒	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT 001270-1246	25-Oct-2024	24-Oct-2025
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NV/NT	+15 to +35	DC3.7V	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Conducted Emission	24.7	53.7	99.7	S202506246345-ZJA01/2	Linson Xie
Radiated Emission	25.4	62.7	99.8		Leo Li

4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	TM1: Charging + FM + earphone TM2: Charging + TF Card playing + earphone
Conducted Emission	TM1: Charging + FM + earphone TM2: Charging + TF Card playing + earphone
Remark: The above test modes in boldface were the worst cases, only the test data of these modes were reported.	

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

Figure 1. 30MHz to 1GHz



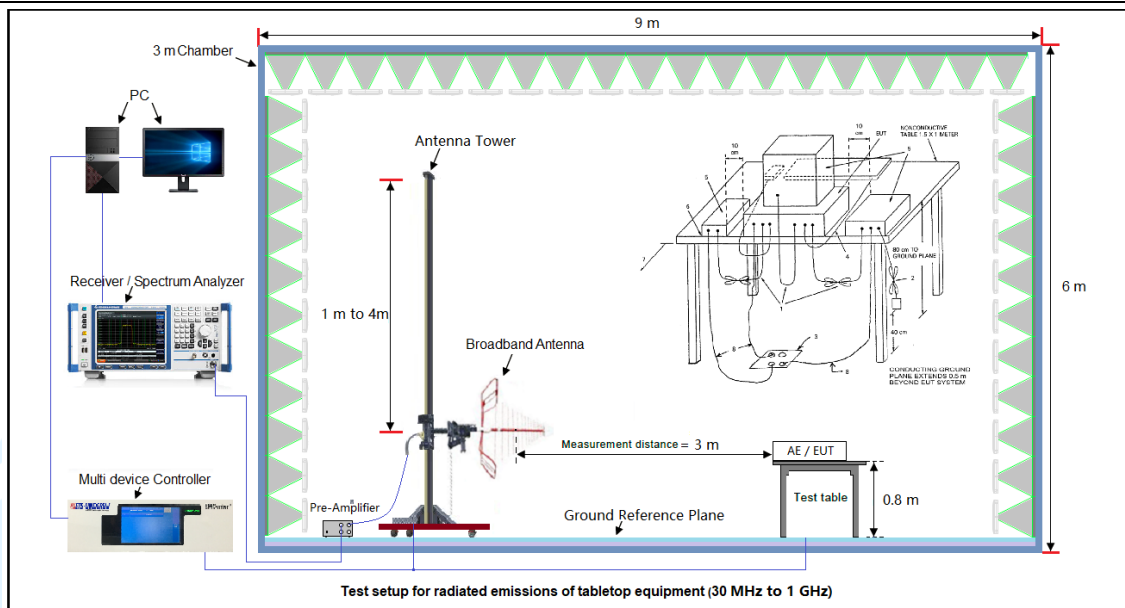


Figure 2. Above 1GHz

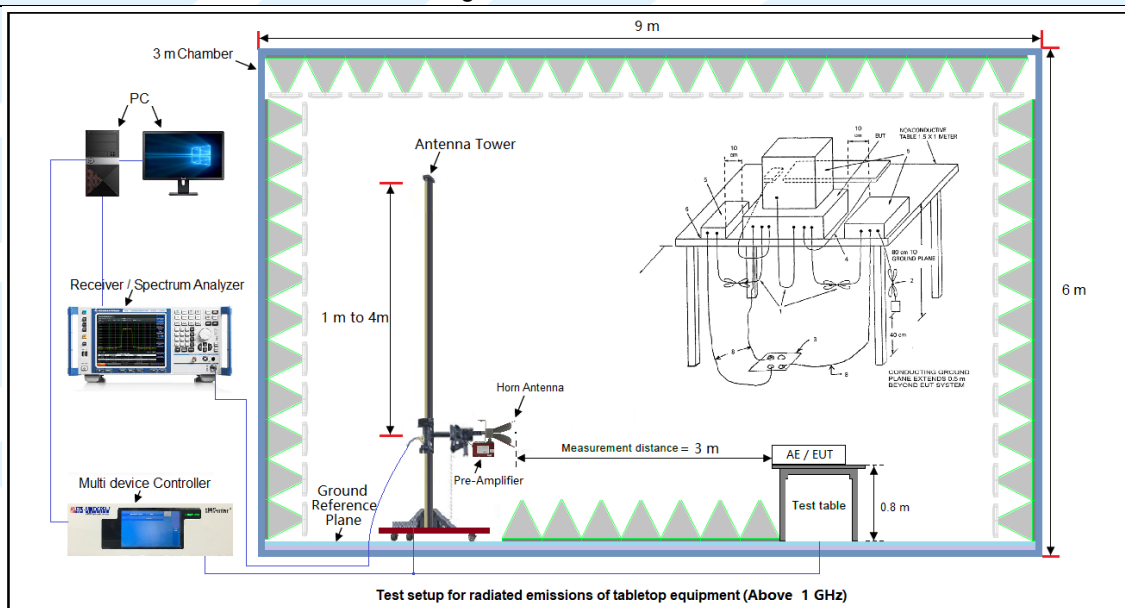

4.3.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

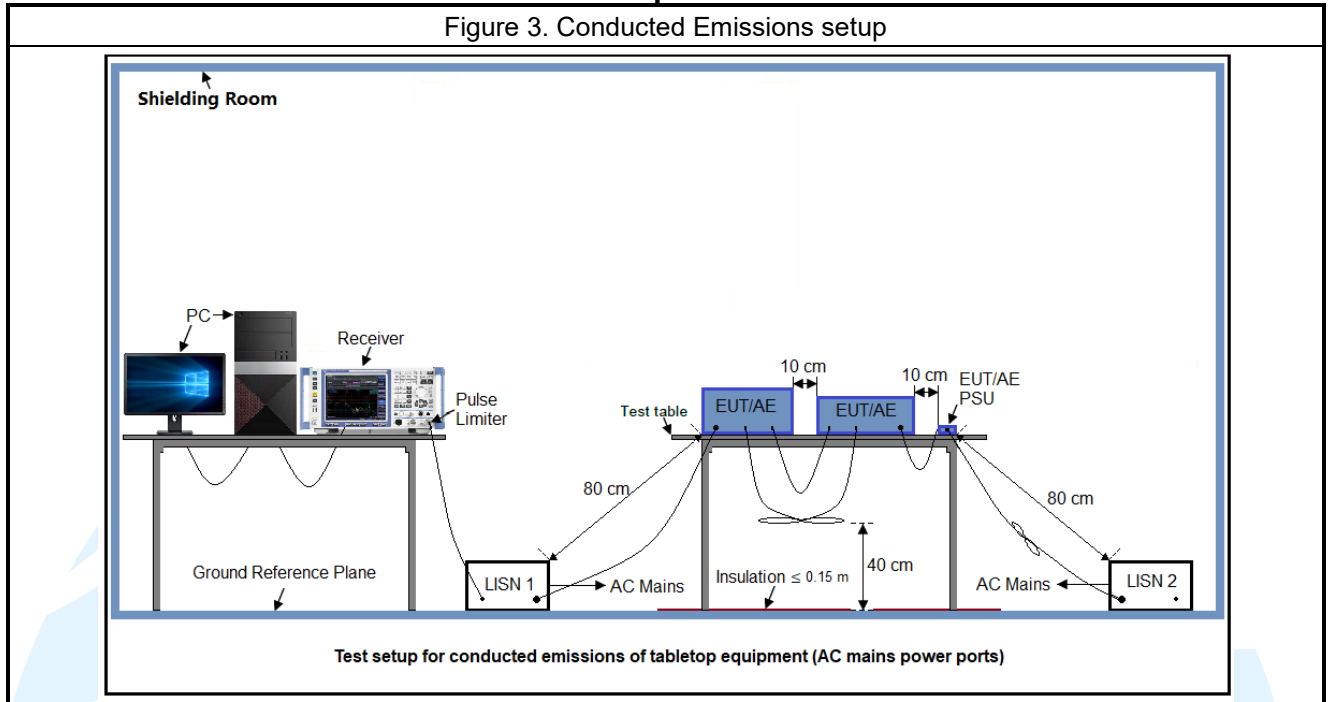

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
3	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
4	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class B devices

FCC 47 CFR Part 15 Subpart B

Frequency (MHz)	limits at 3m (dB μ V/m)		
	QP Detector	PK Detector	AV Detector
30 – 88	40.0	--	--
88 – 216	43.5	--	--
216 – 960	46.0	--	--
960 – 1000	54.0	--	--
Above 1000	--	74.0	54.0

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
 - 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.
2. Above 1GHz test procedure as below:
- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
 - 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
 - 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The measurement data as follows:

The worst measurement data for FCC 47 CFR Part 15 Subpart B as follows:

Below 1GHz(Quasi Peak):


Test Mode2

Horizontal

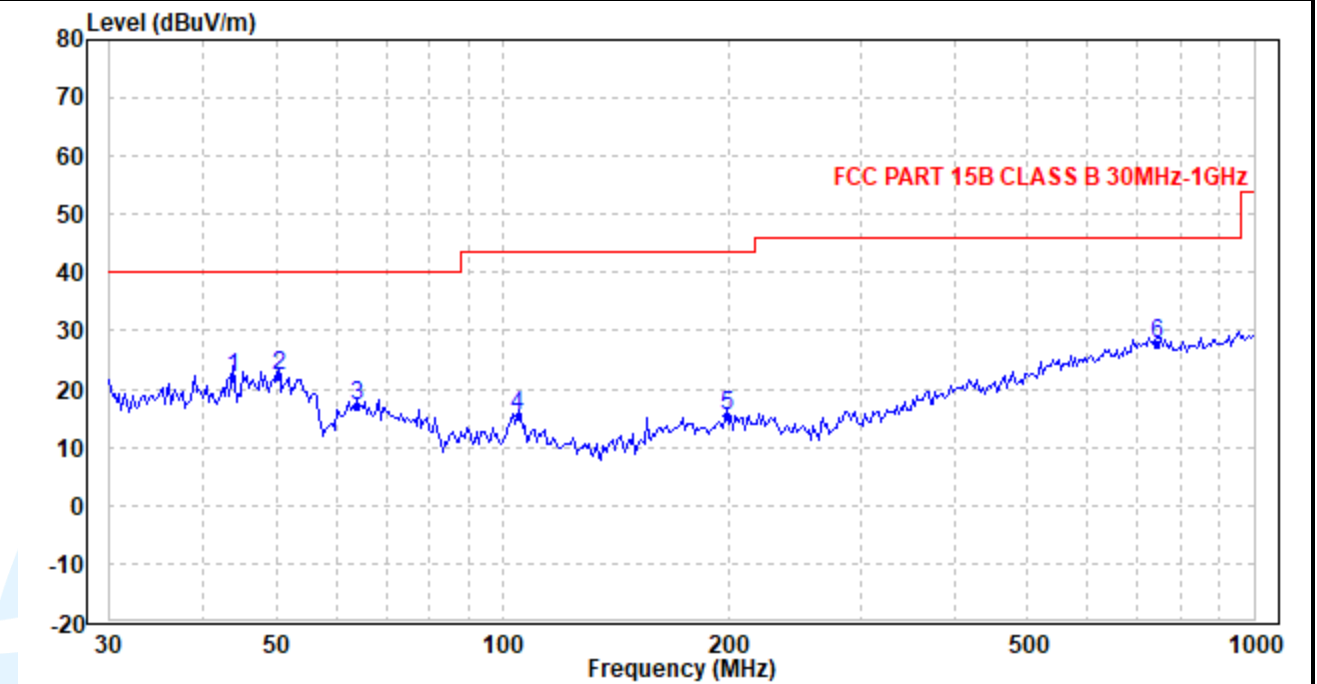

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	43.845	34.47	-12.54	21.93	40.00	-18.07	QP
2	50.461	36.60	-14.19	22.41	40.00	-17.59	QP
3	64.08	34.93	-17.67	17.26	40.00	-22.74	QP
4	104.798	31.15	-15.67	15.48	43.50	-28.02	QP
5	198.642	26.67	-11.35	15.32	43.50	-28.18	QP
6	744.427	26.22	1.62	27.84	46.00	-18.16	QP

Vertical

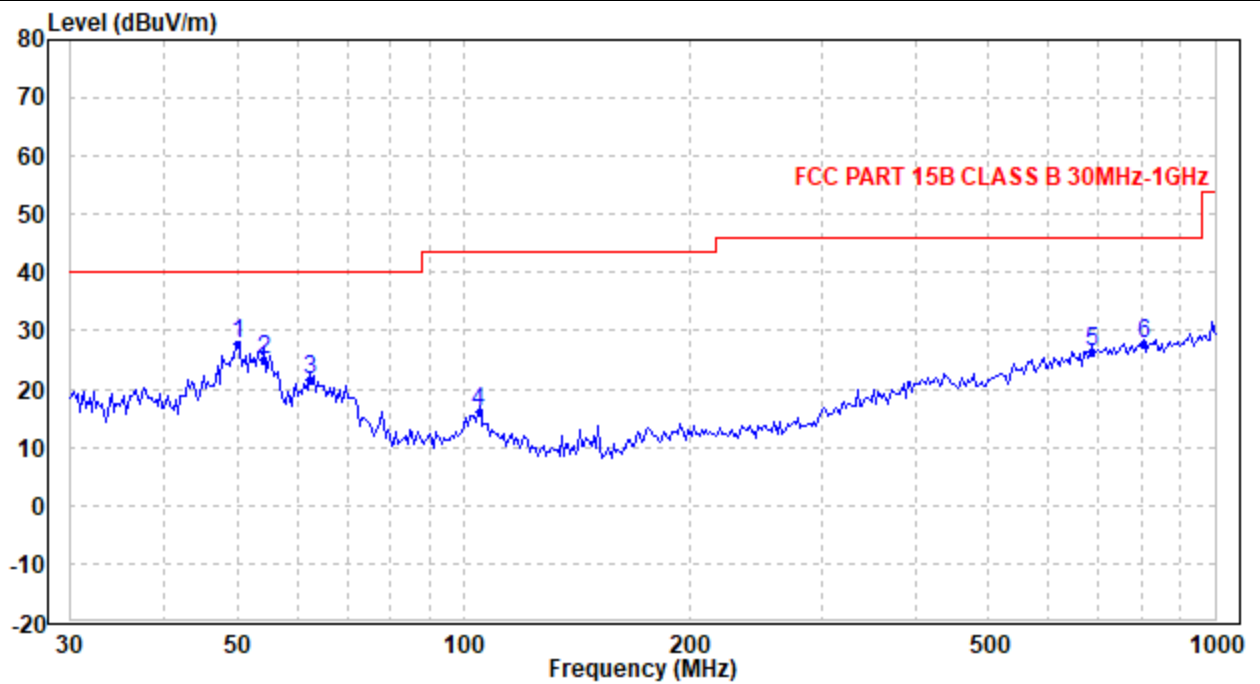

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	50.108	41.98	-14.05	27.93	40.00	-12.07	QP
2	54.135	41.38	-16.34	25.04	40.00	-14.96	QP
3	62.304	39.31	-17.64	21.67	40.00	-18.33	QP
4	104.798	31.87	-15.67	16.20	43.50	-27.30	QP
5	684.226	25.61	0.84	26.45	46.00	-19.55	QP
6	804.252	24.94	2.68	27.62	46.00	-18.38	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-EMC-ICES003-V1.2

Above 1GHz(Peak & Average)
Test Mode 2:
Horizontal

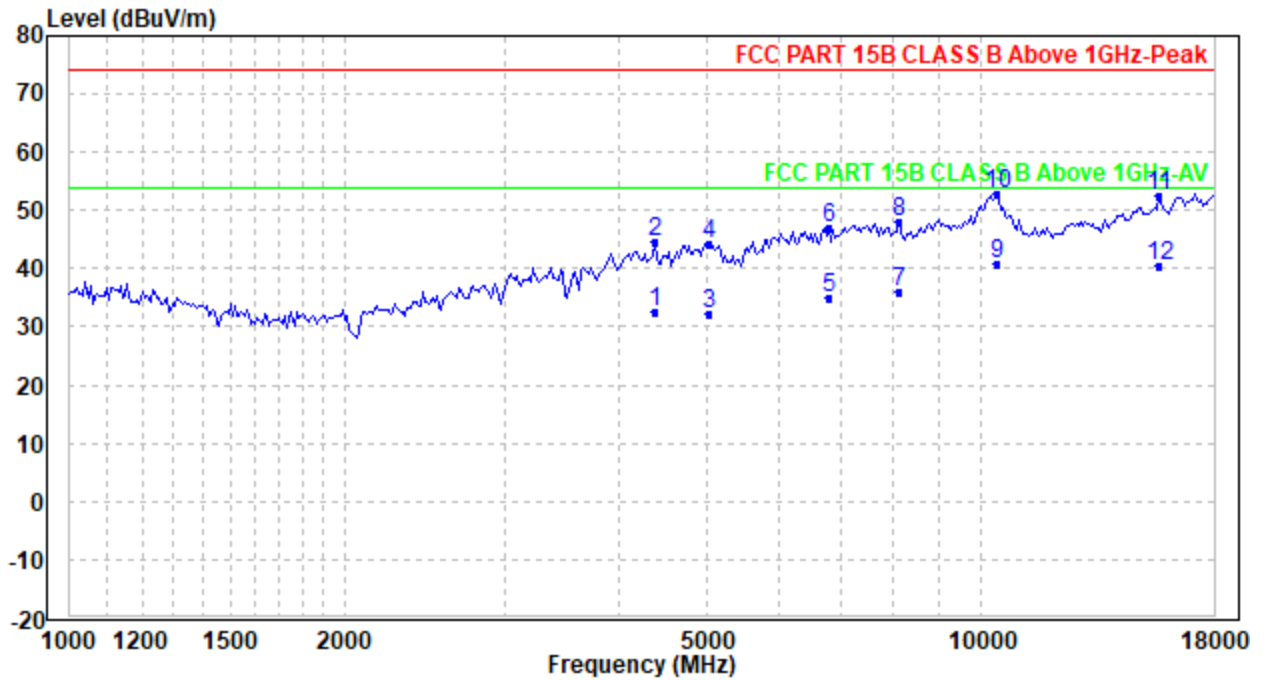

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4379.978	34.90	-2.36	32.54	54.00	-21.46	Average
2	4379.978	46.90	-2.36	44.54	74.00	-29.46	Peak
3	5033.218	34.22	-1.93	32.29	54.00	-21.71	Average
4	5033.218	46.22	-1.93	44.29	74.00	-29.71	Peak
5	6802.299	33.68	1.26	34.94	54.00	-19.06	Average
6	6802.299	45.68	1.26	46.94	74.00	-27.06	Peak
7	8140.266	34.70	1.37	36.07	54.00	-17.93	Average
8	8140.266	46.70	1.37	48.07	74.00	-25.93	Peak
9	10382.28	37.43	3.38	40.81	54.00	-13.19	Average
10	10382.28	49.43	3.38	52.81	74.00	-21.19	Peak
11	15663.86	44.91	7.44	52.35	74.00	-21.65	Peak
12	15663.86	32.91	7.44	40.35	54.00	-13.65	Average

Vertical

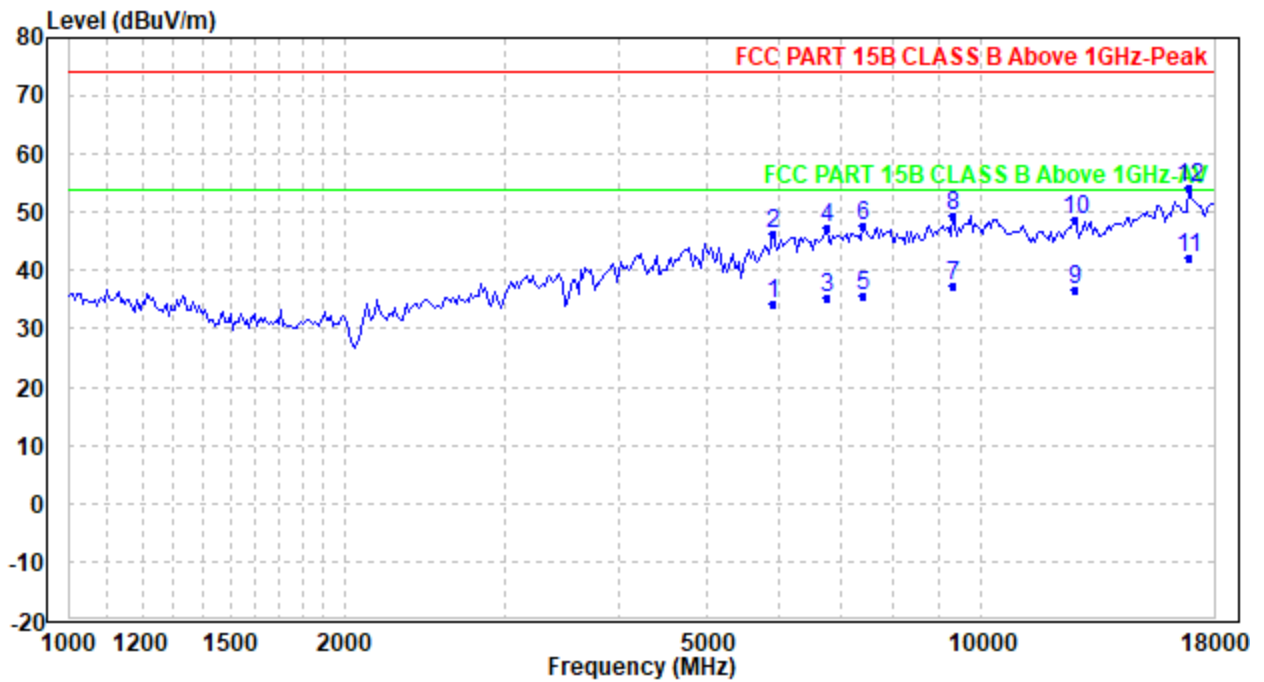

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5919.457	34.20	0.12	34.32	54.00	-19.68	Average
2	5919.457	46.20	0.12	46.32	74.00	-27.68	Peak
3	6763.012	34.06	1.25	35.31	54.00	-18.69	Average
4	6763.012	46.06	1.25	47.31	74.00	-26.69	Peak
5	7419.751	34.41	1.32	35.73	54.00	-18.27	Average
6	7419.751	46.41	1.32	47.73	74.00	-26.27	Peak
7	9300.297	34.50	2.94	37.44	54.00	-16.56	Average
8	9300.297	46.50	2.94	49.44	74.00	-24.56	Peak
9	12642.19	32.39	4.21	36.60	54.00	-17.40	Average
10	12642.19	44.39	4.21	48.60	74.00	-25.40	Peak
11	16888.89	33.86	8.50	42.36	54.00	-11.64	Average
12	16888.89	45.86	8.50	54.36	74.00	-19.64	Peak

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. The limit of ICES-003 in the 230MHz to 960MHz band is higher than that of FCC Part 15B, so the radiation emission test data conform to the limit of ICES-003.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-ICES003-V1.2

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107

Test Method: ANSI C63.4-2014

Limits:

Limits for Class B devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:


Test Mode 2:

Live Line

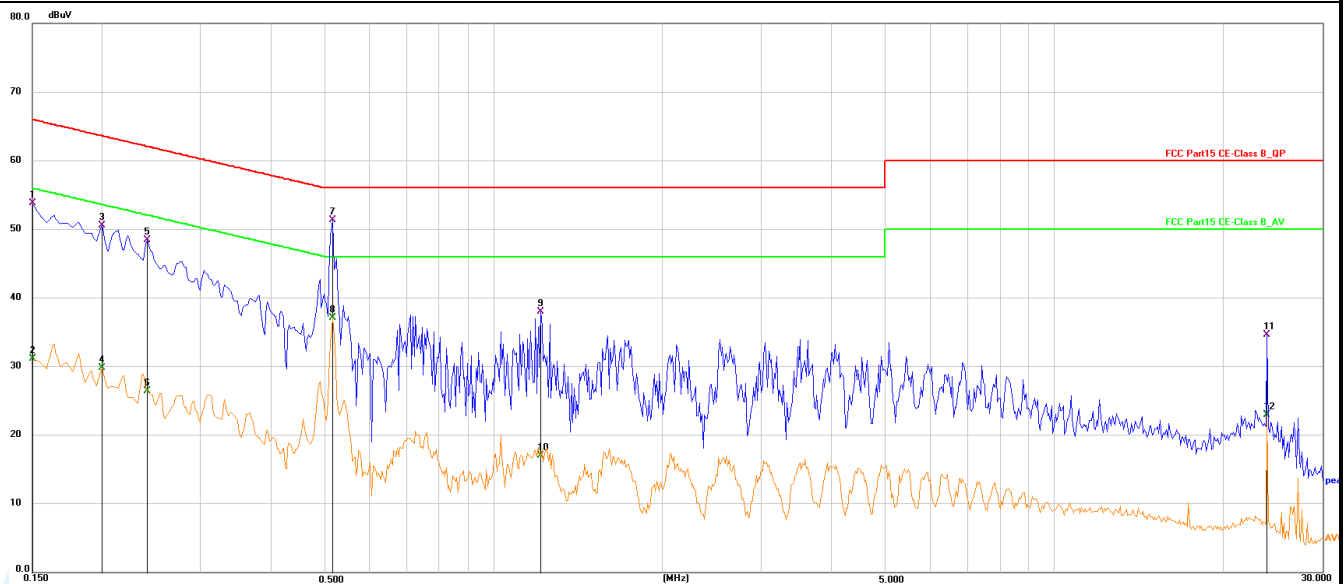

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1500	43.91	9.88	53.79	66.00	-12.21	QP
2	0.1500	21.26	9.88	31.14	56.00	-24.86	AVG
3	0.1995	40.77	9.81	50.58	63.63	-13.05	QP
4	0.1995	19.94	9.81	29.75	53.63	-23.88	AVG
5	0.2400	38.61	9.77	48.38	62.10	-13.72	QP
6	0.2400	16.69	9.77	26.46	52.10	-25.64	AVG
7	0.5144	41.58	9.79	51.37	56.00	-4.63	QP
8	0.5144	27.32	9.79	37.11	46.00	-8.89	AVG
9	1.2120	28.32	9.71	38.03	56.00	-17.97	QP
10	1.2120	7.24	9.71	16.95	46.00	-29.05	AVG
11	24.0000	24.66	9.91	34.57	60.00	-25.43	QP
12	24.0000	12.98	9.91	22.89	50.00	-27.11	AVG

Neutral Line

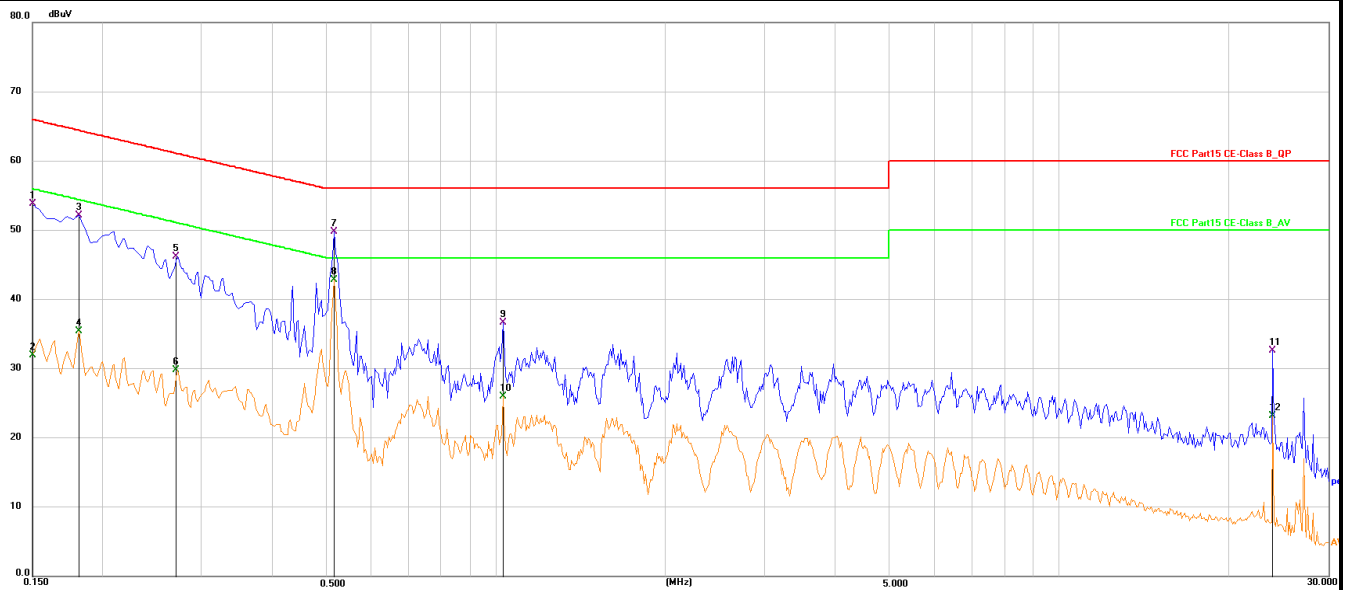

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1500	43.93	9.83	53.76	66.00	-12.24	QP
2	0.1500	22.05	9.83	31.88	56.00	-24.12	AVG
3	0.1814	42.37	9.78	52.15	64.42	-12.27	QP
4	0.1814	25.63	9.78	35.41	54.42	-19.01	AVG
5	0.2714	36.38	9.78	46.16	61.07	-14.91	QP
6	0.2714	20.00	9.78	29.78	51.07	-21.29	AVG
7	0.5144	39.99	9.76	49.75	56.00	-6.25	QP
8	0.5144	33.02	9.76	42.78	46.00	-3.22	AVG
9	1.0275	26.85	9.75	36.60	56.00	-19.40	QP
10	1.0275	16.20	9.75	25.95	46.00	-20.05	AVG
11	24.0000	22.72	9.89	32.61	60.00	-27.39	QP
12	24.0000	13.29	9.89	23.18	50.00	-26.82	AVG

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
