

# TEST REPORT

**Product Name** : POWER BANK  
**Brand Name** : Q  
**Model** : PB180W  
**Series Model** : N/A  
**FCC ID** : 2BQKV-PB180W  
**Applicant** : **Shenzhen Guhe Industrial Co.,Ltd**  
**Address** : Rm 202, Building D, Ganghua High-Tech Park, Zhongxing Road,  
Nanwan Street, Longgang District, Shenzhen, China  
**Manufacturer** : **Shenzhen Guhe Industrial Co.,Ltd**  
**Address** : Rm 202, Building D, Ganghua High-Tech Park, Zhongxing Road,  
Nanwan Street, Longgang District, Shenzhen, China  
**Standard(s)** : FCC CFR 47 PART 1, § 1.1310  
KDB 680106 D01 Wireless Power Transfer v04  
**Date of Receipt** : June 03, 2025  
**Date of Test** : June 04, 2025~ June 24, 2025  
**Issued Date** : June 25, 2025

**Issued By:** **Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,  
Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

**Reviewed by:**

*Leon Yi*

Leon.yi

**Approved by:**

*Sean She*

Sean She



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.

**Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.



**Report Revise Record**

| Report Version | Issued Date   | Notes           |
|----------------|---------------|-----------------|
| M1             | June 25, 2025 | Initial Release |

# Contents

|          |                                               |           |
|----------|-----------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL INFORMATION.....</b>               | <b>4</b>  |
| 1.1      | ENVIRONMENTAL CONDITIONS .....                | 4         |
| 1.2      | GENERAL DESCRIPTION OF EUT .....              | 4         |
| 1.3      | TEST FACILITY .....                           | 5         |
| 1.4      | MEASUREMENT UNCERTAINTY .....                 | 5         |
| 2.1      | DESCRIPTION OF THE TEST MODE .....            | 6         |
| 2.2      | SPECIAL ACCESSORIES .....                     | 6         |
| 2.3      | TEST INSTRUMENTS LIST .....                   | 6         |
| 2.3.1    | <i>Calibration Information</i> .....          | 6         |
| 2.3.2    | <i>MAGPy probe information</i> .....          | 7         |
| 2.4      | COIL PARAMETER .....                          | 8         |
| 2.5      | ANTENNA LOCATION(S) .....                     | 9         |
| <b>3</b> | <b>TEST CONDITIONS AND RESULTS .....</b>      | <b>10</b> |
| 3.1      | APPLICABLE STANDARD .....                     | 10        |
| 3.2      | LIMIT .....                                   | 10        |
| 3.3      | TEST SETUP .....                              | 10        |
| 3.4      | MEASUREMENT PROCEDURE .....                   | 11        |
| 3.5      | TEST RESULT OF E AND H FIELD STRENGTH .....   | 12        |
| 3.5.1    | <i>Duty Cycle</i> .....                       | 12        |
| 3.5.2    | <i>For mobile exposure condition:</i> .....   | 13        |
| 3.5.3    | <i>For portable exposure condition:</i> ..... | 14        |
| 3.6      | EQUIPMENT APPROVAL CONSIDERATIONS .....       | 17        |
| 3.7      | CONCLUSION .....                              | 17        |
| <b>4</b> | <b>TEST SETUP PHOTOGRAPHS OF EUT .....</b>    | <b>18</b> |
| <b>5</b> | <b>EXTERNAL PHOTOGRAPHS OF EUT .....</b>      | <b>29</b> |
| <b>6</b> | <b>INTERNAL PHOTOGRAPHS OF EUT .....</b>      | <b>29</b> |

# 1 GENERAL INFORMATION

## 1.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

## 1.2 General Description of EUT

|                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                                                                                                                                                                               | POWER BANK                                                                                                                                                                                                                                                                                                                                                                            |
| Model/Type reference:                                                                                                                                                                       | PB180W                                                                                                                                                                                                                                                                                                                                                                                |
| Serial Model:                                                                                                                                                                               | N/A                                                                                                                                                                                                                                                                                                                                                                                   |
| Power Supply:                                                                                                                                                                               | Capacity: 3.85V=10000mAh 38.5Wh<br>Output Capacity: 5V 6380mAh<br>AC input: 110-240V~0.5A 50/60Hz<br>USB-C input: 5V=2A,9V=2A,12V=1.5A<br>USB-C Output: 5V=3A,9V=2.2A,12V=1.5A<br>USB Output: 5V=3A<br>Cable Output1: 5V=2.4A<br>Cable Output2: 5V=2.4A<br>Cable Output3: 5V=3A,9V=2A,12V=1.5A<br>Wireless Output: 5W/7.5W/10W/15W<br>Watch Output: 2.5W<br>Max Output: 5V=3A(Shared) |
| Hardware Version:                                                                                                                                                                           | N/A                                                                                                                                                                                                                                                                                                                                                                                   |
| Software Version:                                                                                                                                                                           | N/A                                                                                                                                                                                                                                                                                                                                                                                   |
| Sample(s) Status:                                                                                                                                                                           | AiTSZ-250603027-1(Normal sample)<br>AiTSZ-250603027-2(Engineer sample)                                                                                                                                                                                                                                                                                                                |
| <b>Wireless Charger:</b>                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                       |
| Operation frequency:                                                                                                                                                                        | For Phone: 110kHz-205kHz<br>For Watch: 300kHz-350kHz                                                                                                                                                                                                                                                                                                                                  |
| Modulation Technology:                                                                                                                                                                      | ASK                                                                                                                                                                                                                                                                                                                                                                                   |
| Antenna Type:                                                                                                                                                                               | Loop coil Antenna                                                                                                                                                                                                                                                                                                                                                                     |
| Antenna gain:                                                                                                                                                                               | 0dBi                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Remark:</b><br>The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |                                                                                                                                                                                                                                                                                                                                                                                       |

## 1.3 Test Facility

### Test Laboratory:

#### Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

#### **FCC-Registration No.: 251906 Designation Number: CN1376**

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **IC —Registration No.: 31737 CAB identifier: CN0165**

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

#### **A2LA-Lab Cert. No.: 7133.01**

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## 1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Guangdong Asia Hongke Test Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Asia Hongke laboratory is reported:

| Test                                | Range      | Measurement Uncertainty | Notes |
|-------------------------------------|------------|-------------------------|-------|
| Magnetic field expanded uncertainty | 3KHz-10MHz | 3.58dB                  | (1)   |
| Electric Field expanded uncertainty | 3KHz-10MHz | 2.41dB                  | (1)   |

The report uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty Multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%

## 2.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

| Test Modes:                                                                               |                                                                |            |
|-------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------|
| Mode 1                                                                                    | AC/DC Adapter or AC Direct + EUT + phone(Battery Status:< 1%)  | Record     |
| Mode 2                                                                                    | AC/DC Adapter or AC Direct + EUT + phone(Battery Status:< 50%) | Record     |
| Mode 3                                                                                    | AC/DC Adapter or AC Direct + EUT + phone(Battery Status:< 99%) | Record     |
| Mode 4                                                                                    | AC/DC Adapter or AC Direct + EUT + Apple Watch                 | Record     |
| Mode 5                                                                                    | EUT + phone(Battery Status:< 1%)                               | Record     |
| Mode 6                                                                                    | EUT + phone(Battery Status:< 50%)                              | Pre-tested |
| Mode 7                                                                                    | EUT + phone(Battery Status:< 99%)                              | Pre-tested |
| Mode 8                                                                                    | EUT + Apple Watch                                              | Record     |
| Mode 9                                                                                    | Stand-by mode                                                  | Pre-tested |
| Note: All test modes were pre-tested, but we only recorded the worst case in this report. |                                                                |            |

## 2.2 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description | Manufacturer | Model     | Serial No. | Provided by | Other |
|-------------|--------------|-----------|------------|-------------|-------|
| Adapter     | HNT          | HNT-QC530 | /          | Test lab    | /     |
| Phone       | YBZ          | 15W       | /          | Test lab    | /     |
| Watch       | Apple        | S6        | /          | Test lab    | /     |

## 2.3 Test Instruments list

### 2.3.1 Calibration Information

| No | Test Equipment                               | Manufacturer | Model No                             | Serial No   | Cal. Date  | Cal. Due Date |
|----|----------------------------------------------|--------------|--------------------------------------|-------------|------------|---------------|
| 1  | Magnetic Amplitude and Gradient Probe System | SPEAG        | MAGPy-8H3D+E3D V2.6 & MAGPy-DAS V2.6 | 3107 & 3097 | 2025.03.14 | 2026.03.13    |
| 2  | Spectrum Analyzer                            | Agilent      | N9020A                               | MY512898 43 | 2024.09.25 | 2025.09.24    |


### 2.3.2 MAGPy probe information

Magnetic Amplitude and Gradient Probe System of probe MAGPy-8H3D+E3D consists of eight isotropic H-field sub probes and one isotropic E-field sub probe that are all integrated inside the probe head with a flat tip. Each isotropic H-field sub probe comprises three concentric orthogonal loop coil sensors. The isotropic E-field sub probe is composed of three orthogonal sensors (x and y sensors are dipoles and the sensor measuring the z component is a monopole). In total, the MAGPy-8H3D+E3D V2.6 probe is thus composed of nine sub probes and 27 single sensors that measure in the time-domain. The flat-tip probe design brings the sensors closer to the tip. The probe specifications are provided in Table 2.1.

| Parameter                           | Specs                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------------|
| <b>PROBE DESIGN</b>                 |                                                                                             |
| Diameter                            | 60 mm                                                                                       |
| 8 isotropic <i>H</i> -field sensors | concentric loops of 1 cm <sup>2</sup> arranged at the corner of a cube of 22 mm side length |
| 1 isotropic <i>E</i> -field sensor  | orthogonal dipole/monopole (arm length: 50 mm)                                              |
| Measurement center                  | 18.5 mm from the probe tip                                                                  |
| Temperature range                   | 0–40 °C                                                                                     |
| Dimensions                          | 110 × 635 × 35 mm<br>(MAGPy-8H3D+E3D V2.6 & MAGPy-DAS V2.6)                                 |
| <b><i>H</i>-FIELD SPECIFICATION</b> |                                                                                             |
| Frequency range                     | 3 kHz–10 MHz                                                                                |
| Measurement range                   | 0.1–3200 A/m, 0.12 μT–4 mT                                                                  |
| Gradient range                      | 0–80 T/m/T                                                                                  |
| <b><i>E</i>-FIELD SPECIFICATION</b> |                                                                                             |
| Frequency range                     | 3 kHz–10 MHz                                                                                |
| Measurement range                   | 0.08–2000 V/m                                                                               |

Table 2.1: MAGPy-8H3D+E3D V2.6 probe specifications

## 2.4 Coil Parameter

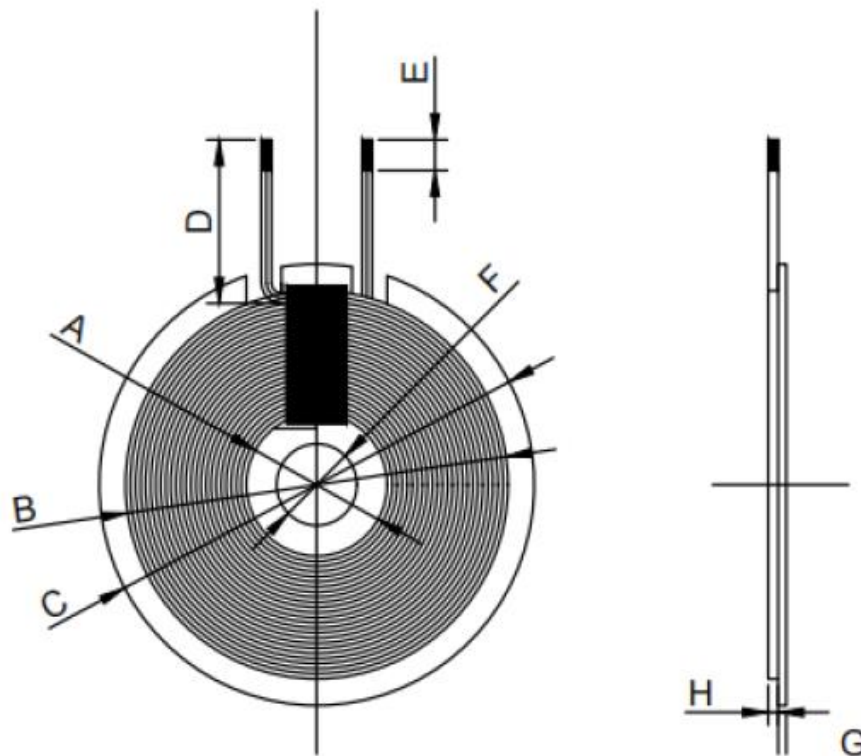


| A      | B    | C        | D    | E   | F       | G        | H        |
|--------|------|----------|------|-----|---------|----------|----------|
| 13±0.5 | 38±1 | 43.5±0.5 | 50±2 | 3±1 | 5.3±0.3 | 0.8±0.05 | 0.6±0.05 |

Unit:mm

## 2.5 Antenna Location(s)

The distance from the antenna to each surface of the product's casing as follow:

| Front A | Rear B | Left C | Right D | Top E | Bottom F |
|---------|--------|--------|---------|-------|----------|
| 17.5mm  | 17.5mm | 57mm   | 57mm    | 3mm   | 22mm     |

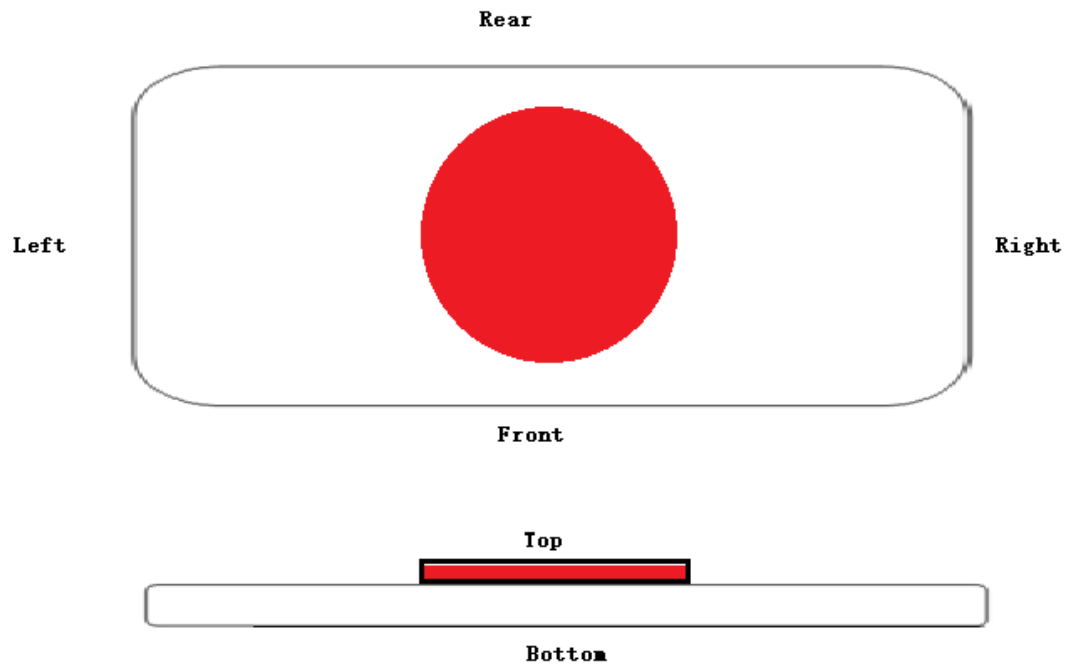

### 3 TEST CONDITIONS AND RESULTS

#### 3.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01 RF Exposure Wireless Charging App v04

#### 3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---------------------------------------------|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 6                       |
| 3.0 – 30                                    | 1842/f                       | 4.89/f                       | (900/f)*                            | 6                       |
| 30 – 300                                    | 61.4                         | 0.163                        | 1.0                                 | 6                       |
| 300 – 1500                                  | /                            | /                            | f/300                               | 6                       |
| 1500 – 100,000                              | /                            | /                            | 5                                   | 6                       |

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure


| Frequency Range(MHz)                        | Electric Field Strength(V/m) | Magnetic Field Strength(A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minute) |
|---------------------------------------------|------------------------------|------------------------------|-------------------------------------|-------------------------|
| Limits for Occupational/Controlled Exposure |                              |                              |                                     |                         |
| 0.3 – 3.0                                   | 614                          | 1.63                         | (100) *                             | 30                      |
| 3.0 – 30                                    | 824/f                        | 2.19/f                       | (180/f)*                            | 30                      |
| 30 – 300                                    | 27.5                         | 0.073                        | 0.2                                 | 30                      |
| 300 – 1500                                  | /                            | /                            | f/1500                              | 30                      |
| 1500 – 100,000                              | /                            | /                            | 1.0                                 | 30                      |

F=frequency in MHz


\*=Plane-wave equivalent power density

#### 3.3 Test Setup

For mobile exposure conditions:

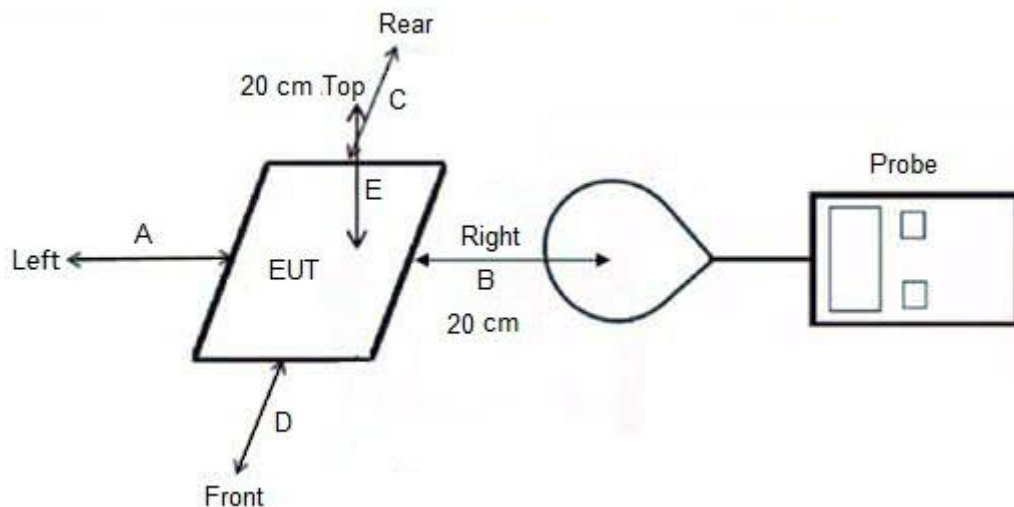

For portable exposure conditions:

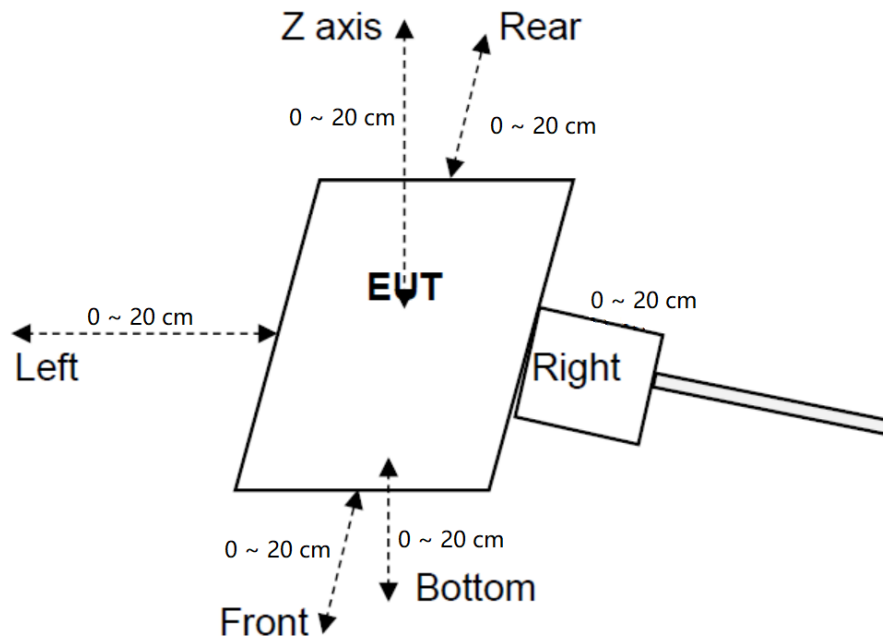

**Note:** A, B, C, D, E, F for six surfaces of the product.

### 3.4 Measurement Procedure

**For portable exposure conditions:**

- The RF exposure test was performed in anechoic chamber.
- The measurement probe was placed at test distance (20 cm from all sides) which is between the edge of the charger and the geometric centre of probe.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v04.

**For portable exposure condition:**



- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

### 3.5 Test Result of E and H field Strength

#### 3.5.1 Duty Cycle

| Mode                     | ON Time(ms) | Period(ms) | Duty Cycle(%) |
|--------------------------|-------------|------------|---------------|
| Operating(110kHz-205kHz) | /           | /          | 100           |
| Operating(300kHz-350kHz) | /           | /          | 100           |

#### Operating

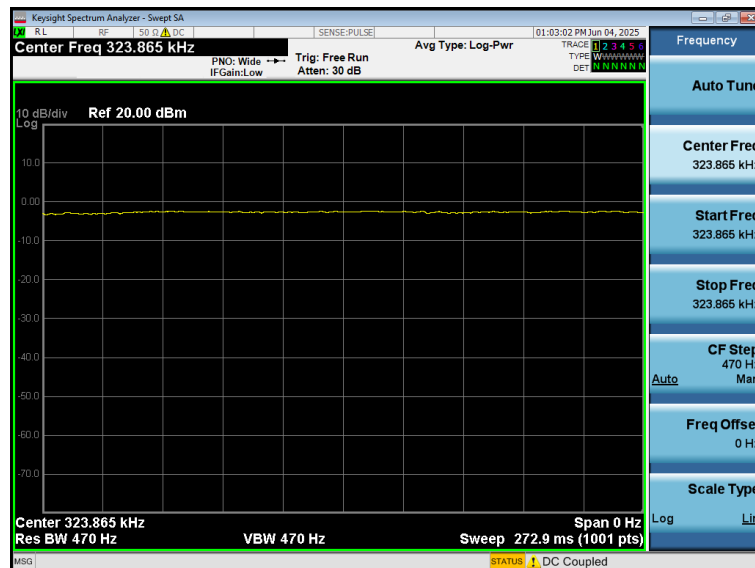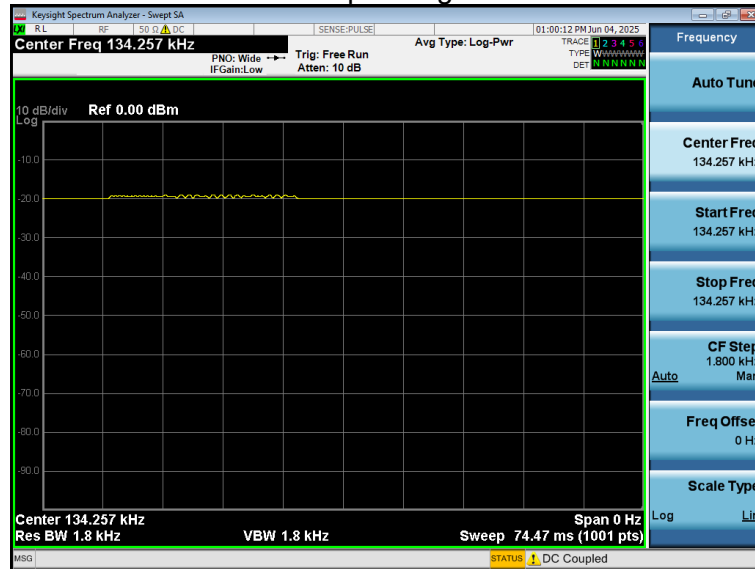

### 3.5.2 For mobile exposure condition:

Operating(110kHz-205kHz)  
Test mode 1

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 1%           | Top                 | 0.134         | 0.082         |
| 20cm             | < 1%           | Left                | 0.073         | 0.045         |
| 20cm             | < 1%           | Right               | 0.058         | 0.036         |
| 20cm             | < 1%           | Front               | 0.141         | 0.087         |
| 20cm             | < 1%           | Rear                | 0.159         | 0.098         |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 0.03%         | 5.99%         |

Test mode 2

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 50%          | Top                 | 0.130         | 0.078         |
| 20cm             | < 50%          | Left                | 0.068         | 0.042         |
| 20cm             | < 50%          | Right               | 0.055         | 0.033         |
| 20cm             | < 50%          | Front               | 0.130         | 0.079         |
| 20cm             | < 50%          | Rear                | 0.144         | 0.095         |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 0.02%         | 5.85%         |

Test mode 3

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 99%          | Top                 | 0.123         | 0.074         |
| 20cm             | < 99%          | Left                | 0.066         | 0.041         |
| 20cm             | < 99%          | Right               | 0.052         | 0.033         |
| 20cm             | < 99%          | Front               | 0.120         | 0.074         |
| 20cm             | < 99%          | Rear                | 0.138         | 0.094         |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 0.02%         | 5.77%         |

Operating(300kHz-350kHz)  
Test mode 4

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 1%           | Top                 | 0.148         | 0.091         |
| 20cm             | < 1%           | Left                | 0.061         | 0.037         |
| 20cm             | < 1%           | Right               | 0.047         | 0.029         |
| 20cm             | < 1%           | Front               | 0.139         | 0.085         |
| 20cm             | < 1%           | Rear                | 0.145         | 0.089         |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 0.02%         | 5.58%         |


Note: All test modes were pre-tested, but we only recorded the worst case in this report.

### 3.5.3 For portable exposure condition:

#### Note:


- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) According to the requirements if KDB 680106 D01 v04, If the center of the probe sensing element is located more than 5mm from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable. (The sensitive elements are located approximately 18.5 mm below the external surface specified in user manual of MAGPy-8H3D+E3D)
- (6) The actual 0cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (7) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

**Top & Bottom Side:**

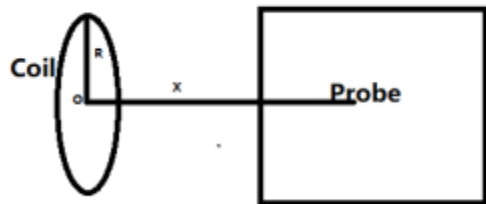

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

**Front, left, right & rear Side:**

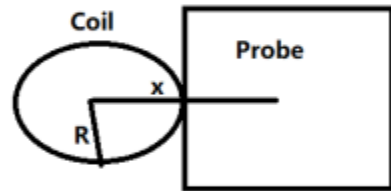

$$B = \frac{\mu_0 * I * N}{2 * x}$$

**B(Unit:A/m):** means H-field value;

$\mu_0$  is space permeability;  $\mu_0=4\pi*10^{-7}$ ;

**I(Unit:A):** A current element passing through a radiated coil;

**R(Unit:m):** means the Radius of radiated coil, according to provided Antenna specification:

R=0.019m;

**Test Distance(Unit:m):** The distance from the sensing element of the probe to the edge of the device surface.

**x(Unit:m):** means the center of the coil to the sensing elements of the probe. (x=test distance+R)

**N:** Number of turns, according to providing "Antenna specification" files: N=12.

(8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

### H-Field Strength result

Operating(110kHz-205kHz)

Note: <1%, 50%, >95% load all have been tested, only worse case Max load (<1%) is reported. H-Field Strength at (distance 0cm to 20cm at 2cm iteration, i.e. at a distance of 20cm, 18cm, 16cm, 0cm, which is between the edge of the charger edge and the probe's tip) surrounding the EUT (A/m).

| Test Distance (cm) | Test Position A (A/m) | Test Position B (A/m) | Test Position C (A/m) | Test Position D (A/m) | Test Position E (A/m) | Test Position F (A/m) | Limit (A/m) |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|
| 2                  | 0.129                 | 0.177                 | 0.081                 | 0.044                 | 0.386                 | 0.149                 | 1.63        |
| 4                  | 0.125                 | 0.133                 | 0.057                 | 0.046                 | 0.125                 | 0.055                 |             |
| 6                  | 0.114                 | 0.127                 | 0.057                 | 0.044                 | 0.123                 | 0.055                 |             |
| 8                  | 0.107                 | 0.126                 | 0.054                 | 0.042                 | 0.111                 | 0.050                 |             |
| 10                 | 0.105                 | 0.123                 | 0.052                 | 0.041                 | 0.111                 | 0.046                 |             |
| 12                 | 0.101                 | 0.113                 | 0.049                 | 0.040                 | 0.101                 | 0.044                 |             |
| 14                 | 0.096                 | 0.109                 | 0.049                 | 0.037                 | 0.093                 | 0.043                 |             |
| 16                 | 0.087                 | 0.107                 | 0.046                 | 0.036                 | 0.089                 | 0.042                 |             |
| 18                 | 0.085                 | 0.104                 | 0.044                 | 0.036                 | 0.083                 | 0.040                 |             |
| 20                 | 0.082                 | 0.094                 | 0.044                 | 0.036                 | 0.082                 | 0.036                 |             |

Use the Biot-Sacart Law to estimate the results of 2cm through 4cm.

| Test position | Measure Value (A/m) | Estimated Value (A/m) | Agreement Ratio | Limits |
|---------------|---------------------|-----------------------|-----------------|--------|
| A             | 0.129               | 0.169                 | -23.90%         | 30%    |
| B             | 0.177               | 0.180                 | -2.26%          | 30%    |
| C             | 0.081               | 0.069                 | 17.52%          | 30%    |
| D             | 0.044               | 0.056                 | -21.31%         | 30%    |
| E             | 0.386               | 0.489                 | -21.27%         | 30%    |
| F             | 0.149               | 0.153                 | -2.87%          | 30%    |

As the model is sufficient, the 0cm value can be estimated through the results of 2 cm.

| Test position | Estimated Value (A/m) | Limits (A/m) |
|---------------|-----------------------|--------------|
| A             | 0.200                 | 1.63         |
| B             | 0.274                 |              |
| C             | 0.102                 |              |
| D             | 0.056                 |              |
| E             | 1.440                 |              |
| F             | 0.594                 |              |

### Operating(300kHz-350kHz)

| Test Distance (cm) | Test Position A (A/m) | Test Position B (A/m) | Test Position C (A/m) | Test Position D (A/m) | Test Position E (A/m) | Test Position F (A/m) | Limit (A/m) |
|--------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|
| 2                  | 0.141                 | 0.200                 | 0.049                 | 0.05                  | 0.363                 | 0.125                 | 1.63        |
| 4                  | 0.114                 | 0.127                 | 0.047                 | 0.039                 | 0.118                 | 0.043                 |             |
| 6                  | 0.113                 | 0.122                 | 0.045                 | 0.037                 | 0.115                 | 0.042                 |             |
| 8                  | 0.110                 | 0.112                 | 0.042                 | 0.035                 | 0.113                 | 0.040                 |             |
| 10                 | 0.107                 | 0.109                 | 0.042                 | 0.033                 | 0.106                 | 0.036                 |             |
| 12                 | 0.104                 | 0.107                 | 0.039                 | 0.030                 | 0.096                 | 0.036                 |             |
| 14                 | 0.094                 | 0.106                 | 0.036                 | 0.029                 | 0.088                 | 0.035                 |             |
| 16                 | 0.089                 | 0.102                 | 0.034                 | 0.026                 | 0.085                 | 0.034                 |             |
| 18                 | 0.080                 | 0.098                 | 0.033                 | 0.025                 | 0.081                 | 0.032                 |             |
| 20                 | 0.077                 | 0.097                 | 0.031                 | 0.025                 | 0.073                 | 0.028                 |             |

Use the Biot-Sacart Law to estimate the results of 2cm through 4cm.

| Test position | Measure Value (A/m) | Estimated Value (A/m) | Agreement Ratio | Limits |
|---------------|---------------------|-----------------------|-----------------|--------|
| A             | 0.141               | 0.154                 | -9.21%          | 30%    |
| B             | 0.200               | 0.172                 | 16.30%          | 30%    |
| C             | 0.049               | 0.057                 | -13.86%         | 30%    |
| D             | 0.050               | 0.047                 | 4.70%           | 30%    |
| E             | 0.363               | 0.462                 | -21.49%         | 30%    |
| F             | 0.125               | 0.120                 | 4.30%           | 30%    |

As the model is sufficient, the 0cm value can be estimated through the results of 2 cm.

| Test position | Estimated Value (A/m) | Limits (A/m) |
|---------------|-----------------------|--------------|
| A             | 0.218                 | 1.63         |
| B             | 0.310                 |              |
| C             | 0.062                 |              |
| D             | 0.063                 |              |
| E             | 1.354                 |              |
| F             | 0.498                 |              |

### 3.6 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

| Requirements of KDB 680106 D01                                                                                                                                                                              | Yes / No | Description                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The power transfer frequency is below 1 MHz.                                                                                                                                                                | Yes      | The device operate in the frequency range is below 1MHz.                                                                                                                     |
| The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.                                                                                                             | Yes      | The maximum output power of the transmitting element is less than 15W                                                                                                        |
| A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact) | Yes      | Client device is placed directly in contact with the transmitter.                                                                                                            |
| Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).                                                                                 | No       | Mobile and Portable exposure conditions.                                                                                                                                     |
| The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit,                                                    | Yes      | The E-field and H-field strengths at and beyond 20 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. |
| For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded.                                                                            | Yes      | The EUT equipped one radiating structure only.                                                                                                                               |

### 3.7 Conclusion

For Mobile exposure conditions, the detected emissions with a distance of 15cm surrounding the device and 20 cm above the top surface of the device are below the FCC E-Field Strength & H-Field Strength limits; and comply with the requirements of FCC KDB 680106 D01.

For Portable exposure conditions, a minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106 D01.

## 4 Test Setup Photographs of EUT

Portable mode:

0mm\_Front



0mm\_Rear




0mm Left



0mm right



0mm Top

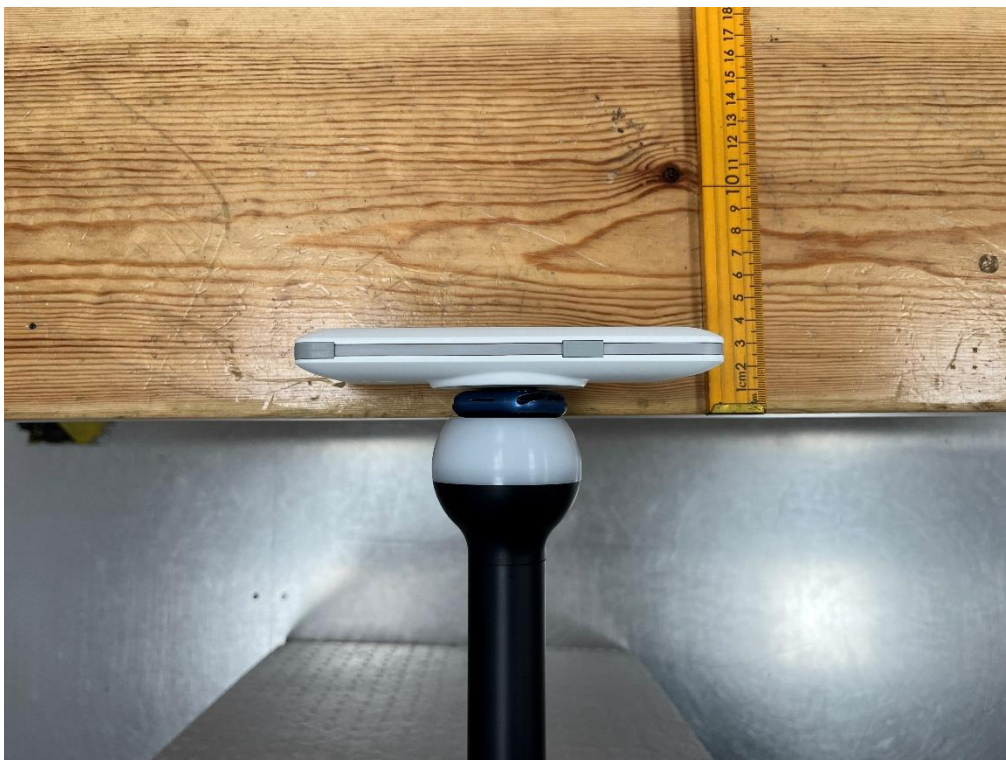


0mm bottom





Mobile mode:



20cm Front

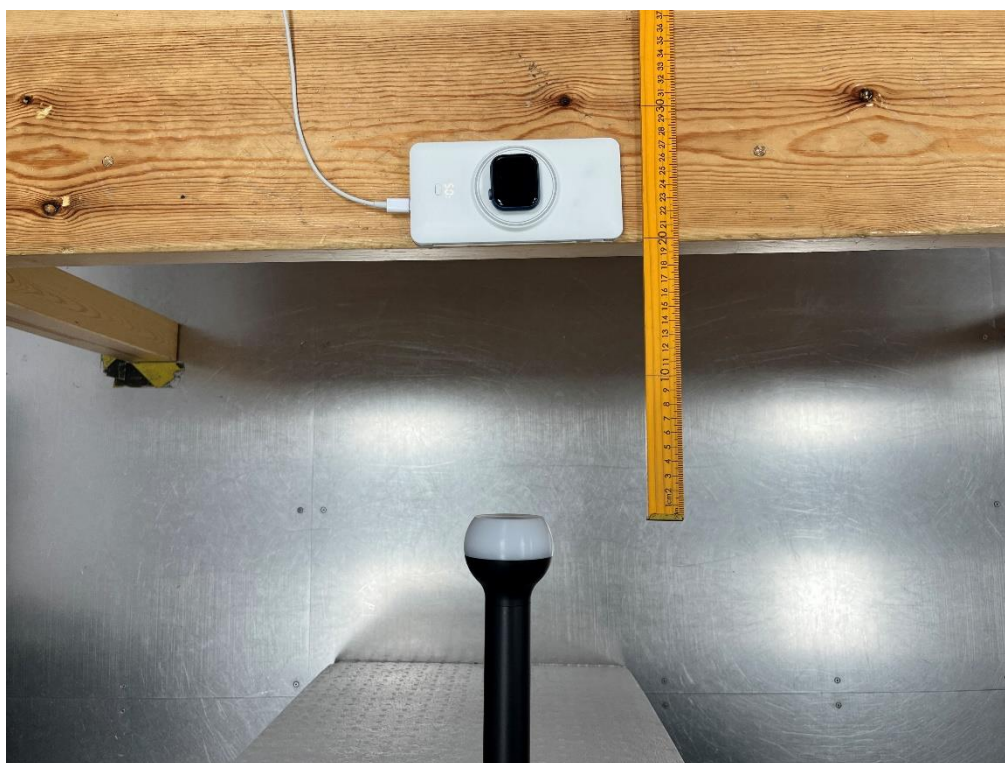

20cm Rear

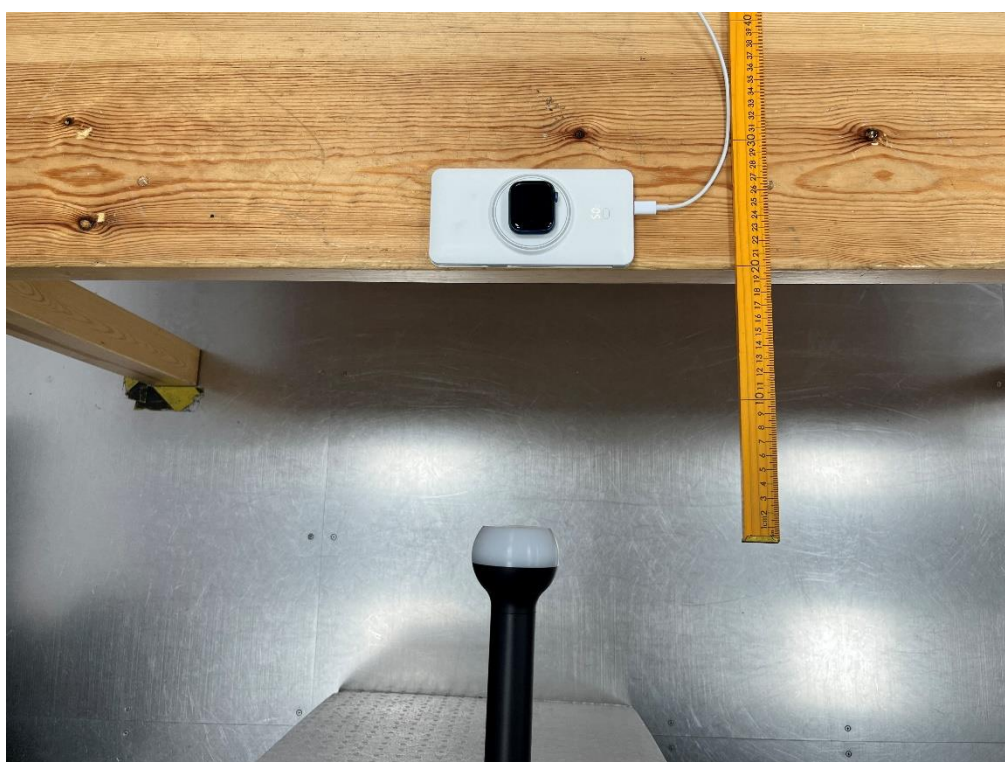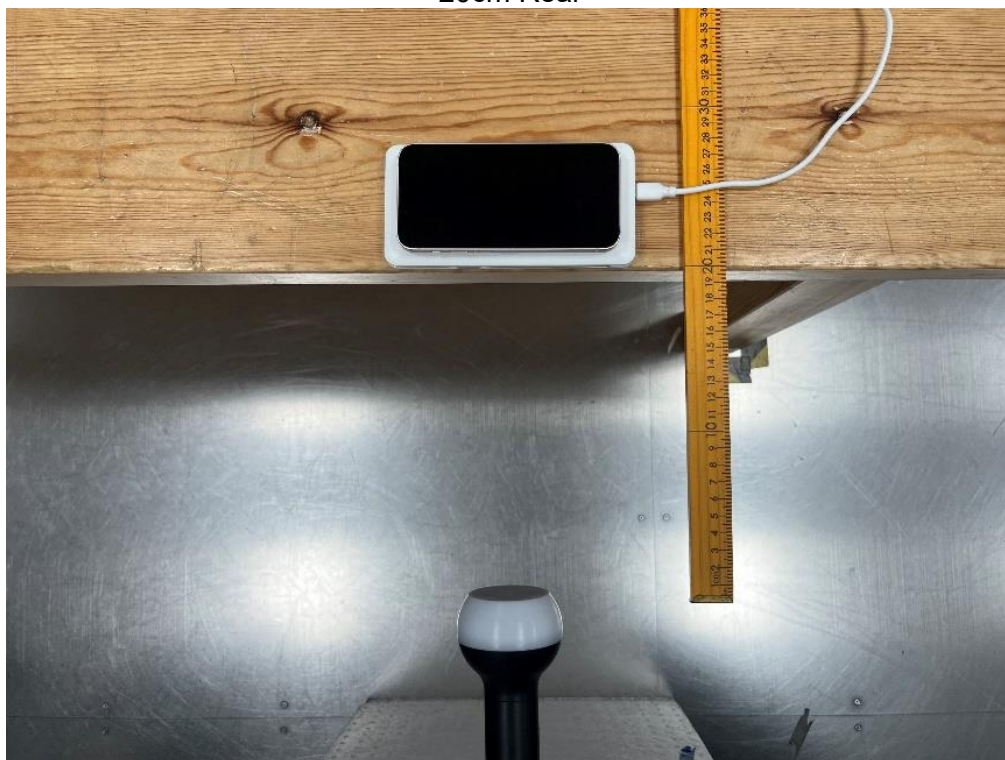


20cm Left

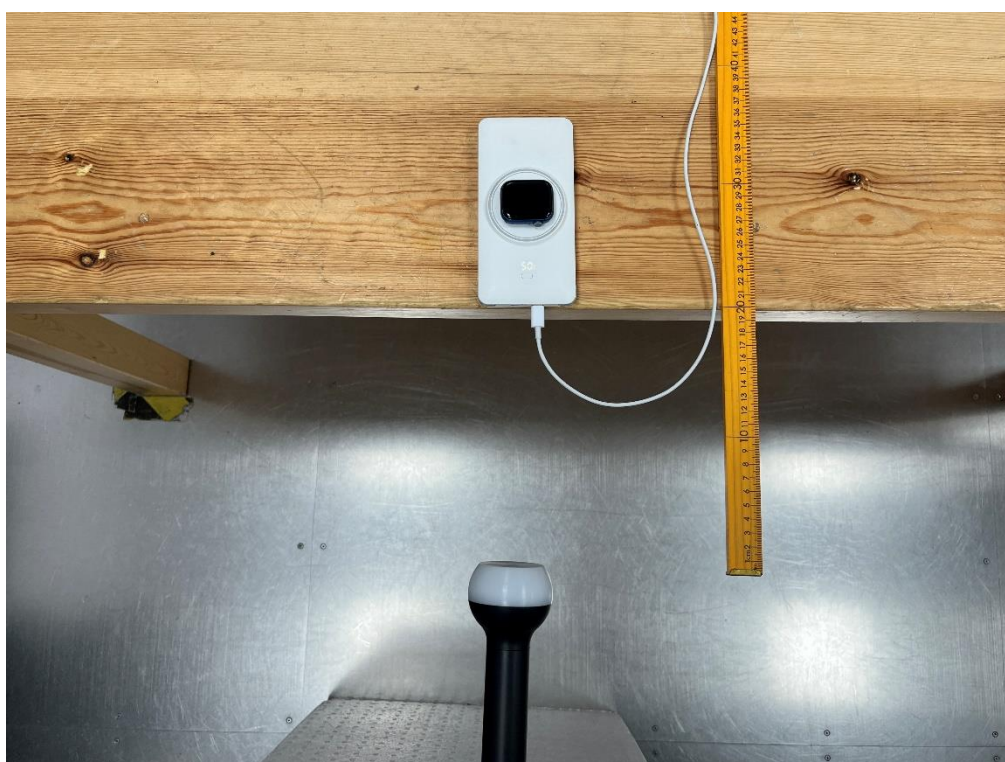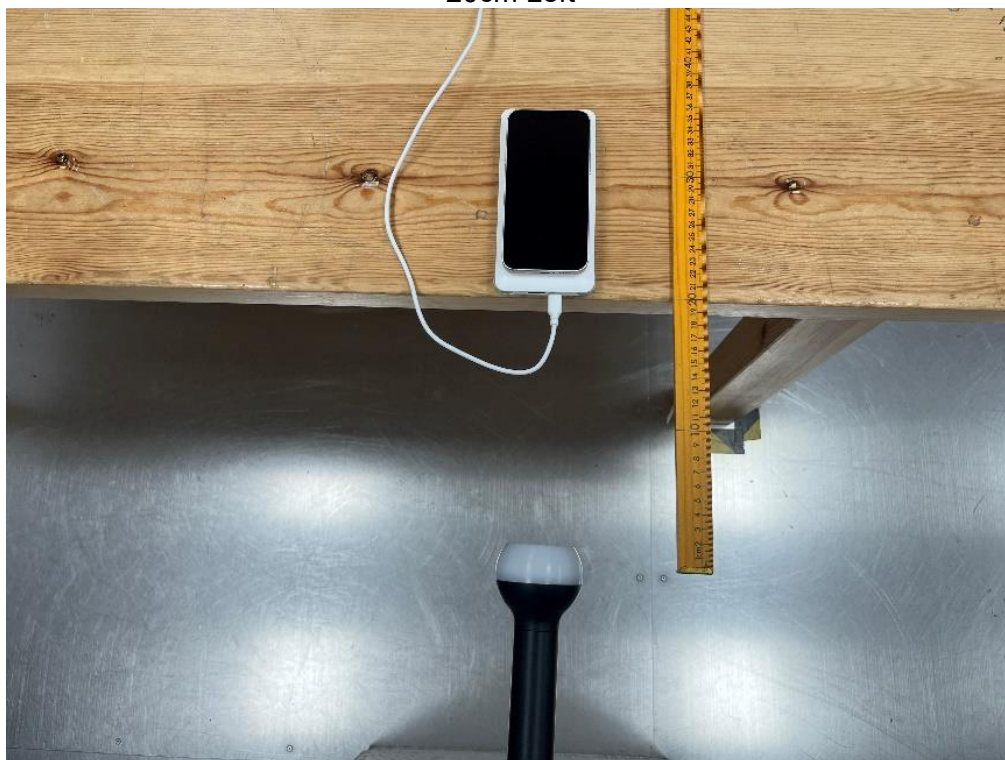

20cm right



20cm Top

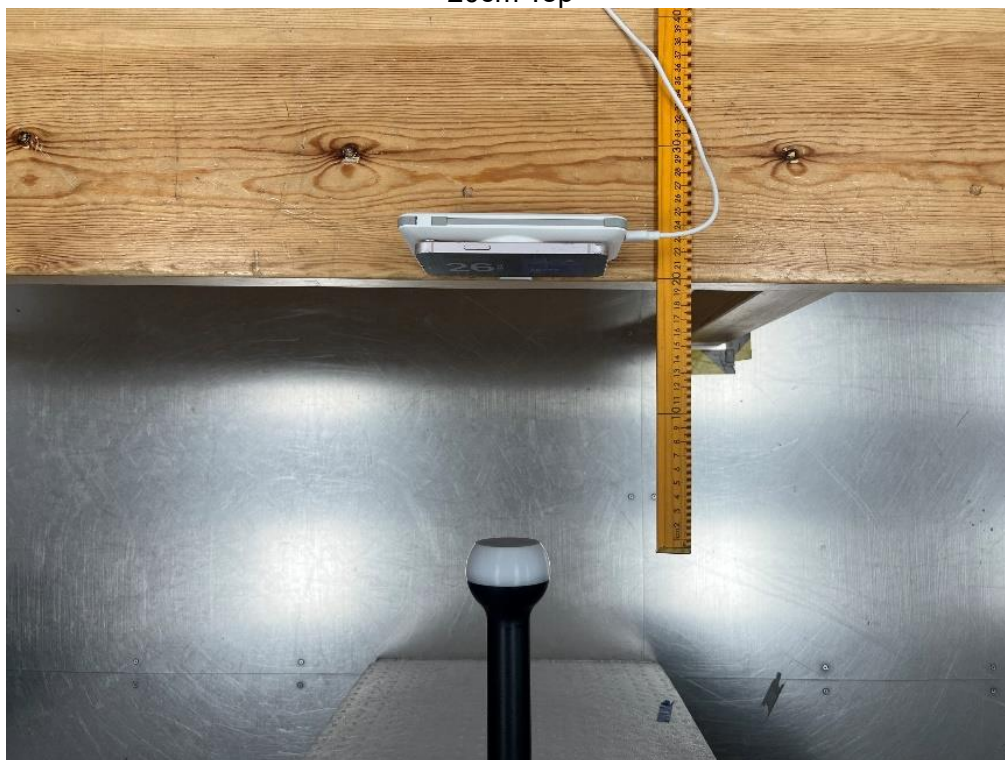

## 5 External Photographs of EUT

Please refer to separated files for External Photos of the EUT.

## 6 Internal Photographs of EUT

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* End of Report \*\*\*\*\*