

FCC RADIO TEST REPORT

Applicant.....: ORTECH Industries Inc

Address.....: 13376 Comber Way, Surrey, BC V3W 5V9

Manufacturer.....: Foshan Shunde Advante Electron Ltd.

Address.....: North Second XinXi Road, LunJiao Industrial Avenue, LunJiao, Shunde, Foshan, Guangdong, China

Factory.....: Foshan Shunde Advante Electron Ltd.

Address.....: North Second XinXi Road, LunJiao Industrial Avenue, LunJiao, Shunde, Foshan, Guangdong, China

Product Name.....: Wireless light control transmitter

Brand Name.....: ORTECH

Model No.: WS

FCC ID.....: 2BQLOWS


Measurement Standard.....: 47 CFR FCC Part 15, Subpart C (Section 15.231)

Receipt Date of Samples.....: June 17, 2025

Date of Tested.....: June 17, 2025 to June 20, 2025

Date of Report.....: July 16, 2025

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Jenny

Prepared by

Jenny Liu / Project Engineer



Iori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT	5
3. Test Channels and Modes Detail.....	7
4. Configuration of EUT.....	7
5. Modification of EUT	7
6. Description of Support Device.....	7
7. Test Facility and Location	8
8. Applicable Standards and References.....	9
9. Deviations and Abnormalities from Standard Conditions	9
10. Test Conditions	9
11. Measurement Uncertainty.....	10
12. Sample Calculations	11
13. Duty Cycle	12
14. Test Items and Results	13
14.1 Conducted Emissions Measurement.....	13
14.2 Radiated Spurious Emissions Measurement.....	15
14.3 20dB Occupied Bandwidth.....	24
14.4 Transmission time	26
14.5 Antenna Requirement	28
15. Test Equipment List.....	29

Revision History

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Line Conducted Emission	N/A <small>see note 2</small>	---
§15.231(b) & 15.209	Radiated Spurious Emission	PASS	---
§15.231(c)	20 dB Occupied bandwidth	PASS	---
§15.231(a)	Transmission time	PASS	---
§15.203	Antenna Requirement	PASS	---

Note:

1. The EUT has been tested as an independent unit. And continual transmitting in maximum power.
2. AC Power Conducted Emission is not applicable due to the EUT only can be powered by pressing the button.
3. N/A means not applicable.

2. General Description of EUT

Product Information	
Product Name:	Wireless light control transmitter
Main Model Name:	WS
Additional Model Name:	N/A
Model Difference:	N/A
S/N:	2506-3910
Brand Name:	ORTECH
Hardware Version:	V01
Software Version:	V01
Rating:	DC 2.1V come from pressing the button
Typical arrangement:	Table-top
I/O Port:	Refer to the user manual
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A
Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification

Declaring the Frequency: 433.925MHz

Modulation Type: ASK

Antenna Type: Spring antenna

Antenna Gain: 0 dBi (Declared by manufacturer)

Number of Channels: 1

3. Test Channels and Modes Detail

Mode	Test Frequency (MHz)	Modulation	Data Rate (Mbps)
1	TX	433.925MHz	ASK

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

4. Configuration of EUT

TX Mode



EUT

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
---	---	---	---	---	---	---

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2030</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>The Certificate is valid until December 31, 2025</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number. Is 46405-9743A</p> <p>The CAB identifier number: CN0015</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C, 15.231

ANSI C63.10-2013

References Test Guidance:

N/A

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	---	---	---	---
2.	Radiated Emission	1	DC 2.1V	Sean	See note 1
3.	20 dB Occupied bandwidth	1	DC 2.1V	Sean	See note 1
4.	Transmission time	1	DC 2.1V	Sean	See note 1
5.	Antenna Requirement	---	---	---	---

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35°C, 30~70%, 86~106kPa.
2. As the EUT can be operated multiple positions, all X,Y,Z axis were considered during the test and only the worst case X was recorded.
3. DC 2.1V come from pressing the button

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
2.	Radiated Emission Test	9kHz ~ 30MHz	±5.60 dB	---
		30MHz ~ 1GHz	±5.60 dB	---
		1GHz ~ 18GHz	±5.22 dB	---
		18GHz ~ 40GHz	±5.22 dB	---
3.	Occupied Bandwidth	---	±1.05%	---
4.	Transmission time	---	±0.01ms	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1900	30.10	10.60	40.70	79.00	-38.30	QP

Where,

Freq. = Emission frequency in MHz
 Reading Level = Spectrum Analyzer/Receiver Reading
 Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation
 Measurement = Reading + Corrector Factor
 Limit = Limit stated in standard
 Margin = Measurement - Limit
 Detector = Reading for Quasi-Peak / Average / Peak

Radiated Spurious Emissions						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
324.8800	14.81	22.09	36.90	46.00	-9.10	QP

Where,

Freq. = Emission frequency in MHz
 Reading Level = Spectrum Analyzer/Receiver Reading
 Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier
 Measurement = Reading + Corrector Factor
 Limit = Limit stated in standard
 Over = Margin, which calculated by Measurement - Limit
 Detector = Reading for Quasi-Peak / Average / Peak


Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Duty Cycle


Frequency MHz	TP time (ms)	Ton time (Total) (ms)	Duty cycle	AV Factor
433.925	3.2	1.45	45.31%	-6.88

Test Photo

TP time

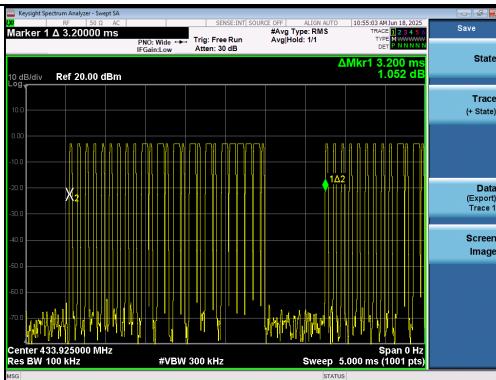

Ton 1 time

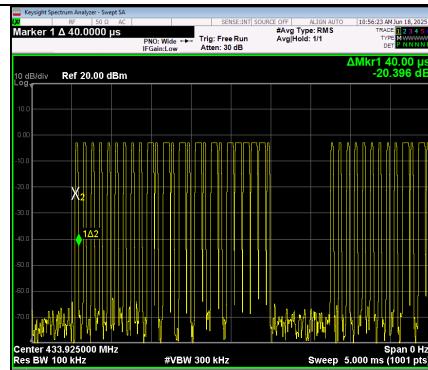

Ton 2 time



Note: Duty Cycle = (Total Ton time / TP time) x 100%

Total Ton time = Ton 1 x n1 + Ton 2 x n2 ++ Ton n x n = 0.04*15 + 0.085*10=1.45ms

AV Factor = 20log(Duty Cycle).

14. Test Items and Results

a) Conducted Emissions Measurement


LIMIT

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

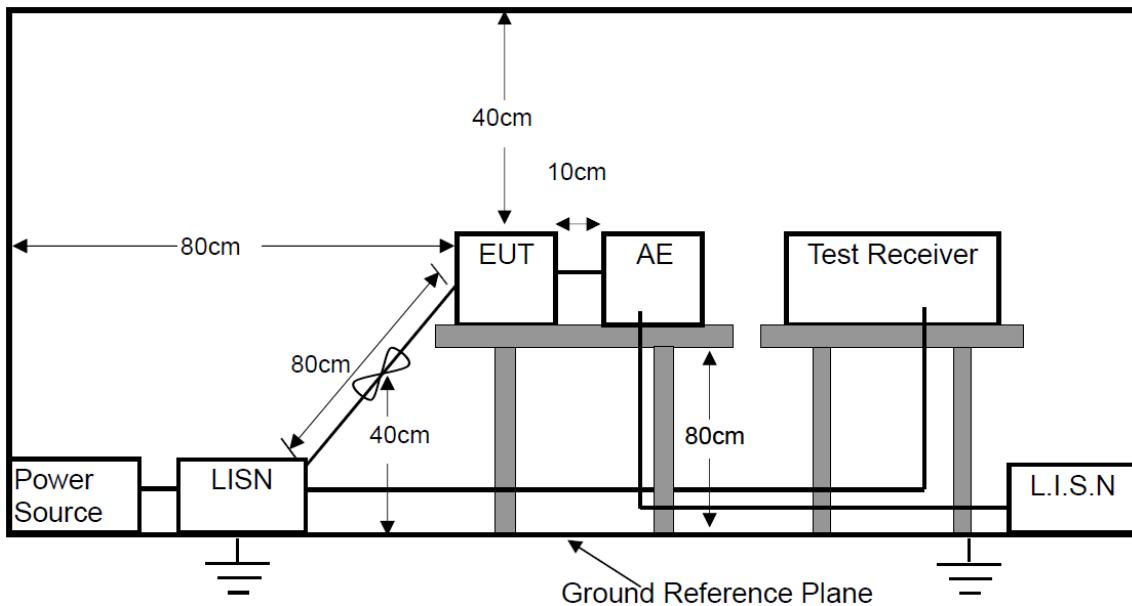

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS

Not applicable.

b) Radiated Spurious Emissions Measurement

LIMIT

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V}/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark: (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V}/\text{m}$.

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.


(5) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

According to 15.231(b), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/ meter)	spurious emissions (microvolts/meter)
40.66 - 40.70	2250	225
70 - 130	1250	125
130 - 174	1250 to 3750*	125 to 375*
174 - 260	3750	375
260 - 470	3750 to 12500*	375 to 1250*
Above 470	12500	1250
Remark: (1) * Linear interpolations. (2) Emission level (dB) μ V = 20 log Emission level μ V/m. (3) The smaller limit shall apply at the cross point between two frequency bands.		

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

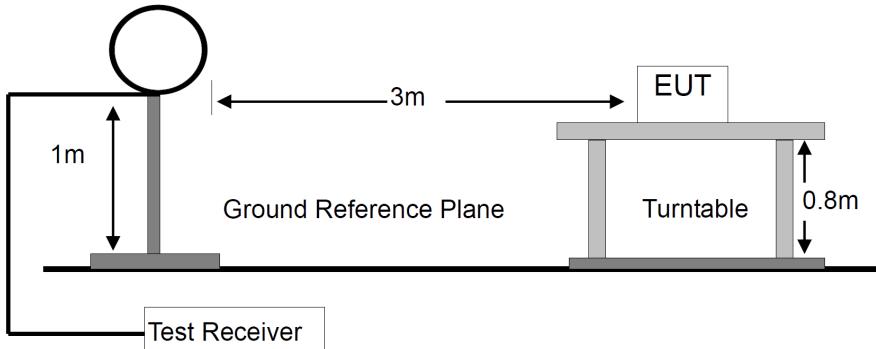

For Radiated Emission 30-1000MHz

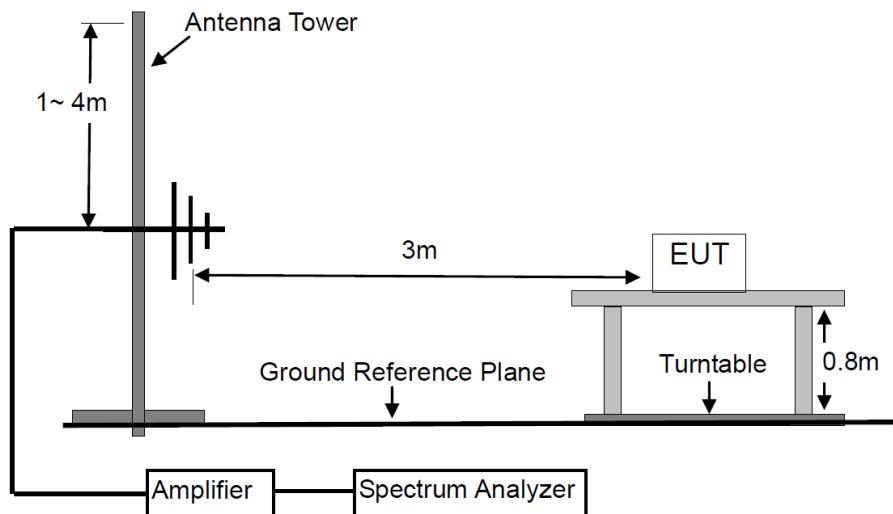

For Radiated Emission Above 1000MHz.

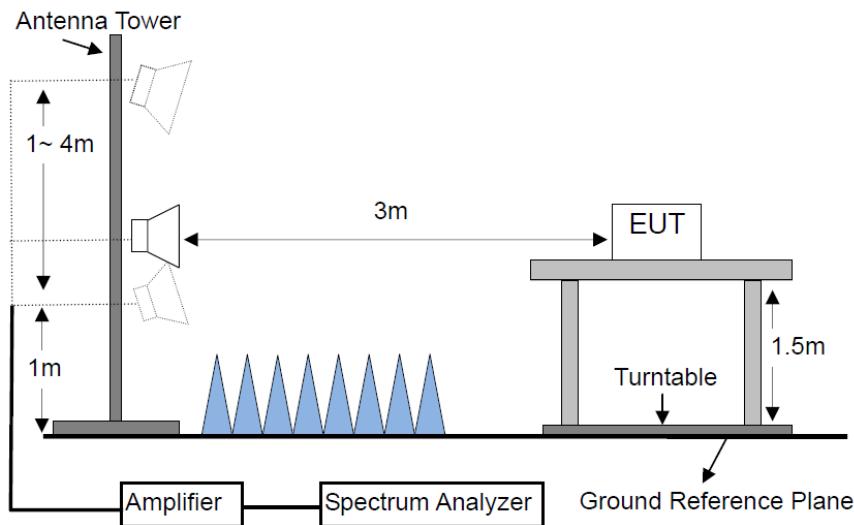

TEST PROCEDURES

- Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth

with maximum hold mode.

f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS

Please refer to the following pages.

AVG = Peak + AV Factor,

where Peak is the measurement peak level, and AV Factor is calculated by duty cycle, details see section 13 of the report.


Sample calculation, Peak=80.59dB_V/m, AV Factor= -6.88dB, then AVG=80.59+(-6.88) =73.71dB_V/m.

M/N: WS	Testing Voltage: DC 2.1V
Polarization: Horizontal	Detector: QP
Test Mode: TX	Distance: 3m

Radiated Emission Measurement

Date: 2025/6/18

Time: 10:04:55

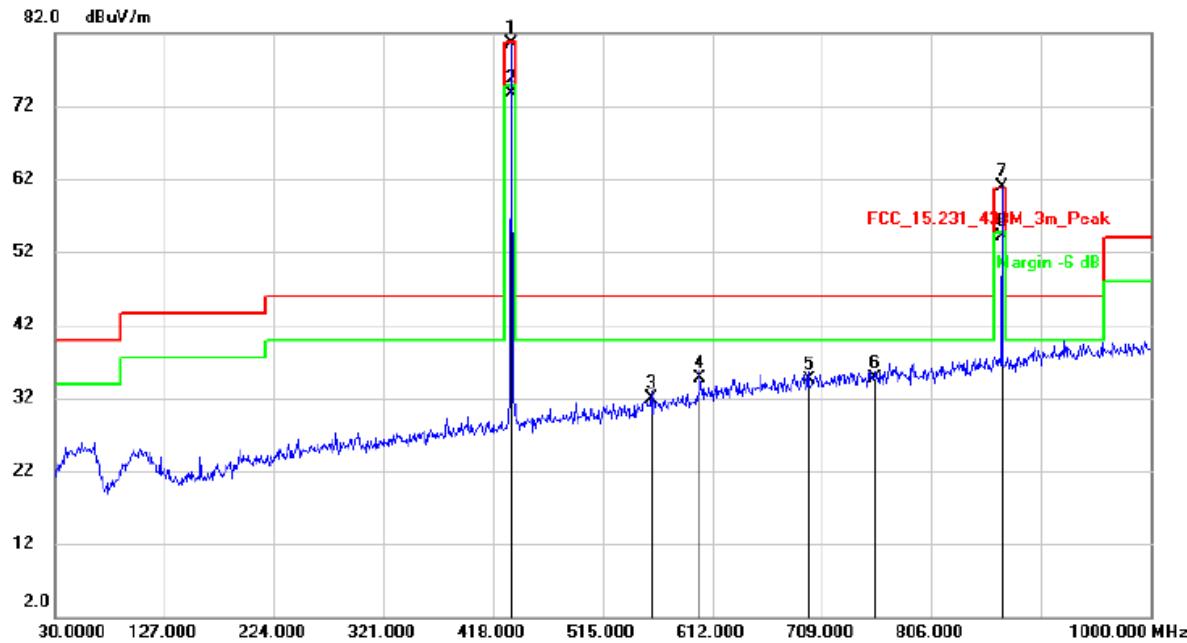

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment							
								MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	433.9250	56.37	24.22	80.59									peak	
2		433.9250			73.71	80.80	-7.09							AVG	
3		557.6800	5.40	26.50	31.90	46.00	-14.10							QP	
4		601.3300	7.47	27.33	34.80	46.00	-11.20							QP	
5		697.3600	5.73	28.87	34.60	46.00	-11.40							QP	
6		756.5300	5.08	29.72	34.80	46.00	-11.20							QP	
7	*	867.8500	29.46	31.50	60.96									peak	
8		867.8500			54.08	60.80	-6.72							AVG	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: WS	Testing Voltage: DC 2.1V
Polarization: Vertical	Detector: QP
Test Mode: TX	Distance: 3m

Radiated Emission Measurement

Date: 2025/6/18

Time: 10:12:53

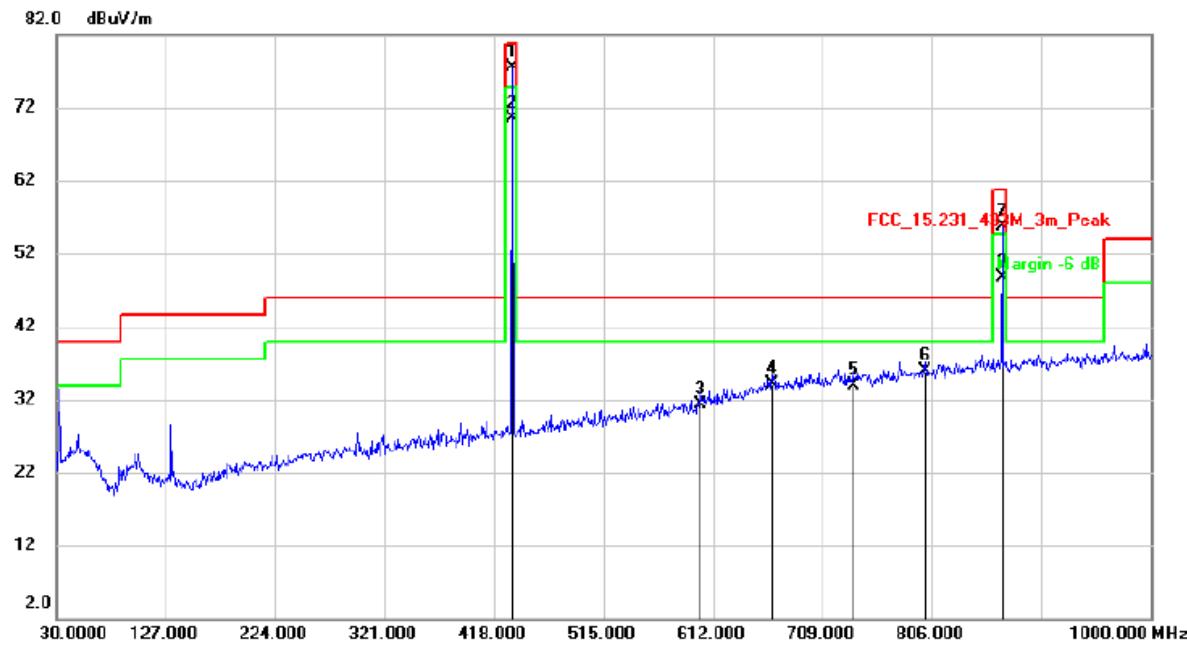

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Comment	
								MHz	dBuV
1	*	433.9250	54.21	23.22	77.43		peak		
2		433.9250			70.55	80.80	-10.25	AVG	
3		601.3300	4.96	26.34	31.30	46.00	-14.70	QP	
4		664.3800	5.96	28.24	34.20	46.00	-11.80	QP	
5		736.1599	4.45	29.45	33.90	46.00	-12.10	QP	
6		800.1800	5.61	30.29	35.90	46.00	-10.10	QP	
7	!	867.8500	24.15	31.50	55.65		peak		
8		867.8500			48.77	60.80	-12.03	AVG	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: WS	Testing Voltage: DC 2.1V
Polarization: Horizontal	Detector: Peak & AVG
Test Mode: TX	Distance: 3m


Radiated Emission Measurement

Date: 2025/6/18

Time: 10:23:32

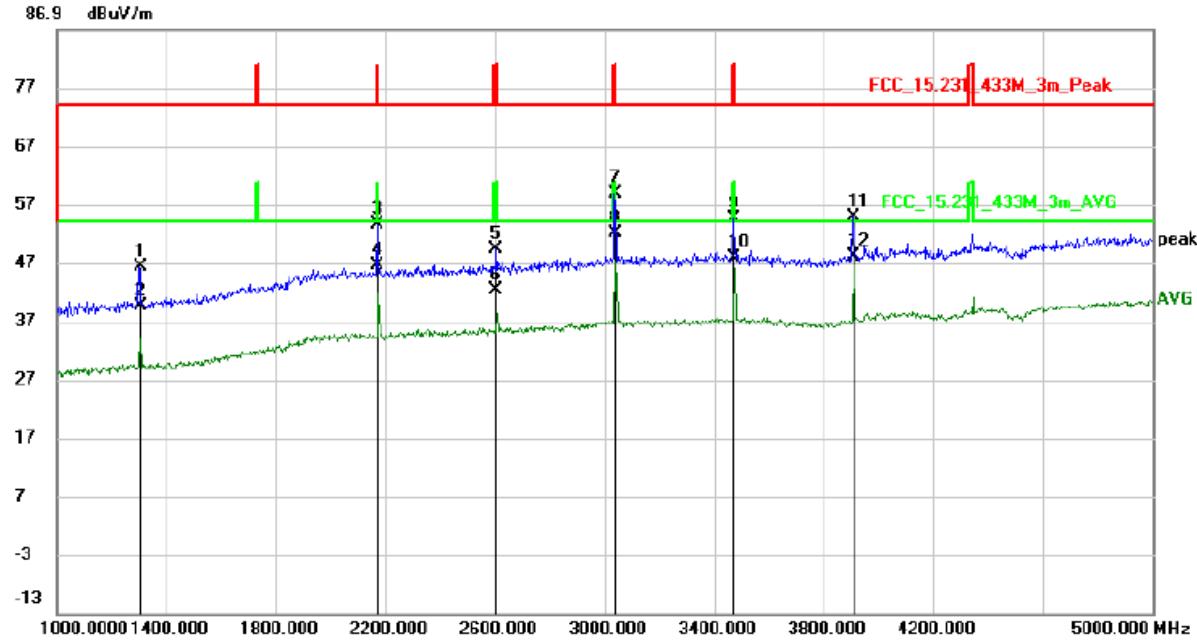

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		1301.775	53.99	-7.61	46.38			peak	
2		1301.775			39.50	54.00	-14.50	AVG	
3		2169.625	53.97	-0.47	53.50			peak	
4		2169.625			46.62	60.80	-14.18	AVG	
5		2603.550	48.39	0.77	49.16			peak	
6		2603.550			42.28	60.80	-18.52	AVG	
7		3037.475	57.00	1.85	58.85			peak	
8		3037.475			51.97	60.80	-8.83	AVG	
9		3471.400	51.97	2.68	54.65			peak	
10		3471.400			47.77	60.80	-13.03	AVG	
11		3905.325	51.08	3.75	54.83			peak	
12	*	3905.325			47.95	54.00	-6.05	AVG	

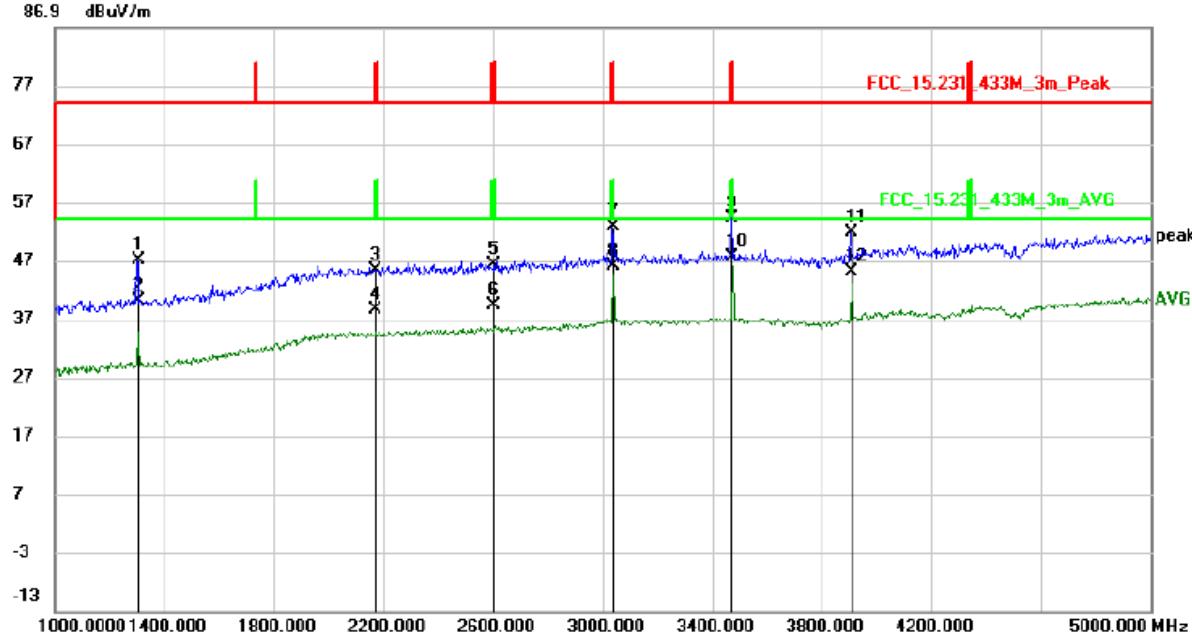M/N: WS	Testing Voltage: DC 2.1V																																																																																																																																										
Polarization: Vertical	Detector: Peak & AVG																																																																																																																																										
Test Mode: TX	Distance: 3m																																																																																																																																										
Radiated Emission Measurement																																																																																																																																											
Date: 2025/6/18	Time: 10:30:48																																																																																																																																										
 <p>The graph shows Radiated Emission Measurement results. The Y-axis is labeled '86.9 dBuV/m' and ranges from -13 to 77. The X-axis is labeled '1000.0000 1400.000 1800.000 2200.000 2600.000 3000.000 3400.000 3800.000 4200.000 5000.000 MHz'. A red horizontal line at 67 dBuV/m is labeled 'FCC_15.231_433M_3m_Peak'. A green horizontal line at 54 dBuV/m is labeled 'FCC_15.231_433M_3m_AVG'. A blue line represents the measured data. Vertical lines with markers (1-12) indicate specific measurement points. The text 'peak' is near the red line, and 'AVG' is near the green line.</p>																																																																																																																																											
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>1301.775</td> <td>54.62</td> <td>-7.61</td> <td>47.01</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>2</td> <td>2</td> <td>1301.775</td> <td></td> <td></td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>AVG</td> <td></td> </tr> <tr> <td>3</td> <td>3</td> <td>2169.625</td> <td>45.82</td> <td>-0.47</td> <td>45.35</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>4</td> <td>4</td> <td>2169.625</td> <td></td> <td></td> <td>38.47</td> <td>60.80</td> <td>-22.33</td> <td>AVG</td> <td></td> </tr> <tr> <td>5</td> <td>5</td> <td>2603.550</td> <td>45.47</td> <td>0.77</td> <td>46.24</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>6</td> <td>6</td> <td>2603.550</td> <td></td> <td></td> <td>39.36</td> <td>60.80</td> <td>-21.44</td> <td>AVG</td> <td></td> </tr> <tr> <td>7</td> <td>7</td> <td>3037.475</td> <td>50.98</td> <td>1.85</td> <td>52.83</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>8</td> <td>8</td> <td>3037.475</td> <td></td> <td></td> <td>45.95</td> <td>60.80</td> <td>-14.85</td> <td>AVG</td> <td></td> </tr> <tr> <td>9</td> <td>9</td> <td>3471.400</td> <td>51.62</td> <td>2.68</td> <td>54.30</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>10</td> <td>10</td> <td>3471.400</td> <td></td> <td></td> <td>47.42</td> <td>60.80</td> <td>-13.38</td> <td>AVG</td> <td></td> </tr> <tr> <td>11</td> <td>11</td> <td>3905.325</td> <td>48.07</td> <td>3.75</td> <td>51.82</td> <td></td> <td></td> <td>peak</td> <td></td> </tr> <tr> <td>12</td> <td>*</td> <td>3905.325</td> <td></td> <td></td> <td>44.94</td> <td>54.00</td> <td>-9.06</td> <td>AVG</td> <td></td> </tr> </tbody> </table>		No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment	1	1	1301.775	54.62	-7.61	47.01			peak		2	2	1301.775			40.13	54.00	-13.87	AVG		3	3	2169.625	45.82	-0.47	45.35			peak		4	4	2169.625			38.47	60.80	-22.33	AVG		5	5	2603.550	45.47	0.77	46.24			peak		6	6	2603.550			39.36	60.80	-21.44	AVG		7	7	3037.475	50.98	1.85	52.83			peak		8	8	3037.475			45.95	60.80	-14.85	AVG		9	9	3471.400	51.62	2.68	54.30			peak		10	10	3471.400			47.42	60.80	-13.38	AVG		11	11	3905.325	48.07	3.75	51.82			peak		12	*	3905.325			44.94	54.00	-9.06	AVG	
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																																																																																																																				
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment																																																																																																																																		
1	1	1301.775	54.62	-7.61	47.01			peak																																																																																																																																			
2	2	1301.775			40.13	54.00	-13.87	AVG																																																																																																																																			
3	3	2169.625	45.82	-0.47	45.35			peak																																																																																																																																			
4	4	2169.625			38.47	60.80	-22.33	AVG																																																																																																																																			
5	5	2603.550	45.47	0.77	46.24			peak																																																																																																																																			
6	6	2603.550			39.36	60.80	-21.44	AVG																																																																																																																																			
7	7	3037.475	50.98	1.85	52.83			peak																																																																																																																																			
8	8	3037.475			45.95	60.80	-14.85	AVG																																																																																																																																			
9	9	3471.400	51.62	2.68	54.30			peak																																																																																																																																			
10	10	3471.400			47.42	60.80	-13.38	AVG																																																																																																																																			
11	11	3905.325	48.07	3.75	51.82			peak																																																																																																																																			
12	*	3905.325			44.94	54.00	-9.06	AVG																																																																																																																																			

c) 20dB Occupied Bandwidth

LIMIT

According to 15.231(C), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

$$\text{Limit} = 433.925\text{MHz} \times 0.25\% = 1084.8125 \text{ KHz}$$

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

1. The output port (antenna) from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.
2. Spectrum analyzer set the corresponding parameters for measurement and record the tested data.


TEST RESULTS

PASS

Please refer to the following table.

Frequency (MHz)	20 dB Bandwidth (KHz)	Limit (KHz)	Result
433.925	126.2	1084.8125	PASS

Test Photo

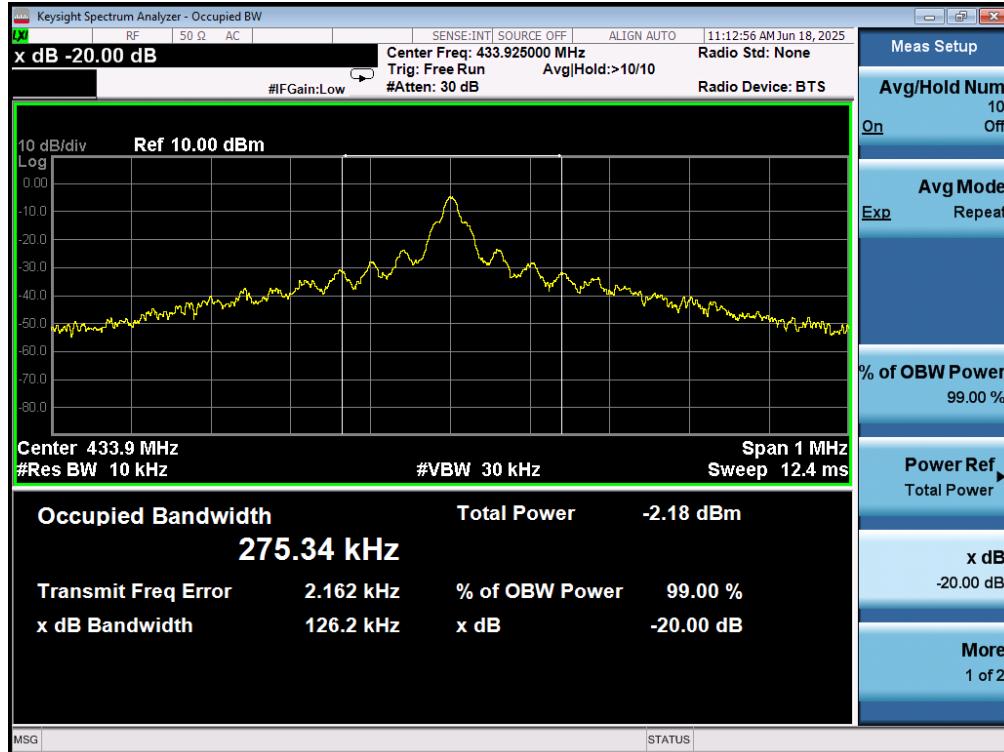

d) Transmission time

LIMIT

15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

15.231(a) (2) A transmitter activated automatically shall cease transmission within 5seconds after activation.

15.231(e), under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of transmission but in no case less than 10 seconds.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

1. The output port (antenna) from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.
2. Spectrum analyzer set the corresponding parameters for measurement and record the tested data.


TEST RESULTS

PASS

Please refer to the following table.

Frequency (MHz)	Transmission time (sec)	Limit (sec)	Result
433.925	0.225	<5	PASS

Test Photo

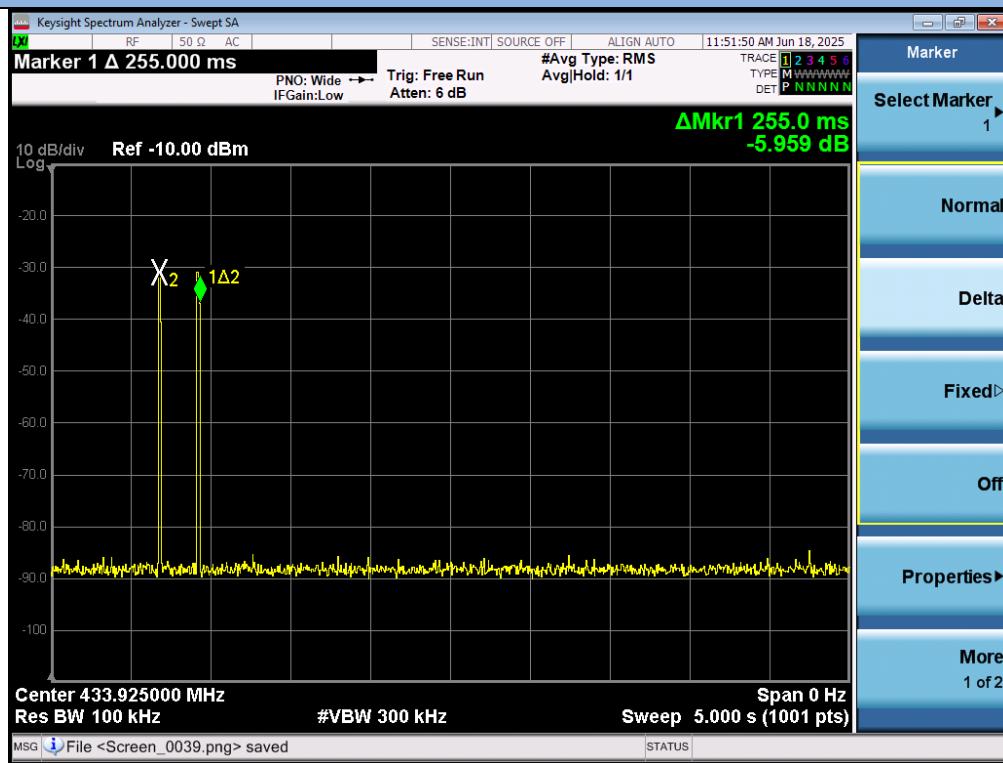

e) Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

ANTENNA CONNECTED CONSTRUCTION

The antenna is spring antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0dBi, Therefore, the antenna is consider meet the requirement.

15. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 12, 2025	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2024	2 Year
3.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 12, 2025	1 Year
4.	Spectrum Analyzer	Keysight	N9010B	MY62170254	Aug. 14, 2024	1 Year
5.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 12, 2025	1 Year
6.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2024	2 Year
7.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 12, 2025	1 Year
8.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 12, 2025	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2024	2 Year
10.	Horn Antenna	COM-Power	AH-840	10100020	Mar. 23, 2024	2 Year
11.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 12, 2025	1 Year
12.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 12, 2025	1 Year
13.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 12, 2025	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 12, 2025	1 Year
15.	Temperature & Humidity Chamber	Wanshun	SS-HWHS-80	N/A	Mar. 12, 2025	1 Year
16.	DC Source	Maynuo	MY8811	N/A	Mar. 12, 2025	1 Year
17.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
18.	Chamber	SAEMC	9*7*7m	N/A	Apr. 21, 2025	2 Year
19.	Test Software	EZ	EZ_EMC, NTC-3A1.1	N/A	N/A	N/A
20.	Test Software	MWRF	MTS 8310, V2.0.0.0	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---